

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	YM120C80N101
Manufacturer:	Amphenol Thermometrics
Package:	Radial, Disc
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/amphenol-thermometrics/ym120c80n101.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.



PTC THERMISTORS: TYPE YM120

OVER-CURRENT PROTECTION

DESCRIPTION:

A range of radially-wired PTC disc thermistors with black silicone resin coating.

FEATURES:

- Designed for general purpose over-current, over-voltage and direct over-temperature protection
- Operation up to 265V rms
- Wide range of operating current levels
- Excellent stability
- Fail-safe operation
- Solid state
- High performance barium titanate ceramic
- Suitable for automatic PCB insertion

OPTIONS:

- Non-standard resistances and tolerances
- Resistance matching
- Non-standard wire lengths
- Other wire configurations

PACKAGING:

All types in the YM120 range are available loose-packed, as shown in the drawing. Devices are also available on bandolier (tape & reel): types with diameter a <14.5mm comply with IEC 286-2.


To identify the packaging required, replace X in the product codes shown in table as follows:

BandolieredR
Loose-packedN


Pack quantities:

Loose-packed500/box
Bandoliered

a < 14.5mm1000/reel (0.5" pitch)
a ≥ 14.5mm500/reel (1" pitch)

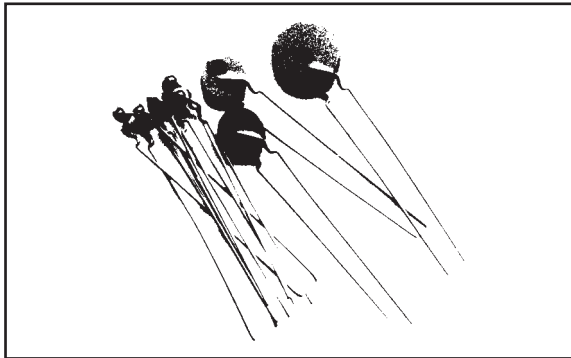

DIMENSIONS:

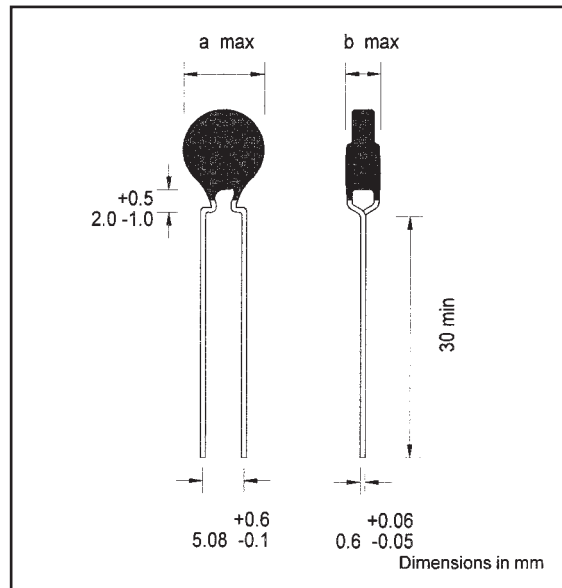

DATA:

Maximum operating voltage265V rms

Switch temperature120°C nominal

Tolerance on R_{25} ±20%

Ambient temperature range:

at maximum voltage0 to +55°C

at zero voltage-25 to +155°C

Lead wire materialSolder-coated copper

Body coatingSilicone resin



PTC THERMISTORS: TYPE YM120

OVER-CURRENT PROTECTION

Code	R_{25} Ω	I_{nt} A	I_t A	I_{mo} A	I_r mA	a mm	b mm	Brand code
YM120C15X182	1800	0.016	0.023	0.1	5	4.0	4.5	D
YM120C20X122	1200	0.020	0.028	0.1	6	4.0	4.5	E
YM120C30X601	600	0.028	0.040	0.2	6	4.0	4.5	F
YM120C45X301	300	0.039	0.055	0.2	7	4.0	4.5	G
YM120C60X151	150	0.057	0.080	0.2	7	4.0	4.5	H
YM120C80X101	100	0.070	0.098	0.4	8	4.5	4.5	I
YM120D105X600	60	0.093	0.131	0.6	8	6.0	4.5	J
YM120D125X450	45	0.110	0.155	0.7	9	7.0	4.5	bTh 450
YM120D150X330	33	0.128	0.181	0.9	9	7.5	4.5	bTh 330
YM120D170X250	25	0.161	0.228	1.1	10	8.5	4.5	bTh 250
YM120D200X200	20	0.192	0.265	1.3	11	9.5	4.5	bTh 200
YM120D260X150	15	0.234	0.330	1.7	12	11.5	4.5	bTh 150
YM120D370X100	10	0.314	0.444	2.7	16	14.5	4.5	bTh 100
YM120D480X060	6	0.407	0.575	3.9	25	17.5	4.5	bTh 060

R_{25}	Resistance at 25°C
I_{nt}	Maximum current without tripping (25°C ambient)
I_t	Minimum trip current (25°C ambient)
I_{mo}	Maximum overload current
I_r	Residual current (25°C ambient)