

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

|                      |                           |
|----------------------|---------------------------|
| <b>Part Number:</b>  | TLV0832CP                 |
| <b>Manufacturer:</b> | Texas Instruments         |
| <b>Package:</b>      | 8-DIP (0.300" , 7.62mm)   |
| <b>Availability:</b> | Please confirm with sales |

### Product Page:

<https://antrexco.com/product/details/texas-instruments/tlv0832cp.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---


# TLV0831C, TLV0831I TLV0832C, TLV0832I

## 3-VOLT 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL


SLAS148 – SEPTEMBER 1996

- 8-Bit Resolution
- 2.7 V to 3.6 V  $V_{CC}$
- Easy Microprocessor Interface or Standalone Operation
- Operates Ratiometrically or With  $V_{CC}$  Reference
- Single Channel or Multiplexed Twin Channels With Single-Ended or Differential Input Options
- Input Range 0 V to  $V_{CC}$  With  $V_{CC}$  Reference
- Inputs and Outputs Are Compatible With TTL and MOS
- Conversion Time of 32  $\mu$ s at  $f_{(CLK)} = 250$  kHz
- Designed to Be Functionally Equivalent to the National Semiconductor ADC0831 and ADC0832 at 3 V Supply
- Total Unadjusted Error . . .  $\pm 1$  LSB

TLV0831 . . . D OR P PACKAGE  
(TOP VIEW)



TLV0832 . . . D OR P PACKAGE  
(TOP VIEW)



### description

These devices are 8-bit successive-approximation analog-to-digital converters. The TLV0831 has single input channels; the TLV0832 has multiplexed twin input channels. The serial output is configured to interface with standard shift registers or microprocessors.

The TLV0832 multiplexer is software configured for single-ended or differential inputs. The differential analog voltage input allows for common-mode rejection or offset of the analog zero input voltage value. In addition, the voltage reference input can be adjusted to allow encoding any smaller analog voltage span to the full 8 bits of resolution.

The operation of the TLV0831 and TLV0832 devices is very similar to the more complex TLV0834 and TLV0838 devices. Ratiometric conversion can be attained by setting the REF input equal to the maximum analog input signal value, which gives the highest possible conversion resolution. Typically, REF is set equal to  $V_{CC}$  (done internally on the TLV0832).

The TLV0831C and TLV0832C are characterized for operation from 0°C to 70°C. The TLV0831I and TLV0832I are characterized for operation from -40°C to 85°C.

### AVAILABLE OPTIONS

| $T_A$         | PACKAGE           |           |                 |           |
|---------------|-------------------|-----------|-----------------|-----------|
|               | SMALL OUTLINE (D) |           | PLASTIC DIP (P) |           |
| 0°C to 70°C   | TLV0831CD         | TLV0832CD | TLV0831CP       | TLV0832CP |
| -40°C to 85°C | TLV0831ID         | TLV0832ID | TLV0831IP       | TLV0832IP |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265  
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

Copyright © 1996, Texas Instruments Incorporated

**TLV0831C, TLV0831I**  
**TLV0832C, TLV0832I**  
**3-VOLT 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL**

SLAS148 – SEPTEMBER 1996

**functional block diagram**

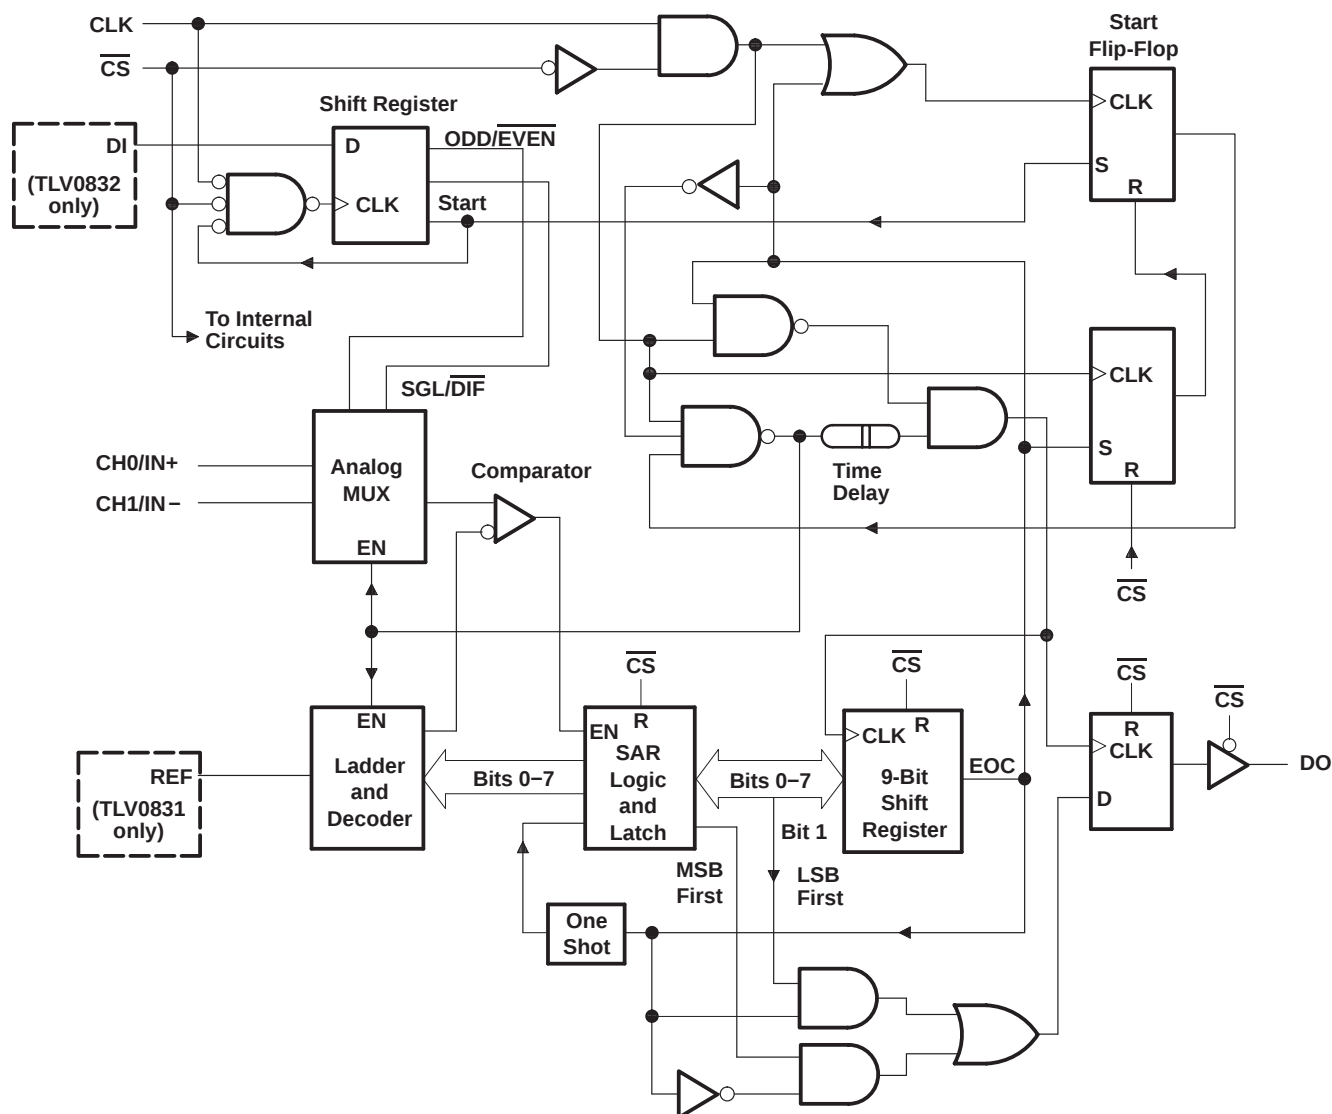

### functional description

The TLV0831 and TLV0832 use a sample-data-comparator structure that converts differential analog inputs by a successive-approximation routine. The input voltage to be converted is applied to an input terminal and is compared to ground (single ended), or to an adjacent input (differential). The TLV0832 input terminals can be assigned a positive (+) or negative (–) polarity. The TLV0831 contains only one differential input channel with fixed polarity assignment; therefore it does not require addressing. The signal can be applied differentially, between IN+ and IN–, to the TLV0831 or can be applied to IN+ with IN– grounded as a single ended input. When the signal input applied to the assigned positive terminal is less than the signal on the negative terminal, the converter output is all zeros.

Channel selection and input configuration are under software control using a serial-data link from the controlling processor. A serial-communication format allows more functions to be included in a converter package with no increase in size. In addition, it eliminates the transmission of low-level analog signals by locating the converter at the analog sensor and communicating serially with the controlling processor. This process returns noise-free digital data to the processor.

A conversion is initiated by setting  $\overline{CS}$  low, which enables all logic circuits.  $\overline{CS}$  must be held low for the complete conversion process. A clock input is then received from the processor. An interval of one clock period is automatically inserted to allow the selected multiplexed channel to settle. DO comes out of the high-impedance state and provides a leading low for one clock period of multiplexer settling time. The SAR comparator compares successive outputs from the resistive ladder with the incoming analog signal. The comparator output indicates whether the analog input is greater than or less than the resistive-ladder output. As the conversion proceeds, conversion data is simultaneously output from DO, with the most significant bit (MSB) first. After eight clock periods, the conversion is complete. When  $\overline{CS}$  goes high, all internal registers are cleared. At this time, the output circuits go to the high-impedance state. If another conversion is desired,  $\overline{CS}$  must make a high-to-low transition followed by address information.

A TLV0832 input configuration is assigned during the multiplexer-addressing sequence. The multiplexer address shifts into the converter through the data input (DI) line. The multiplexer address selects the analog inputs to be enabled and determines whether the input is single ended or differential. When the input is differential, the polarity of the channel input is assigned. In addition to selecting the differential mode, the polarity may also be selected. Either channel of the channel pair may be designated as the negative or positive input.


On each low-to-high transition of the clock input, the data on DI is clocked into the multiplexer-address shift register. The first logic high on the input is the start bit. A 2-bit assignment word follows the start bit on the TLV0832. On each successive low-to-high transition of the clock input, the start bit and assignment word are shifted through the shift register. When the start bit is shifted into the start location of the multiplexer register, the input channel is selected and conversion starts. The TLV0832 DI terminal to the multiplexer shift register is disabled for the duration of the conversion.

The TLV0832 outputs the least-significant-bit (LSB) first data after the MSB-first data stream. The DI and DO terminals can be tied together and controlled by a bidirectional processor I/O bit received on a single wire. This is possible because DI is only examined during the multiplexer-addressing interval and DO is still in the high-impedance state.

# TLV0831C, TLV0831I TLV0832C, TLV0832I 3-VOLT 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS148 – SEPTEMBER 1996

## sequence of operation

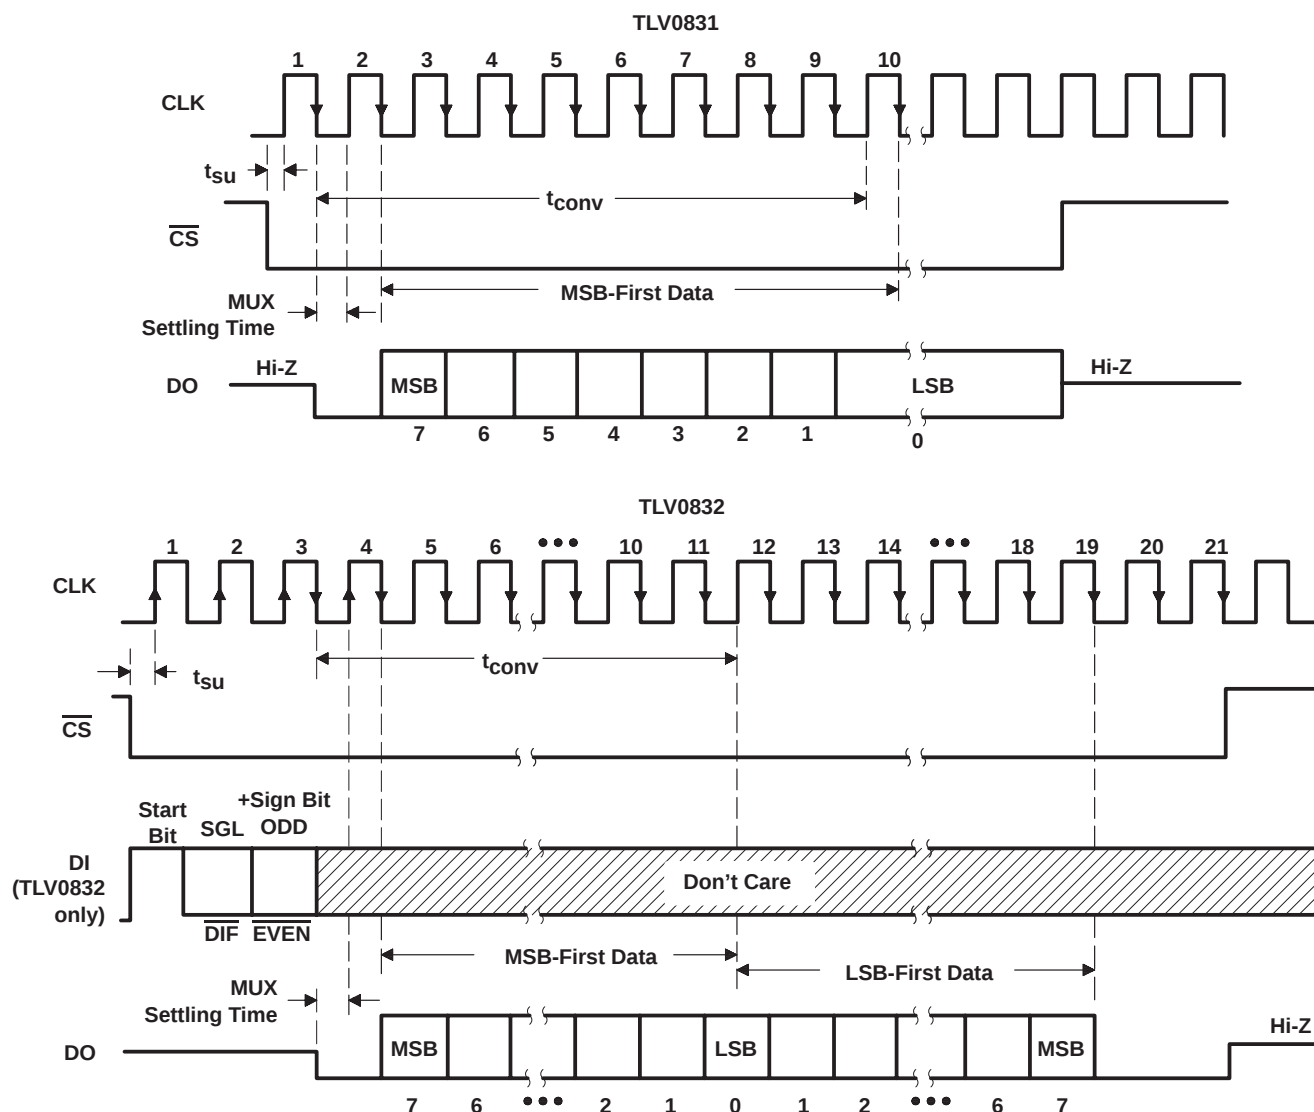

TLV0832 MUX-ADDRESS CONTROL LOGIC TABLE

| MUX ADDRESS |          | CHANNEL NUMBER |     |
|-------------|----------|----------------|-----|
| SGL/DIF     | ODD/EVEN | CH0            | CH1 |
| L           | L        | +              | -   |
| L           | H        | -              | +   |
| H           | L        | +              |     |
| H           | H        |                | +   |

H = high level, L = low level,  
- or + = terminal polarity for the selected input channel

5

**TLV0831C, TLV0831I**  
**TLV0832C, TLV0832I**  
**3-VOLT 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL**

SLAS148 – SEPTEMBER 1996

electrical characteristics over recommended range of operating free-air temperature,  $V_{CC} = 3.3\text{ V}$ ,  $f_{CLK} = 250\text{ kHz}$  (unless otherwise noted)

**digital section**

| PARAMETER                                         | TEST CONDITIONS†                                           | C SUFFIX |        |      | I SUFFIX |        |     | UNIT          |
|---------------------------------------------------|------------------------------------------------------------|----------|--------|------|----------|--------|-----|---------------|
|                                                   |                                                            | MIN      | TYP‡   | MAX  | MIN      | TYP‡   | MAX |               |
| $V_{OH}$ High-level output voltage                | $V_{CC} = 3\text{ V}$ , $I_{OH} = -360\text{ }\mu\text{A}$ | 2.8      |        |      | 2.4      |        |     | V             |
|                                                   | $V_{CC} = 3\text{ V}$ , $I_{OH} = -10\text{ }\mu\text{A}$  | 2.9      |        |      | 2.8      |        |     |               |
| $V_{OL}$ Low-level output voltage                 | $V_{CC} = 3\text{ V}$ , $I_{OL} = 1.6\text{ mA}$           |          |        | 0.34 |          |        | 0.4 | V             |
| $I_{IH}$ High-level input current                 | $V_{IH} = 3.6\text{ V}$                                    |          | 0.005  | 1    |          | 0.005  | 1   | $\mu\text{A}$ |
| $I_{IL}$ Low-level input current                  | $V_{IL} = 0$                                               |          | -0.005 | -1   |          | -0.005 | -1  | $\mu\text{A}$ |
| $I_{OH}$ High-level output (source) current       | At $V_{OH}$ , $DO = 0\text{ V}$ , $T_A = 25^\circ\text{C}$ | -6.5     | -15    |      | -6.5     | -15    |     | mA            |
| $I_{OL}$ Low-level output (sink) current          | At $V_{OL}$ , $DO = 0\text{ V}$ , $T_A = 25^\circ\text{C}$ | 8        | -16    |      | 8        | -16    |     | mA            |
| $I_{OZ}$ High-impedance-state output current (DO) | $V_O = 3.3\text{ V}$ , $T_A = 25^\circ\text{C}$            |          | 0.01   | 3    |          | 0.01   | 3   | $\mu\text{A}$ |
|                                                   | $V_O = 0$ , $T_A = 25^\circ\text{C}$                       |          | -0.01  | -3   |          | -0.01  | -3  |               |
| $C_i$ Input capacitance                           |                                                            |          | 5      |      |          | 5      |     | pF            |
| $C_o$ Output capacitance                          |                                                            |          | 5      |      |          | 5      |     | pF            |

† All parameters are measured under open-loop conditions with zero common-mode input voltage.

‡ All typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

**analog and converter section**

| PARAMETER                                         |             | TEST CONDITIONS†     | MIN                            | TYP‡ | MAX | UNIT          |
|---------------------------------------------------|-------------|----------------------|--------------------------------|------|-----|---------------|
| $V_{IC}$ Common-mode input voltage                |             | See Note 3           | -0.05<br>to<br>$V_{CC} + 0.05$ |      |     | V             |
| $I_{I(stbby)}$ Standby input current (see Note 4) | On channel  | $V_I = 3.3\text{ V}$ |                                |      | 1   | $\mu\text{A}$ |
|                                                   | Off channel | $V_I = 0$            |                                |      | -1  |               |
|                                                   | On channel  | $V_I = 0$            |                                |      | -1  |               |
|                                                   | Off channel | $V_I = 3.3\text{ V}$ |                                |      | 1   |               |
| $r_{i(REF)}$ Input resistance to REF              |             |                      | 1.3                            | 2.4  | 5.9 | k $\Omega$    |

† All parameters are measured under open-loop conditions with zero common-mode input voltage.

‡ All typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

NOTES: 3. When channel IN- is more positive than channel IN+, the digital output code is 0000 0000. Connected to each analog input are two on-chip diodes that conduct forward current for analog input voltages one diode drop above  $V_{CC}$ . Care must be taken during testing at low  $V_{CC}$  levels (3 V) because high-level analog input voltage (3.6 V) can, especially at high temperatures, cause the input diode to conduct and cause errors for analog inputs that are near full scale. As long as the analog voltage does not exceed the supply voltage by more than 50 mV, the output code is correct. To achieve an absolute 0- to 3.3-V input range requires a minimum  $V_{CC}$  of 3.25 V for all variations of temperature and load.

4. Standby input currents go in or out of the on or off channels when the A/D converter is not performing conversion and the clock is in a high or low steady-state conditions.

**total device**

| PARAMETER               |         | MIN | TYP‡ | MAX  | UNIT |
|-------------------------|---------|-----|------|------|------|
| $I_{CC}$ Supply current | TLV0831 |     | 0.2  | 0.75 | mA   |
|                         | TLV0832 |     | 1.5  | 2.5  |      |

‡ All typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .



TLV0831C, TLV0831I  
TLV0832C, TLV0832I  
SLAS148 – SEPTEMBER 1996

## 3-VOLT 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

operating characteristics  $V_{CC} = V_{ref} = 3.3\text{ V}$ ,  $f_{(CLK)} = 250\text{ kHz}$ ,  $t_r = t_f = 20\text{ ns}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                           |                                                                      | TEST CONDITIONS <sup>†</sup>                            | MIN | TYP        | MAX       | UNIT          |
|-------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------|-----|------------|-----------|---------------|
| Supply-voltage variation error      |                                                                      | $V_{CC} = 3\text{ V to }3.6\text{ V}$                   |     | $\pm 1/16$ | $\pm 1/4$ | LSB           |
| Total unadjusted error (see Note 5) |                                                                      | $V_{ref} = 3.3\text{ V}$ ,<br>$T_A = \text{MIN to MAX}$ |     |            | $\pm 1$   | LSB           |
| Common-mode error                   |                                                                      | Differential mode                                       |     | $\pm 1/16$ | $\pm 1/4$ | LSB           |
| $t_{pd}$                            | Propagation delay time, output data after $CLK\uparrow$ (see Note 6) | MSB-first data                                          |     | 200        | 500       | ns            |
|                                     |                                                                      | LSB-first data                                          |     | 80         | 200       |               |
| $t_{dis}$                           | Output disable time, DO after $\overline{CS}\uparrow$                | $C_L = 10\text{ pF}$ , $R_L = 10\text{ k}\Omega$        |     | 80         | 125       | ns            |
|                                     |                                                                      | $C_L = 100\text{ pF}$ , $R_L = 2\text{ k}\Omega$        |     |            | 250       |               |
| $t_{conv}$                          | Conversion time (multiplexer-addressing time not included)           |                                                         |     |            | 8         | clock periods |

<sup>†</sup> All parameters are measured under open-loop conditions with zero common-mode input voltage. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTES: 5. Total unadjusted error includes offset, full-scale, linearity, and multiplexer errors.

6. The MSB-first data is output directly from the comparator and, therefore, requires additional delay to allow for comparator response time. LSB-first data applies only to TLV0832.



## PARAMETER MEASUREMENT INFORMATION

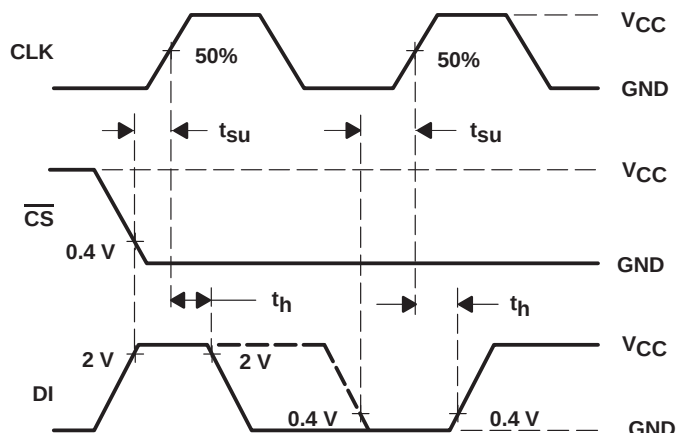


Figure 1. TLV0832 Data-Input Timing


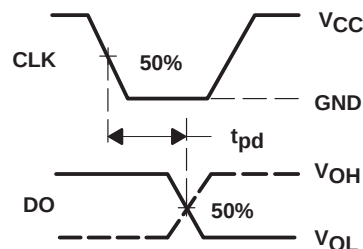


Figure 2. Data-Output Timing

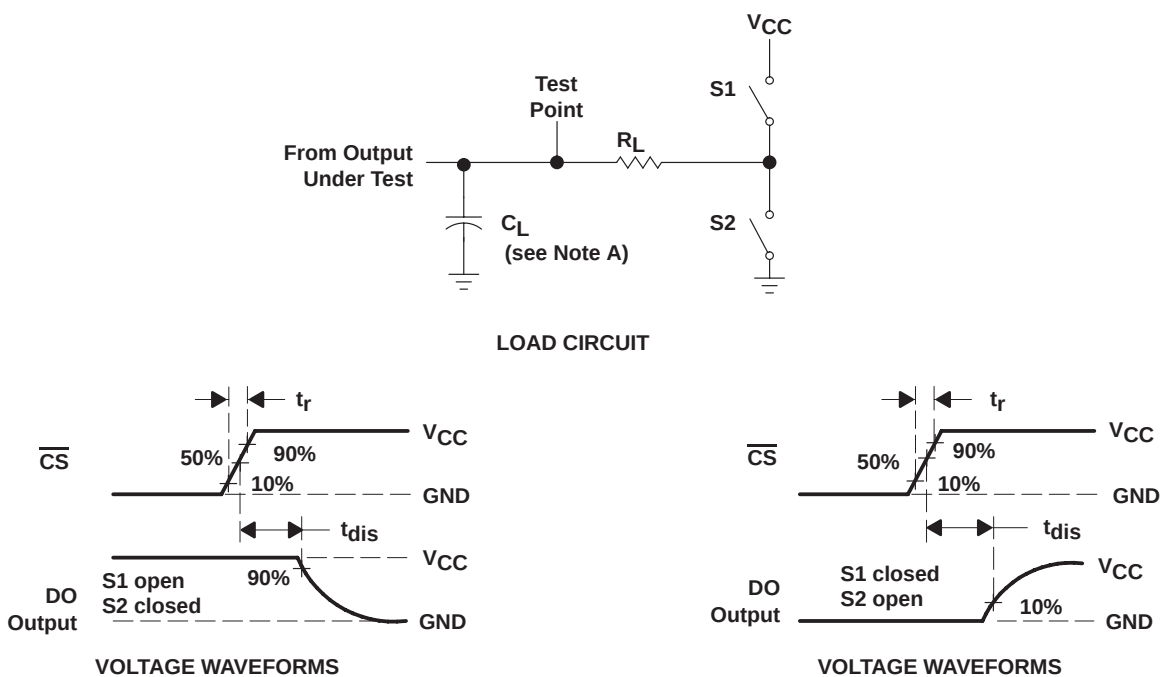

NOTE A:  $C_L$  includes probe and jig capacitance.

Figure 3. Output Disable Time Test Circuit and Voltage Waveforms

### TYPICAL CHARACTERISTICS

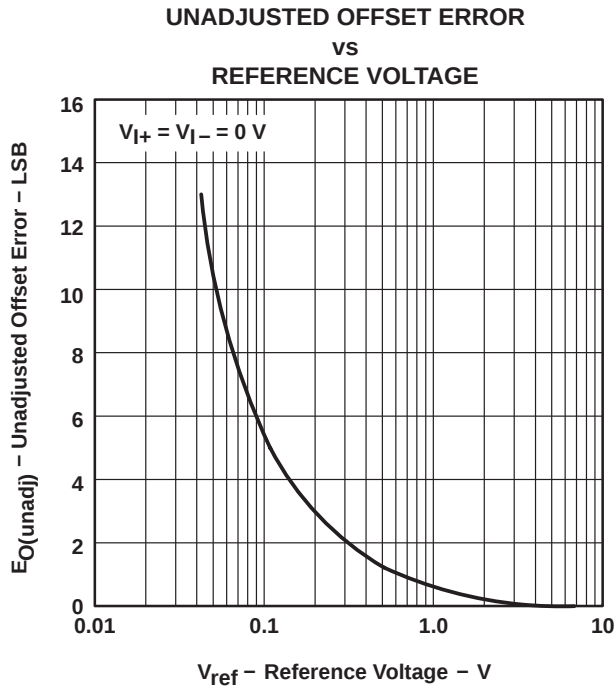


Figure 4

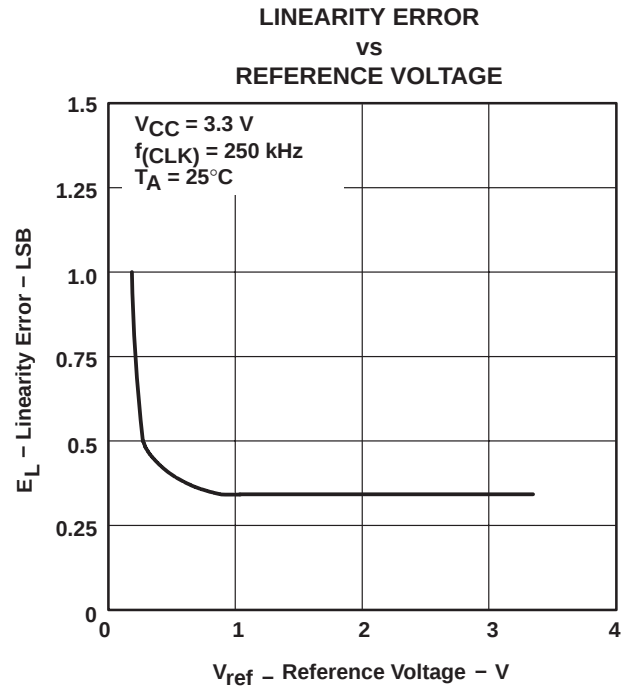


Figure 5

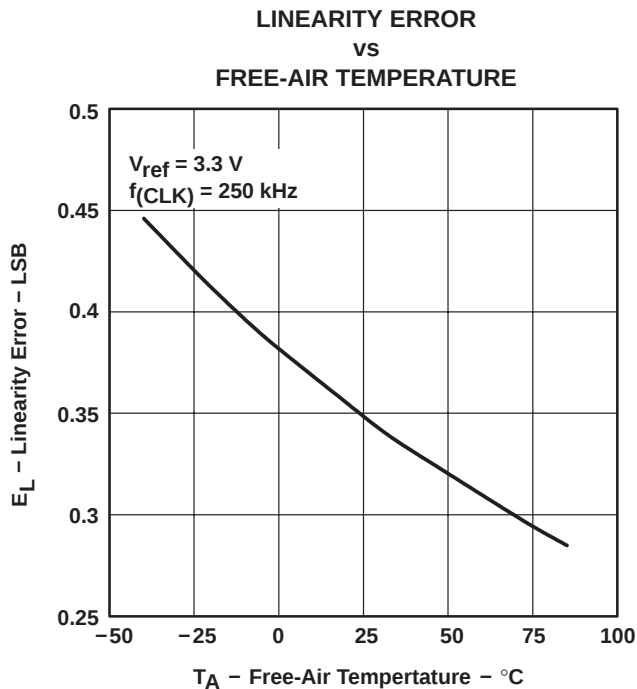


Figure 6

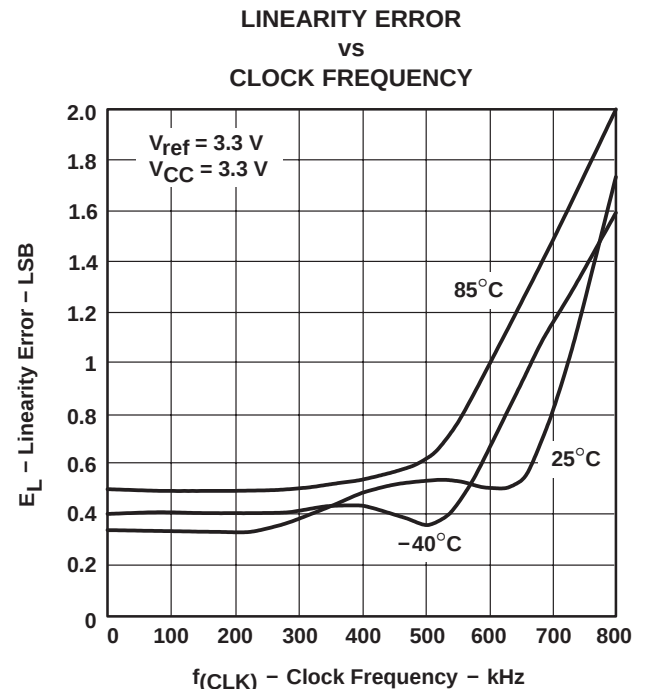


Figure 7

## TYPICAL CHARACTERISTICS

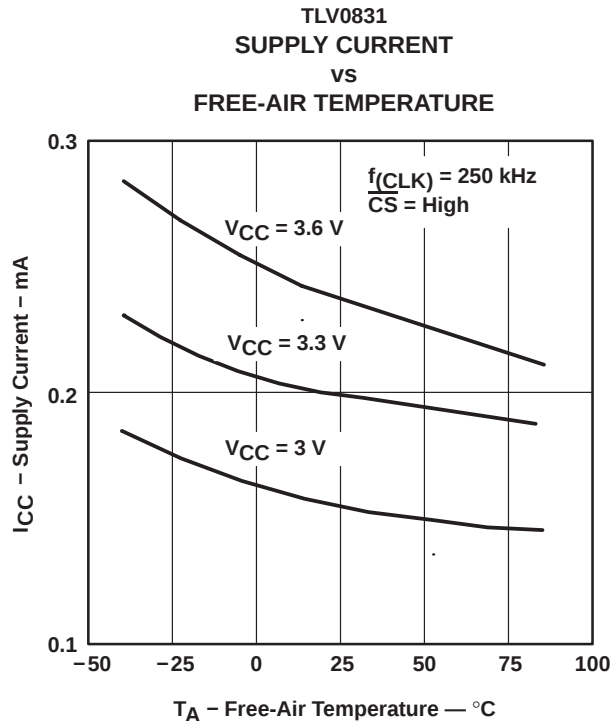


Figure 8

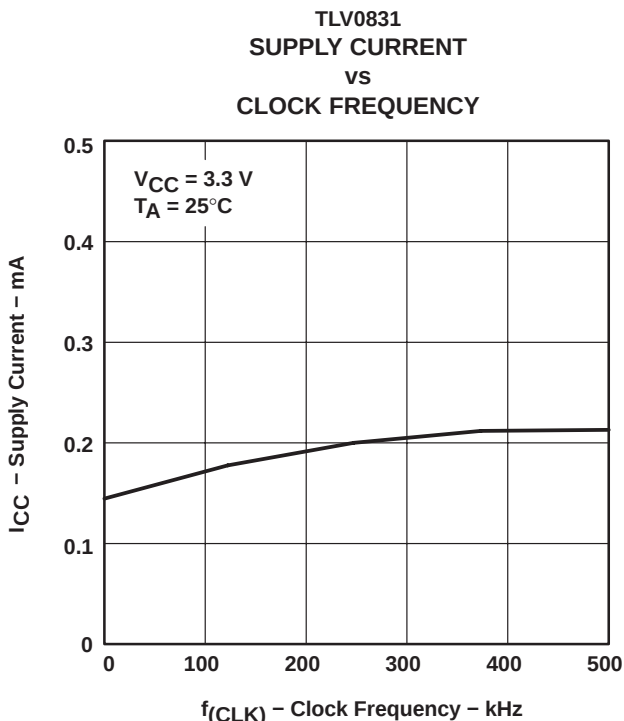


Figure 9

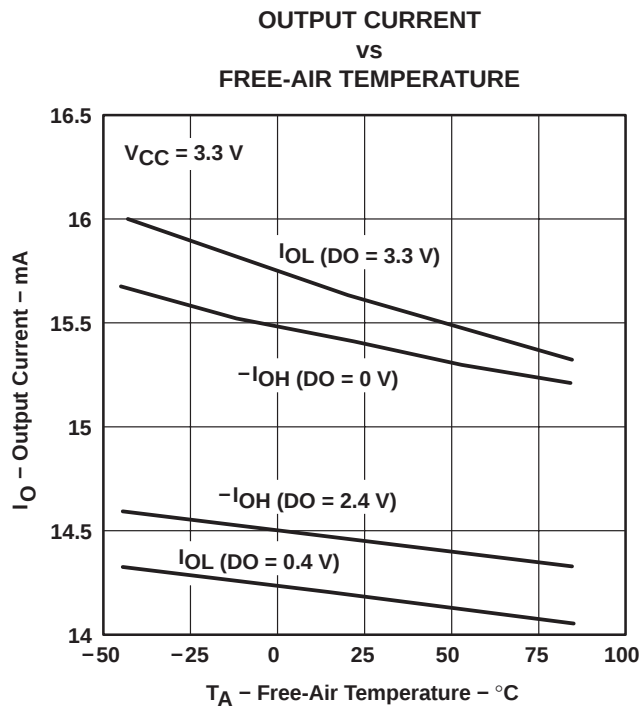


Figure 10

### TYPICAL CHARACTERISTICS

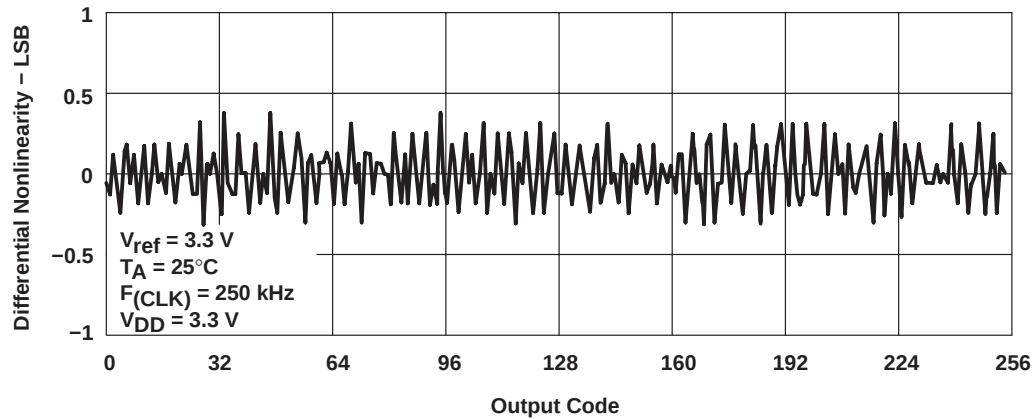


Figure 11. Differential Nonlinearity With Output Code

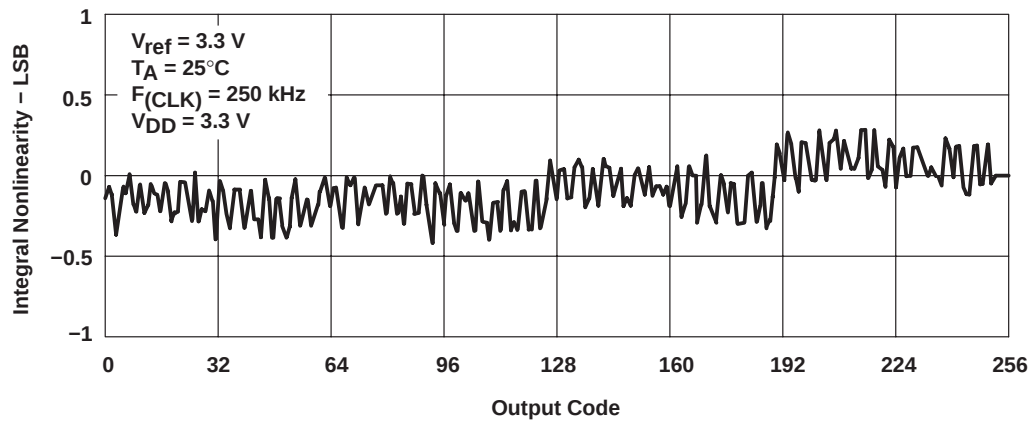


Figure 12. Integral Nonlinearity With Output Code

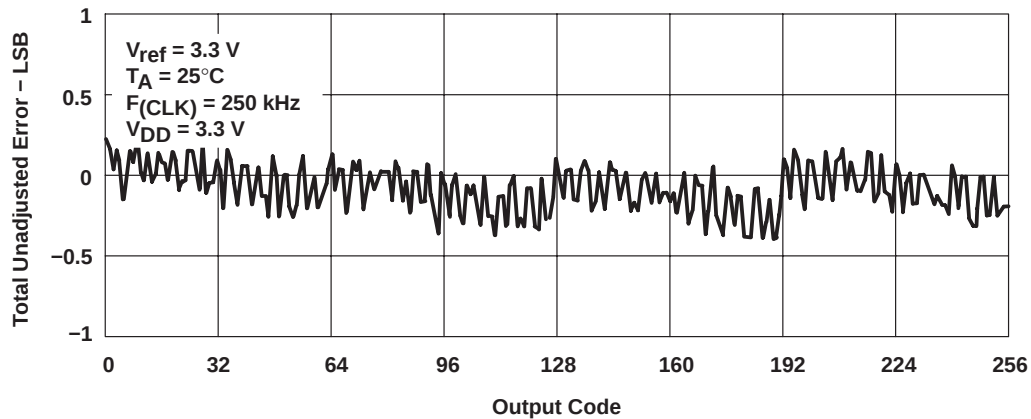


Figure 13. Total Unadjusted Error With Output Code

## PACKAGING INFORMATION

| Orderable part number      | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TLV0831CD</a>  | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0831C              |
| TLV0831CD.A                | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0831C              |
| <a href="#">TLV0831CDR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | V0831C              |
| TLV0831CDR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0831C              |
| <a href="#">TLV0831CP</a>  | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -            | TLV0831CP           |
| TLV0831CP.A                | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -40 to 85    | TLV0831CP           |
| <a href="#">TLV0831ID</a>  | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            |                     |
| TLV0831ID.A                | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    |                     |
| <a href="#">TLV0831IDR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            |                     |
| TLV0831IDR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    |                     |
| <a href="#">TLV0832CD</a>  | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0832C              |
| TLV0832CD.A                | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0832C              |
| <a href="#">TLV0832CDR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | V0832C              |
| TLV0832CDR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0832C              |
| <a href="#">TLV0832CP</a>  | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -            | TLV0832CP           |
| TLV0832CP.A                | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -40 to 85    | TLV0832CP           |
| <a href="#">TLV0832ID</a>  | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | V0832I              |
| TLV0832ID.A                | Active        | Production           | SOIC (D)   8   | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0832I              |
| <a href="#">TLV0832IDR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -            | V0832I              |
| TLV0832IDR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | V0832I              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV0831CDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV0831IDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV0832CDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV0832IDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV0831CDR | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| TLV0831IDR | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| TLV0832CDR | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| TLV0832IDR | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |

**TUBE**


\*All dimensions are nominal

| Device      | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TLV0831CD   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0831CD.A | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0831CP   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLV0831CP.A | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLV0831ID   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0831ID.A | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0832CD   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0832CD.A | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0832CP   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLV0832CP.A | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLV0832ID   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV0832ID.A | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

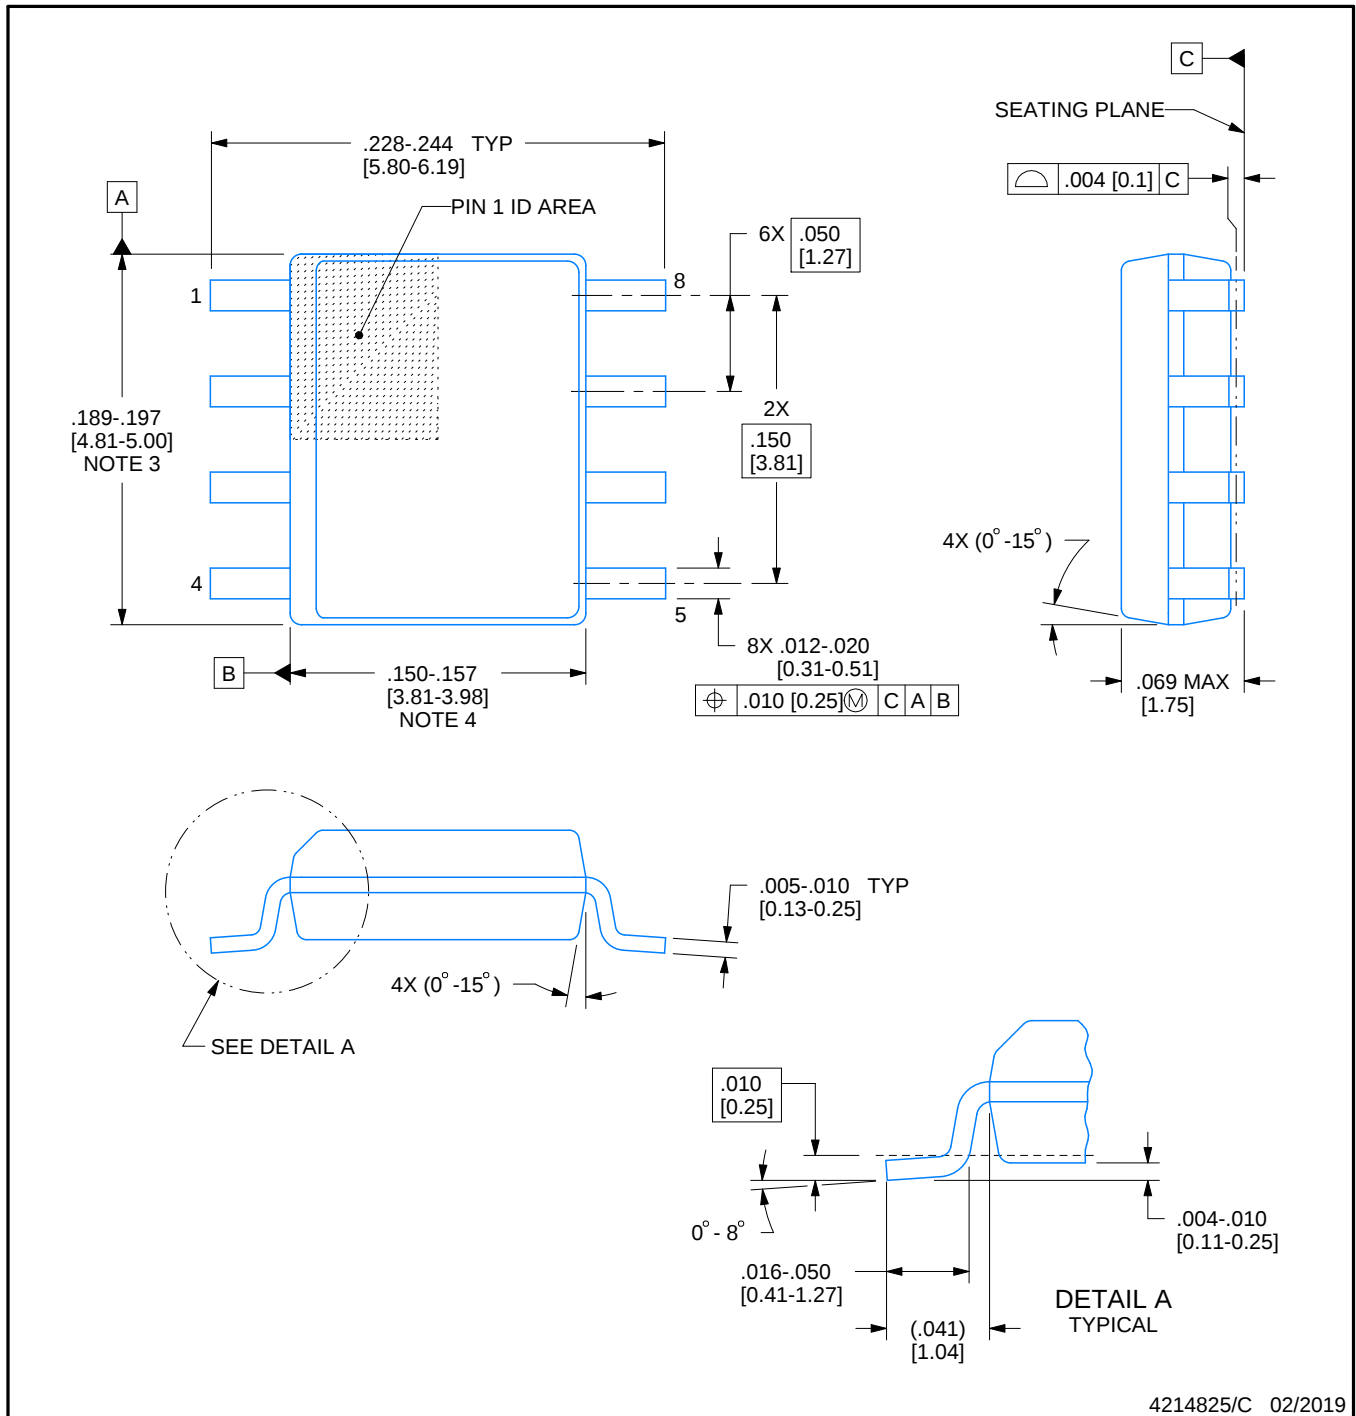

4214825/C 02/2019


## NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.


**D0008A**

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

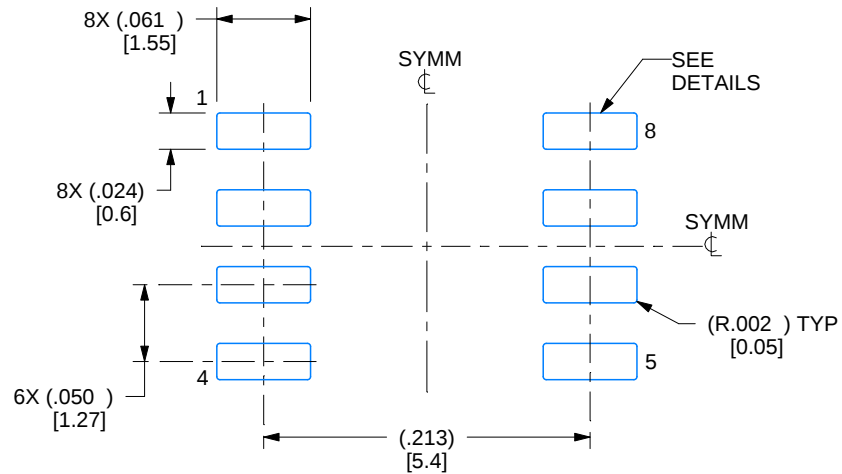

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X

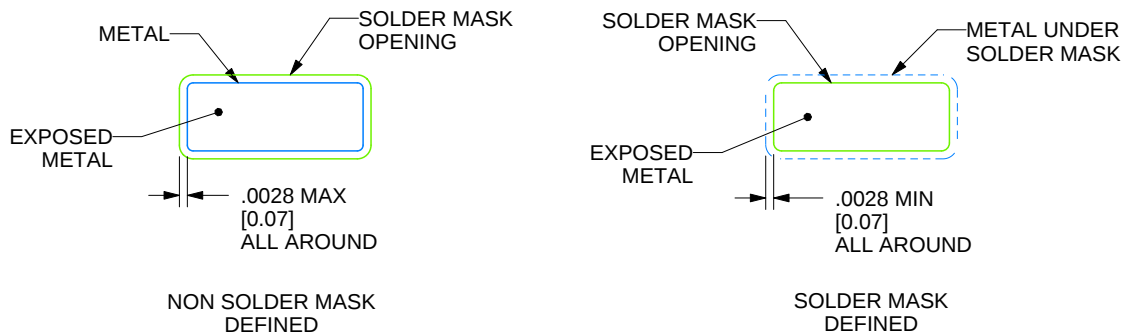

## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

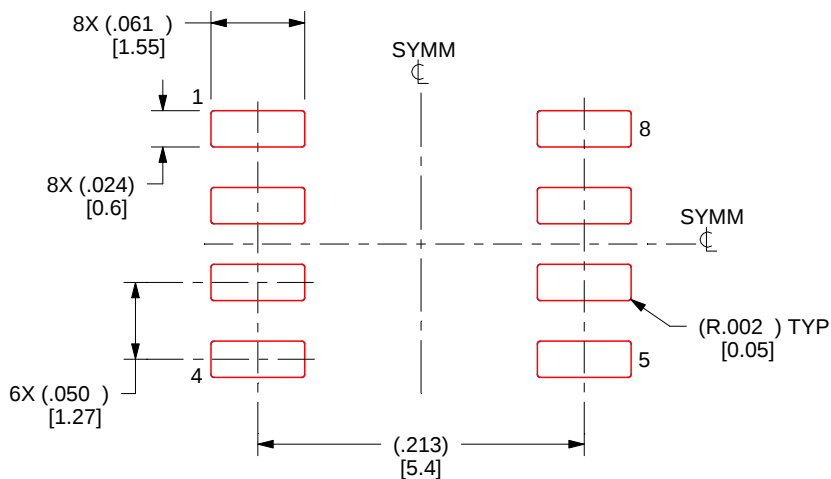

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025