

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information


Part Number: MSWSH-020-30
Manufacturer: MACOM Technology Solutions
Package: 0805 (2012 Metric)
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/macom-technology-solutions/mswsh-020-30.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects


Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Features

- Supports up to 20 W Power when Cold Switched
- Low Insertion Loss: 0.25 dB to 2.7 GHz
- High Isolation: 31 dB to 2.7 GHz
- RoHS* Compliant



Applications


- WiMax, Wibro, WLAN, TD-SCDMA and other wireless infrastructure

Description

A broadband, high linearity, medium power shunt switch element in a 1.9 x 1.1 mm DFN package.

This device is designed for WiMax, Wibro, WLAN, TD-SCDMA and other wireless infrastructure applications. It is also suited for 0.1 ~ 6 GHz applications with up to 20 watts of power.

Pin Out / Schematic



Electrical Specifications: $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Breakdown Voltage (V_B)	$I_R = 10 \mu\text{A}$	V	100	—	—
Junction Capacitance (C_J)	$V_R = 10 \text{ V}$, 1 MHz	pF	—	0.13	—
Series Resistance (R_S)	$I_F = 50 \text{ mA}$, 500 MHz	Ω	—	0.6	0.9
I-Region (W)	I-Layer	μm	—	15	—
Insertion Loss (I_L)	$V_R = 10 \text{ V}$, 2.3 - 2.7 GHz $V_R = 10 \text{ V}$, 6.0 GHz	dB	—	0.25 0.35	0.35 0.45
Isolation (I_{SO})	$I_F = 50 \text{ mA}$, 2.3 - 2.7 GHz $I_F = 50 \text{ mA}$, 6.0 GHz	dB	26 25	31 27	—
Input Return Loss (R_L)	$V_R = 10 \text{ V}$, 2.3 - 2.7 GHz $V_R = 10 \text{ V}$, 6.0 GHz	dB	15 10	19 14	—
Minority Carrier Lifetime (T_L)	$I_F = 10 \text{ mA}$, $I_R = 10 \text{ mA}$, @ 50%	ns	—	600	—

Ordering Information

Part Number	Package
MSWSH-020-30	500 piece reel


* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Absolute Maximum Ratings


Parameter	Absolute Maximum
Breakdown Voltage	100 V
Forward Current	100 mA
Thermal Resistance	30°C/W
Junction Temperature	+175°C
Storage Temperature	-65°C to +150°C
Assembly Temperature	+260°C Per JEDEC STD-J-20C

Typical Performance Curves


Insertion Loss

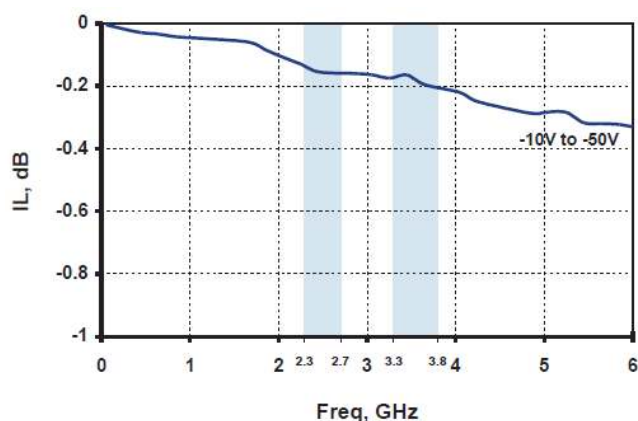


Input Return Loss

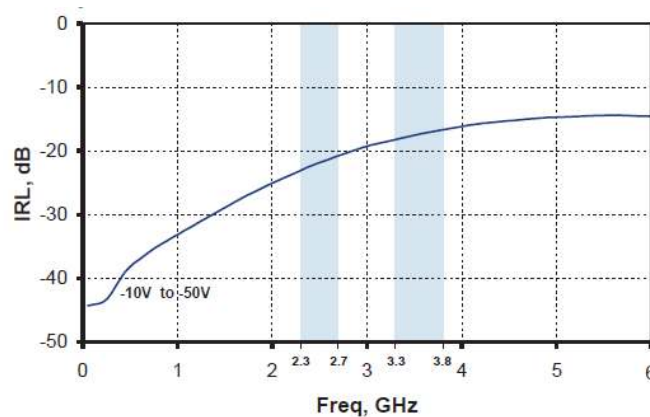


Isolation

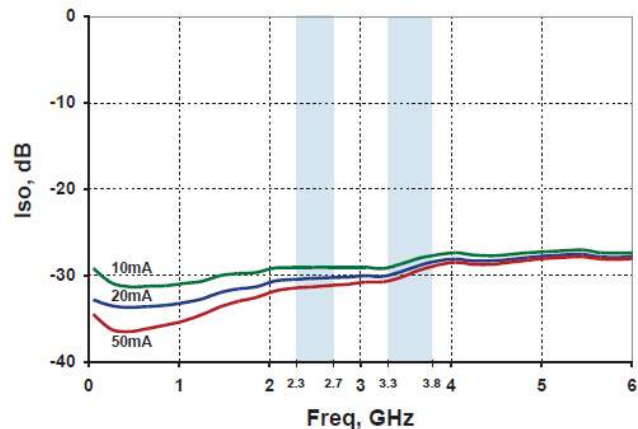

Series Resistance vs. Current, 500 MHz

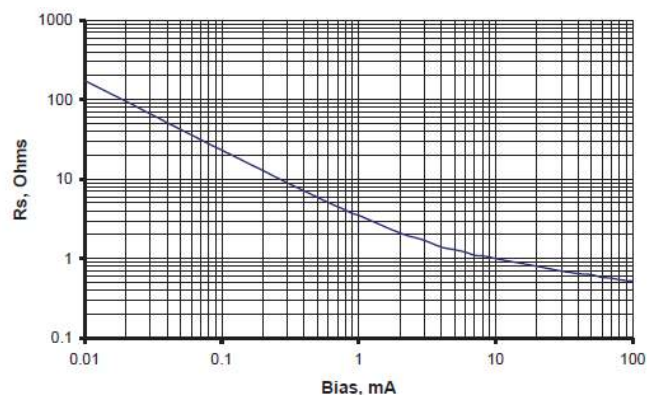

Bias Schematic (0.1 - 6 GHz)

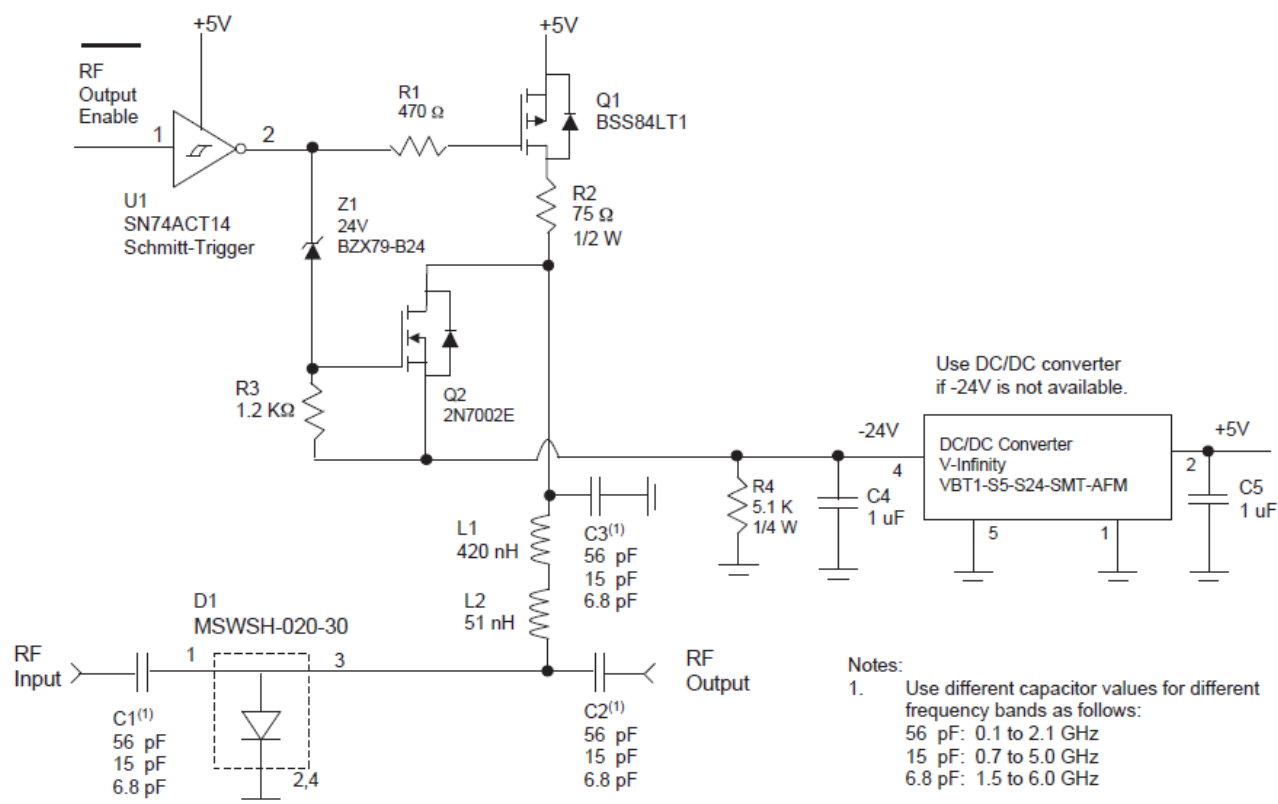

Parts List

Component	Description	Manufacture	Manufacture Part #
R1	470 Ω , 1/10 W, 0603 chip resistor	KOA Speer	RK73B1JTDD471J
R2	75 Ω , 1/2 W, 1210 chip resistor	KOA Speer	RK73B2ETTD750J
R3	1.2 K Ω , 1/10 W, 0603 chip resistor	KOA Speer	RK73B1JTDD122J
R4	5.1 K Ω , 1/4 W, 1206 chip resistor	KOA Speer	RK73B2BTDD512J
C1,C2,C3 ¹	56 pF, 250 VDC Capacitor, 0603 pkg	ATC	ATC600S560JT250XT
C1,C2,C3 ¹	15 pF, 250 VDC Capacitor, 0603 pkg	ATC	ATC600S150JT250XT
C1,C2,C3 ¹	6.8 pF, 250 VDC Capacitor, 0603 pkg	ATC	ATC600S6R8JT250XT
C4,C5	1 μ F, 50 WVDC Capacitor, 1206 pkg	ATC	ATC1206Z5U105MT2AT
L1	420 nH, 340 mA, 700 MHz SRF Inductor	Coilcraft	0402AF-421XJLW
L2	51 nH, 330 mA, 2.3 GHz SRF, Inductor	Coilcraft	0402HP-51NXJLW
Q1	50 V, 130 mA, P-Channel MOSFET	ON SEMI	BSS84LT1
Q2	60 V, 310 mA, N-Channel MOSFET	ON SEMI	2N7002E
U1	Hex Schmitt-Trigger TTL Inverter	Texas Instruments	SN74ACT14
Z1	24 V, 2%, 500 mW Zener Diode	Philips	BZX79-B24
DC1	1 W, 5 V to 24 V DC/DC Converter	V-Infinity	VBT1-S5-S24-SMT-AFM

1. Use different capacitor values for different frequency bands as follows:


56 pF: 0.1 to 2.1 GHz

15 pF: 0.7 to 5.0 GHz

6.8 pF: 1.5 to 6.0 GHz

Printed Circuit Board Layout


Outline (2012)

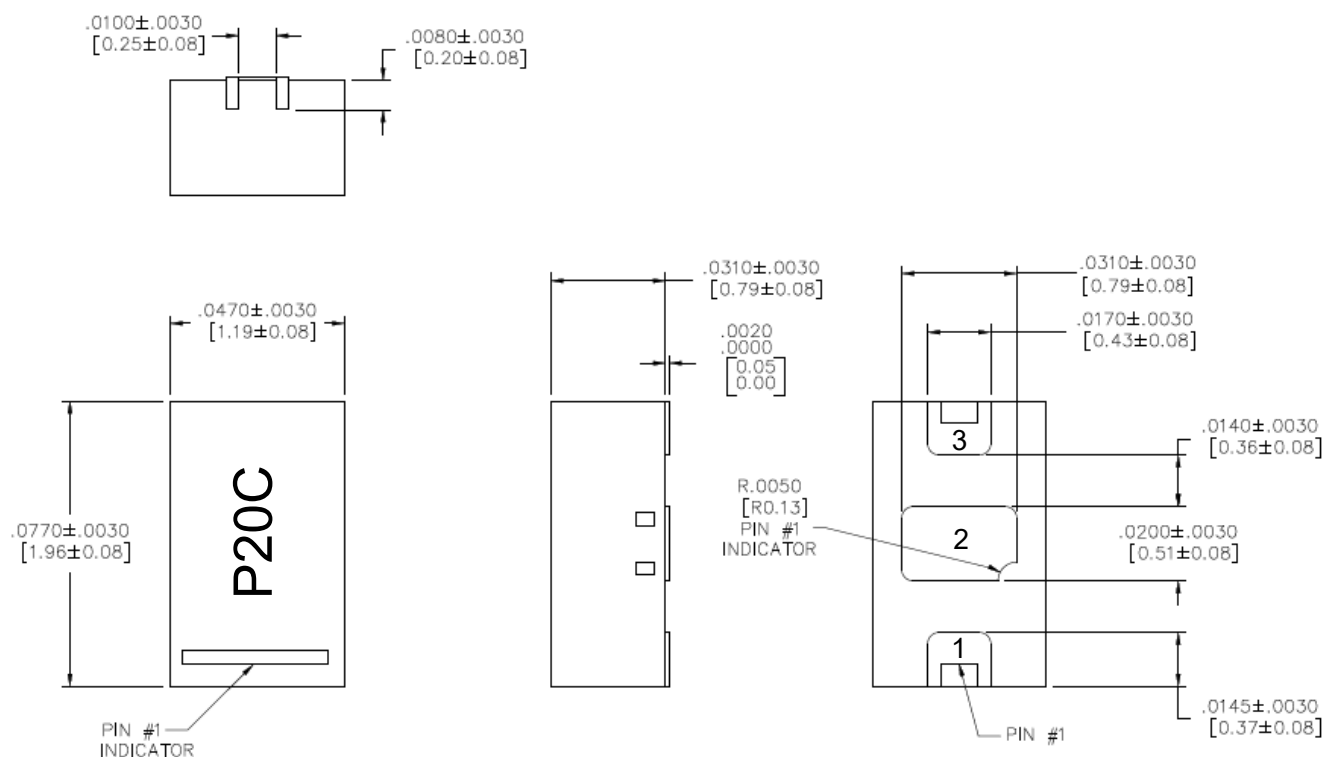

All dimensions shown as in [mm].
 Bottom Terminal Plating: NiPdAu
 Lead Frame Material: 8 mil Copper

1, 3 ANODE
 2 CATHODE

Printed Circuit Board Layout

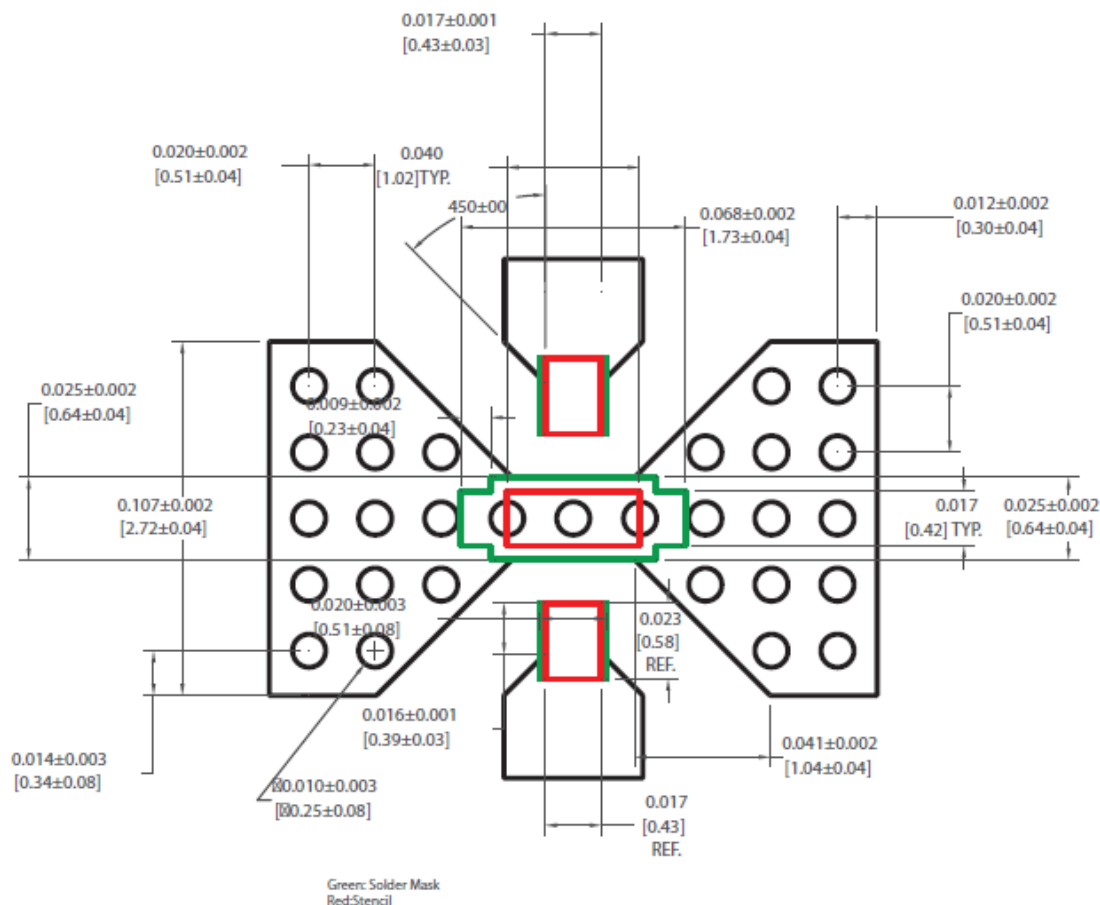

NOTE:

If possible, use copper filled vias underneath pin 2 for better thermals; otherwise, use vias that are plated through, filled and plated over.

Solder mask should provide a 60 μm clearance between copper pad and soldermask. Rounded pkg pads should have matching rounded solder mask openings.

Use circles or squares for the thermal land stencil such that only get 50% to 80% solder paste coverage.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.