

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** MCP48FEB18-E/MQ  
**Manufacturer:** Microchip Technology  
**Package:** 20-VQFN Exposed Pad  
**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/microchip-technology/mcp48feb18-e-mq.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.


---

## 8/10/12-Bit Quad/Octal Voltage Output, 6 LSb INL Digital-to-Analog Converters with SPI Interface

### Features

- Operating Voltage Range:
  - 2.7V to 5.5V – Full specifications
  - 1.8V to 2.7V – Reduced device specifications
- Output Voltage Resolutions:
  - 8-bit: **MCP48FXB0X** (256 steps)
  - 10-bit: **MCP48FXB1X** (1024 steps)
  - 12-bit: **MCP48FXB2X** (4096 steps)
- Rail-to-Rail Output
- Fast Settling Time of 7.8  $\mu$ s (Typical)
- DAC Voltage Reference Source Options:
  - Device  $V_{DD}$
  - External  $V_{REF}$  pin (buffered or unbuffered)
  - Internal band gap (1.22V typical)
- Output Gain Options:
  - 1x (unity)
  - 2x (available when not using internal  $V_{DD}$  as voltage source)
- Nonvolatile Memory (EEPROM) Option:
  - User-programmable Power-on Reset (POR)/Brown-out Reset (BOR) output setting and device Configuration bits recall
  - Auto-recall of saved DAC register setting
  - Auto-recall of saved device configuration (voltage reference, gain, power-down)
- Power-on/Brown-out Reset Protection
- Power-Down Modes:
  - Disconnects output buffer (high-impedance)
  - Selection of  $V_{OUT}$  pull-down resistors (125 k $\Omega$  or 1 k $\Omega$ )
- Low-Power Consumption:
  - Normal operation: <2.6 mA (quad), 3.2 mA (octal)
  - Power-down operation: 680 nA typical
  - EEPROM write cycle: 2.2 mA (quad), 2.7 mA (octal) maximum
- SPI Interface:
  - Supports Mode 0,0 and Mode 1,1
  - Up to 20 MHz writes and 10 MHz reads
  - Input buffers support interfacing to low-voltage digital devices
- Package Types: 20-Lead TSSOP, 20-Lead 5 mm x 5 mm VQFN
- Extended Temperature Range: -40°C to +125°C

### Package Types

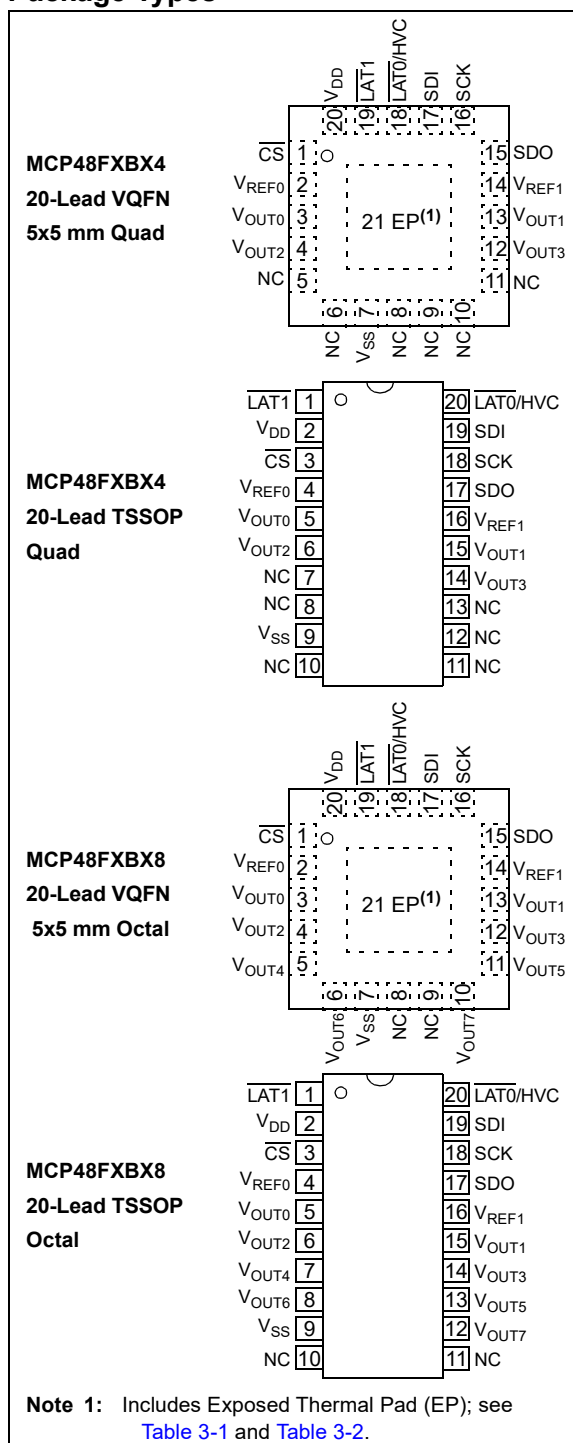

# MCP48FXBX4/8

## General Description

The MCP48FXBX4/8 devices are a family of buffered voltage output Digital-to-Analog Converters (DAC), with the following options:

- Quad or octal output channel configurations
- 8/10/12-bit resolution
- Volatile or nonvolatile user memory

The quad and octal options differ only by the number of output channels. The volatile and nonvolatile versions have an identical analog circuit structure.

There are three voltage reference sources: the external  $V_{REF}$  pin, the device's  $V_{DD}$  or an internal band gap voltage source.

When the  $V_{DD}$  mode is selected, it is internally connected to the DAC's reference circuit. When the external  $V_{REF}$  pin is used, the user has the option to select between a gain of 1 and 2 if the Buffered mode is used, or the internal buffer can be bypassed entirely in the External  $V_{REF}$  Unbuffered mode.

In the Internal Band Gap Voltage Reference mode, the gain can be selected between 2 and 4.

This family of devices features WiperLock™ functionality, which prevents inadvertent changes of the output value. It uses a high voltage on a specific pin, together with dedicated commands, to lock the values that are stored in memory.

These devices have an SPI compatible serial interface. **WRITE** commands are supported up to 20 MHz, while **READ** commands are supported up to 10 MHz.

## Applications

- Set Point or Offset Trimming
- Sensor Calibration
- Low-Power Portable Instrumentation
- PC Peripherals
- Data Acquisition Systems
- Motor Control

## MCP48FXBX4/8 DAC Output Channel Block Diagram



# MCP48FXBX4/8

**MCP48FXBX4 Block Diagram (Quad-Channel Output)**



**MCP48FXBX8 Block Diagram (Octal-Channel Output)**



# MCP48FVBX4/8

## Device Features

| Device     | Package Type            | # of Channels | Resolution (bits) | DAC Output POR/BOR Setting <sup>(1)</sup> | # of V <sub>REF</sub> Inputs | # of LAT Inputs | Internal Band Gap | Memory |
|------------|-------------------------|---------------|-------------------|-------------------------------------------|------------------------------|-----------------|-------------------|--------|
| MCP48FVB04 | VQFN-20 5 x 5, TSSOP-20 | 4             | 8                 | 7Fh                                       | 2                            | 2               | Yes               | RAM    |
| MCP48FVB14 | VQFN-20 5 x 5, TSSOP-20 | 4             | 10                | 1FFh                                      | 2                            | 2               | Yes               | RAM    |
| MCP48FVB24 | VQFN-20 5 x 5, TSSOP-20 | 4             | 12                | 7FFh                                      | 2                            | 2               | Yes               | RAM    |
| MCP48FVB08 | VQFN-20 5 x 5, TSSOP-20 | 8             | 8                 | 7Fh                                       | 2                            | 2               | Yes               | RAM    |
| MCP48FVB18 | VQFN-20 5 x 5, TSSOP-20 | 8             | 10                | 1FFh                                      | 2                            | 2               | Yes               | RAM    |
| MCP48FVB28 | VQFN-20 5 x 5, TSSOP-20 | 8             | 12                | 7FFh                                      | 2                            | 2               | Yes               | RAM    |
| MCP48FEB04 | VQFN-20 5 x 5, TSSOP-20 | 4             | 8                 | 7Fh                                       | 2                            | 2               | Yes               | EEPROM |
| MCP48FEB14 | VQFN-20 5 x 5, TSSOP-20 | 4             | 10                | 1FFh                                      | 2                            | 2               | Yes               | EEPROM |
| MCP48FEB24 | VQFN-20 5 x 5, TSSOP-20 | 4             | 12                | 7FFh                                      | 2                            | 2               | Yes               | EEPROM |
| MCP48FEB08 | VQFN-20 5 x 5, TSSOP-20 | 8             | 8                 | 7Fh                                       | 2                            | 2               | Yes               | EEPROM |
| MCP48FEB18 | VQFN-20 5 x 5, TSSOP-20 | 8             | 10                | 1FFh                                      | 2                            | 2               | Yes               | EEPROM |
| MCP48FEB28 | VQFN-20 5 x 5, TSSOP-20 | 8             | 12                | 7FFh                                      | 2                            | 2               | Yes               | EEPROM |

**Note 1:** The factory default value. The DAC output POR/BOR value can be modified via the nonvolatile DAC Output register (available only on nonvolatile devices – MCP48FEBXX).

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings<sup>(†)</sup>

|                                                                                         |                                             |
|-----------------------------------------------------------------------------------------|---------------------------------------------|
| Voltage on $V_{DD}$ with Respect to $V_{SS}$                                            | -0.6V to +6.5V                              |
| Voltage on All Pins with Respect to $V_{SS}$                                            | -0.6V to $V_{DD}+0.3V$                      |
| Input Clamp Current, $I_{IK}$ ( $V_I < 0$ , $V_I > V_{DD}$ , $V_I > V_{PP}$ on HV Pins) | $\pm 20$ mA                                 |
| Output Clamp Current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{DD}$ )                          | $\pm 20$ mA                                 |
| Maximum Current out of the $V_{SS}$ Pin (Quad)                                          | 150 mA                                      |
| (Octal)                                                                                 | 150 mA                                      |
| Maximum Current into the $V_{DD}$ Pin (Quad)                                            | 150 mA                                      |
| (Octal)                                                                                 | 150 mA                                      |
| Maximum Current Sourced by the $V_{OUT}$ Pin                                            | 20 mA                                       |
| Maximum Current Sunk by the $V_{OUT}$ Pin                                               | 20 mA                                       |
| Maximum Current Sunk by the $V_{REF}$ Pin                                               | 125 $\mu$ A                                 |
| Maximum Input Current Source/Sunk by the SDI, SCK and $\overline{CS}$ Pins              | 2 mA                                        |
| Maximum Output Current Sunk by the SDO Output Pin                                       | 25 mA                                       |
| Total Power Dissipation <sup>(1)</sup>                                                  | 400 mW                                      |
| Package Power Dissipation ( $T_A = +50^\circ\text{C}$ , $T_J = +150^\circ\text{C}$ )    |                                             |
| 20-Lead TSSOP                                                                           | 1300 mW                                     |
| 20-Lead VQFN (5 x 5 mm, ML)                                                             | 2800 mW                                     |
| ESD Protection on all Pins                                                              | $\geq \pm 6$ kV (HBM)                       |
|                                                                                         | $\geq \pm 400$ V (MM)                       |
|                                                                                         | $\geq \pm 2$ kV (CDM)                       |
| Latch-up (per JEDEC <sup>®</sup> JESD78A) at $+125^\circ\text{C}$                       | $\pm 100$ mA                                |
| Storage Temperature                                                                     | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Ambient Temperature with Power Applied                                                  | $-55^\circ\text{C}$ to $+125^\circ\text{C}$ |
| Soldering Temperature of Leads (10 seconds)                                             | $+300^\circ\text{C}$                        |
| Maximum Junction Temperature ( $T_J$ )                                                  | $+150^\circ\text{C}$                        |

**† Notice:** Stresses above those listed under “Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Note 1:** Power dissipation is calculated as follows:

$$P_{DIS} = V_{DD} \times \{I_{DD} - \sum I_{OH}\} + \sum \{(V_{DD} - V_{OH}) \times I_{OH}\} + \sum (V_{OL} \times I_{OL})$$

# MCP48FVBX4/8

## DC CHARACTERISTICS

### Standard Operating Conditions (unless otherwise specified):

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $G_x = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters                                                | Sym.          | Min.     | Typ. | Max.                   | Units | Conditions                                                                                                                                       |
|-----------------------------------------------------------|---------------|----------|------|------------------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply Voltage                                            | $V_{DD}$      | 2.7      | —    | 5.5                    | V     |                                                                                                                                                  |
|                                                           |               | 1.8      | —    | 2.7                    | V     | Serial interface operational, DAC operation with reduced analog specifications                                                                   |
| $V_{DD}$ Voltage (Rising) to Ensure Device Power-on Reset | $V_{POR/BOR}$ | —        | —    | 1.7                    | V     | RAM retention voltage: ( $V_{RAM}$ ) < $V_{POR}$ , $V_{DD}$ voltages greater than the $V_{POR/BOR}$ limit ensure that the device is out of Reset |
| $V_{DD}$ Rise Rate to Ensure Power-on Reset               | $V_{DDRR}$    | Note 3   |      |                        | V/ms  |                                                                                                                                                  |
| High-Voltage Commands Voltage Range (HVC Pin)             | $V_{HV}$      | $V_{SS}$ | —    | 12.5                   | V     | The HVC pin will be at one of the three input levels ( $V_{IL}$ , $V_{IH}$ or $V_{IHH}$ ) <sup>(1)</sup>                                         |
| High-Voltage Input Entry Voltage                          | $V_{IHEN}$    | 9.0      | —    | —                      | V     | Threshold for entry into WiperLock™ technology                                                                                                   |
| High-Voltage Input Exit Voltage                           | $V_{IHHEX}$   | —        | —    | $V_{DD} + 0.8\text{V}$ | V     | Note 1                                                                                                                                           |

**Note 1:** This parameter is ensured by design.

**3:** POR/BOR voltage trip point is not slope dependent. Hysteresis implemented with time delay.

## DC CHARACTERISTICS (CONTINUED)

### Standard Operating Conditions (unless otherwise specified):

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $G_x = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters         | Sym.             | Min. | Typ. | Max. | Units | Conditions                                                     |                                                                                                                                                                                                     |                                                                                                                                                                                   |  |
|--------------------|------------------|------|------|------|-------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Supply Current     | I <sub>DD</sub>  | —    | —    | 1.0  | mA    | Quad                                                           | 1 MHz <sup>(1)</sup>                                                                                                                                                                                | Serial interface active (not High-Voltage Command), VRnB:VRnA = All Modes <sup>(4)</sup> , V <sub>OUT</sub> is unloaded, V <sub>DD</sub> = 5.5V, Volatile DAC Register = Midscale |  |
|                    |                  | —    | —    | 1.7  | mA    |                                                                | 10 MHz <sup>(1)</sup>                                                                                                                                                                               |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 2.6  | mA    |                                                                | 20 MHz                                                                                                                                                                                              |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 1.6  | mA    | Octal                                                          | 1 MHz <sup>(1)</sup>                                                                                                                                                                                |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 2.3  | mA    |                                                                | 10 MHz <sup>(1)</sup>                                                                                                                                                                               |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 3.2  | mA    |                                                                | 20 MHz                                                                                                                                                                                              |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 0.85 | mA    | Quad                                                           | Serial interface inactive <sup>(1)</sup> (not High-Voltage Command), VRnB:VRnA = All Modes, SCK = SDI = V <sub>SS</sub> , V <sub>OUT</sub> is unloaded, Volatile DAC Register = Midscale            |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 1.6  | mA    | Octal                                                          |                                                                                                                                                                                                     |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 2.2  | mA    | Quad                                                           | EE write current, V <sub>REF</sub> = V <sub>DD</sub> = 5.5V (after write, serial interface is inactive), write 0x7FF to nonvolatile DAC0 (address 10h), V <sub>OUT</sub> pins are unloaded          |                                                                                                                                                                                   |  |
|                    |                  | —    | —    | 2.7  | mA    | Octal                                                          |                                                                                                                                                                                                     |                                                                                                                                                                                   |  |
|                    |                  | —    | 560  | 700  | μA    | Quad                                                           | HVC = 12.5V (High-Voltage Command), serial interface inactive, V <sub>REF</sub> = V <sub>DD</sub> = 5.5V, LAT/HVC = V <sub>IHH</sub> , DAC Registers = Midscale, V <sub>OUT</sub> pins are unloaded |                                                                                                                                                                                   |  |
|                    |                  | —    | 1100 | 1300 | μA    | Octal                                                          |                                                                                                                                                                                                     |                                                                                                                                                                                   |  |
| Power-Down Current | I <sub>DDP</sub> | —    | 0.68 | 3.8  | μA    | PDnB:PDnA = 01 <sup>(5)</sup> , V <sub>OUT</sub> not connected |                                                                                                                                                                                                     |                                                                                                                                                                                   |  |

**Note 1:** This parameter is ensured by characterization.

**4:** Supply current is independent of current through the resistor ladder in mode VRnB:VRnA = 10.

**5:** The PDnB:PDnA = 00, 10 and 11 configurations should have the same current.

# MCP48FXBX4/8

## DC CHARACTERISTICS (CONTINUED)

**Standard Operating Conditions (unless otherwise specified):**

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $Gx = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters                                                                                                   | Sym.                                    | Min.     | Typ. | Max.     | Units                         | Conditions                                                |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------|----------|------|----------|-------------------------------|-----------------------------------------------------------|
| Resistor Ladder Resistance                                                                                   | $R_L$                                   | 100      | 140  | 180      | $\text{k}\Omega$              | $VRnB:VRnA = 10$ ,<br>$V_{REF} = V_{DD}$ <sup>(6)</sup>   |
| Resolution; # of Resistors and # of Taps (see <a href="#">B.1 “Resolution”</a> )                             | N                                       | 256      |      |          | Taps                          | 8-bit No missing codes                                    |
|                                                                                                              |                                         | 1024     |      |          | Taps                          | 10-bit No missing codes                                   |
|                                                                                                              |                                         | 4096     |      |          | Taps                          | 12-bit No missing codes                                   |
| Nominal $V_{OUT}$ Match <sup>(11)</sup>                                                                      | $ V_{OUT} - V_{OUTMEAN}  / V_{OUTMEAN}$ | —        | 0.5  | 1.0      | %                             | $2.7\text{V} \leq V_{DD} \leq 5.5\text{V}$ <sup>(2)</sup> |
|                                                                                                              |                                         | —        | —    | 1.2      | %                             | $1.8\text{V}$ <sup>(2)</sup>                              |
| $V_{OUT}$ Temperature Coefficient (see <a href="#">B.19 “<math>V_{OUT}</math> Temperature Coefficient”</a> ) | $\Delta V_{OUT} / \Delta T$             | —        | 15   | —        | $\text{ppm}/^{\circ}\text{C}$ | Code = Midscale (7Fh, 1FFh or 7FFh)                       |
| $V_{REF}$ Pin Input Voltage Range                                                                            | $V_{REF}$                               | $V_{SS}$ | —    | $V_{DD}$ | V                             | $1.8\text{V} \leq V_{DD} \leq 5.5\text{V}$ <sup>(1)</sup> |

**Note 1:** This parameter is ensured by design.

**2:** This parameter is ensured by characterization.

**6:** Resistance is defined as the resistance between the  $V_{REF}$  pin (mode  $VRnB:VRnA = 10$ ) to  $V_{SS}$  pin. For octal-channel devices (MCP48FXBX8), this is the effective resistance of each resistor ladder. The resistance measurement is one of the two resistor ladders measured in parallel.

**11:** Variation of one output voltage to mean output voltage.

## DC CHARACTERISTICS (CONTINUED)

### Standard Operating Conditions (unless otherwise specified):

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $G_x = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters                                                                              | Sym.              | Min.                                                                        | Typ. | Max. | Units | Conditions                      |                                                                                                                                                       |
|-----------------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------|------|------|-------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Zero-Scale Error;<br>Code = 000h<br>(see <a href="#">B.5 “Zero-Scale Error (EzS)”</a> ) | E <sub>ZS</sub>   | —                                                                           | —    | 0.75 | LSb   | 8-bit                           | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                         |                   | —                                                                           | —    | 3    | LSb   | 10-bit                          | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                         |                   | —                                                                           | —    | 12   | LSb   | 12-bit                          | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 11, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = 0.5 × V <sub>DD</sub> = 2.7, no load                                                            |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 10, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = V <sub>DD</sub> /2, V <sub>REF</sub> = V <sub>DD</sub> ,<br>V <sub>DD</sub> = 2.7-5.5V, no load |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 10, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = V <sub>DD</sub> /2, V <sub>REF</sub> = V <sub>DD</sub> ,<br>V <sub>DD</sub> = 2.7-5.5V, no load |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 00, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> = 2.7-5.5V, no load                                                                     |
| Full-Scale Error (see<br><a href="#">B.4 “Full-Scale Error (EFS)”</a> )                 | E <sub>FS</sub>   | —                                                                           | —    | 4.5  | LSb   | 8-bit                           | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                         |                   | —                                                                           | —    | 18   | LSb   | 10-bit                          | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                         |                   | —                                                                           | —    | 70   | LSb   | 12-bit                          | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 11, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = 0.5 × V <sub>DD</sub> = 2.7, no load                                                            |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 10, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = V <sub>DD</sub> /2, V <sub>REF</sub> = V <sub>DD</sub> ,<br>V <sub>DD</sub> = 2.7-5.5V, no load |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 10, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = V <sub>DD</sub> /2, V <sub>REF</sub> = V <sub>DD</sub> ,<br>V <sub>DD</sub> = 2.7-5.5V, no load |
|                                                                                         |                   | See <a href="#">Section 2.0 “Typical Performance Curves”</a> <sup>(1)</sup> |      |      | LSb   |                                 | VRnB:VRnA = 00, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> = 2.7-5.5V, no load                                                                     |
| Offset Error<br>(see <a href="#">B.7 “Offset Error (EOS)”</a> )                         | E <sub>OS</sub>   | -15                                                                         | ±1.5 | +15  | mV    | VRnB:VRnA = 00, Gx = 0, no load |                                                                                                                                                       |
| Offset Voltage<br>Temperature<br>Coefficient                                            | V <sub>OSTC</sub> | —                                                                           | ±10  | —    | μV/°C |                                 |                                                                                                                                                       |

**Note 1:** This parameter is ensured by characterization.

# MCP48FXBX4/8

## DC CHARACTERISTICS (CONTINUED)

### Standard Operating Conditions (unless otherwise specified):

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $G_x = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters                                                                               | Sym.           | Min.                                                               | Typ. | Max. | Units    | Conditions |                                                                                                                                                       |
|------------------------------------------------------------------------------------------|----------------|--------------------------------------------------------------------|------|------|----------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gain Error<br>(see <b>B.9 “Gain Error (EG)”</b> ) <sup>(8)</sup>                         | E <sub>G</sub> | -1.0                                                               | ±0.1 | +1.0 | % of FSR | 8-bit      | Code = 250, no load,<br>VRnB:VRnA = 00, Gx = 0                                                                                                        |
|                                                                                          |                | -1.0                                                               | ±0.1 | +1.0 | % of FSR | 10-bit     | Code = 1000, no load,<br>VRnB:VRnA = 00, Gx = 0                                                                                                       |
|                                                                                          |                | -1.0                                                               | ±0.1 | +1.0 | % of FSR | 12-bit     | Code = 4000, no load,<br>VRnB:VRnA = 00, Gx = 0                                                                                                       |
| Gain Error Drift (see <b>B.10 “Gain Error Drift (EGD)”</b> )                             | ΔG/°C          | —                                                                  | -3   | —    | ppm/°C   |            |                                                                                                                                                       |
| Total Unadjusted Error<br>(see <b>B.6 “Total Unadjusted Error (ET)”</b> ) <sup>(2)</sup> | E <sub>T</sub> | -2.5                                                               | —    | +0.5 | LSb      | 8-bit      | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                          |                | -10.0                                                              | —    | +2.0 | LSb      | 10-bit     | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                          |                | -40.0                                                              | —    | +8.0 | LSb      | 12-bit     | VRnB:VRnA = 10, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> , no load                                                                               |
|                                                                                          |                | See <b>Section 2.0 “Typical Performance Curves”</b> <sup>(1)</sup> |      |      |          |            | VRnB:VRnA = 11, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = 0.5 × V <sub>DD</sub> = 2.7, no load                                                            |
|                                                                                          |                | See <b>Section 2.0 “Typical Performance Curves”</b> <sup>(1)</sup> |      |      |          |            | VRnB:VRnA = 10, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = V <sub>DD</sub> /2, V <sub>REF</sub> = V <sub>DD</sub> ,<br>V <sub>DD</sub> = 2.7-5.5V, no load |
|                                                                                          |                | See <b>Section 2.0 “Typical Performance Curves”</b> <sup>(1)</sup> |      |      |          |            | VRnB:VRnA = 10, Gx = 0, Gx = 1,<br>V <sub>REF</sub> = V <sub>DD</sub> /2, V <sub>REF</sub> = V <sub>DD</sub> ,<br>V <sub>DD</sub> = 2.7-5.5V, no load |
|                                                                                          |                | See <b>Section 2.0 “Typical Performance Curves”</b> <sup>(1)</sup> |      |      |          |            | VRnB:VRnA = 00, Gx = 0,<br>V <sub>REF</sub> = V <sub>DD</sub> = 2.7-5.5V, no load                                                                     |

**Note 1:** This parameter is ensured by characterization.

## DC CHARACTERISTICS (CONTINUED)

| <b>Standard Operating Conditions (unless otherwise specified):</b><br>Operating Temperature: $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (Extended).<br>All parameters apply across the specified operating ranges unless noted.<br>$V_{DD} = +2.7\text{V}$ to $5.5\text{V}$ , $V_{REF} = +2.048\text{V}$ to $V_{DD}$ , $V_{SS} = 0\text{V}$ , $G_x = 0$ , $R_L = 5\text{ k}\Omega$ from $V_{OUT}$ to GND, $C_L = 100\text{ pF}$ .<br>Typical specifications represent values for $V_{DD} = 5.5\text{V}$ , $T_A = +25^{\circ}\text{C}$ . |      |                                                                             |           |      |       |            |                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------|-----------|------|-------|------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Sym. | Min.                                                                        | Typ.      | Max. | Units | Conditions |                                                                                                                                          |
| Integral Nonlinearity<br>(see <a href="#">B.11 "Integral Nonlinearity (INL)"</a> ) <sup>(7,10)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                  | INL  | -0.5                                                                        | $\pm 0.1$ | +0.5 | LSb   | 8-bit      | $VRnB:VRnA = 10$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD}$ , no load                                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      | -1.5                                                                        | $\pm 0.4$ | +1.5 | LSb   | 10-bit     | $VRnB:VRnA = 10$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD}$ , no load                                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      | -6                                                                          | $\pm 1.5$ | +6   | LSb   | 12-bit     | $VRnB:VRnA = 10$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD}$ , no load                                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      | See <a href="#">Section 2.0 "Typical Performance Curves"</a> <sup>(1)</sup> |           |      | LSb   |            | $VRnB:VRnA = 11$ , $G_x = 0$ , $G_x = 1$ ,<br>$V_{REF} = 0.5 \times V_{DD} = 2.7$ , no load                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      | See <a href="#">Section 2.0 "Typical Performance Curves"</a> <sup>(1)</sup> |           |      | LSb   |            | $VRnB:VRnA = 10$ , $G_x = 0$ , $G_x = 1$ ,<br>$V_{REF} = V_{DD}/2$ , $V_{REF} = V_{DD}$ ,<br>$V_{DD} = 2.7\text{-}5.5\text{V}$ , no load |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      | See <a href="#">Section 2.0 "Typical Performance Curves"</a> <sup>(1)</sup> |           |      | LSb   |            | $VRnB:VRnA = 10$ , $G_x = 0$ , $G_x = 1$ ,<br>$V_{REF} = V_{DD}/2$ , $V_{REF} = V_{DD}$ ,<br>$V_{DD} = 2.7\text{-}5.5\text{V}$ , no load |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      | See <a href="#">Section 2.0 "Typical Performance Curves"</a> <sup>(1)</sup> |           |      | LSb   |            | $VRnB:VRnA = 00$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD} = 2.7\text{-}5.5\text{V}$ , no load                                                  |

**Note 1:** This parameter is ensured by characterization.

**7:** INL and DNL are measured at  $V_{OUT}$  with  $V_{RL} = V_{DD}$  ( $VRnB:VRnA = 00$ ).

**10:** Code range is dependent on resolution: 8-bit, codes 6 to 250; 10-bit, codes 25 to 1000; 12-bit, 100 to 4000.

# MCP48FXBX4/8

## DC CHARACTERISTICS (CONTINUED)

### Standard Operating Conditions (unless otherwise specified):

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $G_x = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters                                                                                                      | Sym. | Min.                                                                        | Typ.         | Max.  | Units | Conditions |                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------|--------------|-------|-------|------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Differential Nonlinearity<br>(see <a href="#">B.12</a><br>“Differential Nonlinearity (DNL)” <sup>(7,10)</sup> ) | DNL  | -0.25                                                                       | $\pm 0.0125$ | +0.25 | LSb   | 8-bit      | $VRnB:VRnA = 10$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD}$ , no load                                                                           |
|                                                                                                                 |      | -0.5                                                                        | $\pm 0.05$   | +0.5  | LSb   | 10-bit     | $VRnB:VRnA = 10$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD}$ , no load                                                                           |
|                                                                                                                 |      | -1.0                                                                        | $\pm 0.2$    | +1.0  | LSb   | 12-bit     | $VRnB:VRnA = 10$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD}$ , no load                                                                           |
|                                                                                                                 |      | See <a href="#">Section 2.0</a> “Typical Performance Curves” <sup>(1)</sup> |              |       | LSb   |            | $VRnB:VRnA = 11$ , $G_x = 0$ , $G_x = 1$ ,<br>$V_{REF} = 0.5 \times V_{DD} = 2.7$ , no load                                              |
|                                                                                                                 |      | See <a href="#">Section 2.0</a> “Typical Performance Curves” <sup>(1)</sup> |              |       | LSb   |            | $VRnB:VRnA = 10$ , $G_x = 0$ , $G_x = 1$ ,<br>$V_{REF} = V_{DD}/2$ , $V_{REF} = V_{DD}$ ,<br>$V_{DD} = 2.7\text{-}5.5\text{V}$ , no load |
|                                                                                                                 |      | See <a href="#">Section 2.0</a> “Typical Performance Curves” <sup>(1)</sup> |              |       | LSb   |            | $VRnB:VRnA = 10$ , $G_x = 0$ , $G_x = 1$ ,<br>$V_{REF} = V_{DD}/2$ , $V_{REF} = V_{DD}$ ,<br>$V_{DD} = 2.7\text{-}5.5\text{V}$ , no load |
|                                                                                                                 |      | See <a href="#">Section 2.0</a> “Typical Performance Curves” <sup>(1)</sup> |              |       | LSb   |            | $VRnB:VRnA = 00$ , $G_x = 0$ ,<br>$V_{REF} = V_{DD} = 2.7\text{-}5.5\text{V}$ , no load                                                  |

**Note 1:** This parameter is ensured by characterization.

**7:** INL and DNL are measured at  $V_{OUT}$  with  $V_{RL} = V_{DD}$  ( $VRnB:VRnA = 00$ ).

**10:** Code range is dependent on resolution: 8-bit, codes 6 to 250; 10-bit, codes 25 to 1000; 12-bit, 100 to 4000.

## DC CHARACTERISTICS (CONTINUED)

| Standard Operating Conditions (unless otherwise specified):                                                                                                                                    |                |          |                  |                 |                         |                                                                                                    |                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------|------------------|-----------------|-------------------------|----------------------------------------------------------------------------------------------------|-----------------------|
| Operating Temperature: $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (Extended).                                                                                                    |                |          |                  |                 |                         |                                                                                                    |                       |
| All parameters apply across the specified operating ranges unless noted.                                                                                                                       |                |          |                  |                 |                         |                                                                                                    |                       |
| $V_{DD} = +2.7\text{V}$ to $5.5\text{V}$ , $V_{REF} = +2.048\text{V}$ to $V_{DD}$ , $V_{SS} = 0\text{V}$ , $G_x = 0$ , $R_L = 5\text{ k}\Omega$ from $V_{OUT}$ to GND, $C_L = 100\text{ pF}$ . |                |          |                  |                 |                         |                                                                                                    |                       |
| Typical specifications represent values for $V_{DD} = 5.5\text{V}$ , $T_A = +25^{\circ}\text{C}$ .                                                                                             |                |          |                  |                 |                         |                                                                                                    |                       |
| Parameters                                                                                                                                                                                     | Sym.           | Min.     | Typ.             | Max.            | Units                   | Conditions                                                                                         |                       |
| -3 dB Bandwidth<br>(see <a href="#">B.16 “-3 dB Bandwidth”</a> )                                                                                                                               | BW             | —        | 86.5             | —               | kHz                     | $V_{REF} = 2.048\text{V} \pm 0.1\text{V}$ ,<br>$VRnB:VRnA = 10$ , $G_x = 0$                        |                       |
|                                                                                                                                                                                                |                | —        | 67.7             | —               | kHz                     | $V_{REF} = 2.048\text{V} \pm 0.1\text{V}$ ,<br>$VRnB:VRnA = 10$ , $G_x = 1$                        |                       |
| Output Amplifier                                                                                                                                                                               |                |          |                  |                 |                         |                                                                                                    |                       |
| Minimum Output Voltage                                                                                                                                                                         | $V_{OUT(MIN)}$ | —        | 0.01             | —               | V                       | $1.8\text{V} \leq V_{DD} < 5.5\text{V}$ ,<br>output amplifier's minimum drive                      |                       |
| Maximum Output Voltage                                                                                                                                                                         | $V_{OUT(MAX)}$ | —        | $V_{DD} - 0.016$ | —               | V                       | $1.8\text{V} \leq V_{DD} < 5.5\text{V}$ ,<br>output amplifier's maximum drive                      |                       |
| Phase Margin                                                                                                                                                                                   | PM             | —        | 58               | —               | $^{\circ}\text{C}$      | $C_L = 400\text{ pF}$ , $R_L = \infty$                                                             |                       |
| Slew Rate <sup>(9)</sup>                                                                                                                                                                       | SR             | —        | 0.44             | —               | $\text{V}/\mu\text{s}$  | $R_L = 5\text{ k}\Omega$                                                                           |                       |
| Short-Circuit Current                                                                                                                                                                          | $I_{SC}$       | 3        | 9                | 22              | mA                      | Short to $V_{SS}$                                                                                  | DAC Code = Full Scale |
|                                                                                                                                                                                                |                | 3        | 9                | 22              | mA                      | Short to $V_{DD}$                                                                                  | DAC Code = 000h       |
| Internal Band Gap                                                                                                                                                                              |                |          |                  |                 |                         |                                                                                                    |                       |
| Band Gap Voltage                                                                                                                                                                               | $V_{BG}$       | 1.18     | 1.22             | 1.26            | V                       |                                                                                                    |                       |
| Band Gap Voltage Temperature Coefficient                                                                                                                                                       | $V_{BGTC}$     | —        | 15               | —               | ppm/ $^{\circ}\text{C}$ |                                                                                                    |                       |
| Operating Range                                                                                                                                                                                | $V_{DD}$       | 2.0      | —                | 5.5             | V                       | $V_{REF}$ pin voltage stable                                                                       |                       |
|                                                                                                                                                                                                |                | 2.2      | —                | 5.5             | V                       | $V_{OUT}$ output linear                                                                            |                       |
| External Reference ( $V_{REF}$ )                                                                                                                                                               |                |          |                  |                 |                         |                                                                                                    |                       |
| Input Range <sup>(1)</sup>                                                                                                                                                                     | $V_{REF}$      | $V_{SS}$ | —                | $V_{DD} - 0.04$ | V                       | $VRnB:VRnA = 11$ (Buffered mode)                                                                   |                       |
|                                                                                                                                                                                                |                | $V_{SS}$ | —                | $V_{DD}$        | V                       | $VRnB:VRnA = 10$ (Unbuffered mode)                                                                 |                       |
| Input Capacitance                                                                                                                                                                              | $C_{REF}$      | —        | 1                | —               | pF                      | $VRnB:VRnA = 10$ (Unbuffered mode)                                                                 |                       |
| Total Harmonic Distortion <sup>(1)</sup>                                                                                                                                                       | THD            | —        | -64              | —               | dB                      | $V_{REF} = 2.048\text{V} \pm 0.1\text{V}$ ,<br>$VRnB:VRnA = 10$ , $G_x = 0$ ,<br>Frequency = 1 kHz |                       |
| Dynamic Performance                                                                                                                                                                            |                |          |                  |                 |                         |                                                                                                    |                       |
| Major Code Transition Glitch (see <a href="#">B.14 “Major Code Transition Glitch”</a> )                                                                                                        | —              | —        | 45               | —               | nV-s                    | 1 LSb change around major carry (7FFh to 800h)                                                     |                       |
| Digital Feedthrough (see <a href="#">B.15 “Digital Feedthrough”</a> )                                                                                                                          | —              | —        | <10              | —               | nV-s                    |                                                                                                    |                       |

**Note 1:** This parameter is ensured by design.

**9:** Within 1/2 LSb of final value when code changes from 1/4 to 3/4 of FSR. (Example: 400h to C00h in a 12-bit device.)

# MCP48FVBX4/8

## DC CHARACTERISTICS (CONTINUED)

| <b>Standard Operating Conditions (unless otherwise specified):</b><br>Operating Temperature: $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (Extended).<br>All parameters apply across the specified operating ranges unless noted.<br>$V_{DD} = +2.7\text{V}$ to $5.5\text{V}$ , $V_{REF} = +2.048\text{V}$ to $V_{DD}$ , $V_{SS} = 0\text{V}$ , $Gx = 0$ , $R_L = 5\text{ k}\Omega$ from $V_{OUT}$ to GND, $C_L = 100\text{ pF}$ .<br>Typical specifications represent values for $V_{DD} = 5.5\text{V}$ , $T_A = +25^{\circ}\text{C}$ . |                   |               |              |              |               |                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|--------------|--------------|---------------|----------------------------------------------------|
| Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Sym.              | Min.          | Typ.         | Max.         | Units         | Conditions                                         |
| <b>Digital Inputs/Outputs (CS, SCK, SDI, SDO, LAT0/HVC, LAT1)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                   |               |              |              |               |                                                    |
| Schmitt Trigger High Input Threshold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $V_{IH}$          | $0.45 V_{DD}$ | —            | —            | V             | $2.7\text{V} \leq V_{DD} \leq 5.5\text{V}$         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                   | $0.5 V_{DD}$  | —            | —            | V             | $1.8\text{V} \leq V_{DD} \leq 2.7\text{V}$         |
| Schmitt Trigger Low Input Threshold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | $V_{IL}$          | —             | —            | $0.2 V_{DD}$ | V             |                                                    |
| Hysteresis of Schmitt Trigger Inputs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $V_{HYS}$         | —             | $0.1 V_{DD}$ | —            | V             |                                                    |
| Output Low Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $V_{OL}$          | $V_{SS}$      | —            | $0.3 V_{DD}$ | V             | $I_{OL} = 5\text{ mA}$ , $V_{DD} = 5.5\text{V}$    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                   | $V_{SS}$      | —            | $0.3 V_{DD}$ | V             | $I_{OL} = 1\text{ mA}$ , $V_{DD} = 1.8\text{V}$    |
| Output High Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | $V_{OH}$          | $0.7 V_{DD}$  | —            | $V_{DD}$     | V             | $I_{OH} = -2.5\text{ mA}$ , $V_{DD} = 5.5\text{V}$ |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                   | $0.7 V_{DD}$  | —            | $V_{DD}$     | V             | $I_{OH} = -1\text{ mA}$ , $V_{DD} = 1.8\text{V}$   |
| Input Leakage Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $I_{IL}$          | -1            | —            | 1            | $\mu\text{A}$ | $V_{IN} = V_{DD}$ and $V_{IN} = V_{SS}$            |
| Pin Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $C_{IN}, C_{OUT}$ | —             | 10           | —            | pF            | $f_C = 20\text{ MHz}$                              |

## DC CHARACTERISTICS (CONTINUED)

### Standard Operating Conditions (unless otherwise specified):

Operating Temperature:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$  (Extended).

All parameters apply across the specified operating ranges unless noted.

$V_{DD} = +2.7\text{V}$  to  $5.5\text{V}$ ,  $V_{REF} = +2.048\text{V}$  to  $V_{DD}$ ,  $V_{SS} = 0\text{V}$ ,  $G_x = 0$ ,  $R_L = 5\text{ k}\Omega$  from  $V_{OUT}$  to GND,  $C_L = 100\text{ pF}$ .

Typical specifications represent values for  $V_{DD} = 5.5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ .

| Parameters                                                       | Sym.             | Min.          | Typ.  | Max.  | Units  | Conditions                      |                  |
|------------------------------------------------------------------|------------------|---------------|-------|-------|--------|---------------------------------|------------------|
| RAM Value                                                        |                  |               |       |       |        |                                 |                  |
| Value Range                                                      | N                | 0h            | —     | FFh   | Hex    | 8-bit                           |                  |
|                                                                  |                  | 0h            | —     | 3FFh  | Hex    | 10-bit                          |                  |
|                                                                  |                  | 0h            | —     | FFFh  | Hex    | 12-bit                          |                  |
| DAC Register POR/BOR Value                                       | N                | See Table 4-2 |       |       | Hex    | 8-bit                           |                  |
|                                                                  |                  | See Table 4-2 |       |       | Hex    | 10-bit                          |                  |
|                                                                  |                  | See Table 4-2 |       |       | Hex    | 12-bit                          |                  |
| PDCON Initial Factory Setting                                    | N                | See Table 4-2 |       |       | Hex    |                                 |                  |
| EEPROM                                                           |                  |               |       |       |        |                                 |                  |
| Endurance                                                        | EN <sub>EE</sub> | —             | 1M    | —     | Cycles | Notes 1, 2                      |                  |
| Data Retention                                                   | DR <sub>EE</sub> | —             | 200   | —     | Years  | At +25°C <sup>(1,2)</sup>       |                  |
| EEPROM Range                                                     | N                | 0h            | —     | FFh   | Hex    | 8-bit                           | DACn register(s) |
|                                                                  |                  | 0h            | —     | 3FFh  | Hex    | 10-bit                          | DACn register(s) |
|                                                                  |                  | 0h            | —     | FFFh  | Hex    | 12-bit                          | DACn register(s) |
| Initial Factory Setting                                          | N                | See Table 4-2 |       |       |        |                                 |                  |
| EEPROM Programming Write Cycle Time                              | t <sub>WC</sub>  | —             | 11    | 16    | ms     | V <sub>DD</sub> = +1.8V to 5.5V |                  |
| Power Requirements                                               |                  |               |       |       |        |                                 |                  |
| Power Supply Sensitivity (B.17 “Power Supply Sensitivity (PSS)”) | PSS              | —             | 0.002 | 0.005 | %/%    | 8-bit                           | Code = 7Fh       |
|                                                                  |                  | —             | 0.002 | 0.005 | %/%    | 10-bit                          | Code = 1FFh      |
|                                                                  |                  | —             | 0.002 | 0.005 | %/%    | 12-bit                          | Code = 7FFh      |

**Note 1:** This parameter is ensured by design.

**Note 2:** This parameter is ensured by characterization.

# MCP48FXBX4/8

---

## DC Notes:

1. This parameter is ensured by design.
2. This parameter is ensured by characterization.
3. POR/BOR voltage trip point is not slope-dependent. Hysteresis is implemented with time delay.
4. Supply current is independent of current through the resistor ladder in mode VRnB:VRnA = 10.
5. The PDnB:PDnA bits = 01, 10 and 11 configurations should have the same current.
6. Resistance is defined as the resistance between the V<sub>REF</sub> pin (mode VRnB:VRnA = 10) to V<sub>SS</sub> pin. For octal-channel devices (MCP48FXBX8), this is the effective resistance of each resistor ladder. The resistance measurement is one of the two resistor ladders measured in parallel.
7. INL and DNL are measured at V<sub>OUT</sub> with V<sub>RL</sub> = V<sub>DD</sub> (VRnB:VRnA = 00).
8. This gain error does not include an offset error.
9. Within 1/2 LSB of the final value when the code changes from 1/4 to 3/4 of FSR. (Example: 400h to C00h in a 12-bit device.)
10. Code range is dependent on resolution: 8-bit, codes 6 to 250; 10-bit, codes 25 to 1000; 12-bit, codes 100 to 4000.
11. Variation of one output voltage to mean output voltage.

## 1.1 Timing Waveforms and Requirements

### 1.1.1 WIPER SETTTLING TIME




**FIGURE 1-1:**  $V_{OUT}$  Settling Time Waveforms.

**TABLE 1-1: WIPER SETTTLING TIMING**

| Timing Characteristics                                                                                                      |       | Standard Operating Conditions (unless otherwise specified):<br>Operating Temperature: $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (Extended).<br>All parameters apply across the specified operating ranges unless noted.<br>$V_{DD} = +1.8\text{V}$ to $5.5\text{V}$ , $V_{SS} = 0\text{V}$ , $R_L = 2\text{ k}\Omega$ from $V_{OUT}$ to GND, $C_L = 100\text{ pF}$ .<br>Typical specifications represent values for $V_{DD} = 5.5\text{V}$ , $T_A = +25^{\circ}\text{C}$ . |      |      |      |               |                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|-------------------------------------------------------------------------------|
|                                                                                                                             |       | Sym.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Min. | Typ. | Max. | Units         | Conditions                                                                    |
| $V_{OUT}$ Settling Time; $\pm 0.5\text{ LSB}$ Error Band, $C_L = 100\text{ pF}$ (see <a href="#">B.13 "Settling Time"</a> ) | $t_s$ | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 7.8  | —    | —    | $\mu\text{s}$ | 12-bit Code = 400h $\rightarrow$ C00h; C00h $\rightarrow$ 400h <sup>(1)</sup> |

**Note 1:** Within 1/2 LSB of the final value when the code changes from 1/4 to 3/4 of FSR.

### 1.1.2 LATCH PIN ( $\overline{\text{LAT}}$ ) TIMING

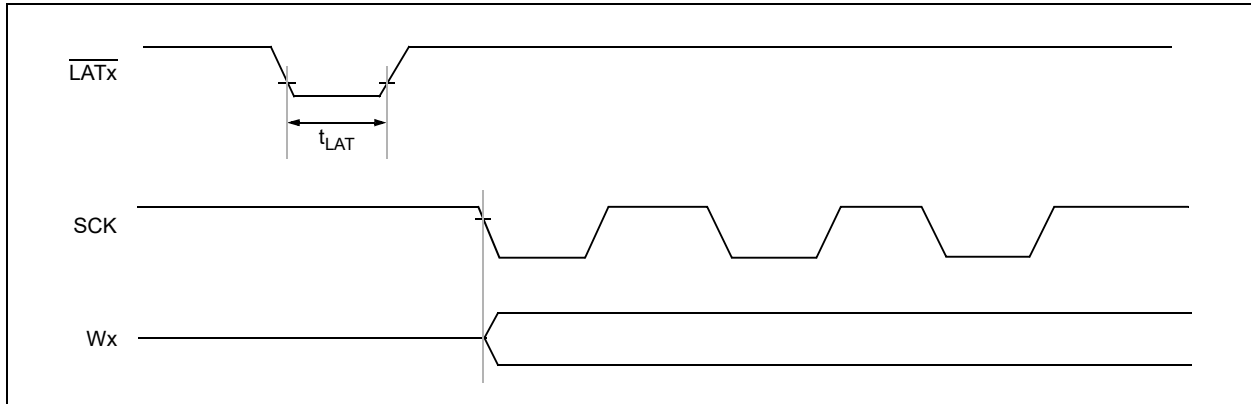


**FIGURE 1-2:**  $\overline{\text{LAT}}$  Pin Waveforms.

**TABLE 1-2:  $\overline{\text{LAT}}$  PIN TIMING**


| Timing Characteristics                   |                  | Standard Operating Conditions (unless otherwise specified):<br>Operating Temperature: $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (Extended).<br>All parameters apply across the specified operating ranges unless noted.<br>$V_{DD} = +2.7\text{V}$ to $5.5\text{V}$ , $V_{SS} = 0\text{V}$ , $R_L = 2\text{ k}\Omega$ from $V_{OUT}$ to GND, $C_L = 100\text{ pF}$ .<br>Typical specifications represent values for $V_{DD} = 5.5\text{V}$ , $T_A = +25^{\circ}\text{C}$ . |      |      |      |       |            |
|------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|------------|
|                                          |                  | Sym.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Min. | Typ. | Max. | Units | Conditions |
| $\overline{\text{LATx}}$ Pin Pulse Width | $t_{\text{LAT}}$ | 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | —    | —    | —    | ns    |            |

# MCP48FXBX4/8

## 1.1.3 RESET AND POWER-DOWN TIMING

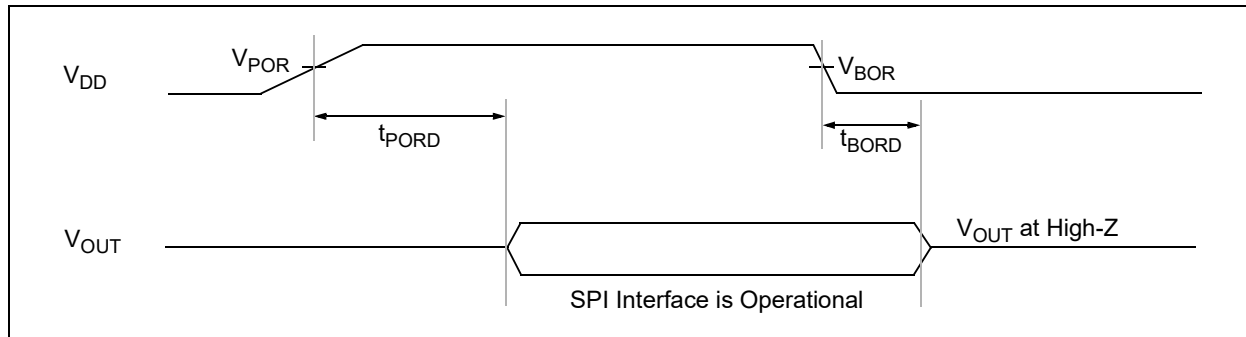

**FIGURE 1-3:** Power-on and Brown-out Reset Waveforms.

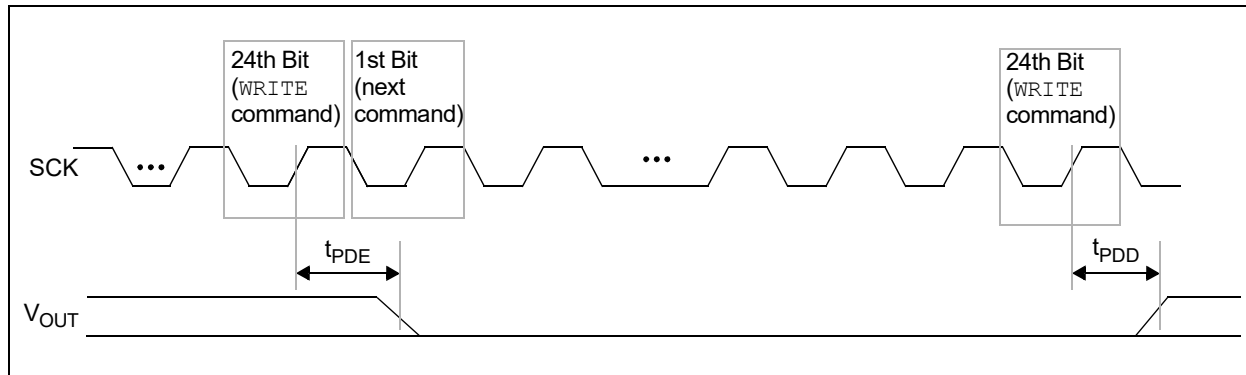


**FIGURE 1-4:** SPI Power-Down Command Waveforms.


**TABLE 1-3: RESET AND POWER-DOWN TIMING**

| Timing Characteristics                   |            | Standard Operating Conditions (unless otherwise specified):<br>Operating Temperature: $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (Extended).<br>Unless otherwise noted, all parameters apply across these specified operating ranges:<br>$V_{DD} = +2.7\text{V}$ to $5.5\text{V}$ , $V_{SS} = 0\text{V}$ , $R_L = 5\text{ k}\Omega$ from $V_{OUT}$ to $V_{SS}$ , $C_L = 100\text{ pF}$ .<br>Typical specifications represent values for $V_{DD} = 5.5\text{V}$ , $T_A = +25^{\circ}\text{C}$ . |      |      |      |               | Conditions                                                                                                                                                                                                             |
|------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                          |            | Sym.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Min. | Typ. | Max. | Units         |                                                                                                                                                                                                                        |
| Power-on Reset Delay                     | $t_{PORD}$ | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 60   | —    | —    | $\mu\text{s}$ | $V_{DD}$ rising, $V_{DD} > V_{POR}$                                                                                                                                                                                    |
| Brown-out Reset Delay                    | $t_{BORD}$ | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 45   | —    | —    | $\mu\text{s}$ | $V_{DD}$ transitions from $V_{DD(MIN)} \rightarrow > V_{POR}$ ,<br>$V_{OUT}$ driven to $V_{OUT}$ disabled                                                                                                              |
| Power-Down DAC Output Disable Time Delay | $T_{PDE}$  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 10.5 | —    | —    | $\mu\text{s}$ | $\text{PDnB:PDnA} = 00 \rightarrow 11, 10 \text{ or } 01$ started from the falling edge of the SCK at the end of the 24th clock cycle, $V_{OUT} = V_{OUT} - 10\text{ mV}$ , $V_{OUT}$ not connected                    |
| Power-Down DAC Output Enable Time Delay  | $T_{PDD}$  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1    | —    | —    | $\mu\text{s}$ | $\text{PDnB:PDnA} = 11, 10 \text{ or } 01 \rightarrow 00$ started from the falling edge of the SCK at the end of the 24th clock cycle, Volatile DAC Register = FFh, $V_{OUT} = 10\text{ mV}$ , $V_{OUT}$ not connected |

## 1.2 SPI Mode Timing Waveforms and Requirements

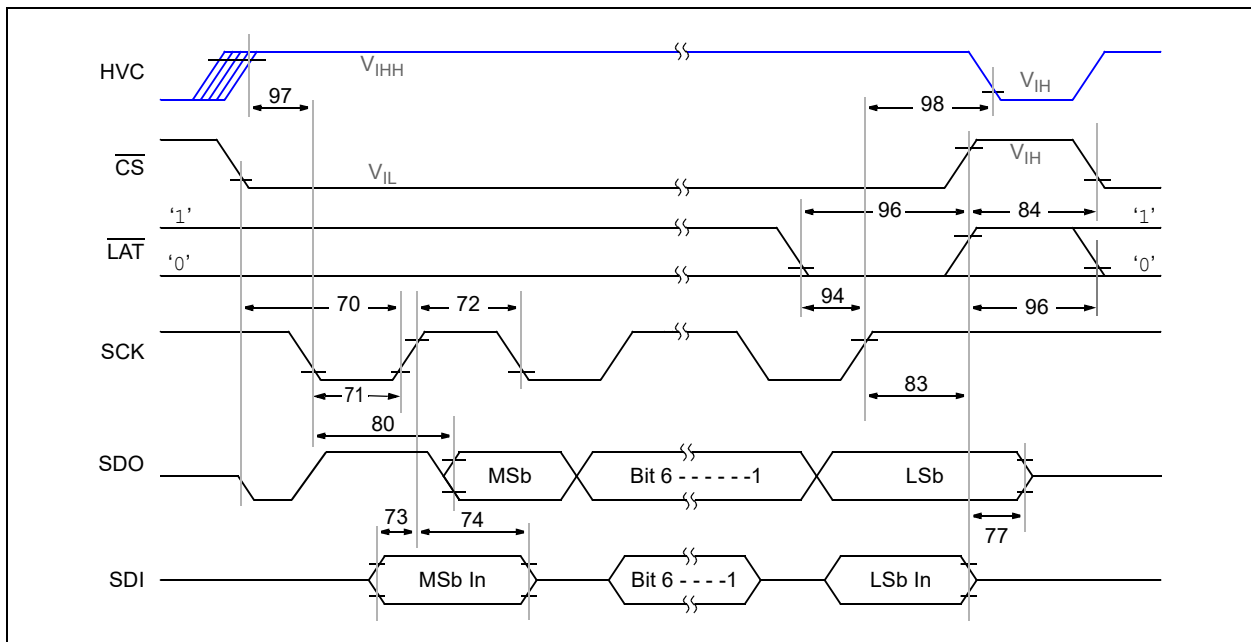

**FIGURE 1-5:** SPI Timing Waveforms – Mode 1,1.

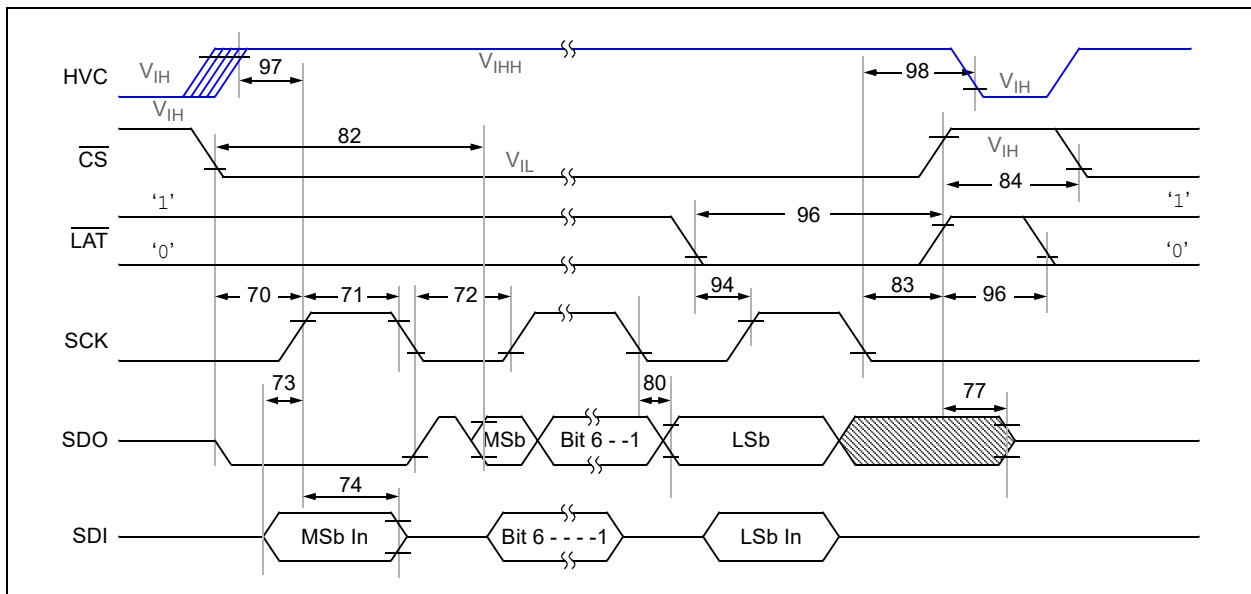

**FIGURE 1-6:** SPI Timing (Mode 0,0) Waveforms.

# MCP48FXBX4/8

**TABLE 1-4: SPI REQUIREMENTS (MODE 1,1)**

| #  | Characteristic                                                                            | Symbol        | Min. | Max. | Units   | Conditions                                          |
|----|-------------------------------------------------------------------------------------------|---------------|------|------|---------|-----------------------------------------------------|
|    | SCK Input Frequency                                                                       | $F_{SCK}$     | —    | 10   | MHz     | $V_{DD} = 2.7V$ to $5.5V$<br>( <b>READ</b> command) |
|    |                                                                                           |               | —    | 20   | MHz     | $V_{DD} = 2.7V$ to $5.5V$<br>(all other commands)   |
| 70 | $\overline{CS}$ Active ( $V_{IL}$ ) to Command's 1st SCK $\uparrow$ Input                 | $T_{CSA2SCH}$ | 60   | —    | ns      |                                                     |
| 71 | SCK Input High Time                                                                       | $T_{SCH}$     | 20   | —    | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                           |               | 400  | —    | ns      | $V_{DD} = 1.8V$ to $2.7V$                           |
| 72 | SCK Input Low Time                                                                        | $T_{SCL}$     | 20   | —    | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                           |               | 400  | —    | ns      | $V_{DD} = 1.8V$ to $2.7V$                           |
| 73 | Setup Time of SDI Input to SCK $\uparrow$ Edge                                            | $T_{DIV2SCH}$ | 10   | —    | ns      |                                                     |
| 74 | Hold Time of SDI Input from SCK $\uparrow$ Edge                                           | $T_{SCH2DIL}$ | 20   | —    | ns      |                                                     |
| 77 | $\overline{CS}$ Inactive ( $V_{IH}$ ) to SDO Output High-Impedance                        | $T_{CSH2DOZ}$ | —    | 50   | ns      | <b>Note 1</b>                                       |
| 80 | SDO Data Output Valid after SCK $\downarrow$ Edge                                         | $T_{SCL2DOV}$ | —    | 45   | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                           |               | —    | 170  | ns      | $V_{DD} = 1.8V$ to $2.7V$                           |
| 83 | $\overline{CS}$ Inactive ( $V_{IH}$ ) after SCK $\uparrow$ Edge                           | $T_{SCH2CSL}$ | 100  | —    | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                           |               | 1    | —    | $\mu s$ | $V_{DD} = 1.8V$ to $2.7V$                           |
| 84 | $\overline{CS}$ High Time ( $V_{IH}$ )                                                    | $T_{CSH}$     | 50   | —    | ns      |                                                     |
| 94 | $\overline{LAT}$ $\downarrow$ to SCK $\uparrow$ (write data 24th bit) Setup Time          | $T_{LATSU}$   | 20   | —    | ns      | Write data transferred <sup>(3)</sup>               |
| 96 | $\overline{LAT}$ High or Low Time                                                         | $T_{LAT}$     | 20   | —    | ns      |                                                     |
| 97 | HVC $\uparrow$ to SCK $\downarrow$ (1st data bit) (HVC setup time)                        | $T_{HVCSU}$   | 0    | —    | ns      | High-Voltage Commands <sup>(1)</sup>                |
| 98 | SCK $\uparrow$ (last bit of command, 8th or 24th bit) to HVC $\downarrow$ (HVC hold time) | $T_{HVCHD}$   | 25   | —    | ns      | High-Voltage Commands <sup>(1)</sup>                |

**Note 1:** This parameter is ensured by design.

- 3:** Within 1/2 LSb of the final value when the code changes from 1/4 to 3/4 of FSR. (Example: 400h to C00h in 12-bit device.) The transition of the  $\overline{LAT}$  signal must occur 10 ns before the rising edge of the 24th SCK signal (Spec 94) or the current register data value may not be transferred to the output latch ( $V_{OUT}$ ) before the register is overwritten with the new value.

**TABLE 1-5: SPI REQUIREMENTS (MODE 0,0)**

| #  | Characteristic                                                                              | Sym.          | Min. | Max. | Units   | Conditions                                          |
|----|---------------------------------------------------------------------------------------------|---------------|------|------|---------|-----------------------------------------------------|
|    | SCK Input Frequency                                                                         | $F_{SCK}$     | —    | 10   | MHz     | $V_{DD} = 2.7V$ to $5.5V$<br>( <b>READ</b> command) |
|    |                                                                                             |               | —    | 20   | MHz     | $V_{DD} = 2.7V$ to $5.5V$<br>(all other commands)   |
| 70 | $\overline{CS}$ Active ( $V_{IL}$ ) to SCK $\uparrow$ Input                                 | $T_{CSA2SCH}$ | 60   | —    | ns      |                                                     |
| 71 | SCK Input High Time                                                                         | $T_{SCH}$     | 20   | —    | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                             |               | 400  | —    | ns      | $V_{DD} = 1.8V$ to $2.7V$                           |
| 72 | SCK Input Low Time                                                                          | $T_{SCL}$     | 20   | —    | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                             |               | 400  | —    | ns      | $V_{DD} = 1.8V$ to $2.7V$                           |
| 73 | Setup Time of SDI Input to SCK $\uparrow$ Edge                                              | $T_{DIV2SCH}$ | 10   | —    | ns      |                                                     |
| 74 | Hold Time of SDI Input from SCK $\uparrow$ Edge                                             | $T_{SCH2DIL}$ | 20   | —    | ns      |                                                     |
| 77 | $\overline{CS}$ Inactive ( $V_{IH}$ ) to SDO Output High-Impedance                          | $T_{CSH2DOZ}$ | —    | 50   | ns      | <b>Note 1</b>                                       |
| 80 | SDO Data Output Valid after SCK $\downarrow$ Edge                                           | $T_{SCL2DOV}$ | —    | 45   | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                             |               | —    | 170  | ns      | $V_{DD} = 1.8V$ to $2.7V$                           |
| 82 | SDO Data Output Valid after $\overline{CS}$ Active ( $V_{IL}$ )                             | $T_{SSL2DOV}$ | —    | 70   | ns      |                                                     |
| 83 | $\overline{CS}$ Inactive ( $V_{IH}$ ) after SCK $\downarrow$ Edge                           | $T_{SCH2CSL}$ | 100  | —    | ns      | $V_{DD} = 2.7V$ to $5.5V$                           |
|    |                                                                                             |               | 1    | —    | $\mu s$ | $V_{DD} = 1.8V$ to $2.7V$                           |
| 84 | $\overline{CS}$ High Time ( $V_{IH}$ )                                                      | $T_{CSH}$     | 50   | —    | ns      |                                                     |
| 94 | $\overline{LAT}$ $\downarrow$ to SCK $\uparrow$ (write data 24th bit) Setup Time            | $T_{LATSU}$   | 10   | —    | ns      | Write data transferred <sup>(3)</sup>               |
| 96 | $\overline{LAT}$ High or Low Time                                                           | $T_{LAT}$     | 50   | —    | ns      |                                                     |
| 97 | HVC $\uparrow$ to SCK $\uparrow$ (1st data bit) (HVC setup time)                            | $T_{HVCSU}$   | 0    | —    | ns      | High-Voltage Commands <sup>(1)</sup>                |
| 98 | SCK $\downarrow$ (last bit of command, 8th or 24th bit) to HVC $\downarrow$ (HVC hold time) | $T_{HVCHD}$   | 25   | —    | ns      | High-Voltage Commands <sup>(1)</sup>                |

**Note 1:** This parameter is ensured by design.

- 3:** Within 1/2 LSb of the final value when the code changes from 1/4 to 3/4 of FSR. (Example: 400h to C00h in 12-bit device.) The transition of the  $\overline{LAT}$  signal must occur 10 ns before the rising edge of the 24th SCK signal (Spec 94) or the current register data value may not be transferred to the output latch ( $V_{OUT}$ ) before the register is overwritten with the new value.

# MCP48FXBX4/8

---

## Timing Table Notes:

1. This parameter is ensured by design.
2. This parameter is ensured by characterization.
3. Within 1/2 LSb of the final value when the code changes from 1/4 to 3/4 of FSR. (Example: 400h to C00h in 12-bit device). The transition of the LAT signal must occur 10 ns before the rising edge of the 24th SCK signal (Spec 94) or the current register data value may not be transferred to the output latch ( $V_{OUT}$ ) before the register is overwritten with the new value.

## TEMPERATURE SPECIFICATIONS

| Electrical Specifications: Unless otherwise indicated, $V_{DD} = +2.7V$ to $+5.5V$ , $V_{SS} = GND$ . |               |      |      |      |       |            |
|-------------------------------------------------------------------------------------------------------|---------------|------|------|------|-------|------------|
| Parameters                                                                                            | Sym.          | Min. | Typ. | Max. | Units | Conditions |
| Temperature Ranges                                                                                    |               |      |      |      |       |            |
| Specified Temperature Range                                                                           | $T_A$         | -40  | —    | +125 | °C    |            |
| Operating Temperature Range                                                                           | $T_A$         | -40  | —    | +125 | °C    | Note 1     |
| Storage Temperature Range                                                                             | $T_A$         | -65  | —    | +150 | °C    |            |
| Thermal Package Resistances                                                                           |               |      |      |      |       |            |
| Thermal Resistance, 20-Lead TSSOP                                                                     | $\theta_{JA}$ | —    | 90   | —    | °C/W  |            |
| Thermal Resistance, 20-Lead VQFN (5x5 mm, P8X)                                                        | $\theta_{JA}$ | —    | 36.1 | —    | °C/W  |            |

**Note 1:** Operation in this range must not cause  $T_J$  to exceed the Maximum Junction Temperature of +150°C.

# MCP48FXBX4/8

---

NOTES:

## 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

### 2.1 Electrical Data

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-1:** Average Device Supply Current vs.  $F_{SCK}$  Frequency, Voltage and Temperature – Active Interface,  $VRnB:VRnA = 00$ , ( $V_{DD}$  Mode).



**FIGURE 2-4:** Average Device Supply Current – Inactive Interface ( $SCK = V_{IH}$  or  $V_{IL}$ ) vs. Voltage and Temperature,  $VRnB:VRnA = 00$  ( $V_{DD}$  Mode).



**FIGURE 2-2:** Average Device Supply Current vs.  $F_{SCK}$  Frequency, Voltage and Temperature – Active Interface,  $VRnB:VRnA = 01$  (Band Gap Mode).



**FIGURE 2-5:** Average Device Supply Current – Inactive Interface ( $SCK = V_{IH}$  or  $V_{IL}$ ) vs. Voltage and Temperature,  $VRnB:VRnA = 01$  (Band Gap Mode).



**FIGURE 2-3:** Average Device Supply Current vs.  $F_{SCK}$  Frequency, Voltage and Temperature – Active Interface,  $VRnB:VRnA = 11$  ( $V_{REF}$  Buffered Mode).



**FIGURE 2-6:** Average Device Supply Current – Inactive Interface ( $SCK = V_{IH}$  or  $V_{IL}$ ) vs. Voltage and Temperature,  $VRnB:VRnA = 11$  ( $V_{REF}$  Buffered Mode).

# MCP48FXBX4/8

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-7:** Average Device Supply Current vs.  $F_{SCK}$  Frequency, Voltage and Temperature – Active Interface,  $VRnB:VRnA = 10$  ( $V_{REF}$  Unbuffered Mode).



**FIGURE 2-9:** Average Device Supply Current – Inactive Interface ( $SCK = V_{IH}$  or  $V_{IL}$ ) vs. Voltage and Temperature,  $VRnB:VRnA = 10$  ( $V_{REF}$  Unbuffered Mode).



**FIGURE 2-8:** Average Device Supply Active Current ( $I_{DDA}$ ) (at 5.5V and  $F_{SCK} = 20\text{ MHz}$ ) vs. Temperature and DAC Reference Voltage Mode.



**FIGURE 2-10:** Power-Down Currents.

## 2.2 Linearity Data

### 2.2.1 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), $V_{REF} = V_{DD}$ (VRnB:VRnA = 00), GAIN = 1x, CODE 100-4000

**Note:** Unless otherwise indicated:  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$



**FIGURE 2-11:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-14:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-12:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-15:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-13:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-16:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

# MCP48FXBX4/8

## 2.2.2 INTEGRAL NONLINEARITY (INL) – MCP48FXB28 (12-BIT), $V_{REF} = V_{DD}$ (VRnB:VRnA = 00), GAIN = 1x, CODE 64-4032

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-17:** INL Error vs. DAC Code,  $T = 40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-20:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-18:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-21:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-19:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-22:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.3 DIFFERENTIAL NONLINEARITY (DNL) – MCP48FXB28 (12-BIT), $V_{REF} = V_{DD}$ (VRnB:VRnA = 00), GAIN = 1x, CODE 64-4032

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-23:** DNL Error vs. DAC Code,  
 $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-26:** DNL Error vs. DAC Code,  
 $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .




**FIGURE 2-24:** DNL Error vs. DAC Code,  
 $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-27:** DNL Error vs. DAC Code,  
 $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-25:** DNL Error vs. DAC Code,  
 $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

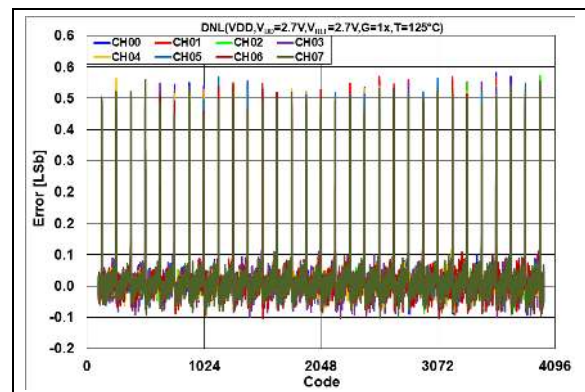

**FIGURE 2-28:** DNL Error vs. DAC Code,  
 $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

# MCP48FXBX4/8

## 2.2.4 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), BAND GAP MODE (VRnB:VRnA = 01), GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-29:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-32:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-30:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-33:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-31:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-34:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.5 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), BAND GAP MODE (VRnB:VRnA = 01), GAIN = 4x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-35:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-37:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-36:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

# MCP48FXBX4/8

## 2.2.6 INTEGRAL NONLINEARITY (INL) – MCP48FXB28 (12-BIT), BAND GAP MODE (VRnB:VRnA = 01), GAIN = 2x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-38:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-41:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

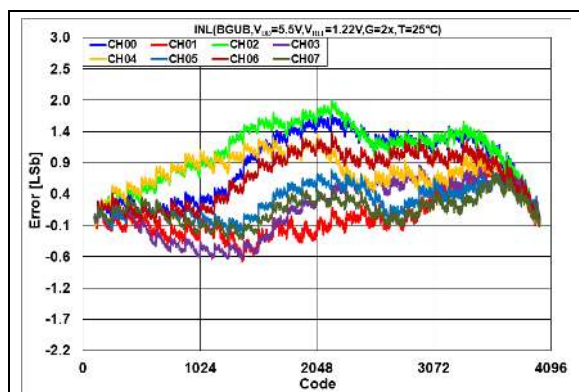

**FIGURE 2-39:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

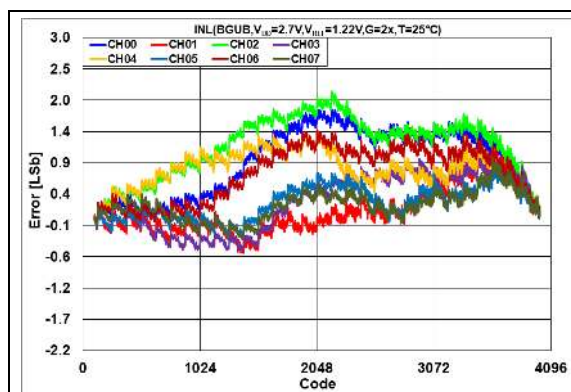

**FIGURE 2-42:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .




**FIGURE 2-40:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-43:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.7 INTEGRAL NONLINEARITY (INL) – MCP48FXB28 (12-BIT), BAND GAP MODE (VRnB:VRnA = 01), GAIN = 4x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

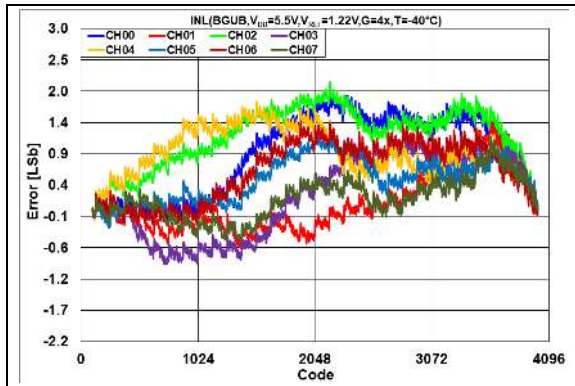

**FIGURE 2-44:** INL Error vs. DAC Code,  
 $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-46:** INL Error vs. DAC Code,  
 $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

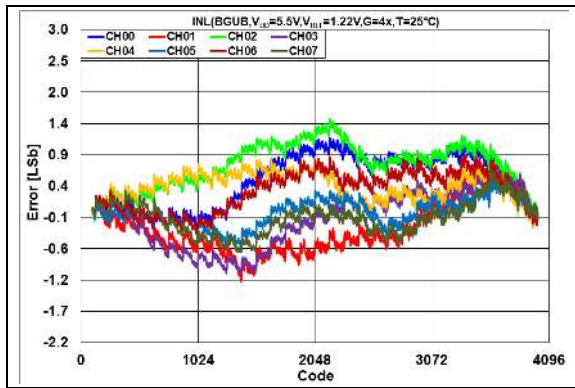

**FIGURE 2-45:** INL Error vs. DAC Code,  
 $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .


# MCP48FXBX4/8

## 2.2.8 DIFFERENTIAL NONLINEARITY ERROR (DNL) – MCP48FXB28 (12-BIT), BAND GAP MODE (VRnB:VRnA = 01), GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-47:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

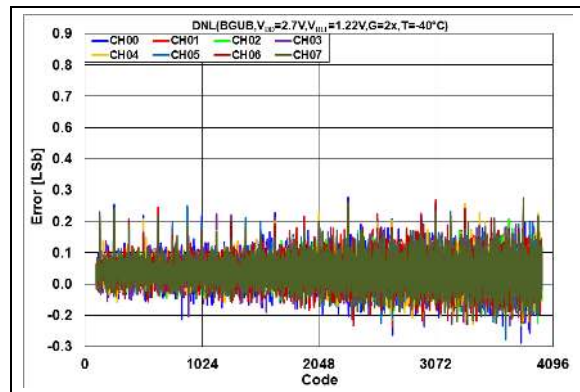


**FIGURE 2-50:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .




**FIGURE 2-48:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

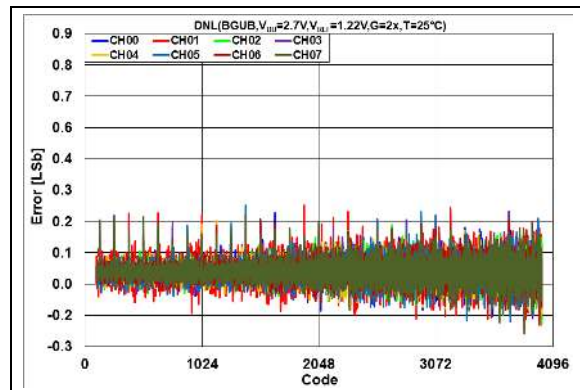

**FIGURE 2-51:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

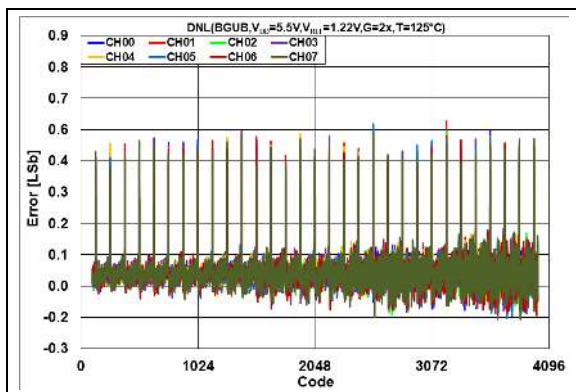

**FIGURE 2-49:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

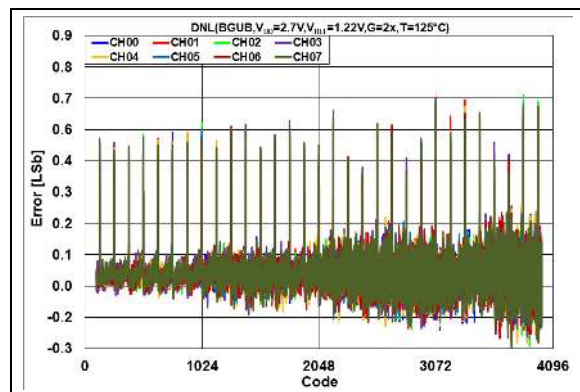

**FIGURE 2-52:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.9 DIFFERENTIAL NONLINEARITY ERROR (DNL) – MCP48FXB28 (12-BIT), BAND GAP MODE (VRnB:VRnA = 01), GAIN = 4x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-53:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-55:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-54:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .


# MCP48FXBX4/8

## 2.2.10 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ UNBUFFERED MODE ( $V_{RnB}:V_{RnA} = 10$ ), $V_{REF} = V_{DD}$ , GAIN = 1x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

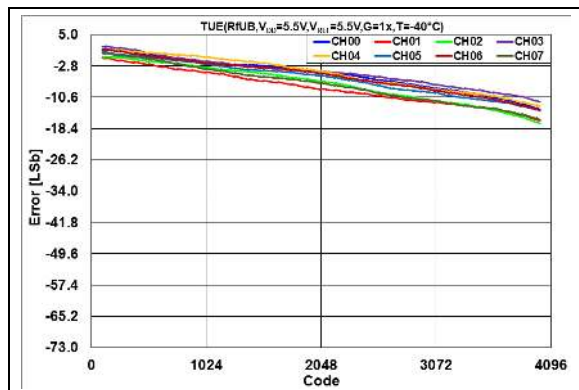


**FIGURE 2-56:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

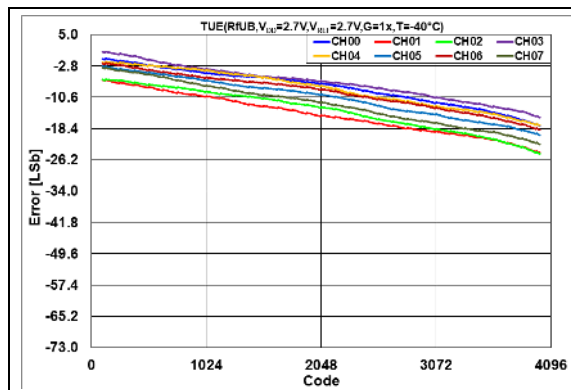


**FIGURE 2-59:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

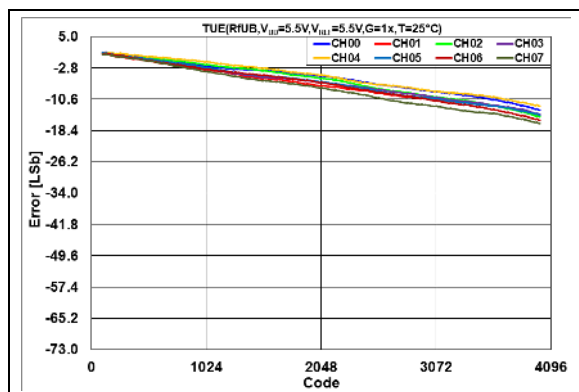


**FIGURE 2-57:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

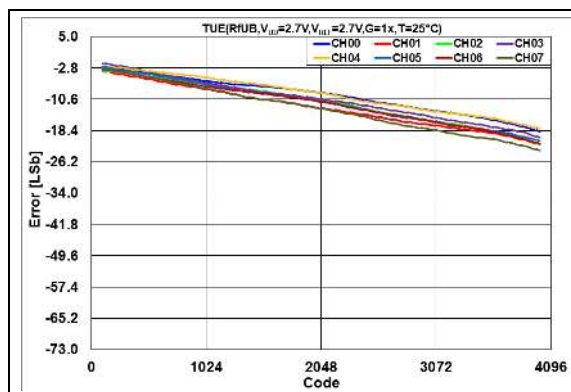

**FIGURE 2-60:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

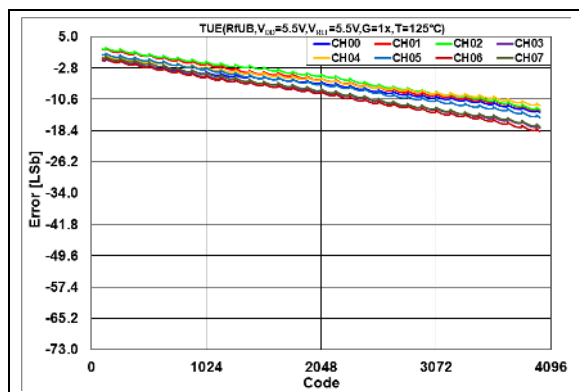

**FIGURE 2-58:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

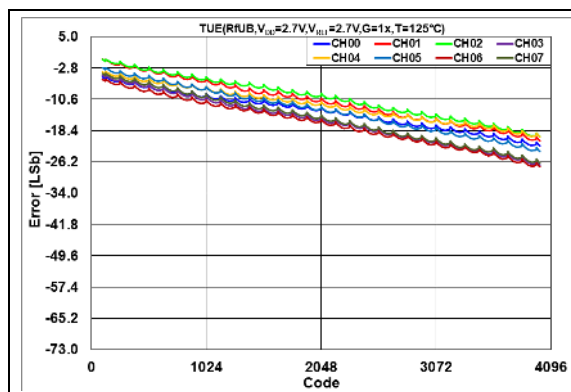

**FIGURE 2-61:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.11 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ UNBUFFERED MODE ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}/2$ , GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-62:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-65:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-63:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-66:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-64:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-67:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

# MCP48FXBX4/8

## 2.2.12 INTEGRAL NONLINEARITY ERROR (INL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, UNBUFFERED ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}$ , GAIN = 1x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

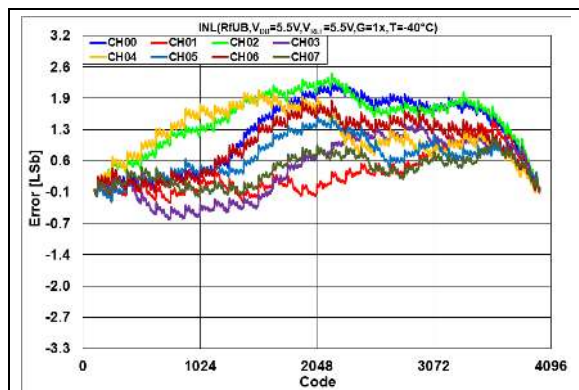

**FIGURE 2-68:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-71:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

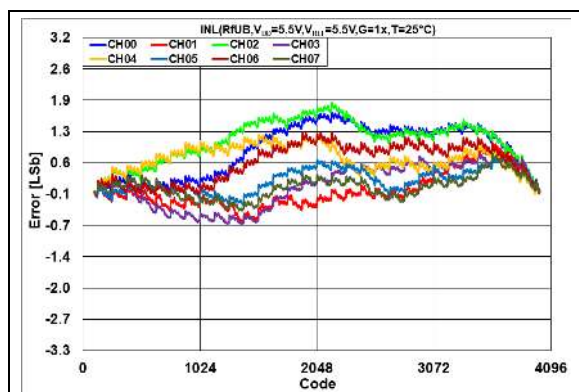

**FIGURE 2-69:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-72:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

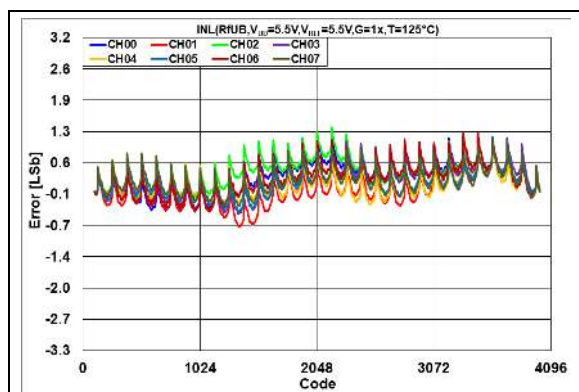

**FIGURE 2-70:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-73:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.13 INTEGRAL NONLINEARITY ERROR (INL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, UNBUFFERED ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}/2$ , GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-74:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-77:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-75:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-78:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-76:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-79:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

# MCP48FXBX4/8

## 2.2.14 DIFFERENTIAL NONLINEARITY ERROR (DNL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, UNBUFFERED ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}$ , GAIN = 1x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-80:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-83:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-81:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-84:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-82:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-85:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.15 DIFFERENTIAL NONLINEARITY ERROR (DNL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, UNBUFFERED ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}/2$ , GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-86:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-89:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-87:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-90:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-88:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-91:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .


# MCP48FXBX4/8

## 2.2.16 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ BUFFERED MODE ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}$ , GAIN = 1x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

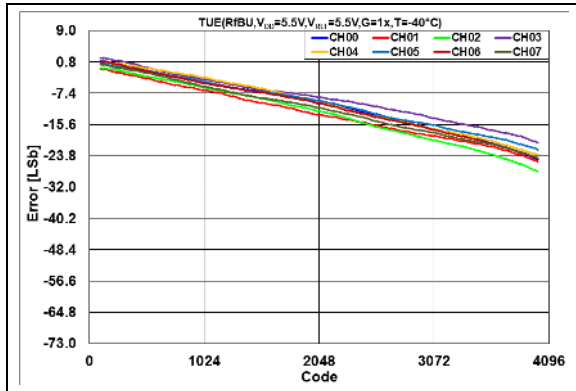


**FIGURE 2-92:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

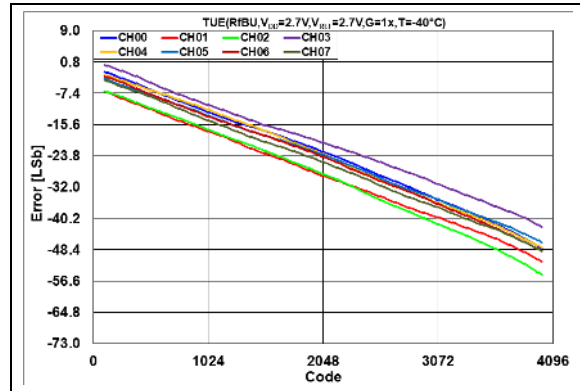


**FIGURE 2-95:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

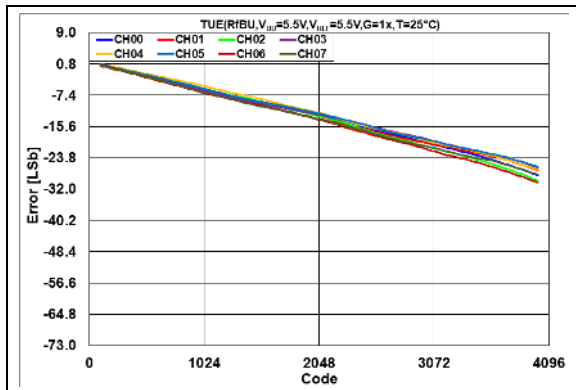


**FIGURE 2-93:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

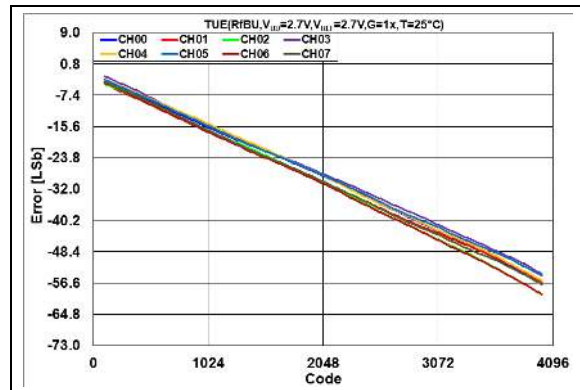

**FIGURE 2-96:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

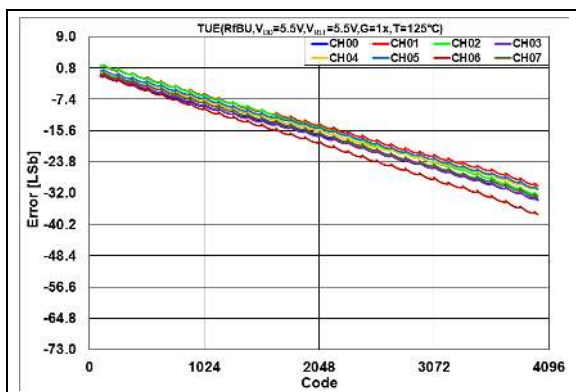

**FIGURE 2-94:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

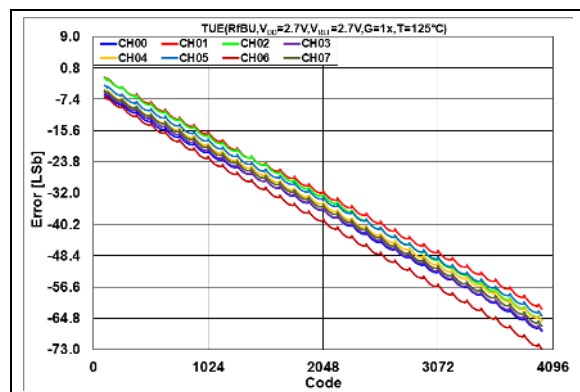

**FIGURE 2-97:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.17 TOTAL UNADJUSTED ERROR (TUE) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ BUFFERED MODE ( $VRnB:VRnA = 10$ ), $V_{REF} = V_{DD}/2$ , GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-98:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-101:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .




**FIGURE 2-99:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-102:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

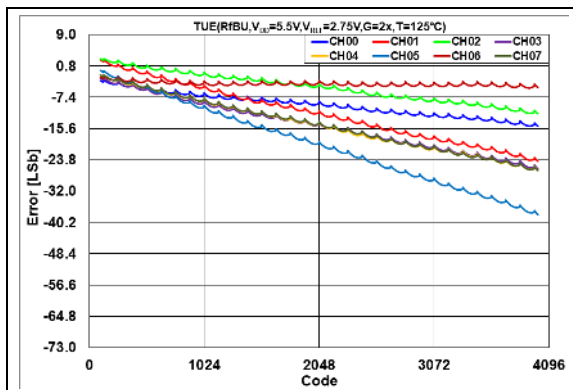

**FIGURE 2-100:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

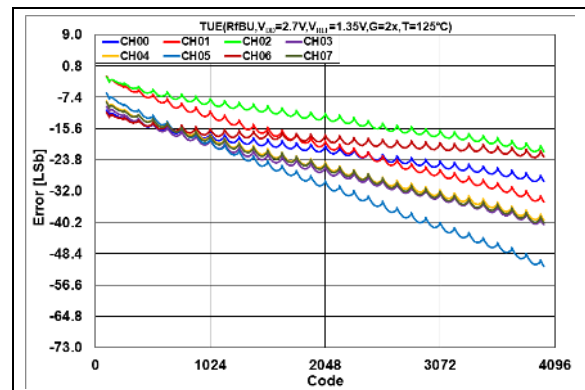

**FIGURE 2-103:** Total Unadjusted Error ( $V_{OUT}$ ) vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .


# MCP48FXBX4/8

## 2.2.18 INTEGRAL NONLINEARITY ERROR (INL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, BUFFERED ( $VRnB:VRnA = 11$ ), $V_{REF} = V_{DD}$ , GAIN = 1x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .




**FIGURE 2-104:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

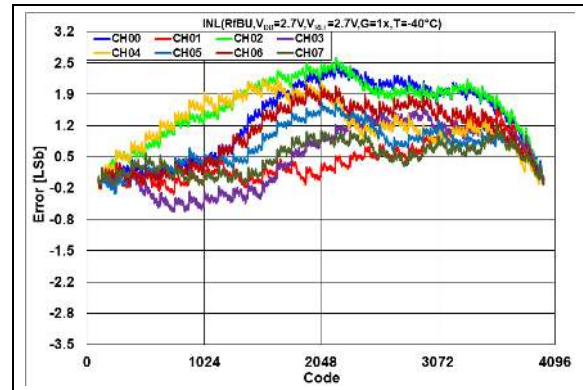

**FIGURE 2-107:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

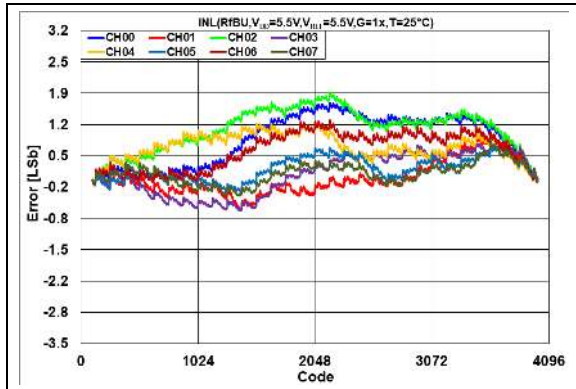


**FIGURE 2-105:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

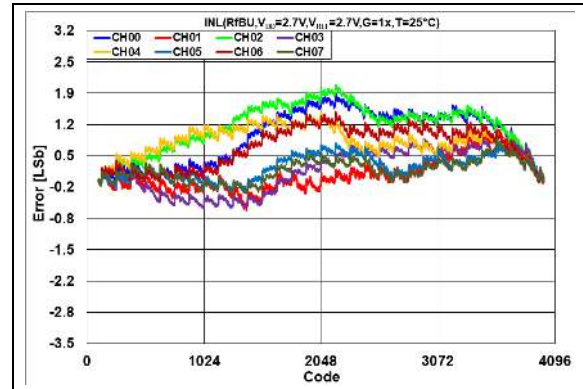

**FIGURE 2-108:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .




**FIGURE 2-106:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

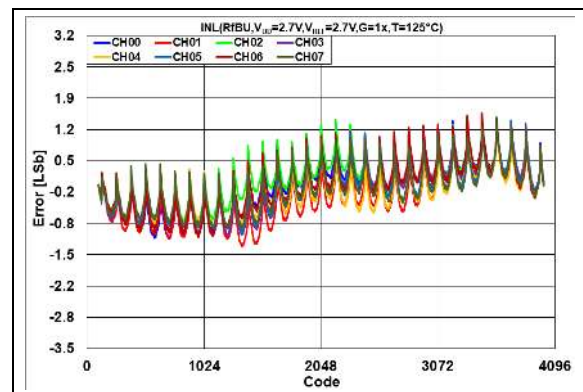


**FIGURE 2-109:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.19 INTEGRAL NONLINEARITY ERROR (INL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, BUFFERED ( $VRnB:VRnA = 11$ ), $V_{REF} = V_{DD}/2$ , GAIN = 2x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

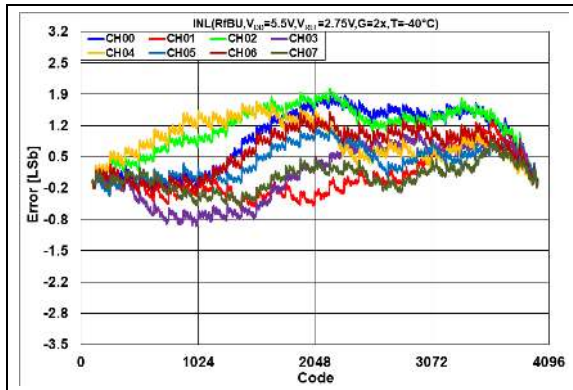


**FIGURE 2-110:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

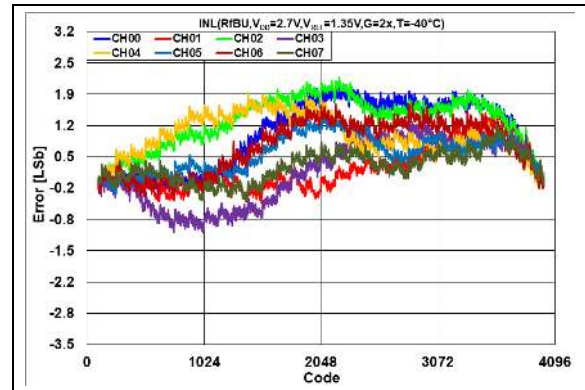


**FIGURE 2-113:** INL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

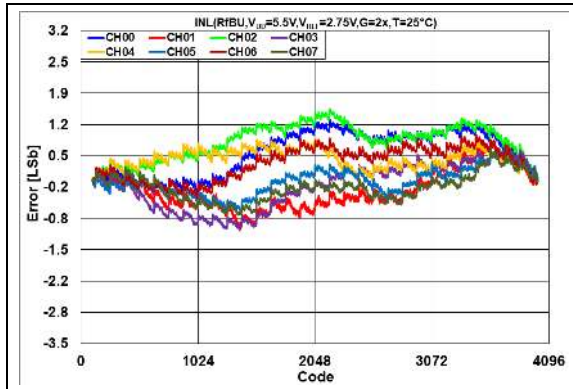


**FIGURE 2-111:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

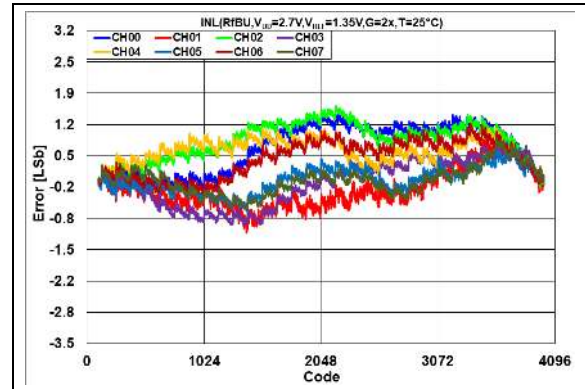

**FIGURE 2-114:** INL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

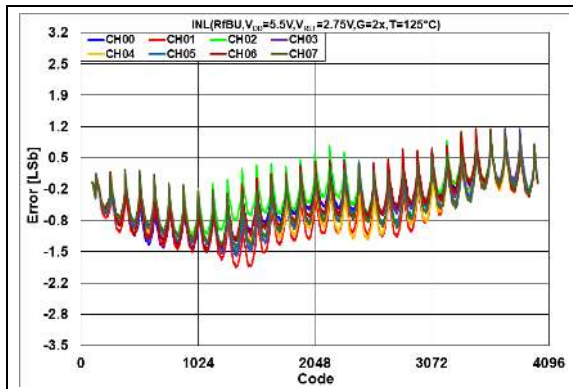

**FIGURE 2-112:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

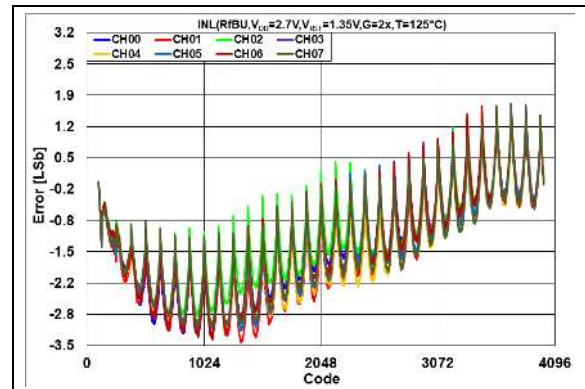


**FIGURE 2-115:** INL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .


# MCP48FXBX4/8

## 2.2.20 DIFFERENTIAL NONLINEARITY ERROR (DNL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, BUFFERED ( $VRnB:VRnA = 11$ ), $V_{REF} = V_{DD}$ , GAIN = 1x, CODE 100-4000


**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

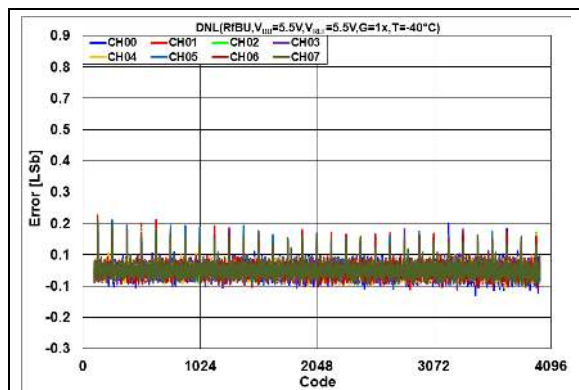


**FIGURE 2-116:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

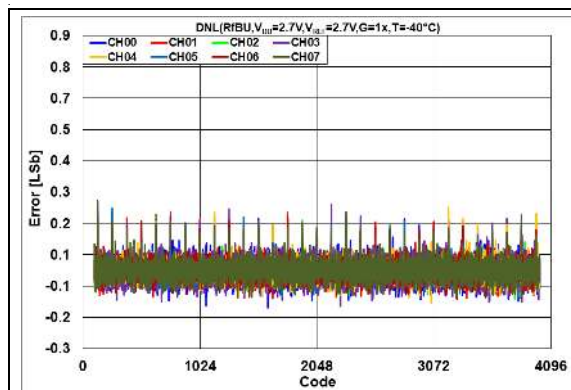


**FIGURE 2-119:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

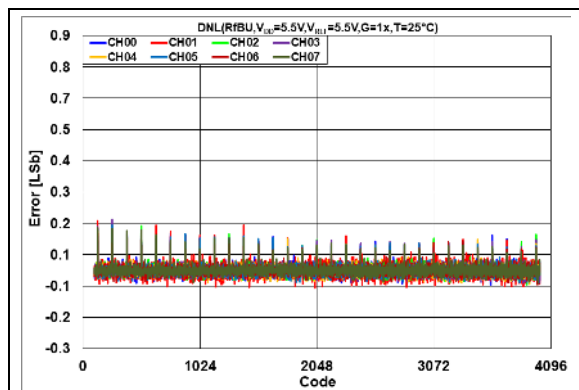


**FIGURE 2-117:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

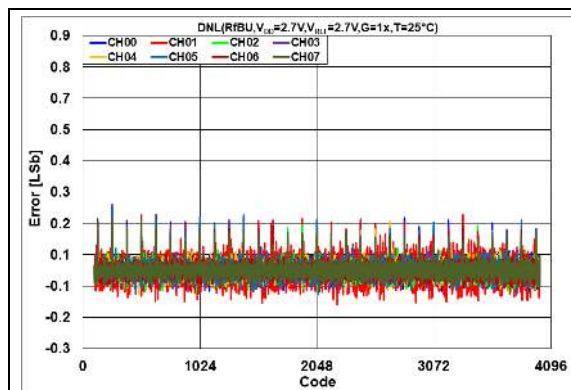

**FIGURE 2-120:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

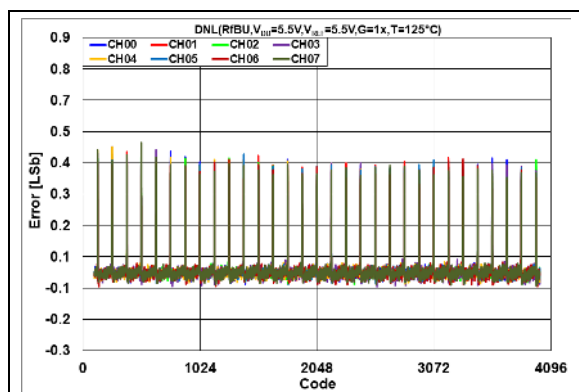

**FIGURE 2-118:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .

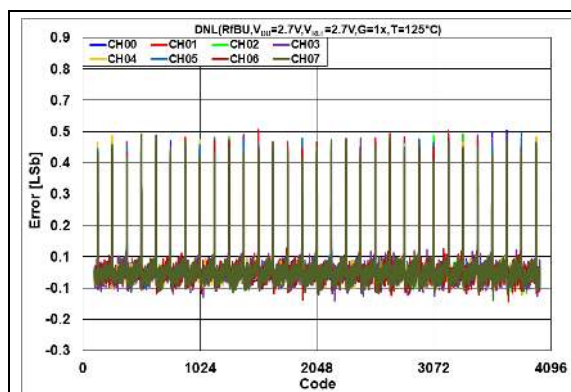

**FIGURE 2-121:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

## 2.2.21 DIFFERENTIAL NONLINEARITY ERROR (DNL) – MCP48FXB28 (12-BIT), EXTERNAL $V_{REF}$ MODE, BUFFERED ( $VRnB:VRnA = 11$ ), $V_{REF} = V_{DD}/2$ , GAIN = 2x, CODE 100-4000

**Note:** Unless otherwise indicated,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-122:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-125:** DNL Error vs. DAC Code,  $T = -40^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-123:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-126:** DNL Error vs. DAC Code,  $T = +25^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .



**FIGURE 2-124:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 5.5\text{V}$ .



**FIGURE 2-127:** DNL Error vs. DAC Code,  $T = +125^\circ\text{C}$ ,  $V_{DD} = 2.7\text{V}$ .

# MCP48FXBX4/8

---

NOTES:

## 3.0 PIN DESCRIPTIONS

Overviews of the pin functions are provided in [Section 3.1 “Positive Power Supply Input Pin \(V<sub>DD</sub>\)”](#) through [Section 3.10 “No Connect Pin \(NC\)”](#).

The descriptions of the pins for the quad DAC output devices are listed in [Table 3-1](#) and descriptions for the octal DAC output devices are listed in [Table 3-2](#).

**TABLE 3-1: MCP48FXBX4 (QUAD DAC) PIN FUNCTION TABLE**

| Pin                  |                    |                              |     |             | Description                                                                                                                                                                                                                                                                                                         |
|----------------------|--------------------|------------------------------|-----|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 20-Lead TSSOP        | 20-Lead VQFN       | Symbol                       | I/O | Buffer Type |                                                                                                                                                                                                                                                                                                                     |
| 1                    | 19                 | $\overline{\text{LAT1}}$     | I   | ST          | DAC Register Latch Pin. The Latch 1 pin allows the value in the volatile DAC1/DAC3 registers (wiper and Configuration bits) to be transferred to the DAC1/DAC3 outputs ( $V_{\text{OUT1}}$ , $V_{\text{OUT3}}$ ).                                                                                                   |
| 2                    | 20                 | $V_{\text{DD}}$              | —   | P           | Supply Voltage Pin                                                                                                                                                                                                                                                                                                  |
| 3                    | 1                  | $\overline{\text{CS}}$       | I   | ST          | SPI Chip Select Pin                                                                                                                                                                                                                                                                                                 |
| 4                    | 2                  | $V_{\text{REF0}}$            | A   | Analog      | Voltage Reference Input 0 Pin                                                                                                                                                                                                                                                                                       |
| 5                    | 3                  | $V_{\text{OUT0}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 0 Pin                                                                                                                                                                                                                                                                      |
| 6                    | 4                  | $V_{\text{OUT2}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 2 Pin                                                                                                                                                                                                                                                                      |
| 7, 8, 10, 11, 12, 13 | 5, 6, 8, 9, 10, 11 | NC                           | —   | —           | Not internally connected                                                                                                                                                                                                                                                                                            |
| 9                    | 7                  | $V_{\text{SS}}$              | —   | P           | Ground Reference Pin for all circuitries on the device                                                                                                                                                                                                                                                              |
| 14                   | 12                 | $V_{\text{OUT3}}$            | —   | —           | Buffered Analog Voltage Output – Channel 3 Pin                                                                                                                                                                                                                                                                      |
| 15                   | 13                 | $V_{\text{OUT1}}$            | —   | —           | Buffered Analog Voltage Output – Channel 1 Pin                                                                                                                                                                                                                                                                      |
| 16                   | 14                 | $V_{\text{REF1}}$            | A   | Analog      | Voltage Reference Input 1 Pin                                                                                                                                                                                                                                                                                       |
| 17                   | 15                 | SDO                          | I   | —           | SPI Serial Data Output Pin                                                                                                                                                                                                                                                                                          |
| 18                   | 16                 | SCK                          | I   | ST          | SPI Serial Clock Pin                                                                                                                                                                                                                                                                                                |
| 19                   | 17                 | SDI                          | I   | ST          | SPI Serial Data Input Pin                                                                                                                                                                                                                                                                                           |
| 20                   | 18                 | $\overline{\text{LAT0/HVC}}$ | I   | ST          | DAC Register Latch/High-Voltage Command Pin. The Latch 0 pin allows the value in the volatile DAC0/DAC2 registers (wiper and Configuration bits) to be transferred to the DAC0/DAC2 outputs ( $V_{\text{OUT0}}$ , $V_{\text{OUT2}}$ ). The High-Voltage Command (HVC) allows user Configuration bits to be written. |
| —                    | 21                 | EP                           | —   | —           | Exposed Thermal Pad Pin <sup>(1)</sup>                                                                                                                                                                                                                                                                              |

**Note 1:** A = Analog, ST = Schmitt Trigger, HV = High Voltage, I = Input, O = Output, I/O = Input/Output, P = Power.

# MCP48FVBX4/8

**TABLE 3-2: MCP48FVBX8 (OCTAL DAC) PIN FUNCTION TABLE**

| Pin           |              |                              |     |             | Description                                                                                                                                                                                                                                                                                                                                                                     |
|---------------|--------------|------------------------------|-----|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 20-Lead TSSOP | 20-Lead VQFN | Symbol                       | I/O | Buffer Type |                                                                                                                                                                                                                                                                                                                                                                                 |
| 1             | 19           | $\overline{\text{LAT1}}$     | I   | ST          | DAC Register Latch Pin. The Latch 1 pin allows the value in the volatile DAC1/DAC3/DAC5/DAC7 registers (wiper and Configuration bits) to be transferred to the DAC1/DAC3/DAC5/DAC7 outputs ( $V_{\text{OUT1}}$ , $V_{\text{OUT3}}$ , $V_{\text{OUT5}}$ , $V_{\text{OUT7}}$ ).                                                                                                   |
| 2             | 20           | $V_{\text{DD}}$              | —   | P           | Supply Voltage Pin                                                                                                                                                                                                                                                                                                                                                              |
| 3             | 1            | $\overline{\text{CS}}$       | I   | ST          | SPI Chip Select Pin                                                                                                                                                                                                                                                                                                                                                             |
| 4             | 2            | $V_{\text{REF0}}$            | A   | Analog      | Voltage Reference Input 0 Pin                                                                                                                                                                                                                                                                                                                                                   |
| 5             | 3            | $V_{\text{OUT0}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 0 Pin                                                                                                                                                                                                                                                                                                                                  |
| 6             | 4            | $V_{\text{OUT2}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 2 Pin                                                                                                                                                                                                                                                                                                                                  |
| 7             | 5            | $V_{\text{OUT4}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 4 Pin                                                                                                                                                                                                                                                                                                                                  |
| 8             | 6            | $V_{\text{OUT6}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 6 Pin                                                                                                                                                                                                                                                                                                                                  |
| 9             | 7            | $V_{\text{SS}}$              | —   | P           | Ground Reference Pin for all circuitries on the device                                                                                                                                                                                                                                                                                                                          |
| 10, 11        | 8, 9         | NC                           | —   | —           | Not internally connected                                                                                                                                                                                                                                                                                                                                                        |
| 12            | 10           | $V_{\text{OUT7}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 7 Pin                                                                                                                                                                                                                                                                                                                                  |
| 13            | 11           | $V_{\text{OUT5}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 5 Pin                                                                                                                                                                                                                                                                                                                                  |
| 14            | 12           | $V_{\text{OUT3}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 3 Pin                                                                                                                                                                                                                                                                                                                                  |
| 15            | 13           | $V_{\text{OUT1}}$            | A   | Analog      | Buffered Analog Voltage Output – Channel 1 Pin                                                                                                                                                                                                                                                                                                                                  |
| 16            | 14           | $V_{\text{REF1}}$            | A   | Analog      | Voltage Reference Input 1 Pin                                                                                                                                                                                                                                                                                                                                                   |
| 17            | 15           | SDO                          | I   | —           | SPI Serial Data Output Pin                                                                                                                                                                                                                                                                                                                                                      |
| 18            | 16           | SCK                          | I   | ST          | SPI Serial Clock Pin                                                                                                                                                                                                                                                                                                                                                            |
| 19            | 17           | SDI                          | I   | ST          | SPI Serial Data Input Pin                                                                                                                                                                                                                                                                                                                                                       |
| 20            | 18           | $\overline{\text{LAT0/HVC}}$ | I   | ST          | DAC Register Latch/High-Voltage Command Pin. The Latch 0 pin allows the value in the volatile DAC0/DAC2/DAC4/DAC6 registers (wiper and Configuration bits) to be transferred to the DAC0/DAC2/DAC4/DAC6 outputs ( $V_{\text{OUT0}}$ , $V_{\text{OUT2}}$ , $V_{\text{OUT4}}$ , $V_{\text{OUT6}}$ ). The High-Voltage Command (HVC) allows user Configuration bits to be written. |
| —             | 21           | EP                           | —   | —           | Exposed Thermal Pad Pin <sup>(1)</sup>                                                                                                                                                                                                                                                                                                                                          |

**Note 1:** A = Analog, ST = Schmitt Trigger, HV = High Voltage, I = Input, O = Output, I/O = Input/Output, P = Power.

## 3.1 Positive Power Supply Input Pin ( $V_{DD}$ )

$V_{DD}$  is the positive supply voltage input pin. The input supply voltage is relative to  $V_{SS}$ .

The power supply at the  $V_{DD}$  pin should be as clean as possible for a good DAC performance. It is recommended to use an appropriate bypass capacitor of about 0.1  $\mu$ F (ceramic) to ground. An additional 10  $\mu$ F capacitor (tantalum) in parallel is also recommended to further attenuate noise present in application boards.

## 3.2 Ground Pin ( $V_{SS}$ )

The  $V_{SS}$  pin is the device ground reference.

The user must connect the  $V_{SS}$  pin to a ground plane through a low-impedance connection. If an analog ground path is available in the application PCB (Printed Circuit Board), it is highly recommended that the  $V_{SS}$  pin be tied to the analog ground path or isolated within an analog ground plane of the circuit board.

## 3.3 Voltage Reference Pins ( $V_{REF}$ )

The  $V_{REF}$  pin is either an input or an output. When the DAC's voltage reference is configured as the  $V_{REF}$  pin, the pin is an input. When the DAC's voltage reference is configured as the internal band gap, the pin is an output.

When the DAC's voltage reference is configured as the  $V_{REF}$  pin, there are two options for this voltage input:

- $V_{REF}$  pin voltage buffered
- $V_{REF}$  pin voltage unbuffered

The buffered option is offered in cases where the external reference voltage does not have sufficient current capability to not drop its voltage when connected to the internal resistor ladder circuit.

When the DAC's voltage reference is configured as the device  $V_{DD}$ , the  $V_{REF}$  pin is disconnected from the internal circuit.

When the DAC's voltage reference is configured as the internal band gap, the  $V_{REF}$  pin's drive capability is minimal, so the output signal should be buffered.

There are two  $V_{REF}$  pins, each corresponding to a group of output channels.  $V_{REF0}$  is connected to even channels: 0-6, while  $V_{REF1}$  is connected to odd channels: 1-7. See [Section 5.2 "Voltage Reference Selection"](#) and [Register 4-2](#) for more details on the configuration bits.

## 3.4 Analog Output Voltage Pins ( $V_{OUTn}$ )

$V_{OUT}$  is the DAC analog voltage output pin. The DAC output has an output amplifier. The DAC output range depends on the selection of the voltage reference source (and potential output gain selection). These are:

- Device  $V_{DD}$  – The full-scale range of the DAC output is from  $V_{SS}$  to approximately  $V_{DD}$ .
- $V_{REF}$  Pin – The full-scale range of the DAC output is from  $V_{SS}$  to  $G \times V_{RL}$ , where G is the gain selection option (1x or 2x).
- Internal Band Gap – The full-scale range of the DAC output is from  $V_{SS}$  to  $G \times (2 \times V_{BG})$ , where G is the gain selection option (1x or 2x).

In Normal mode, the DC impedance of the output pin is about 1 $\Omega$ . In Power-Down mode, the output pin is internally connected to a known pull-down resistor of 1 k $\Omega$ , 125 k $\Omega$  or open. The power-down selection bits setting are shown in [Register 4-3](#) and [Table 5-4](#).

## 3.5 Latch Pin ( $\overline{LAT}$ )/High-Voltage Command Pin (HVC)

The DAC output value update event can be controlled and synchronized using the  $\overline{LAT}$  pins, for one or both channels, on a single or different devices.

The  $\overline{LAT}$  pins control the effect of the Volatile Wiper registers, and the VRnB:VRnA, PDnB:PDnA and Gx bits on the DAC output.

If the  $\overline{LAT}$  pins are held at  $V_{IH}$ , the values sent to the Volatile Wiper registers and Configuration bits have no effect on the DAC outputs.

Once voltage on the pin transitions to  $V_{IL}$ , the values in the Volatile Wiper registers and Configuration bits are transferred to the DAC outputs.

The pin is level-sensitive, so writing to the Volatile Wiper registers and Configuration bits, while it is being held at  $V_{IL}$ , will trigger an immediate change in the outputs.

The HVC pin allows the device's nonvolatile user Configuration bits to be programmed when the voltage on the pin is greater than the  $V_{IH}$  entry voltage.

## 3.6 SPI – Chip Select Pin ( $\overline{CS}$ )

The  $\overline{CS}$  pin enables/disables the serial interface. The serial interface must be enabled for the SPI commands to be received by the device. See [Section 6.2 "SPI Serial Interface"](#) for more details on the SPI serial interface communication.

# MCP48FXBX4/8

---

## 3.7 SPI – Serial Data Input Pin (SDI)

The SDI pin is the serial data input pin of the SPI interface. The SDI pin is used to read the DAC registers and Configuration bits.

See [Section 6.2 “SPI Serial Interface”](#) for more details on the SPI serial interface communication.

## 3.8 SPI – Serial Data Output Pin (SDO)

The SDO pin is the serial data output pin of the SPI interface. The SDO pin is used to write the DAC registers and Configuration bits.

See [Section 6.2 “SPI Serial Interface”](#) for more details on the SPI serial interface communication.

## 3.9 SPI – Serial Clock Pin (SCK)

The SCK pin is the serial clock pin of the SPI interface. The MCP48FXBX4/8 SPI interface only accepts external serial clocks.

See [Section 6.2, SPI Serial Interface](#) for more details on the SPI serial interface communication.

## 3.10 No Connect Pin (NC)

The NC pins are not connected to the device.

## 3.11 Exposed Pad Pin

This pad is conductively connected to the device's substrate. It should be tied to the same potential as the V<sub>SS</sub> pin (or left unconnected). This pad could be used to assist in heat dissipation for the device when connected to a PCB heat sink. The pad is only present on the VQFN package.

## 4.0 GENERAL DESCRIPTION

The MCP48FXBX4 (MCP48FXB04, MCP48FXB14 and MCP48FXB24) devices are quad-channel voltage output devices. The MCP48FXBX8 (MCP48FXB08, MCP48FXB18 and MCP48FXB28) devices are octal-channel voltage output devices.

These devices are offered with 8-bit (MCP48FXB0X), 10-bit (MCP48FXB1X) and 12-bit (MCP48FXB2X) resolutions and include nonvolatile memory (EEPROM), an SPI serial interface and two write Latch pins ( $\overline{\text{LAT0}}$ ,  $\overline{\text{LAT1}}$ ) to control the update of the written DAC value to the DAC output pin.

The devices use a resistor ladder architecture. The resistor ladder DAC is driven from a software-selectable voltage reference source. The source can be either the device's internal  $V_{DD}$ , an external  $V_{REF}$  pin voltage (buffered or unbuffered) or an internal band gap voltage source.

The DAC output is buffered with a low-power and precision output amplifier (op amp). This output amplifier provides a rail-to-rail output with low offset voltage and low noise. The gain (1x or 2x) of the output buffer is software configurable.

This device family also has a user-programmable nonvolatile memory (EEPROM) option, which allows the user to save the desired POR/BOR value of the DAC register and device Configuration bits.

High-voltage lock bits can be used to ensure that the device's output settings are not accidentally modified.

The device operates from a single-supply voltage. This voltage is specified from 2.7V to 5.5V for full specified operation and from 1.8V to 5.5V for digital operation. The device can operate between 1.8V and 2.7V, but its analog performance is significantly reduced; therefore, most device parameters are not specified for this range.

The main functional blocks are:

- **Power-on Reset/Brown-out Reset (POR/BOR)**
- **Device Memory**
- **Resistor Ladder**
- **Output Buffer/ $V_{OUT}$  Operation**
- **Internal Band Gap**
- **SPI Serial Interface Module**

## 4.1 Power-on Reset/Brown-out Reset (POR/BOR)

The internal POR/BOR circuit monitors the power supply voltage ( $V_{DD}$ ) during operation. This circuit ensures correct device start-up at system power-up and power-down events. The device's RAM Retention Voltage ( $V_{RAM}$ ) is lower than the POR/BOR Voltage ( $V_{POR}/V_{BOR}$ ) trip point. The maximum  $V_{POR}/V_{BOR}$  voltage is less than 1.8V.

POR occurs as the voltage rises (typically from 0V), while BOR occurs as the voltage falls (typically from  $V_{DD(MIN)}$  or higher).

The POR and BOR trip points are at the same voltage and the condition is determined by whether the  $V_{DD}$  voltage is rising or falling (see Figure 4-1). What occurs is different depending on whether the reset is a POR or BOR.

When  $V_{POR}/V_{BOR} < V_{DD} < 2.7V$ , the electrical performance may not meet the data sheet specifications. In this region, the device is capable of reading and writing to its EEPROM and reading and writing to its volatile memory if the proper serial command is executed.

### 4.1.1 POWER-ON RESET

The Power-on Reset is the case where the  $V_{DD}$  has power applied to it, ramping up from the  $V_{SS}$  voltage level. As the device powers up, the  $V_{OUT}$  pin floats to an unknown value. When  $V_{DD}$  is above the transistor threshold voltage of the device, the output starts to be pulled low. After the  $V_{DD}$  is above the POR/BOR trip point ( $V_{BOR}/V_{POR}$ ), the resistor network's wiper is loaded with the POR value (midscale). The volatile memory determines the analog output ( $V_{OUT}$ ) pin voltage. After the device is powered up, the user can update the device's memory.

When the rising  $V_{DD}$  voltage crosses the  $V_{POR}$  trip point, the following occurs:

- The nonvolatile DAC register value is latched into the volatile DAC register.
- The nonvolatile Configuration bit values are latched into the volatile Configuration bits.
- The POR status bit is set ('1').
- The POR Reset Delay Timer ( $t_{PORD}$ ) starts; when the POR Reset Delay Timer ( $t_{PORD}$ ) times out, the serial interface is operational. During this delay time, the serial interface will not accept commands.
- The Device Memory Address Pointer is forced to 00h.

The Analog Output ( $V_{OUT}$ ) state is determined by the state of the volatile Configuration bits and the DAC register. This is called a Power-on Reset (event).

Figure 4-1 illustrates the conditions for power-up and power-down events under typical conditions.

# MCP48FXXB4/8

## 4.1.2 BROWN-OUT RESET

The Brown-out Reset occurs when a device has power applied to it and that power (voltage) drops below the specified range.

When the falling  $V_{DD}$  voltage crosses the  $V_{POR}$  trip point (BOR event), the following occurs:

- The serial interface is disabled.
- EEPROM writes are disabled.
- The device is forced into a Power-Down state (PDnB:PDnA = 11). Analog circuitry is turned off.
- The volatile DAC register is forced to 000h.
- Volatile Configuration bits, VRnB:VRnA and Gx, are forced to '0'.

If the  $V_{DD}$  voltage decreases below the  $V_{RAM}$  voltage, all volatile memory may become corrupted.

As the voltage recovers above the  $V_{POR}/V_{BOR}$  voltage, see [Section 4.1.1 "Power-on Reset"](#).

Serial commands not completed due to a brown-out condition may cause the memory location (volatile and nonvolatile) to become corrupted.

[Figure 4-1](#) illustrates the conditions for power-up and power-down events under typical conditions.



**FIGURE 4-1:** POR/BOR Operation.

## 4.2 Device Memory

User memory includes the following types:

- [Volatile Register Memory \(RAM\)](#)
- [Nonvolatile Register Memory](#)
- [Device Configuration Memory](#)

Each memory address is 16 bits wide. There are up to 17 nonvolatile user control bits that do not reside in memory-mapped register space (see [Section 4.2.3 “Device Configuration Memory”](#)).

### 4.2.1 VOLATILE REGISTER MEMORY (RAM)

There are up to twelve volatile memory locations:

- DAC0 through DAC7 Output Value registers
- $V_{REF}$  Select register
- Power-Down Configuration register
- Gain and Status register
- WiperLock Technology Status register

The volatile memory starts functioning when the device  $V_{DD}$  is at (or above) the RAM Retention Voltage ( $V_{RAM}$ ). The volatile memory will be loaded with the default device values when the  $V_{DD}$  rises across the  $V_{POR}/V_{BOR}$  voltage trip point.

### 4.2.2 NONVOLATILE REGISTER MEMORY

This device family uses the nonvolatile memory for the DAC output value and Configuration registers:

- Nonvolatile DAC0 through DAC7 Output Value registers
- Nonvolatile  $V_{REF}$  Select register
- Nonvolatile Power-Down Configuration register
- Nonvolatile Gain register

The nonvolatile memory starts functioning below the device's  $V_{POR}/V_{BOR}$  trip point, and is loaded into the corresponding volatile registers whenever the device rises above the POR/BOR voltage trip point.

The device starts writing the nonvolatile (EEPROM) memory location at the completion of the serial interface command, after the Acknowledge pulse of the `WRITE` single command. Continuous `WRITE` commands addressing the nonvolatile memory are not permitted.

**Note:** When the nonvolatile memory is written, the corresponding volatile memory is **not** modified.

Nonvolatile DAC registers enable the stand-alone operation of the device (without microcontroller control) after being programmed to the desired value.

### 4.2.3 DEVICE CONFIGURATION MEMORY

There are up to sixteen nonvolatile user bits that are not directly mapped into the address space. These non-volatile device Configuration bits control the WiperLock technology for DAC registers and configuration (two bits per DAC).

The Status register shows the states of the device WiperLock technology Configuration bits. The Status register is described in [Register 4-6](#).

The operation of WiperLock technology is discussed in [Section 4.2.6 “WiperLock Technology”](#).

### 4.2.4 UNIMPLEMENTED REGISTER BITS

`READ` commands of a valid location will read unimplemented bits as '0'.

### 4.2.5 UNIMPLEMENTED (RESERVED) LOCATIONS

Normal (voltage) commands (`READ` or `WRITE`) to any unimplemented memory address (reserved) will result in a Command Error (CMDERR) condition. `READ` commands of a reserved location will read bits as '1'.

High-Voltage Commands (enable or disable) to any unimplemented Configuration bits will result in a Command Error (CMDERR) condition.

#### 4.2.5.1 Default Factory POR Memory State of Nonvolatile Memory (EEPROM)

[Table 4-2](#) shows the default factory POR initialization of the device memory map for the 8, 10 and 12-bit devices. In the case of volatile memory devices (MCP48FVBXX), the factory default values cannot be modified.

**Note:** The volatile memory locations will be determined by the nonvolatile memory states (registers and device Configuration bits).

# MCP48FXBX4/8

**TABLE 4-1: MCP48FXBX4/8 MEMORY MAP**

| Address | Function                              | Config Bit <sup>(1)</sup> | Quad | Octal | Address | Function                              | Config Bit <sup>(1)</sup> | Quad | Octal |
|---------|---------------------------------------|---------------------------|------|-------|---------|---------------------------------------|---------------------------|------|-------|
| 00h     | Volatile DAC0 Register                | CL0                       | Y    | Y     | 10h     | Nonvolatile DAC0 Register             | DL0                       | Y    | Y     |
| 01h     | Volatile DAC1 Register                | CL1                       | Y    | Y     | 11h     | Nonvolatile DAC1 Register             | DL1                       | Y    | Y     |
| 02h     | Volatile DAC2 Register                | CL2                       | Y    | Y     | 12h     | Nonvolatile DAC2 Register             | DL2                       | Y    | Y     |
| 03h     | Volatile DAC3 Register                | CL3                       | Y    | Y     | 13h     | Nonvolatile DAC3 Register             | DL3                       | Y    | Y     |
| 04h     | Volatile DAC4 Register                | CL4                       | —    | Y     | 14h     | Nonvolatile DAC4 Register             | DL4                       | —    | Y     |
| 05h     | Volatile DAC5 Register                | CL5                       | —    | Y     | 15h     | Nonvolatile DAC5 Register             | DL5                       | —    | Y     |
| 06h     | Volatile DAC6 Register                | CL6                       | —    | Y     | 16h     | Nonvolatile DAC6 Register             | DL6                       | —    | Y     |
| 07h     | Volatile DAC7 Register                | CL7                       | —    | Y     | 17h     | Nonvolatile DAC7 Register             | DL7                       | —    | Y     |
| 08h     | V <sub>REF</sub> Register             | —                         | Y    | Y     | 18h     | Nonvolatile V <sub>REF</sub> Register | —                         | Y    | Y     |
| 09h     | Power-Down Register                   | —                         | Y    | Y     | 19h     | Nonvolatile Power-Down Register       | —                         | Y    | Y     |
| 0Ah     | Gain and Status Register              | —                         | Y    | Y     | 1Ah     | Nonvolatile Gain Register             | —                         | Y    | Y     |
| 0Bh     | WiperLock™ Technology Status Register | —                         | Y    | Y     | 1Bh     | Reserved                              | —                         | —    | —     |

 Volatile Memory Address Range

 Nonvolatile Memory Address Range

**Note 1:** Device Configuration memory bits require a high-voltage enable or disable command (LATn = V<sub>IHH</sub> or CS = V<sub>IHH</sub>) to modify the bit value.

**TABLE 4-2: FACTORY DEFAULT POR/BOR VALUES**

| Address | Function                              | POR/BOR Value |        |        | Address | Function                              | POR/BOR Value |        |        |
|---------|---------------------------------------|---------------|--------|--------|---------|---------------------------------------|---------------|--------|--------|
|         |                                       | 8-Bit         | 10-Bit | 12-Bit |         |                                       | 8-Bit         | 10-Bit | 12-Bit |
| 00h     | Volatile DAC0 Register                | 7Fh           | 1FFh   | 7FFh   | 10h     | Nonvolatile DAC0 Register             | 7Fh           | 1FFh   | 7FFh   |
| 01h     | Volatile DAC1 Register                | 7Fh           | 1FFh   | 7FFh   | 11h     | Nonvolatile DAC1 Register             | 7Fh           | 1FFh   | 7FFh   |
| 02h     | Volatile DAC2 Register                | FFh           | 3FFh   | FFFh   | 12h     | Nonvolatile DAC2 Register             | FFh           | 3FFh   | FFFh   |
| 03h     | Volatile DAC3 Register                | FFh           | 3FFh   | FFFh   | 13h     | Nonvolatile DAC3 Register             | FFh           | 3FFh   | FFFh   |
| 04h     | Volatile DAC4 Register                | FFh           | 3FFh   | FFFh   | 14h     | Nonvolatile DAC4 Register             | FFh           | 3FFh   | FFFh   |
| 05h     | Volatile DAC5 Register                | FFh           | 3FFh   | FFFh   | 15h     | Nonvolatile DAC5 Register             | FFh           | 3FFh   | FFFh   |
| 06h     | Volatile DAC6 Register                | FFh           | 3FFh   | FFFh   | 16h     | Nonvolatile DAC6 Register             | FFh           | 3FFh   | FFFh   |
| 07h     | Volatile DAC7 Register                | FFh           | 3FFh   | FFFh   | 17h     | Nonvolatile DAC7 Register             | FFh           | 3FFh   | FFFh   |
| 08h     | V <sub>REF</sub> Register             | 0000h         | 0000h  | 0000h  | 18h     | Nonvolatile V <sub>REF</sub> Register | 0000h         | 0000h  | 0000h  |
| 09h     | Power-Down Register                   | 0000h         | 0000h  | 0000h  | 19h     | Nonvolatile Power-Down Register       | 0000h         | 0000h  | 0000h  |
| 0Ah     | Gain and Status Register              | 0080h         | 0080h  | 0080h  | 1Ah     | Nonvolatile Gain Register             | 0000h         | 0000h  | 0000h  |
| 0Bh     | WiperLock™ Technology Status Register | 0000h         | 0000h  | 0000h  | 1Bh     | Reserved <sup>(1)</sup>               | —             | —      | —      |

 Volatile Memory address range

 Nonvolatile Memory address range

**Note 1:** Reading a reserved memory location results in the SPI command error condition. The SDO pin will output all '0's. Forcing the CS pin to the V<sub>IH</sub> state will reset the SPI interface.

## 4.2.6 WIPERLOCK TECHNOLOGY

The MCP48FXBX4/8 WiperLock technology allows application-specific device settings (DAC register and configuration) to be secured without requiring the use of an additional write-protect pin. There are two Configuration bits (DLn:CLn) for each DAC channel (DAC0 through DAC7).

Dependent on the state of the DLn:CLn Configuration bits, WiperLock technology prevents the serial commands from the following actions on the DACn registers and bits:

- Writing to the specified volatile DACn register memory location
- Writing to the specified nonvolatile DACn register memory location
- Writing to the specified volatile DACn Configuration bits
- Writing to the specified nonvolatile DACn Configuration bits

Each pair of these Configuration bits controls one of the four modes.

To modify the Configuration bits, the HVC pin must be forced to the  $V_{IH}$  state and then an enable or disable command must be received for the desired pair of DAC register addresses.

Example: To modify the CL0 bit, the enable or disable command specifies address 00h; while to modify the DL0 bit, the enable or disable command specifies address 10h.

**Note:** During device communication, if the device address/command combination is invalid or an unimplemented address is specified, the MCP48FXBX4/8 will command error that command byte. To reset the serial interface state machine, the  $\overline{CS}$  pin must be driven to the Inactive state ( $V_{IH}$ ) before returning to the Active state ( $V_{IL}$  or  $V_{IHH}$ ).

### 4.2.6.1 POR/BOR Operation with WiperLock Technology Enabled

The WiperLock Technology state is not affected by a POR/BOR event. A POR/BOR event will load the volatile DACn register values with the nonvolatile or default factory values (in case of volatile memory only devices).

**TABLE 4-3: WIPERLOCK™ TECHNOLOGY CONFIGURATION BITS – FUNCTIONAL DESCRIPTION**

| DLn:CLn <sup>(1)</sup> | Register/Bits |             |                                   |             | Comments                                                                                                                    |
|------------------------|---------------|-------------|-----------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------|
|                        | DACn Wiper    |             | DACn Configuration <sup>(1)</sup> |             |                                                                                                                             |
|                        | Volatile      | Nonvolatile | Volatile                          | Nonvolatile |                                                                                                                             |
| 11                     | Locked        | Locked      | Locked                            | Locked      | All DACn registers are locked.                                                                                              |
| 10                     | Locked        | Locked      | Unlocked                          | Locked      | All DACn registers are locked, except for volatile DACn Configuration registers. This allows operation of Power-Down modes. |
| 01                     | Unlocked      | Locked      | Unlocked                          | Locked      | Volatile DACn registers are unlocked, nonvolatile DACn registers are locked.                                                |
| 00                     | Unlocked      | Unlocked    | Unlocked                          | Unlocked    | All DACn registers are unlocked.                                                                                            |

**Note 1:** The state of these Configuration bits (DLn:CLn) is reflected in the WLnB:WLnA bits, as shown in [Register 4-6](#). DAC Configuration bits include Voltage Reference Control bits (VRnB:VRnA), Power-Down Control bits (PDnB:PDnA) and Output Gain bits (Gx).

# MCP48FXXB4/8

## 4.2.7 DEVICE REGISTERS

Register 4-1 shows the format of the DAC Output Value registers for both volatile and nonvolatile memory locations. These registers will be either 8 bits, 10 bits or 12 bits wide. The values are right justified.

**REGISTER 4-1: DAC0 TO DAC7: DAC OUTPUT VALUE REGISTERS  
(ADDRESSES 00h THROUGH 07h/10h THROUGH 17h; VOLATILE/NONVOLATILE)**

|        | U-0    | U-0 | U-0 | U-0 | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n |
|--------|--------|-----|-----|-----|------------------|------------------|------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 12-bit | —      | —   | —   | —   | D11              | D10              | D09              | D08              | D07   | D06   | D05   | D04   | D03   | D02   | D01   | D00   |
| 10-bit | —      | —   | —   | —   | — <sup>(1)</sup> | — <sup>(1)</sup> | D09              | D08              | D07   | D06   | D05   | D04   | D03   | D02   | D01   | D00   |
| 8-bit  | —      | —   | —   | —   | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | D07   | D06   | D05   | D04   | D03   | D02   | D01   | D00   |
|        | bit 15 |     |     |     | bit 0            |                  |                  |                  |       |       |       |       |       |       |       |       |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown  
 = 12-bit device       = 10-bit device       = 8-bit device

### 12-Bit      10-Bit      8-Bit

bit 15-12    bit 15-10    bit 15-8    **Unimplemented:** Read as '0'

bit 11-0      —      —      **D11-D00:** DAC Output Value – 12-bit devices  
 FFFh = Full-scale output value  
 7FFh = Midscale output value  
 000h = Zero scale output value

—      bit 9-0      —      **D09-D00:** DAC Output Value – 10-bit devices  
 3FFh = Full-scale output value  
 1FFh = Midscale output value  
 000h = Zero scale output value

—      —      bit 7-0      **D07-D00:** DAC Output Value – 8-bit devices  
 FFh = Full-scale output value  
 7Fh = Midscale output value  
 000h = Zero scale output value

**Note 1:** Unimplemented bit, read as '0'.

Register 4-2 shows the format of the Voltage Reference Control register. Each DAC has two bits to control the source of the DAC's voltage reference. This register is for both volatile and nonvolatile memory locations.

**REGISTER 4-2: VREF: VOLTAGE REFERENCE CONTROL REGISTER  
(ADDRESSES 08h AND 18h; VOLATILE/NONVOLATILE)**

|       | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n |
|-------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------|-------|-------|-------|-------|-------|-------|
| Octal | VR7B             | VR7A             | VR6B             | VR6A             | VR5B             | VR5A             | VR4B             | VR4A             | VR3B  | VR3A  | VR2B  | VR2A  | VR1B  | VR1A  | VR0B  |
| Quad  | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | VR3B  | VR3A  | VR2B  | VR2A  | VR1B  | VR1A  | VR0B  |
|       | bit 15           |                  |                  |                  |                  |                  |                  |                  | bit 0 |       |       |       |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown  
 [Purple Box] = Quad-channel device      [White Box] = Octal-channel device

| Octal    | Quad     |                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| —        | bit 15-8 | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                                                                                                                                                                                                            |
| bit 15-0 | bit 7-0  | <b>VRnB:VRnA:</b> DAC Voltage Reference Control<br>11 = $V_{REF}$ pin (buffered); $V_{REF}$ buffer enabled<br>10 = $V_{REF}$ pin (unbuffered); $V_{REF}$ buffer disabled<br>01 = Internal band gap (1.22V typical); $V_{REF}$ buffer enabled, $V_{REF}$ voltage driven when powered down<br>00 = $V_{DD}$ (unbuffered); $V_{REF}$ buffer disabled<br>Use this state with Power-Down bits for lowest current. |

**Note 1:** Unimplemented bit, read as '0'.

# MCP48FXBX4/8

Register 4-3 shows the format of the Power-Down Control register. Each DAC has two bits to control the Power-Down state of the DAC. This register is for both volatile and nonvolatile memory locations.

## REGISTER 4-3: POWER-DOWN CONTROL REGISTER (ADDRESSES 09h, 19h; VOLATILE/NONVOLATILE)

|       |                  |                  |                  |                  |                  |                  |                  |                  |       |       |       |       |       |       |       |       |
|-------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|
|       | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n |
| Octal | PD7B             | PD7A             | PD6B             | PD6A             | PD5B             | PD5A             | PD4B             | PD4A             | PD3B  | PD3A  | PD2B  | PD2A  | PD1B  | PD1A  | PD0B  | PD0A  |
| Quad  | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | PD0B  | PD0A  | PD0B  | PD0A  | PD0B  | PD0A  | PD0B  | PD0A  |
|       | bit 15           |                  |                  |                  |                  |                  |                  |                  | bit 0 |       |       |       |       |       |       |       |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown  
 ■ = Quad-channel device      □ = Octal-channel device

### Octal

—  
 bit 15-0

### Quad

bit 15-8  
 bit 7-0

**Unimplemented:** Read as '1'

**PDnB:PDnA:** DAC Power-Down Control<sup>(2)</sup>

11 = Powered down –  $V_{OUT}$  is open circuit  
 10 = Powered down –  $V_{OUT}$  is loaded with a 125 k $\Omega$  resistor to ground  
 01 = Powered down –  $V_{OUT}$  is loaded with a 1 k $\Omega$  resistor to ground  
 00 = Normal operation (not powered down)

**Note 1:** Unimplemented bit, read as '0'.

**2:** See Table 5-4 for more details.

Register 4-4 shows the format of the volatile Gain Control and System Status register. Each DAC has one bit to control the gain of the DAC and three status bits.

## REGISTER 4-4: GAIN CONTROL AND SYSTEM STATUS REGISTER (ADDRESS 0Ah; VOLATILE)

|       | R/W-n            | R/W-n            | R/W-n            | R/W-n            | R/W-n | R/W-n | R/W-n | R/C-1 | R-0   | U-0  | U-0 | U-0 | U-0 | U-0 | U-0 |
|-------|------------------|------------------|------------------|------------------|-------|-------|-------|-------|-------|------|-----|-----|-----|-----|-----|
| Octal | G7               | G6               | G5               | G4               | G3    | G2    | G1    | G0    | POR   | EEWA | —   | —   | —   | —   | —   |
| Quad  | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | — <sup>(1)</sup> | G3    | G2    | G1    | G0    | POR   | EEWA | —   | —   | —   | —   | —   |
|       | bit 15           |                  |                  |                  |       |       |       |       | bit 0 |      |     |     |     |     |     |

### Legend:

R = Readable bit  
-n = Value at POR

W = Writable bit  
'1' = Bit is set

C = Clearable bit  
'0' = Bit is cleared

U = Unimplemented bit, read as '0'  
x = Bit is unknown

  = Quad-channel device   = Octal-channel device

| Octal    | Quad      |                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| —        | bit 15-12 | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                                                                                                                                                                                                                                    |
| bit 15-8 | bit 11-8  | <b>Gn:</b> DAC Channel n Output Driver Gain Control<br>1 = 2x gain<br>0 = 1x gain                                                                                                                                                                                                                                                                                                                                                    |
| bit 7    | bit 7     | <b>POR:</b> Power-on Reset (Brown-out Reset) Status bit<br>This bit indicates if a POR or BOR event has occurred since the last <b>READ</b> command of this register. Reading this register clears the state of the POR status bit.<br>1 = A POR (BOR) event has occurred since the last read of this register; reading this register clears this bit<br>0 = A POR (BOR) event has not occurred since the last read of this register |
| bit 6    | bit 6     | <b>EEWA:</b> EEPROM Write Active Status<br>This bit indicates if the EEPROM write cycle is occurring.<br>1 = An EEPROM write cycle is currently occurring; only serial commands to the volatile memory are allowed<br>0 = An EEPROM write cycle is NOT currently occurring                                                                                                                                                           |
| bit 5-0  | bit 5-0   | <b>Unimplemented:</b> Read as '0'                                                                                                                                                                                                                                                                                                                                                                                                    |

**Note 1:** Unimplemented bit, read as '0'.

# MCP48FVBX4/8

Register 4-5 shows the format of the nonvolatile Gain Control register. Each DAC has one bit to control the gain of the DAC.

## REGISTER 4-5: GAIN CONTROL REGISTER (ADDRESS 1Ah; NONVOLATILE)

|       | R/W-n  | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | R/W-n | U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|-------|--------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-----|-----|-----|
| Octal | G7     | G6    | G5    | G4    | G3    | G2    | G1    | G0    | —   | —   | —   | —   | —   | —   | —   |
| Quad  | —(1)   | —(1)  | —(1)  | —(1)  | G3    | G2    | G1    | G0    | —   | —   | —   | —   | —   | —   | —   |
|       | bit 15 |       |       |       |       |       |       | bit 0 |     |     |     |     |     |     |     |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown  
 = Quad-channel device      = Octal-channel device

|          |                                                                                        |
|----------|----------------------------------------------------------------------------------------|
| Octal    | Quad                                                                                   |
| —        | bit 15-12 <b>Unimplemented:</b> Read as '0'                                            |
| bit 15-8 | bit 11-8 <b>Gn:</b> DACn Output Driver Gain Control bits<br>1 = 2x gain<br>0 = 1x gain |
| bit 7-0  | bit 7-0 Unimplemented bits.                                                            |

**Note 1:** Unimplemented bit, read as '0'.

Register 4-6 shows the format of the DAC WiperLock Technology Status register.

## REGISTER 4-6: DAC WiperLock™ TECHNOLOGY STATUS REGISTER (ADDRESS 0Bh; VOLATILE)

|       |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |  |
|-------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--|
|       | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> | R-0 <sup>(1)</sup> |  |
| Octal | WL7B               | WL7A               | WL6B               | WL6A               | WL5B               | WL5A               | WL4B               | WL4A               | WL3B               | WL3A               | WL2B               | WL2A               | WL1B               | WL1A               | WL0B               |  |
| Quad  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | __ <sup>(2)</sup>  | WL3B               | WL3A               | WL2B               | WL2A               | WL1B               | WL1A               | WL0B               |  |
|       | bit 15             |                    |                    |                    |                    |                    |                    |                    | bit 0              |                    |                    |                    |                    |                    |                    |  |

### Legend:

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown  
  = Quad-channel device      = Octal-channel device

### Octal

—  
bit 15-0

### Quad

bit 15-8  
bit 7-0

**Unimplemented:** Read as '0'

**WLnB:WLnA:** WiperLock™ Technology Status

These bits reflect the state of the DLn:CLn nonvolatile Configuration bits.

11 = DAC Wiper and DAC Configuration (volatile and nonvolatile registers) are locked (DLn = CLn = Enabled)

10 = DAC Wiper (volatile and nonvolatile) and DAC Configuration (nonvolatile registers) are locked (DLn = Enabled; CLn = Disabled)

01 = DAC Wiper (nonvolatile) and DAC Configuration (nonvolatile registers) are locked (DLn = Disabled; CLn = Enabled)

00 = DAC Wiper and DAC Configuration are unlocked (DLn = CLn = Disabled)

**Note 1:** POR value depends on the programmed values of the DLn:CLn Configuration bits. The devices are shipped with a default DLn:CLn Configuration bit state of '0'.

**2:** Unimplemented bit, read as '0'.

# MCP48FXBX4/8

---

NOTES:

## 5.0 DAC CIRCUITRY

The Digital-to-Analog Converter circuitry converts a digital value into its analog representation. The description shows the functional operation of the device.

The DAC circuit uses a resistor ladder implementation. Devices have up to eight DACs.

Figure 5-1 shows the functional block diagram for the MCP48FXBX4/8 DAC circuitry.

The functional blocks of the DAC include:

- **Resistor Ladder**
- **Voltage Reference Selection**
- **Output Buffer/V<sub>OUT</sub> Operation**
- **Internal Band Gap**
- **Latch Pins (LATn)**
- **Power-Down Operation**



**FIGURE 5-1:** MCP48FXBX4/8 DAC Module Block Diagram.

# MCP48FXXB4/8

## 5.1 Resistor Ladder

The resistor ladder is a digital potentiometer with the B Terminal internally grounded and the A Terminal connected to the selected reference voltage (see Figure 5-2). The volatile DAC register controls the wiper position. The Wiper Voltage ( $V_W$ ) is proportional to the DAC register value divided by the number of Resistor Elements ( $R_S$ ) in the ladder (256, 1024 or 4096) related to the  $V_{RL}$  voltage.

The output of the resistor network will drive the input of an output buffer.



**FIGURE 5-2:** Resistor Ladder Model.

The resistor network is made of these three parts:

- Resistor ladder (string of  $R_S$  elements)
- Wiper switches
- DAC register decode

The Resistor Ladder ( $R_{RL}$ ) has a typical impedance of approximately 120 k $\Omega$ . This resistance may vary from device to device by up to  $\pm 20\%$ . Since this is a voltage divider configuration, the actual  $R_{RL}$  resistance does not affect the output given a fixed voltage at  $V_{RL}$ .

Equation 5-1 shows the calculation for the step resistance:

### EQUATION 5-1: $R_S$ CALCULATION

$$R_S = \frac{R_{RL}}{(256)} \quad \text{8-Bit Device}$$

$$R_S = \frac{R_{RL}}{(1024)} \quad \text{10-Bit Device}$$

$$R_S = \frac{R_{RL}}{(4096)} \quad \text{12-Bit Device}$$


**Note:** The maximum wiper position is  $2^n - 1$ , while the number of resistors in the resistor ladder is  $2^n$ . This means that when the DAC register is at full scale, there is one Resistor Element ( $R_S$ ) between the wiper and the  $V_{RL}$  voltage.

If the unbuffered  $V_{REF}$  pin is used as the  $V_{RL}$  voltage source, this voltage source should have a low output impedance.

When the DAC is powered down, the resistor ladder is disconnected from the selected reference voltage.

## 5.2 Voltage Reference Selection

The resistor ladder has up to four sources for the reference voltage. Two user control bits ( $VRnB:VRnA$ ) are used to control the selection with the selection connected to the  $V_{RL}$  node (see Figure 5-3 and Figure 5-4).

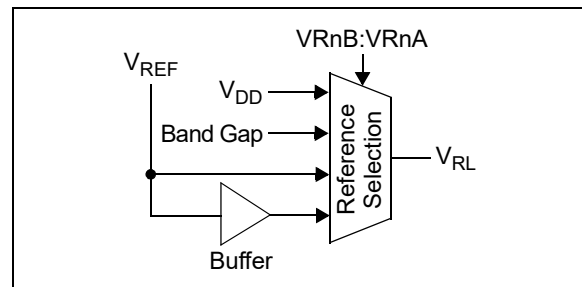


**FIGURE 5-3:** Resistor Ladder Reference Voltage Selection Block Diagram.

The four voltage source options for the resistor ladder are:

1.  $V_{DD}$  pin voltage.
2. Internal Voltage Reference ( $V_{BG}$ ).
3.  $V_{REF}$  pin voltage unbuffered.
4.  $V_{REF}$  pin voltage internally buffered.

# MCP48FXBX4/8

When the user selects the  $V_{DD}$  as reference, the  $V_{REF}$  pin voltage is not connected to the resistor ladder.

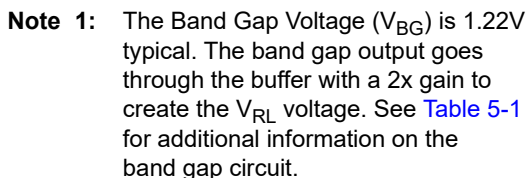

**FIGURE 5-4:** Reference Voltage Selection Implementation Block Diagram.

If the  $V_{REF}$  pin is selected, then a selection has to be made between the Buffered and Unbuffered mode.

### 5.2.1 BUFFERED MODE

The  $V_{REF}$  pin voltage may be from 0.01V to  $V_{DD} - 0.04V$ . The input buffer (amplifier) provides low offset voltage, low noise and a very high input impedance, with only minor limitations on the input range and frequency response.

- Note 1:** Any variation or noises on the reference source can directly affect the DAC output. The reference voltage needs to be as clean as possible for accurate DAC performance.
- 2:** If the  $V_{REF}$  pin is tied to the  $V_{DD}$  voltage, the  $V_{DD}$  mode ( $VRnB:VRnA = 00$ ) is recommended.

### 5.2.2 UNBUFFERED MODE

The  $V_{REF}$  pin voltage may be from  $V_{SS}$  to  $V_{DD}$ .

- Note 1:** The voltage source should have a low output impedance. If the voltage source has a high output impedance, then the voltage on the  $V_{REF}$  pin is lower than expected. The resistor ladder has a typical impedance of 140 k $\Omega$  and a typical capacitance of 29 pF.
- 2:** If the  $V_{REF}$  pin is tied to the  $V_{DD}$  voltage, the  $V_{DD}$  mode ( $VRnB:VRnA = 00$ ) is recommended.

### 5.2.3 BAND GAP MODE

If the internal band gap is selected, then the external  $V_{REF}$  pin should not be driven and should only use high-impedance loads.

The band gap output is buffered, but the internal switches limit the current that the output should source to the  $V_{REF}$  pin. The resistor ladder buffer is used to drive the band gap voltage for the cases of multiple DAC outputs. This ensures that the resistor ladders are always properly sourced when the band gap is selected.

### 5.3 Internal Band Gap

The internal band gap is designed to drive the resistor ladder buffer.

The resistance of a Resistor Ladder ( $R_{RL}$ ) is targeted to be 140 k $\Omega$  ( $\pm 40$  k $\Omega$ ), which means a minimum resistance of 100 k $\Omega$ .

The band gap selection can be used across the  $V_{DD}$  voltages while maximizing the  $V_{OUT}$  voltage ranges. For  $V_{DD}$  voltages below the  $2 \times \text{Gain} \times V_{BG}$  voltage, the output for the upper codes will be clipped to the  $V_{DD}$  voltage. [Table 5-1](#) shows the maximum DAC register code given device  $V_{DD}$  and Gain bit setting.

**TABLE 5-1:  $V_{OUT}$  USING BAND GAP**

| V <sub>DD</sub> <sup>(3)</sup> | DAC Gain | Max DAC Code <sup>(1)</sup> |        |       | Comment                                      |
|--------------------------------|----------|-----------------------------|--------|-------|----------------------------------------------|
|                                |          | 12-Bit                      | 10-Bit | 8-Bit |                                              |
| 5.5                            | 1        | FFFh                        | 3FFh   | FFh   | V <sub>OUT(max)</sub> = 2.44V <sup>(2)</sup> |
|                                | 2        | FFFh                        | 3FFh   | FFh   | V <sub>OUT(max)</sub> = 4.88V <sup>(2)</sup> |
| 2.7                            | 1        | FFFh                        | 3FFh   | FFh   | V <sub>OUT(max)</sub> = 2.44V <sup>(2)</sup> |
|                                | 2        | 8CDh                        | 233h   | 8Ch   | ~ 0 to 56% range                             |

- Note 1:** Without the  $V_{OUT}$  pin voltage being clipped.
- 2:** When  $V_{BG} = 1.22V$  typical.
- 3:** Band gap performance achieves full performance starting from a  $V_{DD}$  of 2.0V.

# MCP48FVBX4/8

## 5.4 Output Buffer/V<sub>OUT</sub> Operation

The output driver buffers the Wiper Voltage (V<sub>W</sub>) of the resistor ladder.

The DAC output is buffered with a low-power and precision output amplifier (op amp). This amplifier provides a rail-to-rail output with low offset voltage and low noise. The amplifier's output can drive the resistive and high capacitive loads without oscillation. The amplifier provides a maximum load current, which is enough for most programmable voltage reference applications. See [Section 1.0 "Electrical Characteristics"](#) for the specifications of the output amplifier.

**Note:** The load resistance must be kept higher than 5 kΩ for the stable and expected analog output (to meet electrical specifications).

[Figure 5-5](#) shows the block diagram of the output driver circuit.

The user can select the output gain of the output amplifier. The gain options are:

- Gain of 1, when either the V<sub>DD</sub>, External V<sub>REF</sub> or Band Gap mode are used. In case of the Band Gap mode, the effective gain is 2; see [Section 5.3 "Internal Band Gap"](#).
- Gain of 2, when the External V<sub>REF</sub> or Internal Band Gap modes are used. In case of the Band Gap mode, the effective gain is 4; see [Section 5.3 "Internal Band Gap"](#).



**FIGURE 5-5:** Output Driver Block Diagram.

### 5.4.1 PROGRAMMABLE GAIN

The amplifier's gain is controlled by the Gain (G) Configuration bit (see [Register 4-5](#)) and the V<sub>RL</sub> reference selection.

The volatile Gain bit value can be modified by:

- POR events
- BOR events
- SPI `WRITE` commands

### 5.4.2 OUTPUT VOLTAGE

The volatile DAC register values, along with the device's Configuration bits, control the analog V<sub>OUT</sub> voltage. The volatile DAC register's value is unsigned binary. The formula for the output voltage is given in [Equation 5-2](#). [Table 5-5](#) shows examples of volatile DAC register values and the corresponding theoretical V<sub>OUT</sub> voltage for the MCP48FVBX4/8 devices.

#### EQUATION 5-2: CALCULATING OUTPUT VOLTAGE (V<sub>OUT</sub>)

$$V_{OUT} = \frac{V_{RL} \times \text{DAC Register Value}}{\# \text{ Resistor in Resistor Ladder}} \times \text{Gain}$$

Where:

# Resistors in R-Ladder = 4096 (**MCP48FVB2X**)  
1024 (**MCP48FVB1X**)  
256 (**MCP48FVB0X**)

**Note:** When Gain = 2 (V<sub>RL</sub> = V<sub>REF</sub>) and if V<sub>REF</sub> > V<sub>DD</sub>/2, the V<sub>OUT</sub> voltage will be limited to V<sub>DD</sub>. So if V<sub>REF</sub> = V<sub>DD</sub>, then the V<sub>OUT</sub> voltage will not change for volatile DAC register values midscale and greater, since the op amp is at full-scale output.

The following events update the DAC register value, and therefore, the analog Voltage Output (V<sub>OUT</sub>):

- POR
- BOR
- `WRITE` command

The V<sub>OUT</sub> voltage starts driving to the new value after the event has occurred.

### 5.4.3 STEP VOLTAGE (V<sub>S</sub>)

The step voltage depends on the device resolution and the calculated output voltage range. One LSb is defined as the ideal voltage difference between two successive codes. The step voltage can be easily calculated by using [Equation 5-3](#) (DAC register value is equal to 1). Theoretical step voltages are shown in [Table 5-2](#) for several V<sub>REF</sub> voltages.

#### EQUATION 5-3: V<sub>S</sub> CALCULATION

$$V_S = \frac{V_{RL}}{\# \text{ Resistor in Resistor Ladder}} \times \text{Gain}$$

Where:

# Resistors in R-Ladder = 4096 (**12-bit**)  
1024 (**10-bit**)  
256 (**8-bit**)


**TABLE 5-2: THEORETICAL STEP VOLTAGE ( $V_S$ )<sup>(1)</sup>**

|       | $V_{REF}$ |             |             |             |             |        |
|-------|-----------|-------------|-------------|-------------|-------------|--------|
|       | 5.0       | 2.7         | 1.8         | 1.5         | 1.0         |        |
| $V_S$ | 1.22 mV   | 659 $\mu$ V | 439 $\mu$ V | 366 $\mu$ V | 244 $\mu$ V | 12-bit |
|       | 4.88 mV   | 2.64 mV     | 1.76 mV     | 1.46 mV     | 977 $\mu$ V | 10-bit |
|       | 19.5 mV   | 10.5 mV     | 7.03 mV     | 5.86 mV     | 3.91 mV     | 8-bit  |

**Note 1:** When Gain = 1x,  $V_{FS} = V_{RL}$  and  $V_{ZS} = 0V$ .

## 5.4.4 OUTPUT SLEW RATE

Figure 5-6 shows an example of the slew rate for the  $V_{OUT}$  pin. The slew rate can be affected by the characteristics of the circuit connected to the  $V_{OUT}$  pin.

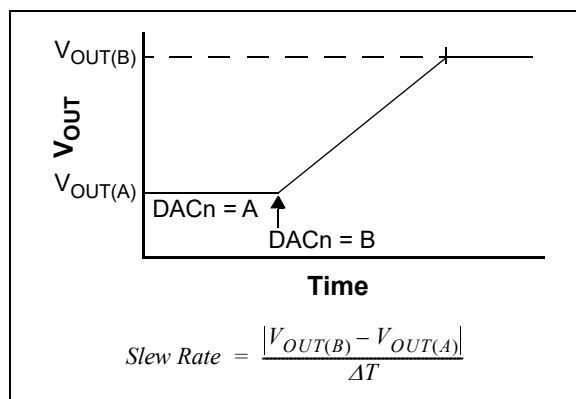

**FIGURE 5-6:**  $V_{OUT}$  Pin Slew Rate.

### 5.4.4.1 Small Capacitive Load

With a small Capacitive Load ( $C_L$ ), the output buffer's current is not affected, but the  $V_{OUT}$  pin's voltage is not a step transition from one output value (DAC register value) to the next output value. The change of the  $V_{OUT}$  voltage is limited by the output buffer's characteristics, so the  $V_{OUT}$  pin voltage will have a slope from the old voltage to the new one. This slope is fixed for the output buffer and is referred to as the Buffer Slew Rate ( $SR_{BUF}$ ).

### 5.4.4.2 Large Capacitive Load

With a larger capacitive load, the slew rate is determined by two factors:

- The output buffer's Short-Circuit Current ( $I_{SC}$ )
- The  $V_{OUT}$  pin's external load

$I_{OUT}$  cannot exceed the output buffer's Short-Circuit Current ( $I_{SC}$ ), which fixes the output Buffer Slew Rate ( $SR_{BUF}$ ). The voltage on the Capacitive Load,  $V_{CL}$ , changes at a rate proportional to  $I_{OUT}$ , which fixes a Capacitive Load Slew Rate ( $SR_{CL}$ ).

The  $V_{CL}$  voltage slew rate is limited to the slower of the output buffer's internally set Slew Rate ( $SR_{BUF}$ ) and the Capacitive Load Slew Rate ( $SR_{CL}$ ).


## 5.4.5 DRIVING RESISTIVE AND CAPACITIVE LOADS

The  $V_{OUT}$  pin can drive up to 100 pF of capacitive load in parallel with a 5 k $\Omega$  resistive load (to meet electrical specifications).

$V_{OUT}$  drops slowly as the load resistance decreases after about 3.5 k $\Omega$ . It is recommended to use a load with  $R_L$  greater than 5 k $\Omega$ .

Driving large capacitive loads can cause stability problems for voltage feedback op amps. As the load capacitance increases, the feedback loop's phase margin decreases and the closed-loop bandwidth is reduced. This produces gain peaking in the frequency response with overshoot and ringing in the step response. That is, since the  $V_{OUT}$  pin's voltage does not quickly follow the buffer's input voltage (due to the large capacitive load), the output buffer will overshoot the desired target voltage. Once the driver detects this overshoot, it compensates by forcing it to a voltage below the target. This causes voltage ringing on the  $V_{OUT}$  pin.

When driving large capacitive loads with the output buffer, a small Series Resistor ( $R_{ISO}$ ) at the output (see Figure 5-7) improves the output buffer's stability (feedback loop's phase margin) by making the output load resistive at higher frequencies. The bandwidth will be generally lower than the bandwidth with no capacitive load.

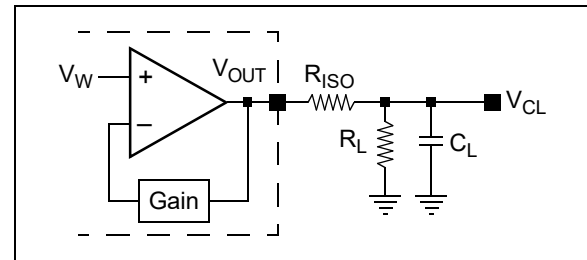

**FIGURE 5-7:** Circuit to Stabilize the Output Buffer for Large Capacitive Loads ( $C_L$ ).

The  $R_{ISO}$  resistor value for your circuit needs to be selected. The resulting frequency response peaking and step response overshoot for this  $R_{ISO}$  resistor value should be verified on the bench. Modify the  $R_{ISO}$ 's resistance value until the output characteristics meet your requirements.

A method to evaluate the system's performance is to inject a step voltage on the  $V_{REF}$  pin and observe the  $V_{OUT}$  pin's characteristics.

**Note:** Additional insight into circuit design for driving capacitive loads can be found in AN884, "Driving Capacitive Loads with Op Amps" (DS00884).

# MCP48FXXB4/8

## 5.5 Power-Down Operation

To allow the application to conserve power when the DAC operation is not required, three Power-Down modes are available. The Power-Down configuration bits (PDnB:PDnA) control the power-down operation (Figure 5-8 and Table 5-3). On devices with multiple DACs, each DAC's Power-Down mode is individually controllable. All Power-Down modes do the following:

- Turn off most DAC module's internal circuits (output op amp, resistor ladder, etc.)
- Op amp output becomes high-impedance to the  $V_{OUT}$  pin
- Disconnect the resistor ladder from the Reference Voltage ( $V_{RL}$ )
- Retain the value of the volatile DAC register and Configuration bits and the nonvolatile (EEPROM) DAC register and Configuration bits

Depending on the selected Power-Down mode, the following will occur:

- $V_{OUT}$  pin is switched to one of the two resistive pull-downs (see Table 5-4):
  - 125 k $\Omega$  (typical)
  - 1 k $\Omega$  (typical)
- Op amp is powered down and the  $V_{OUT}$  pin becomes high-impedance

There is a delay ( $T_{PDE}$ ) between the PDnB:PDnA bits, changing from '00' to either '01', '10' or '11', with the op amp no longer driving the  $V_{OUT}$  output and the pull-down resistors sinking current.



**FIGURE 5-8:**  $V_{OUT}$  Power-Down Block Diagram.

In any of the Power-Down modes where the  $V_{OUT}$  pin is not externally connected (sinking or sourcing current), the power-down current will typically be 680 nA for a quad DAC device. As the number of DACs increases, the device's power-down current will also increase.

The Power-Down bits are modified by using a **WRITE** command to the volatile Power-Down register or a **POR** event which transfers the nonvolatile Power-Down register to the volatile Power-Down register.

**TABLE 5-3: POWER-DOWN BITS AND OUTPUT RESISTIVE LOAD**

| PDnB | PDnA | Function                          |
|------|------|-----------------------------------|
| 0    | 0    | Normal operation                  |
| 0    | 1    | 1 k $\Omega$ resistor to ground   |
| 1    | 0    | 125 k $\Omega$ resistor to ground |
| 1    | 1    | Open circuit                      |

Table 5-4 shows the current sources for the DAC based on the selected source of the DAC's reference voltage and if the device is in a normal operating mode or in one of the Power-Down modes.

**TABLE 5-4: DAC CURRENT SOURCES**

| Device $V_{DD}$<br>Current<br>Source | PDnB:A = 00,<br>$V_{RN}B:A =$ |    |                  |    | PDnB:A $\neq$ 00,<br>$V_{RN}B:A =$ |    |                  |    |
|--------------------------------------|-------------------------------|----|------------------|----|------------------------------------|----|------------------|----|
|                                      | 00                            | 01 | 10               | 11 | 00                                 | 01 | 10               | 11 |
| Output Op Amp                        | Y                             | Y  | Y                | Y  | N                                  | N  | N                | N  |
| Resistor Ladder                      | Y                             | Y  | N <sup>(1)</sup> | Y  | N                                  | N  | N <sup>(1)</sup> | N  |
| RL Op Amp                            | N                             | Y  | N                | Y  | N                                  | N  | N                | N  |
| Band Gap                             | N                             | Y  | N                | N  | N                                  | Y  | N                | N  |

**Note 1:** Current is sourced from the  $V_{REF}$  pin, not the device  $V_{DD}$ .

**Section 7.0 "SPI Device Commands"** describes the SPI commands for writing the power-down bits. The command that can update the volatile PDnB:PDnA bits is a **WRITE** command (normal and high voltage).

**Note:** The SPI serial interface circuit is not affected by the Power-Down mode. This circuit remains active in order to receive any command that might come from the master device.

## 5.5.1 EXITING POWER-DOWN

When the device exits Power-Down mode, the following occurs:

- Disabled circuits (op amp, resistor ladder, etc.) are turned on
- The resistor ladder is connected to the selected Reference Voltage ( $V_{RL}$ )
- The selected pull-down resistor is disconnected
- The  $V_{OUT}$  output will be driven to the voltage represented by the volatile DAC register's value and Configuration bits

The  $V_{OUT}$  output signal requires time as these circuits are powered up and the output voltage is driven to the specified value as determined by the volatile DAC register and Configuration bits.

**Note:** Since the op amp and resistor ladder are powered off (0V), the op amp's Input Voltage ( $V_W$ ) can be considered 0V. There is a delay ( $T_{PDD}$ ) between the PDnB:PDnA bits updating to '00' and the op amp driving the  $V_{OUT}$  output. The op amp's settling time (from 0V) needs to be taken into account to ensure the  $V_{OUT}$  voltage reflects the selected value.

Any **WRITE** command where the PDnB:PDnA bits are '00' will cause the device to exit the Power-Down mode.

## 5.6 DAC Registers, Configuration Bits and Status Bits

The MCP48FXBX4/8 device family has both volatile and nonvolatile (EEPROM) memory options. [Table 4-2](#) shows the volatile and nonvolatile memory, and their interaction due to a POR event.

There are five Configuration bits, DAC registers, and two volatile status bits in both the volatile and nonvolatile memory. The DAC registers (volatile and nonvolatile) will be either twelve bits (MCP48FXB2X), ten bits (MCP48FEB1X) or eight bits (MCP48FXB0X) wide.

When the device is first powered up, it automatically uploads the EEPROM memory values or factory default values (in case of MCP48FVBXX devices) to the volatile memory. The volatile memory determines the analog Output Voltage ( $V_{OUT}$ ) pin. After the device is powered up, the user can update the memory.

This memory is read and written through the SPI interface. See [Section 6.0 "SPI Serial Interface Module"](#) and [Section 7.0 "SPI Device Commands"](#) for more details on reading and writing the device's memory.

When the nonvolatile memory is written, the device starts writing the EEPROM cell at the Acknowledge pulse of the **WRITE** single memory location command.

[Register 4-4](#) shows the operation of the device status bits and [Table 4-2](#) shows the factory default value of a POR/BOR event for the device Configuration bits.

There are two status bits. These are only in volatile memory and indicate the status of the device. The POR bit indicates if the device  $V_{DD}$  is above or below the POR trip point. During normal operation, this bit should be '1'. The EEWA bit indicates if an EEPROM write cycle is in progress. While the EEWA bit is '1' (during the EEPROM writing), all commands are ignored, except for the **READ** command.

5.7 Latch Pins ( $\overline{\text{LATn}}$ )

The Latch pins control when the volatile DAC register value is transferred to the DAC wiper. This is useful for applications that need to synchronize the wiper(s) updates to an external event, such as zero-crossing or updates to the other wipers on the device. The  $\overline{\text{LAT}}$  pin functionality is asynchronous to the serial interface operation.

When the  $\overline{\text{LAT}}$  pin is high, transfers from the volatile DAC register to the DAC wiper are inhibited. The volatile DAC register value(s) can continue to update.

When the  $\overline{\text{LAT}}$  pin is low, the volatile DAC register value is transferred to the DAC wiper.

**Note:** This allows the volatile DAC0 through DAC7 registers to be updated while the  $\overline{\text{LATn}}$  pins are high, and to have outputs synchronously updated as the  $\overline{\text{LATn}}$  pins are driven low.

Figure 5-9 shows the interaction of the  $\overline{\text{LAT}}$  pin and the loading of the DAC Wiper n (from the volatile DAC register n). The transfers are level-driven. If the  $\overline{\text{LAT}}$  pin is held low, the corresponding DAC wiper is updated as soon as the volatile DAC register value is updated.

The  $\overline{\text{LAT}}$  pin allows the DAC wiper to be updated to an external event and have multiple DAC channels/devices updating at a common event.

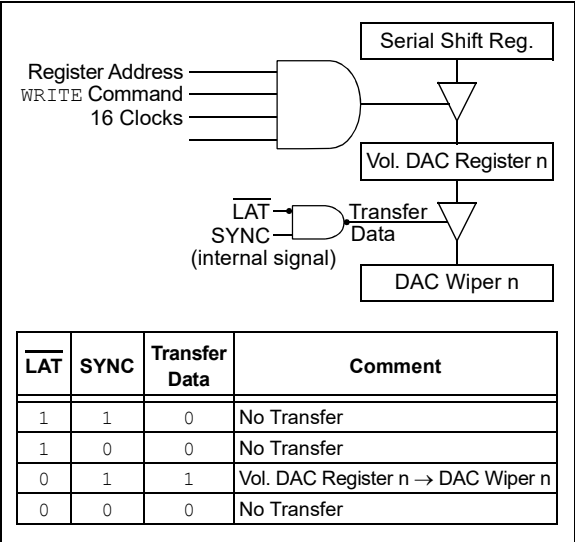


FIGURE 5-9:  $\overline{\text{LAT}}$  and DAC Interaction.

Since the DAC wiper n is updated from the volatile DAC register n, all DACs that are associated with a given  $\overline{\text{LAT}}$  pin can be updated synchronously.

If the application does not require synchronization, then this signal should be tied low.

Figure 5-10 shows two examples of using the  $\overline{\text{LAT}}$  pin to control when the Wiper register is updated relative to the value of a sine wave signal.



FIGURE 5-10:  $\overline{\text{LAT}}$  Pin Operation Example.

**TABLE 5-5: DAC INPUT CODE VS. CALCULATED ANALOG OUTPUT (V<sub>OUT</sub>) (V<sub>DD</sub> = 5.0V)**

| Device              | Volatile DAC Register Value | V <sub>RL</sub> <sup>(1)</sup> | LSb       |          | Gain Selection <sup>(2)</sup> | V <sub>OUT</sub> <sup>(3)</sup> |          |
|---------------------|-----------------------------|--------------------------------|-----------|----------|-------------------------------|---------------------------------|----------|
|                     |                             |                                | Equation  | μV       |                               | Equation                        | V        |
| MCP48FXB2X (12-bit) | 1111 1111 1111              | 5.0V                           | 5.0V/4096 | 1,220.7  | 1x                            | $V_{RL} * (4095/4096) * 1$      | 4.998779 |
|                     |                             | 2.5V                           | 2.5V/4096 | 610.4    | 1x                            | $V_{RL} * (4095/4096) * 1$      | 2.499390 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (4095/4096) * 2$      | 4.998779 |
|                     | 0111 1111 1111              | 5.0V                           | 5.0V/4096 | 1,220.7  | 1x                            | $V_{RL} * (2047/4096) * 1$      | 2.498779 |
|                     |                             | 2.5V                           | 2.5V/4096 | 610.4    | 1x                            | $V_{RL} * (2047/4096) * 1$      | 1.249390 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (2047/4096) * 2$      | 2.498779 |
|                     | 0011 1111 1111              | 5.0V                           | 5.0V/4096 | 1,220.7  | 1x                            | $V_{RL} * (1023/4096) * 1$      | 1.248779 |
|                     |                             | 2.5V                           | 2.5V/4096 | 610.4    | 1x                            | $V_{RL} * (1023/4096) * 1$      | 0.624390 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (1023/4096) * 2$      | 1.248779 |
|                     | 0000 0000 0000              | 5.0V                           | 5.0V/4096 | 1,220.7  | 1x                            | $V_{RL} * (0/4096) * 1$         | 0        |
|                     |                             | 2.5V                           | 2.5V/4096 | 610.4    | 1x                            | $V_{RL} * (0/4096) * 1$         | 0        |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (0/4096) * 2$         | 0        |
| MCP48FEB1X (10-bit) | 11 1111 1111                | 5.0V                           | 5.0V/1024 | 4,882.8  | 1x                            | $V_{RL} * (1023/1024) * 1$      | 4.995117 |
|                     |                             | 2.5V                           | 2.5V/1024 | 2,441.4  | 1x                            | $V_{RL} * (1023/1024) * 1$      | 2.497559 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (1023/1024) * 2$      | 4.995117 |
|                     | 01 1111 1111                | 5.0V                           | 5.0V/1024 | 4,882.8  | 1x                            | $V_{RL} * (511/1024) * 1$       | 2.495117 |
|                     |                             | 2.5V                           | 2.5V/1024 | 2,441.4  | 1x                            | $V_{RL} * (511/1024) * 1$       | 1.247559 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (511/1024) * 2$       | 2.495117 |
|                     | 00 1111 1111                | 5.0V                           | 5.0V/1024 | 4,882.8  | 1x                            | $V_{RL} * (255/1024) * 1$       | 1.245117 |
|                     |                             | 2.5V                           | 2.5V/1024 | 2,441.4  | 1x                            | $V_{RL} * (255/1024) * 1$       | 0.622559 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (255/1024) * 2$       | 1.245117 |
|                     | 00 0000 0000                | 5.0V                           | 5.0V/1024 | 4,882.8  | 1x                            | $V_{RL} * (0/1024) * 1$         | 0        |
|                     |                             | 2.5V                           | 2.5V/1024 | 2,441.4  | 1x                            | $V_{RL} * (0/1024) * 1$         | 0        |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (0/1024) * 1$         | 0        |
| MCP48FXB0X (8-bit)  | 1111 1111                   | 5.0V                           | 5.0V/256  | 19,531.3 | 1x                            | $V_{RL} * (255/256) * 1$        | 4.980469 |
|                     |                             | 2.5V                           | 2.5V/256  | 9,765.6  | 1x                            | $V_{RL} * (255/256) * 1$        | 2.490234 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (255/256) * 2$        | 4.980469 |
|                     | 0111 1111                   | 5.0V                           | 5.0V/256  | 19,531.3 | 1x                            | $V_{RL} * (127/256) * 1$        | 2.480469 |
|                     |                             | 2.5V                           | 2.5V/256  | 9,765.6  | 1x                            | $V_{RL} * (127/256) * 1$        | 1.240234 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (127/256) * 2$        | 2.480469 |
|                     | 0011 1111                   | 5.0V                           | 5.0V/256  | 19,531.3 | 1x                            | $V_{RL} * (63/256) * 1$         | 1.230469 |
|                     |                             | 2.5V                           | 2.5V/256  | 9,765.6  | 1x                            | $V_{RL} * (63/256) * 1$         | 0.615234 |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (63/256) * 2$         | 1.230469 |
|                     | 0000 0000                   | 5.0V                           | 5.0V/256  | 19,531.3 | 1x                            | $V_{RL} * (0/256) * 1$          | 0        |
|                     |                             | 2.5V                           | 2.5V/256  | 9,765.6  | 1x                            | $V_{RL} * (0/256) * 1$          | 0        |
|                     |                             |                                |           |          | 2x <sup>(2)</sup>             | $V_{RL} * (0/256) * 2$          | 0        |

- Note 1:** V<sub>RL</sub> is the resistor ladder's reference voltage. It is independent of the VRnB:VRnA selection.
- Note 2:** Gain selection of 2x (Gx = 1) requires the voltage reference source to come from the V<sub>REF</sub> pin (VRnB:VRnA = 10 or 11) and requires a V<sub>REF</sub> pin voltage (or V<sub>RL</sub>) ≤ V<sub>DD</sub>/2, or from the internal band gap (VRnB:VRnA = 01).
- Note 3:** These theoretical calculations do not take into account the offset, gain and nonlinearity errors.

# MCP48FXBX4/8

---

NOTES:

## 6.0 SPI SERIAL INTERFACE MODULE

The MCP48FXBX4/8 devices' SPI serial interface module supports the SPI serial protocol specification.

The command format and waveforms for the MCP48FXBX4/8 are defined in [Section 7.0 "SPI Device Commands"](#).

### 6.1 Overview

This section discusses some of the specific characteristics of the MCP48FXBX4/8's serial interface module.

The following sections discuss some of these device-specific characteristics:

- [SPI Serial Interface](#)
- [Interface Pins \(CS, SCK, SDI, SDO and LAT/HVC\)](#)
- [Communication Data Rates](#)
- [POR/BOR](#)


### 6.2 SPI Serial Interface

The MCP48FXBX4/8 devices support the SPI serial protocol. This SPI operates in Slave mode (does not generate the serial clock).

The SPI interface uses up to four pins. These are:

- $\overline{\text{CS}}$  – Chip Select
- SCK – Serial Clock
- SDI – Serial Data In (MOSI)
- SDO – Serial Data Out (MISO)

Typical SPI interfaces are shown in [Figure 6-1](#). In the SPI interface, the master's output pin is connected to the slave's input pin, and the master's input pin is connected to the slave's output pin.

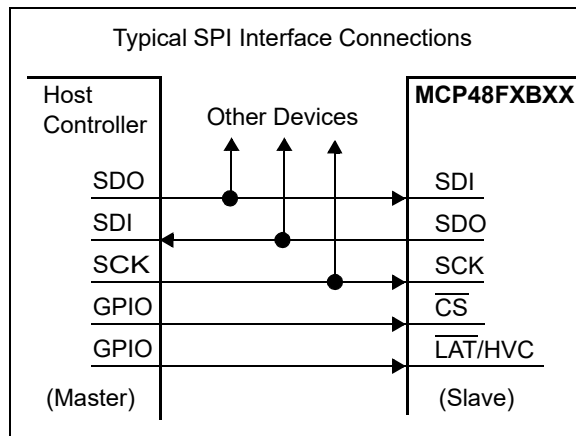

**FIGURE 6-1:** Typical SPI Interface Block Diagram.

The MCP48FXBX4/8 SPI's module supports two (of the four) standard SPI modes. These are Mode 0,0 and 1,1. The SPI mode is determined by the state of the SCK pin ( $V_{IH}$  or  $V_{IL}$ ) when the  $\overline{\text{CS}}$  pin transitions from inactive ( $V_{IH}$ ) to active ( $V_{IL}$ ).

An additional HVC pin is available for High-Voltage Command support. High-Voltage Commands allow the device to enable and disable nonvolatile Configuration bits. Without a high voltage present, those bits are inhibited from being modified.

The HVC pin is high-voltage tolerant. To enter a High-Voltage Command, the HVC pin must be greater than the  $V_{IH}$  voltage.

#### 6.2.1 SPI MODES

The SPI module supports two (of the four) standard SPI modes. These are Mode 0,0 and 1,1. The mode is determined by the state of the SDI pin on the rising edge of the first clock bit (of the 8-bit byte).

##### 6.2.1.1 Mode 0,0

In Mode 0,0:

- SCK Idle state = low ( $V_{IL}$ )
- Data are clocked in on the SDI pin on the rising edge of SCK
- Data are clocked out on the SDO pin on the falling edge of SCK

##### 6.2.1.2 Mode 1,1

In Mode 1,1:

- SCK Idle state = high ( $V_{IH}$ )
- Data are clocked in on the SDI pin on the rising edge of SCK
- Data are clocked out on the SDO pin on the falling edge of SCK

### 6.3 Interface Pins ( $\overline{\text{CS}}$ , SCK, SDI, SDO and LAT/HVC)

The operation of the five interface pins and the High-Voltage Command (HVC) pin is discussed in this section. The pins are:

- SDI (Serial Data In)
- SDO (Serial Data Out)
- SCK (Serial Clock)
- $\overline{\text{CS}}$  (Chip Select)
- LAT/HVC (High-Voltage Command)

The serial interface works on either 8-bit or 24-bit boundaries depending on the selected command. The Chip Select ( $\overline{\text{CS}}$ ) pin frames the SPI commands.

# MCP48FVBX4/8

## 6.3.1 SERIAL DATA IN (SDI)

The Serial Data In (SDI) signal is the data signal into the device. The value on this pin is latched on the rising edge of the SCK signal.

## 6.3.2 SERIAL DATA OUT (SDO)

The Serial Data Out (SDO) signal is the data signal out of the device. The value on this pin is driven on the falling edge of the SCK signal.

Once the  $\overline{CS}$  pin is forced to the active level ( $V_{IL}$  or  $V_{IHH}$ ), the SDO pin will be driven. The state of the SDO pin is determined by the serial bit's position in the command, the command selected and if there is a Command Error (CMDERR) state.

## 6.3.3 SERIAL CLOCK (SCK) (SPI FREQUENCY OF OPERATION)

The SPI interface is specified to operate up to 20 MHz. The actual clock rate depends on the configuration of the system and the serial command used. Table 6-1 shows the SCK frequency for different configurations.

**TABLE 6-1: SCK FREQUENCY**

| Memory Type Access |          | Command |                         |
|--------------------|----------|---------|-------------------------|
|                    |          | Read    | Write, Enable, Disable  |
| Nonvolatile Memory | SDI, SDO | 10 MHz  | 20 MHz <sup>(1,2)</sup> |
| Volatile Memory    | SDI, SDO | 10 MHz  | 20 MHz <sup>(2)</sup>   |

**Note 1:** After a WRITE command, the internal write cycle must be completed before the next SPI command is received.

**2:** This is a design goal. The SDO pin performance is believed to be the limiting factor.

## 6.3.4 $\overline{CS}$ SIGNAL

The Chip Select ( $\overline{CS}$ ) signal is used to select the device and frame a command sequence. To start a command, or sequence of commands, the  $\overline{CS}$  signal must transition from the Inactive state ( $V_{IH}$ ) to an Active state ( $V_{IL}$  or  $V_{IHH}$ ).

After the  $\overline{CS}$  signal has gone active, the SDO pin is driven and the clock bit counter is reset.

**Note:** There is a required delay after the  $\overline{CS}$  pin goes active to the first edge of the SCK pin.

If an error condition occurs for an SPI command, then the command byte's Command Error (CMDERR) bit (on the SDO pin) will be driven low ( $V_{IL}$ ). To exit the error condition, the user must take the  $\overline{CS}$  pin to the  $V_{IH}$  level.

When the  $\overline{CS}$  pin returns to the Inactive state ( $V_{IH}$ ), the SPI module resets (including the Address Pointer). While the  $\overline{CS}$  pin is in the Inactive state ( $V_{IH}$ ), the serial interface is ignored. This allows the host controller to interface to other SPI devices using the same SDI, SDO and SCK signals.

## 6.3.5 HVC SIGNAL

The high-voltage capability of the HVC pin allows High-Voltage Commands. High-Voltage Commands allow the device's WiperLock technology and write-protect features to be enabled and disabled.

## 6.4 Communication Data Rates

The MCP48FVBX4/8 devices support clock rates (bit rate) of up to 20 MHz for WRITE commands and 10 MHz for READ commands.

For most applications, the write time will be considered more important, since that is how the device operation is controlled.

## 6.5 POR/BOR

On a POR/BOR event, the SPI serial interface module state machine is reset, which means that the device's Memory Address Pointer is forced to 00h.

## 7.0 SPI DEVICE COMMANDS

The MCP48FXBX4/8 devices' SPI command format supports 32 memory address locations and four commands:

- WRITE command (C1:C0 = 00)
- READ command (C1:C0 = 11)
- Enable Configuration bit (high voltage,  $HVC = V_{IH}$ ):
  - Enable Configuration bit (C1:C0 = 10)
  - Disable Configuration bit (C1:C0 = 01)

The supported commands are shown in Table 7-1. These commands allow for both single data or continuous data operation. Table 7-2 also shows the required number of bit clocks for each command's different mode of operation.

Commands may have two modes. These are:

- Normal Serial Commands
- High-Voltage Serial Commands

Normal serial commands are those where the HVC pin is driven to either  $V_{IH}$  or  $V_{IL}$ . With high-voltage serial commands, the HVC pin is driven to  $V_{IH}$ .

**TABLE 7-1: COMMAND BITS OVERVIEW**

| C1:C0 Bit States | Command                | # of Bits | Normal or HV |
|------------------|------------------------|-----------|--------------|
| 11               | Read Data              | 24 Bits   | Normal       |
| 00               | Write Data             | 24 Bits   | Normal       |
| 01               | Enable <sup>(1)</sup>  | 8 Bits    | HV Only      |
| 10               | Disable <sup>(1)</sup> | 8 Bits    | HV Only      |

**Note 1:** High-voltage enable and disable commands on selected nonvolatile memory locations.

The 8-bit commands (see Figure 7-1) are used to modify the device Configuration bits (Section 7.9 "Enable Configuration Bit (High Voltage)" and Section 7.10 "Disable Configuration Bit (High Voltage)") while the 24-bit commands (see Figure 7-2) are used to read and write to the device registers (Section 7.8 "READ Command (Normal and High Voltage)" and Section 7.7 "WRITE Command (Normal and High Voltage)"). These commands contain a command byte and two data bytes.



**FIGURE 7-1: 8-Bit SPI Command Format.**

### 7.1 Command Byte

The command byte has three fields: the address, the command and one reserved bit (see Figure 7-1).

The device memory is accessed when the master sends a proper command byte to select the desired operation. The memory location getting accessed is contained in the command byte's AD4:AD0 bits. The action desired is contained in the command byte's C1:C0 bits; see Table 7-2. C1:C0 determines if the desired memory location will be read, written, enabled or disabled.

As the command byte is being loaded into the device (on the SDI pin), the device's SDO pin is driving. The SDO pin will output high bits for the first seven bits of that command. On the 8th bit, the SDO pin will output the CMDERR bit state (see Section 7.6 "Error Condition").

### 7.2 Data Bytes

Data bytes are only present in the READ and WRITE commands. These commands concatenate the two data bytes, after the command byte, for a 24-bit long command (see Figure 7-2).



**FIGURE 7-2: 24-Bit SPI Command Format.**

# MCP48FVBX4/8

**TABLE 7-2: SPI COMMANDS – OVERVIEW AND COMMAND RATE**

| Command                                     |      |    |                   |                     | # of Bit<br>Clocks <sup>(2)</sup> | Estimated Peak<br>Command Rate<br>(Commands/ms) <sup>(5)</sup> |        |        | Comments |      |      |                                       |
|---------------------------------------------|------|----|-------------------|---------------------|-----------------------------------|----------------------------------------------------------------|--------|--------|----------|------|------|---------------------------------------|
| Operation                                   | Code |    | HV                | Mode <sup>(1)</sup> |                                   | 1 MHz                                                          | 10 MHz | 20 MHz |          |      |      |                                       |
|                                             | C1   | C0 |                   |                     |                                   |                                                                |        |        |          |      |      |                                       |
| WRITE Command                               | 0    | 0  | No <sup>(3)</sup> | Single              | 24                                | 41                                                             | 416    | 833    |          |      |      |                                       |
|                                             | 0    | 0  | No <sup>(3)</sup> | Continuous          | 24 * n                            |                                                                |        |        |          |      |      |                                       |
| READ Command <sup>(4)</sup>                 | 1    | 1  | No <sup>(3)</sup> | Single              | 24                                |                                                                |        |        | 125      | 1250 | 2500 | Read frequency can<br>be up to 10 MHz |
|                                             | 1    | 1  | No <sup>(3)</sup> | Continuous          | 24 * n                            |                                                                |        |        |          |      |      |                                       |
| Enable Configuration<br>Bit (High Voltage)  | 1    | 0  | Yes               | Single              | 8                                 |                                                                |        |        |          |      |      |                                       |
|                                             | 1    | 0  | Yes               | Continuous          | 8 * n                             |                                                                |        |        |          |      |      |                                       |
| Disable Configuration<br>Bit (High Voltage) | 0    | 1  | Yes               | Single              | 8                                 |                                                                |        |        |          |      |      |                                       |
|                                             | 0    | 1  | Yes               | Continuous          | 8 * n                             |                                                                |        |        |          |      |      |                                       |

**Note 1:** Nonvolatile registers can only use the Single mode.

**2:** “n” indicates the number of times the command operation is to be repeated.

**3:** If the state of the HVC pin is  $V_{IHH}$ , then the command is ignored, but a Command Error condition (CMDERR) will NOT be generated.

**4:** This command is used to determine when an EEPROM programming cycle is complete.

**5:** The actual voltage output update rate depends on several factors, such as output settling time, code, reference voltage or load impedance.

## 7.3 Continuous Commands

The devices support the ability to execute commands continuously. While the  $\overline{CS}$  pin is in the Active state ( $V_{IL}$ ), any sequence of valid commands may be received.

The following example is a valid sequence of events:

1.  $\overline{CS}$  pin is driven active ( $V_{IL}$ ).
2. READ command.
3. WRITE command (volatile memory).
4. WRITE command (nonvolatile memory).
5.  $\overline{CS}$  pin is driven inactive ( $V_{IH}$ ).

**Note 1:** It is recommended that while the  $\overline{CS}$  pin is active, only one type of command should be issued. When changing commands, it is advisable to take the  $\overline{CS}$  pin inactive, then force it back to the Active state.

- 2: Long command strings should be broken down into shorter command strings. This reduces the probability of noise on the SCK pin, corrupting the desired SPI command string.

## 7.4 Commands to Modify the Device Configuration Bits

The MCP48FVBX4/8 devices support two commands, which are used to program the device's Configuration bits. These commands require a High Voltage ( $V_{IHH}$ ) on the HVC pin. The commands are:

- [Enable Configuration Bit \(High Voltage\)](#)
- [Disable Configuration Bit \(High Voltage\)](#)

The Configuration bits are used to inhibit the DAC values from inadvertent modification. High voltage is required to change the state of these bits if/when the DAC values need to be modified.

## 7.5 High-Voltage Command (HVC) Signal

The High-Voltage Command (HVC) signal is used to indicate that the command or sequence of commands are in the High-Voltage mode. Signals higher than  $V_{IHH}$  (~9.0V) on the  $\overline{LAT}/HVC$  pin puts the device into High-Voltage mode. High-voltage commands allow the device's WiperLock technology and write-protect features to be enabled and disabled.

**Note 1:** There is a required delay after the HVC pin is driven to the  $V_{IHH}$  level on the first edge of the SCK pin.

## 7.6 Error Condition

The Command Error (CMDERR) bit indicates if the five Address bits received (AD4:AD0) and the two Command bits received (C1:C0) are a valid combination (see [Figures 7-1](#) and [7-2](#)). The CMDERR bit is high if the combination is valid and low if the combination is invalid.

The Command Error bit will also be low if a write to a nonvolatile address has been specified and another SPI command occurs before the  $\overline{CS}$  pin is driven inactive ( $V_{IH}$ ).

SPI commands that do not have a multiple of eight clocks are ignored.

Once an error condition has occurred, any following commands are ignored. All following SDO bits will be low until the CMDERR condition is cleared by forcing the  $\overline{CS}$  pin to the Inactive state ( $V_{IH}$ ).

### 7.6.1 ABORTING A TRANSMISSION

All SPI transmissions must have the correct number of SCK pulses to be executed. The command is not executed until the complete number of clocks is received. Some commands also require the  $\overline{CS}$  pin to be forced inactive ( $V_{IH}$ ). If the  $\overline{CS}$  pin is forced to the Inactive state ( $V_{IH}$ ), the serial interface is reset. Partial commands are not executed.

SPI is more susceptible to noise than other bus protocols. The most likely case is that noise corrupts the value of the data being clocked into the MCP48FXBX4/8 or the SCK pin is injected with extra clock pulses. This may cause data to be corrupted in the device, or a Command Error to occur, since the address and command bits were not a valid combination. The extra SCK pulse will also cause the SPI data (SDI) and clock (SCK) to be out of sync. Forcing the  $\overline{CS}$  pin to the Inactive state ( $V_{IH}$ ) resets the serial interface. The SPI interface will ignore activity on the SDI and SCK pins until the  $\overline{CS}$  pin transition to the Active state is detected ( $V_{IH}$  to  $V_{IL}$  or  $V_{IH}$  to  $V_{IHH}$ ).

- Note 1:** When the MCP48FXBX4/8 devices do not receive data, it is recommended that the  $\overline{CS}$  pin be forced to the Inactive Level ( $V_{IL}$ ).
- 2:** It is also recommended that long continuous command strings be broken down into single commands or shorter continuous command strings. This reduces the probability of noise on the SCK pin corrupting the desired SPI commands.

## 7.7 WRITE Command (Normal and High Voltage)

WRITE commands are used to transfer data to the desired memory location (from the host controller). The WRITE command can be issued to both the volatile and nonvolatile memory locations.

WRITE commands can be structured as either single or continuous.

The format of the command is shown in [Figure 7-3](#) (single) and [Figure 7-6](#) (continuous).

A WRITE command to a volatile memory location changes that location after a properly formatted WRITE command has been received.

A WRITE command to a nonvolatile memory location starts an EEPROM write cycle only after a properly formatted WRITE command has been received and the  $\overline{CS}$  pin transitions to the Inactive state ( $V_{IH}$ ).

- Note 1:** Writes to certain memory locations depend on the state of the WiperLock™ technology status bits.
- 2:** During device communication, if an unimplemented address is specified, then the MCP48FXBX4/8 will generate a Command Error state. To reset the SPI state machine, the  $\overline{CS}$  pin must transition to the Inactive state ( $V_{IH}$ ).

### 7.7.1 SINGLE WRITE TO VOLATILE MEMORY

The write operation requires that the  $\overline{CS}$  pin be in the Active state ( $V_{IL}$ ). Typically, the  $\overline{CS}$  pin will be in the Inactive state ( $V_{IH}$ ) and it is driven to the Active state ( $V_{IL}$ ). The 24-bit WRITE command (command byte and data bytes) is then clocked in on the SCK and SDI pins. Once all 24 bits have been received, the specified volatile address is updated. A write will not occur if the WRITE command is not exactly 24 clock pulses. This protects against system issues corrupting the nonvolatile memory locations.

[Figures 7-4](#) and [7-5](#) show the waveforms for a single write (depending on the SPI mode).

# MCP48FVBX4/8

## 7.7.2 SINGLE WRITE TO NONVOLATILE MEMORY

The sequence to write to a single nonvolatile memory location is the same as a single write to volatile memory, with the exception that after the  $\overline{CS}$  pin is driven inactive ( $V_{IH}$ ), the EEPROM Write Cycle ( $t_{WC}$ ) is started. A write cycle will not start if the `WRITE` command is not exactly 24 clock pulses. This protects against system issues corrupting the nonvolatile memory locations.

Once a `WRITE` command to a nonvolatile memory location has been received, no other SPI commands should be received before the  $\overline{CS}$  pin transitions to the Inactive state ( $V_{IH}$ ) or the current SPI command will have a Command Error (CMDERR) occur.

After the  $\overline{CS}$  pin is driven inactive ( $V_{IH}$ ), the serial interface may immediately be re-enabled by driving the  $\overline{CS}$  pin to the Active state ( $V_{IL}$ ).

During an EEPROM write cycle, access to the volatile memory is allowed when using the appropriate command sequence. Commands that address nonvolatile memory are ignored until the EEPROM Write Cycle ( $t_{WC}$ ) completes. This allows the host controller to operate on the volatile DAC registers.

**Note:** The EEWA status bit indicates if an EEPROM write cycle is active (see [Register 4-4](#)).

## 7.7.3 CONTINUOUS WRITES TO VOLATILE MEMORY

A Continuous Write mode of operation is possible when writing to the device's volatile memory registers (see [Table 7-3](#)). [Figure 7-6](#) shows the sequence for three continuous writes. The writes do not need to be to the same volatile memory address.

**TABLE 7-3: VOLATILE MEMORY ADDRESSES**

| Address | Quad-Channel | Octal-Channel |
|---------|--------------|---------------|
| 00h-03h | Yes          | Yes           |
| 04h-07h | No           | Yes           |
| 08h     | Yes          | Yes           |
| 09h     | Yes          | Yes           |
| 0Ah     | Yes          | Yes           |


## 7.7.4 CONTINUOUS WRITES TO NONVOLATILE MEMORY

Continuous writes to nonvolatile memory are not allowed and attempts to do so will result in a Command Error (CMDERR) condition.


## 7.7.5 HIGH-VOLTAGE COMMAND (HVC) SIGNAL

The High-Voltage Command (HVC) signal is used to indicate that the command or sequence of commands are in the high-voltage operational state. HVC commands allow the device's WiperLock technology and write-protect features to be enabled and disabled.


**Note:** Writes to a volatile DAC register will not transfer to the output register until the  $\overline{LAT}$  (HVC) pin is transitioned from the  $V_{IHEN}$  voltage to a  $V_{IL}$  voltage.

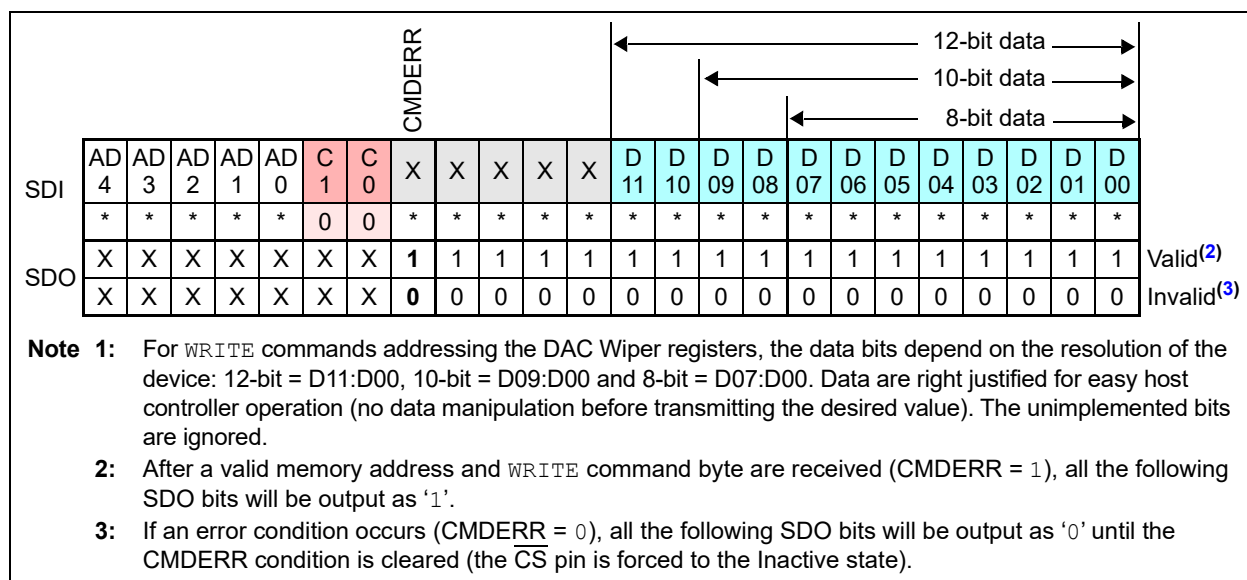

**FIGURE 7-3:** Write Single Memory Location Command – SDI and SDO States.<sup>(1)</sup>

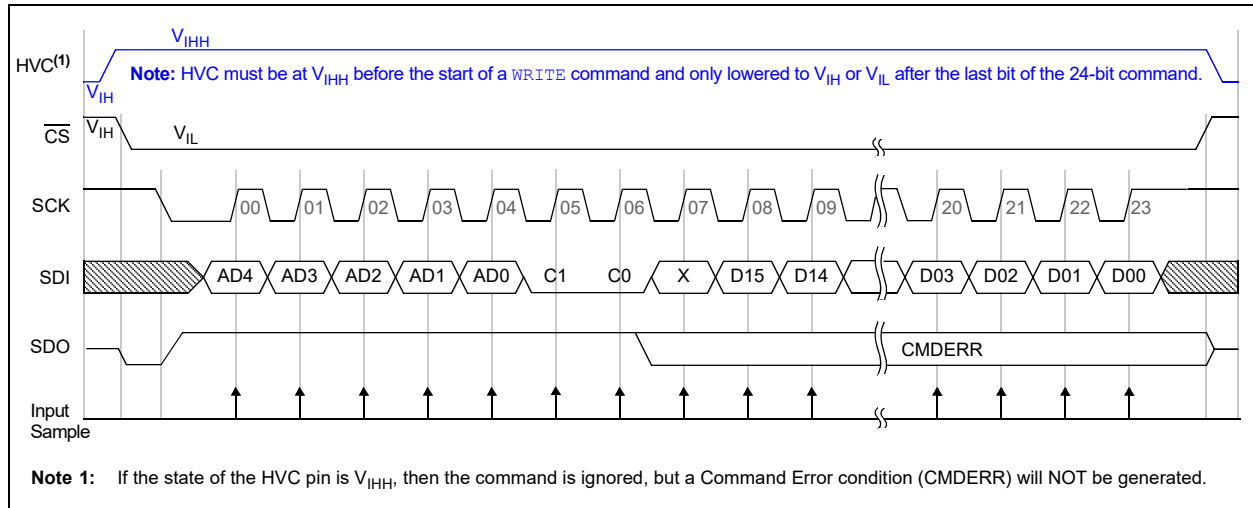


**FIGURE 7-4:** 24-Bit *WRITE* Command ( $C1:C0 = 00$ ) – SPI Waveform (Mode 1,1).

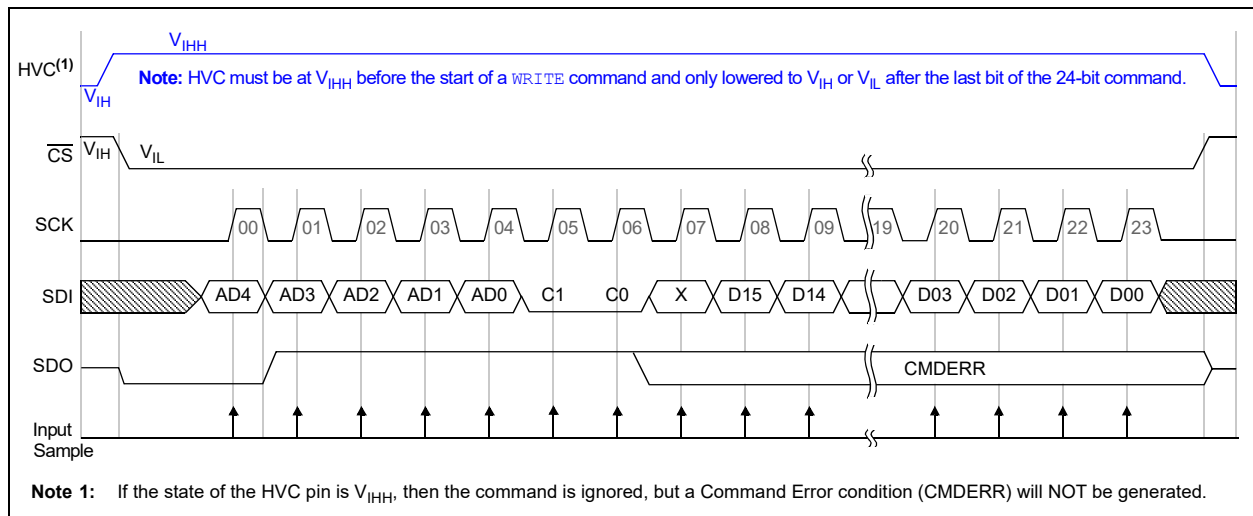

**FIGURE 7-5:** 24-Bit *WRITE* Command ( $C1:C0 = 00$ ) – SPI Waveform (Mode 0,0).

# MCP48FVBX4/8

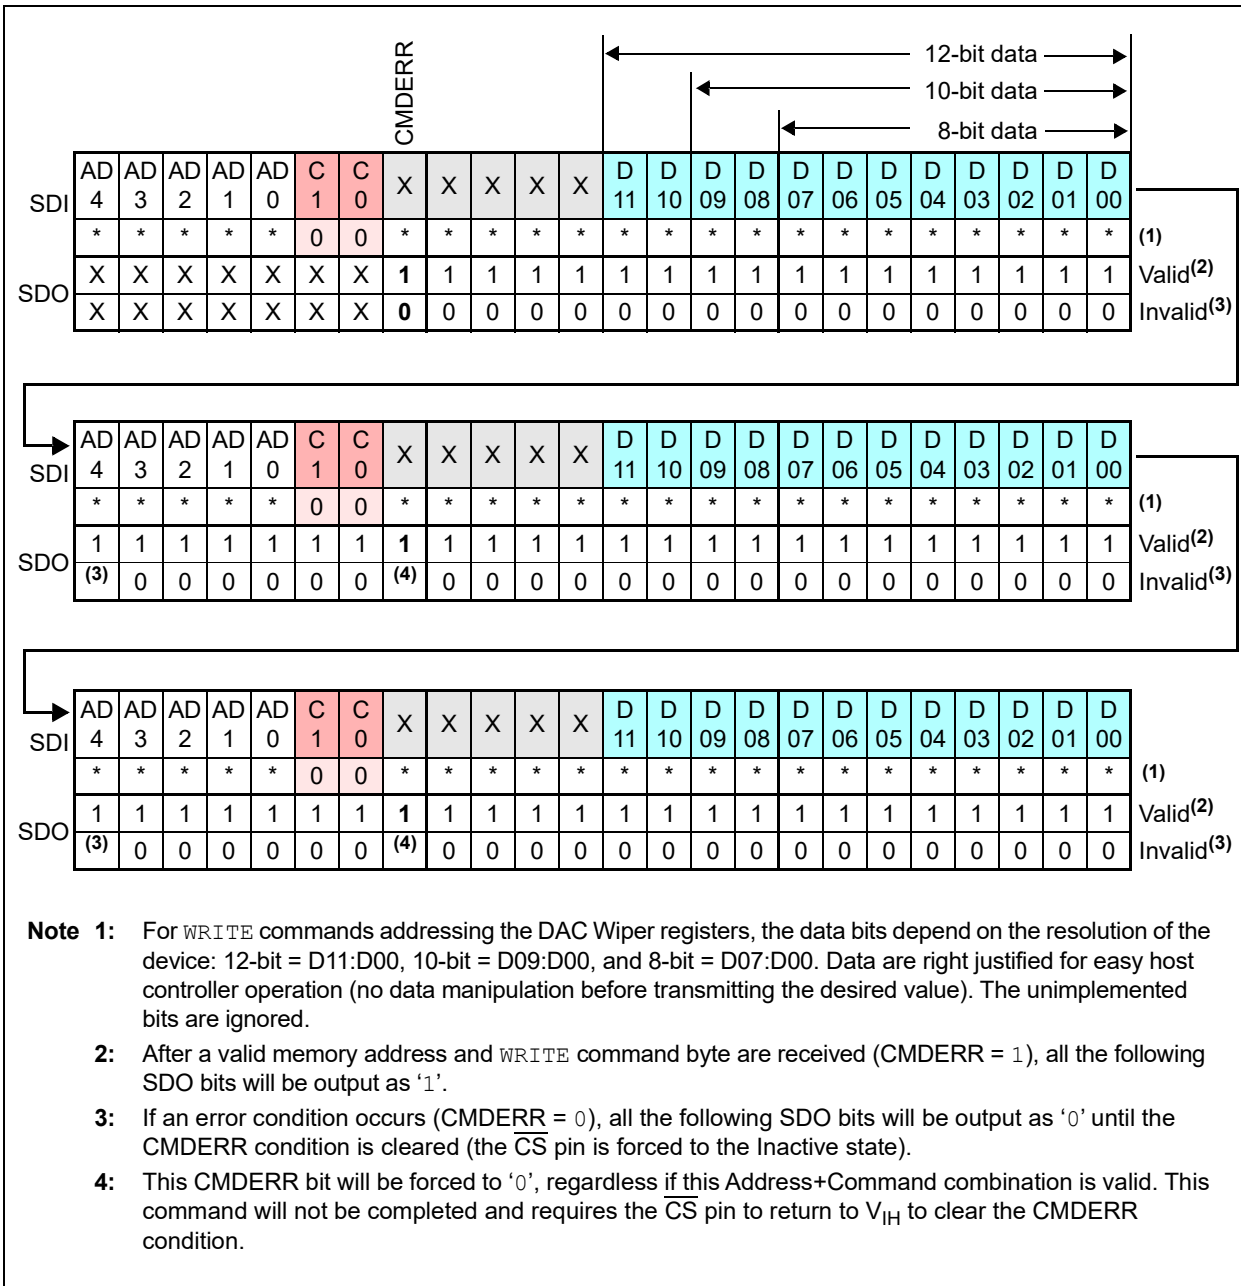

**FIGURE 7-6:** Continuous WRITE Commands (Volatile Memory Only).

## 7.8 READ Command (Normal and High Voltage)

The READ command is a 24-bit command and is used to transfer data from the specified memory location to the host controller. The READ command can be issued to both the volatile and nonvolatile memory locations. The format of the command, as well as an example of SDI and SDO data, are shown in Figure 7-7.

The first seven bits of the READ command determine the address and the command. The 8th clock will output the CMDERR bit on the SDO pin. By means of the remaining 16 clocks, the device will transmit the data bits of the specified address (AD4:AD0).

During an EEPROM write cycle (write to nonvolatile memory location or enable/disable Configuration bit command), the READ command can only read the volatile memory locations. By reading the Status register (0Ah), the host controller can determine when the write cycle has been completed (via the state of the EEWA bit).

- Note 1:** During device communication, if an unimplemented address is specified, then the MCP48FXBX4/8 will command error that byte. To reset the SPI state machine, the CS pin must be driven to the V<sub>IH</sub> state.
- 2:** If the LAT pin is high (V<sub>IH</sub>), reads of the volatile DAC register read the output value, not the internal register.
- 3:** The READ commands operate the same regardless of the state of the High-Voltage Command (HVC) signal.

The READ command formats include:

- **Single Read**
- **Continuous Reads**


### 7.8.1 LAT PIN INTERACTION

During a READ command of the DACn registers, if the LAT pin transitions from V<sub>IH</sub> to V<sub>IL</sub>, then the read data may be corrupted. This is due to the fact that the data being read are the output value and not the DAC register value. The LAT pin transition causes an update of the output value. Based on the DAC output value, the DACn register value and the Command bit where the LAT pin transitions, the value being read could be corrupted.

If LAT pin transitions occur during a read of the DACn register, it is recommended that sequential reads be performed until the two most recent read values match. Then the most recent read data are good.

### 7.8.2 SINGLE READ

The READ command operation requires that the CS pin be in the Active state (V<sub>IL</sub>). Typically, the CS pin will be in the Inactive state (V<sub>IH</sub>) and is driven to the Active state (V<sub>IL</sub>). The 24-bit READ command (command byte and data byte) is then clocked in on the SCK and SDI pins. The SDO pin starts driving data on the 8th bit (CMDERR bit) and the addressed data come out on the 9th through 24th clocks.

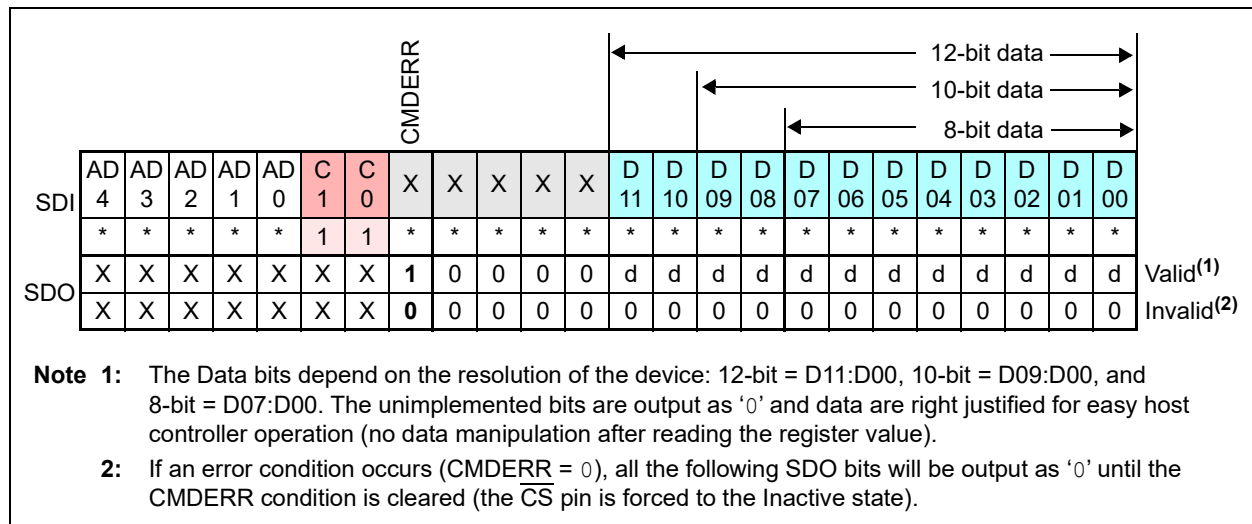

**FIGURE 7-7:** READ Command – SDI and SDO States.


# MCP48FVBX4/8

## 7.8.3 CONTINUOUS READS


Continuous reads format allows the device's memory to be read quickly. Continuous reads are possible to all memory locations. If a nonvolatile memory write cycle is occurring, then READ commands may only access the volatile memory locations.

Figure 7-8 shows the sequence for three continuous reads. The reads do not need to be to the same memory address.


This is useful in reading the System Status register (0Ah) to determine if an EEPROM write cycle is complete (EEWA bit).

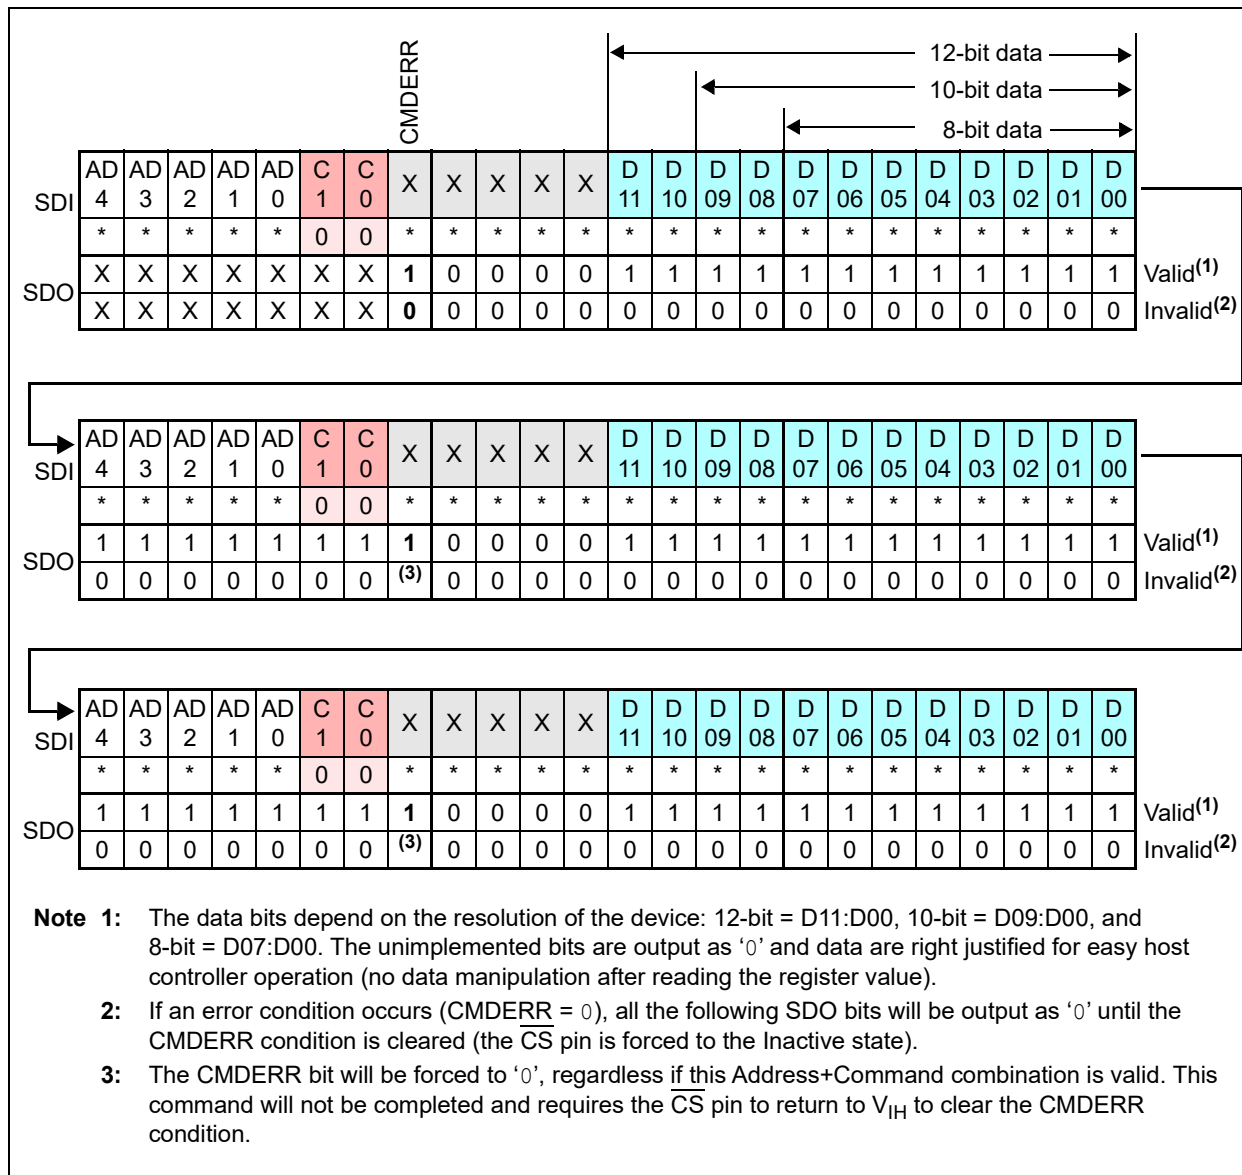

**FIGURE 7-8:** READ Command – Continuous Read Sequence.

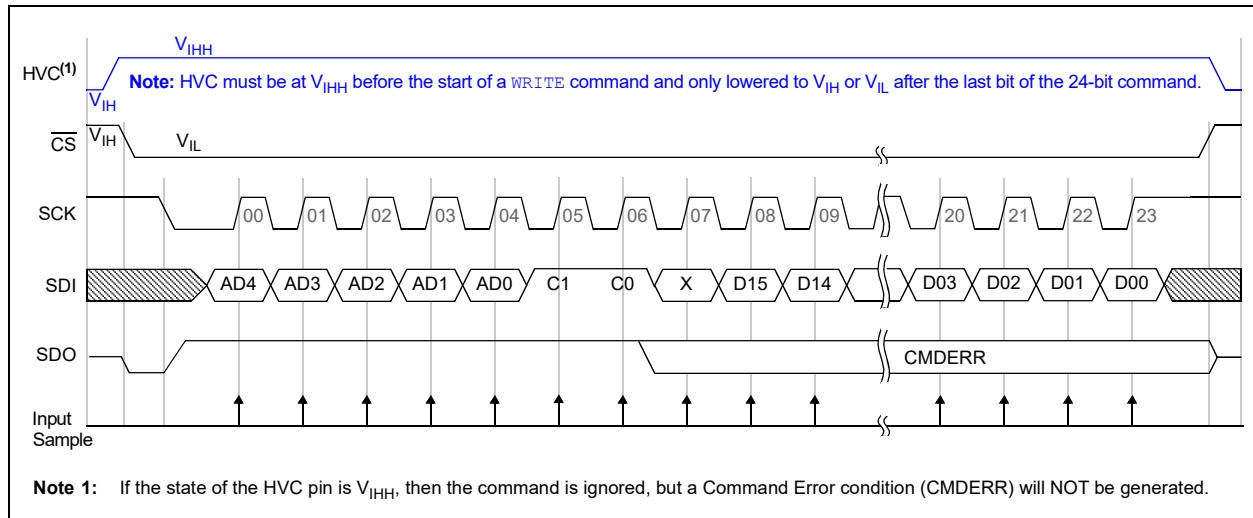

**FIGURE 7-9:** 24-Bit *READ* Command ( $C1:C0 = 11$ ) – SPI Waveforms (Mode 1,1).

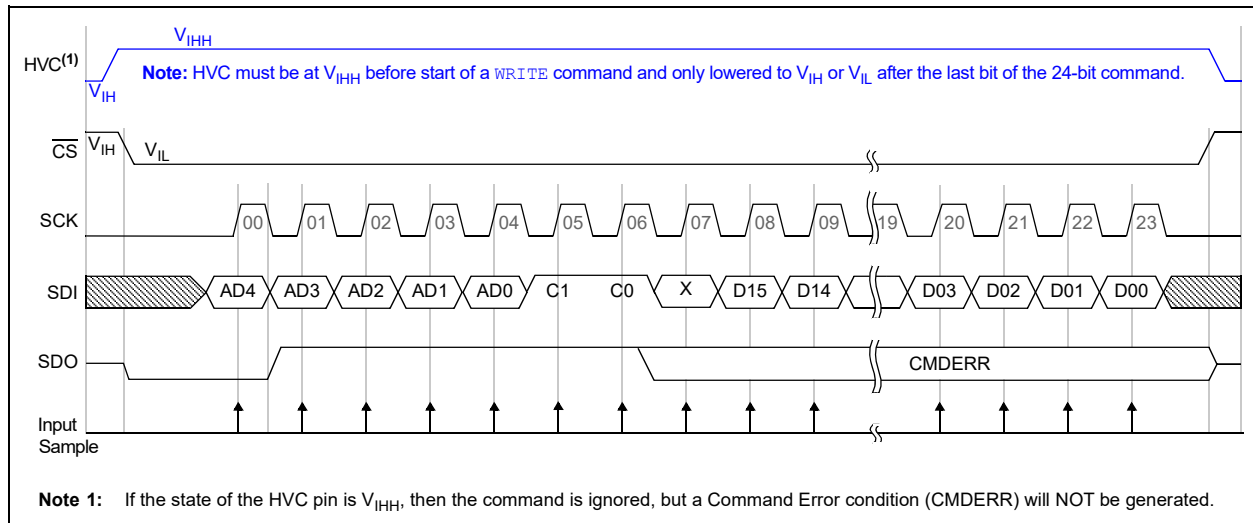

**FIGURE 7-10:** 24-Bit *READ* Command ( $C1:C0 = 11$ ) – SPI Waveforms (Mode 0,0).

# MCP48FVBX4/8

## 7.9 Enable Configuration Bit (High Voltage)

Figure 7-11 shows the formats for a single enable Configuration bit command. The command will only start the EEPROM Write Cycle ( $t_{WC}$ ) after a properly formatted command has been received.

During an EEPROM write cycle, only serial commands to volatile memory are accepted. All other serial commands are ignored until the EEPROM Write Cycle ( $t_{WC}$ ) completes. This allows the host controller to operate on the volatile DAC, the volatile  $V_{REF}$ , Power-Down, Gain and Status, and WiperLock Technology Status registers. The EEWA bit in the Status register indicates the status of the EEPROM write cycle.



FIGURE 7-11: Enable Command Sequence.



FIGURE 7-12: 8-Bit Enable Command (C1:C0 = 10) – SPI Waveforms (Mode 1,1).



**FIGURE 7-13:** 8-Bit Enable Command ( $C1:C0 = 10$ ) – SPI Waveforms (Mode 0,0).

## 7.10 Disable Configuration Bit (High Voltage)


Figure 7-14 shows the formats for a single disable Configuration bit command. The command will only start an EEPROM Write Cycle ( $t_{WC}$ ) after a properly formatted command has been received.

During an EEPROM write cycle, only serial commands to volatile memory are accepted. All other serial commands are ignored until the EEPROM Write Cycle ( $t_{WC}$ ) completes. This allows the host controller to operate on the volatile DAC, the volatile  $V_{REF}$ , Power-Down, Gain and Status, and WiperLock Technology Status registers. The EEWA bit in the Status register indicates the status of an EEPROM write cycle.




**FIGURE 7-14:** Disable Command Sequence.

# MCP48FBX4/8

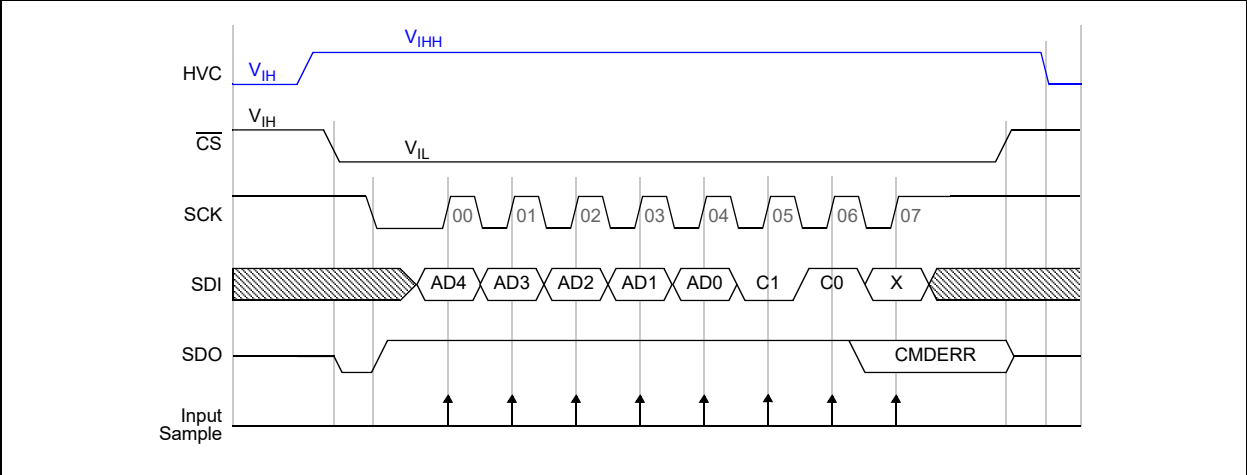

**FIGURE 7-15:** 8-Bit Disable Command ( $C1:C0 = 01$ ) – SPI Waveforms (Mode 1,1).

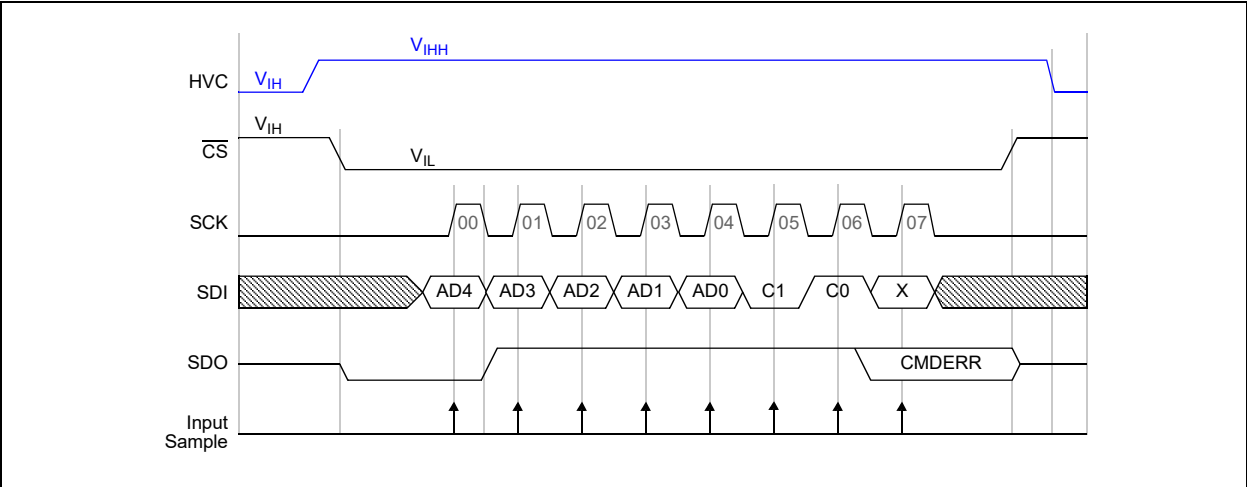

**FIGURE 7-16:** 8-Bit Disable Command ( $C1:C0 = 01$ ) – SPI Waveforms (Mode 0,0).

## 8.0 APPLICATIONS INFORMATION

The MCP48FXBX4/8 devices are general purpose, quad/octal-channel voltage output DACs for various applications, where a precision operation with low-power and nonvolatile EEPROM memory is needed.


Since the devices include a nonvolatile EEPROM memory, the user can utilize these devices for applications that require the output to return to the previous setup value on subsequent power-ups.

### 8.1 Power Supply Considerations

The power source should be as clean as possible. The power supply to the device is also used for the DAC voltage reference internally if the internal  $V_{DD}$  is selected as the resistor ladder's reference voltage ( $VRnB:VRnA = 00$ ).

Any noise induced on the  $V_{DD}$  line can affect the DAC performance. Typical applications will require a bypass capacitor in order to filter out high-frequency noise on the  $V_{DD}$  line. The noise can be induced onto the power supply's traces or as a result of changes on the DAC output. The bypass capacitor helps to minimize the effect of these noise sources on signal integrity. Figure 8-1 shows an example of using two bypass capacitors (a 10  $\mu F$  tantalum capacitor and a 0.1  $\mu F$  ceramic capacitor) in parallel on the  $V_{DD}$  line. These capacitors should be placed as close to the  $V_{DD}$  pin as possible (within 4 mm). If the application circuit has separate digital and analog power supplies, the  $V_{DD}$  and  $V_{SS}$  pins of the device should reside on the analog plane.

When setting the part voltage reference to Band Gap mode, the use of the  $V_{REF}$  pin decoupling capacitors is not recommended.

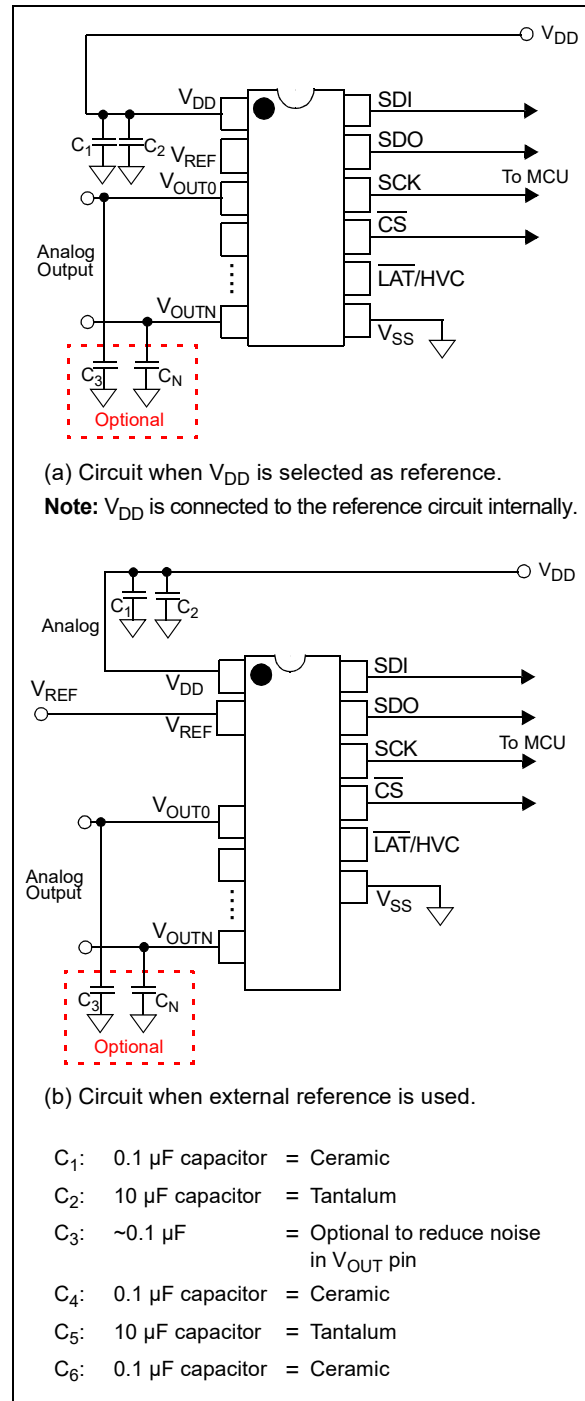

**FIGURE 8-1:** Example Circuit.

# MCP48FVBX4/8

## 8.2 Layout Considerations

Several layout considerations may be applicable to your application. These may include:

- [Noise](#)
- [PCB Area Requirements](#)

### 8.2.0.1 Noise

Particularly harsh environments may require shielding of critical signals. Inductively coupled AC transients and digital switching noise can degrade the input and output signal integrity, potentially masking the MCP48FVBX4/8 devices' performance. Careful board layout minimizes these effects and increases the Signal-to-Noise Ratio (SNR).

Multilayer boards utilizing a low-inductance ground plane, isolated inputs, isolated outputs and proper decoupling are critical to achieving the performance that the silicon is capable of providing.

Separate digital and analog ground planes are recommended. In this case, the  $V_{SS}$  pin and the ground pins of the  $V_{DD}$  capacitors should be terminated to the analog ground plane.

**Note:** Breadboards and wire-wrapped boards are not recommended.

### 8.2.0.2 PCB Area Requirements

In some applications, PCB area is a criteria for device selection. [Table 8-1](#) shows the typical package dimensions and area for the different package options.

**TABLE 8-1: PACKAGE FOOTPRINT<sup>(1)</sup>**

| Package |       |      | Package Footprint |       |                         |
|---------|-------|------|-------------------|-------|-------------------------|
| Pins    | Type  | Code | Dimensions (mm)   |       | Area (mm <sup>2</sup> ) |
|         |       |      | Length            | Width |                         |
| 20      | TSSOP | ST   | 3.00              | 4.90  | 14.70                   |
| 20      | VQFN  | MQ   | 5                 | 5     | 25                      |

**Note 1:** Does not include recommended land pattern dimensions. Dimensions are typical values.

## 9.0 DEVELOPMENT SUPPORT

Development support can be classified into two groups. These are:

- [Development Tools](#)
- [Technical Documentation](#)

### 9.1 Development Tools

Several development tools are available to assist in your design and evaluation of the MCP48FXBX4/8 devices. The currently available tools are shown in [Table 9-1](#).

[Figure 9-1](#) shows how the TSSOP20EV bond-out PCB can be populated to easily evaluate the MCP48FXBX4/8 devices. The PICkit™ Serial Analyzer can be used to control the DAC Output registers and state of the Configuration, Control and Status register.

The TSSOP20EV boards may be purchased directly from the Microchip website at [www.microchip.com](http://www.microchip.com).

### 9.2 Technical Documentation

Several additional technical documents are available to assist you in your design and development. These technical documents include Application Notes, Technical Briefs and Design Guides. [Table 9-2](#) lists some of these documents.

**TABLE 9-1: DEVELOPMENT TOOLS<sup>(1)</sup>**


| Board Name                             | Part #    | Comment                                         |
|----------------------------------------|-----------|-------------------------------------------------|
| 20-Pin TSSOP and SSOP Evaluation Board | TSSOP20EV | Most Flexible Option – Recommended Bond-out PCB |

**Note 1:** Supports the PICkit™ Serial Analyzer. See the User's Guide for additional information and requirements.

**TABLE 9-2: TECHNICAL DOCUMENTATION**

| Application Note Number | Title                                                                      | Literature # |
|-------------------------|----------------------------------------------------------------------------|--------------|
| AN1326                  | Using the MCP4828 12-Bit DAC for LDMOS Amplifier Bias Control Applications | DS01326      |
| —                       | Signal Chain Design Guide                                                  | DS21825      |
| —                       | Analog Solutions for Automotive Applications Design Guide                  | DS01005      |

# MCP48FVBX4/8

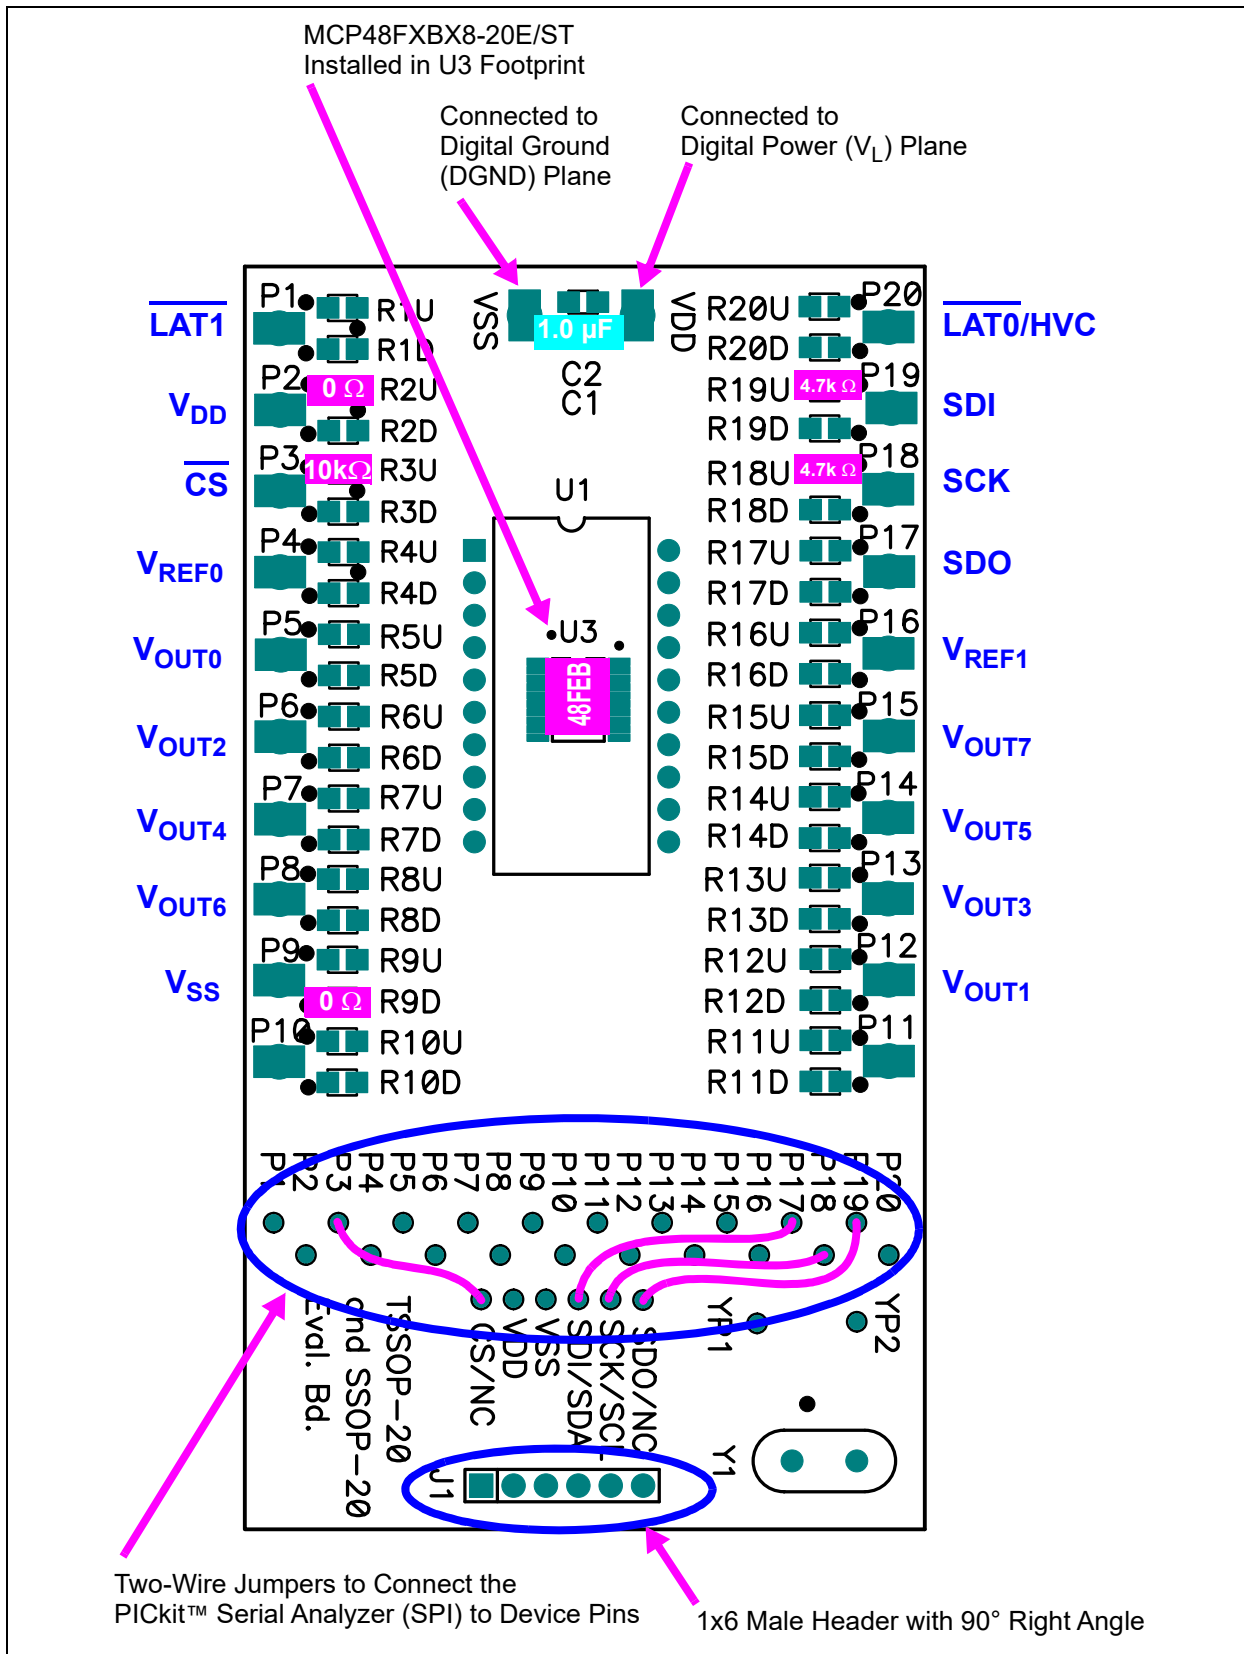


**FIGURE 9-1:** MCP48FVBX4/8 Evaluation Board Circuit Using TSSOP20EV.


## 10.0 PACKAGING INFORMATION

### 10.1 Package Marking Information


20-Lead 5 x 5 mm VQFN

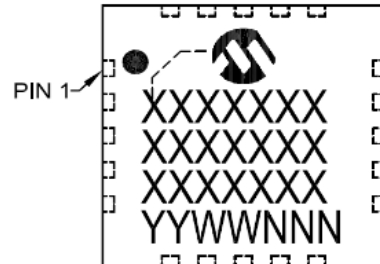


Example

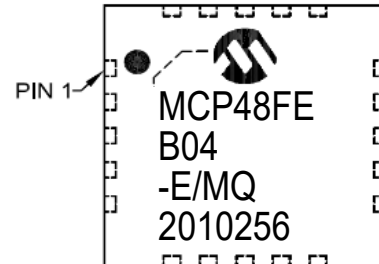

20-Lead TSSOP



Example



|                |        |                                                                                                                  |
|----------------|--------|------------------------------------------------------------------------------------------------------------------|
| <b>Legend:</b> | XX...X | Customer-specific information                                                                                    |
|                | Y      | Year code (last digit of calendar year)                                                                          |
|                | YY     | Year code (last 2 digits of calendar year)                                                                       |
|                | WW     | Week code (week of January 1 is week '01')                                                                       |
|                | NNN    | Alphanumeric traceability code                                                                                   |
|                | (e3)   | Pb-free JEDEC designator for Matte Tin (Sn)                                                                      |
|                | *      | This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package. |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

# MCP48FBX4/8

## 20-Lead Plastic Quad Flat, No Lead Package (MQ) – 5x5x1.0 mm Body [VQFN] With 0.40 mm Contact Length

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



Microchip Technology Drawing C04-139C (MQ) Sheet 1 of 2

## 20-Lead Plastic Quad Flat, No Lead Package (MQ) – 5x5x1.0 mm Body [VQFN] With 0.40 mm Contact Length

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



|                        |      | Units | MILLIMETERS |      |      |
|------------------------|------|-------|-------------|------|------|
| Dimension Limits       |      |       | MIN         | NOM  | MAX  |
| Number of Terminals    | N    |       | 20          |      |      |
| Pitch                  | e    |       | 0.65 BSC    |      |      |
| Overall Height         | A    |       | 0.80        | 0.90 | 1.00 |
| Standoff               | A1   |       | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | (A3) |       | 0.20 REF    |      |      |
| Overall Length         | D    |       | 5.00 BSC    |      |      |
| Exposed Pad Length     | D2   |       | 3.15        | 3.25 | 3.35 |
| Overall Width          | E    |       | 5.00 BSC    |      |      |
| Exposed Pad Width      | E2   |       | 3.15        | 3.25 | 3.35 |
| Contact Width          | b    |       | 0.25        | 0.30 | 0.35 |
| Contact Length         | L    |       | 0.35        | 0.40 | 0.45 |
| Contact-to-Exposed Pad | K    |       | 0.20        | -    | -    |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-139C (MQ) Sheet 2 of 2

# MCP48FVBX4/8

## 20-Lead Plastic Quad Flat, No Lead Package (MQ) – 5x5x1.0 mm Body [VQFN] With 0.40 mm Contact Length

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



### RECOMMENDED LAND PATTERN

| Dimension Limits           | Units | MILLIMETERS |      |      |
|----------------------------|-------|-------------|------|------|
|                            |       | MIN         | NOM  | MAX  |
| Contact Pitch              | E     | 0.65 BSC    |      |      |
| Optional Center Pad Width  | W2    |             |      | 3.35 |
| Optional Center Pad Length | T2    |             |      | 3.35 |
| Contact Pad Spacing        | C1    |             | 4.50 |      |
| Contact Pad Spacing        | C2    |             | 4.50 |      |
| Contact Pad Width (X20)    | X1    |             |      | 0.40 |
| Contact Pad Length (X20)   | Y1    |             |      | 0.55 |
| Distance Between Pads      | G     | 0.20        |      |      |
| Thermal Via Diameter       | V     |             | 0.30 |      |
| Thermal Via Pitch          | EV    |             | 1.00 |      |



#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2139B (MQ)

## 20-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

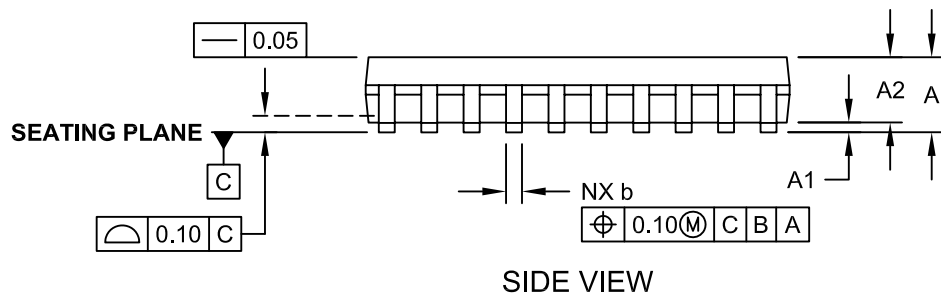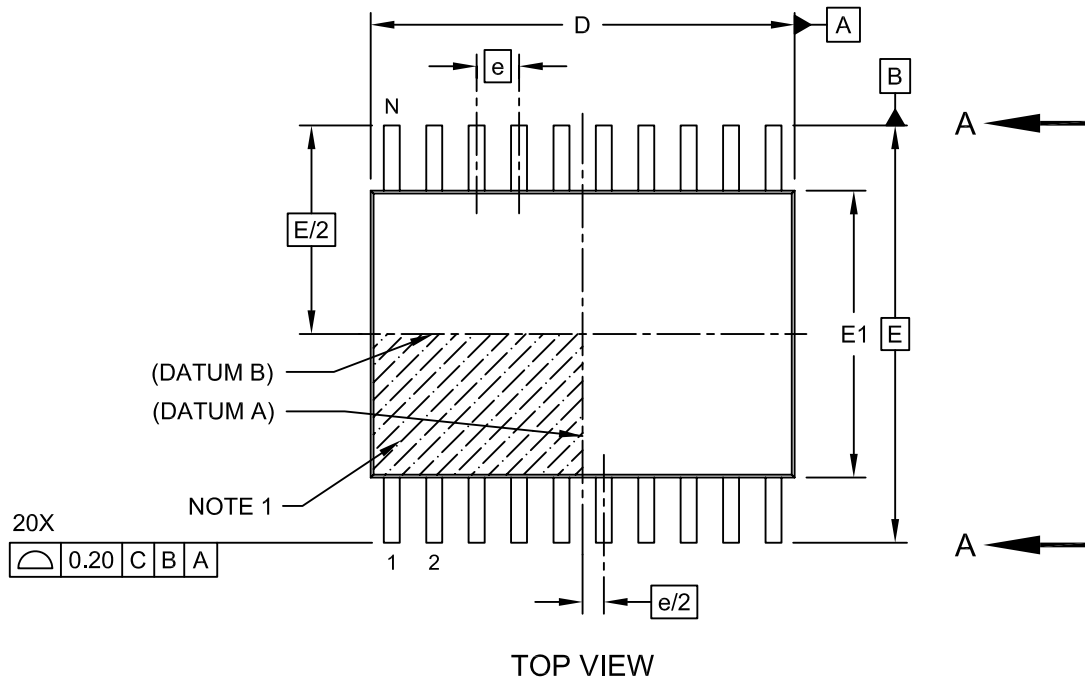

# MCP48FXBX4/8

## 20-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

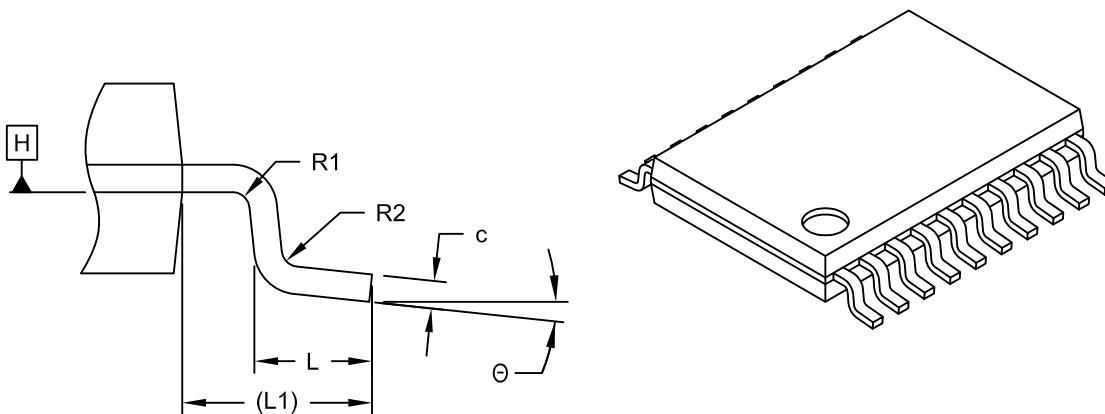

DETAIL B

| Units                    |          | MILLIMETERS |      |      |
|--------------------------|----------|-------------|------|------|
| Dimension Limits         |          | MIN         | NOM  | MAX  |
| Number of Pins           | N        | 20          |      |      |
| Pitch                    | e        | 0.65 BSC    |      |      |
| Overall Height           | A        | -           | -    | 1.20 |
| Molded Package Thickness | A2       | 0.80        | 1.00 | 1.05 |
| Standoff                 | A1       | 0.05        | -    | 0.15 |
| Overall Width            | E        | 6.40 BSC    |      |      |
| Molded Package Width     | E1       | 4.30        | 4.40 | 4.50 |
| Molded Package Length    | D        | 6.40        | 6.50 | 6.60 |
| Foot Length              | L        | 0.45        | 0.60 | 0.75 |
| Footprint                | L1       | 1.00 REF    |      |      |
| Foot Angle               | $\theta$ | 0°          | -    | 8°   |
| Lead Width               | b        | 0.19        | -    | 0.30 |
| Lead Thickness           | c        | 0.09        | -    | 0.20 |
| Bend Radius              | R1       | 0.09        | -    | -    |
| Bend Radius              | R2       | 0.09        | -    | -    |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-088C Sheet 2 of 2

## 20-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



| Units                    |    | MILLIMETERS |      |      |
|--------------------------|----|-------------|------|------|
| Dimension Limits         |    | MIN         | NOM  | MAX  |
| Contact Pitch            | E  | 0.65 BSC    |      |      |
| Contact Pad Spacing      | C  |             | 5.90 |      |
| Contact Pad Width (X20)  | X1 |             |      | 0.45 |
| Contact Pad Length (X20) | Y1 |             |      | 1.45 |
| Distance Between Pads    | G  | 0.20        |      |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2088A

# MCP48FXBX4/8

---

NOTES:

## APPENDIX A: REVISION HISTORY

### Revision A (May 2020)

- Original release of this document.

# MCP48FXBX4/8

---

NOTES:

## APPENDIX B: TERMINOLOGY

### B.1 Resolution

The resolution is the number of DAC output states that divide the full-scale range. For the 12-bit DAC, the resolution is  $2^{12}$ , meaning the DAC code ranges from 0 to 4095.

**Note:** When there are  $2^N$  resistors in the resistor ladder and  $2^N$  tap points, the full-scale DAC register code is the resistor element (1 LSb) from the source reference voltage ( $V_{DD}$  or  $V_{REF}$ ).

### B.2 Least Significant Bit (LSb)

This is the voltage difference between two successive codes. For a given output voltage range, it is divided by the resolution of the device (Equation B-1). The range may be  $V_{DD}$  (or  $V_{REF}$ ) to  $V_{SS}$  (ideal); the DAC register codes across the linear range of the output driver (Measured 1), or full scale to zero scale (Measured 2).

#### EQUATION B-1: LSb VOLTAGE CALCULATION

##### Ideal

$$V_{LSb(IDEAL)} = \frac{V_{DD}}{2^N} \quad \text{or} \quad \frac{V_{REF}}{2^N}$$

##### Measured 1

$$V_{LSb(Measured)} = \frac{V_{OUT(@4000)} - V_{OUT(@100)}}{(4000 - 100)}$$

##### Measured 2

$$V_{LSb} = \frac{V_{OUT(@FS)} - V_{OUT(@ZS)}}{2^N - 1}$$

$$\begin{aligned} 2^N &= 4096 \quad (\text{MCP48FXB2X}) \\ &= 1024 \quad (\text{MCP48FXB1X}) \\ &= 256 \quad (\text{MCP48FXB0X}) \end{aligned}$$

### B.3 Monotonic Operation

Monotonic operation means that the device's output voltage ( $V_{OUT}$ ) increases with every 1 code step (LSb) increment (from  $V_{SS}$  to the DAC's reference voltage ( $V_{DD}$  or  $V_{REF}$ )).



FIGURE B-1:  $V_W$  ( $V_{OUT}$ ).

## B.4 Full-Scale Error ( $E_{FS}$ )

The Full-Scale Error (see [Figure B-3](#)) is the error on the  $V_{OUT}$  pin relative to the expected  $V_{OUT}$  voltage (theoretical) for the maximum device DAC register code (code FFFh for 12-bit, code 3FFh for 10-bit and code FFh for 8-bit); see [Equation B-2](#). The error depends on the resistive load on the  $V_{OUT}$  pin (and where that load is tied to, such as  $V_{SS}$  or  $V_{DD}$ ). For loads (to  $V_{SS}$ ) greater than specified, the Full-Scale Error will be greater.

The error in bits is determined by the theoretical voltage step-size to give an error in LSb.

### EQUATION B-2: FULL-SCALE ERROR

$$E_{FS} = \frac{V_{OUT(@FS)} - V_{IDEAL(@FS)}}{V_{LSb(IDEAL)}}$$

Where:

$E_{FS}$  is expressed in LSb.

$V_{OUT(@FS)}$  = The  $V_{OUT}$  voltage when the DAC register code is at full scale.

$V_{IDEAL(@FS)}$  = The ideal output voltage when the DAC register code is at full scale.

$V_{LSb(IDEAL)}$  = The theoretical voltage step size.

## B.5 Zero-Scale Error ( $E_{ZS}$ )

The Zero-Scale Error (see [Figure B-2](#)) is the difference between the ideal and the measured  $V_{OUT}$  voltage with the DAC register code equal to 000h ([Equation B-3](#)). The error depends on the resistive load on the  $V_{OUT}$  pin (and where that load is tied to, such as  $V_{SS}$  or  $V_{DD}$ ). For loads (to  $V_{DD}$ ) greater than specified, the Zero-Scale Error will be greater.

The error in bits is determined by the theoretical voltage step-size to give an error in LSb.

### EQUATION B-3: ZERO-SCALE ERROR

$$E_{ZS} = \frac{V_{OUT(@ZS)}}{V_{LSb(IDEAL)}}$$

Where:

$E_{ZS}$  is expressed in LSb.

$V_{OUT(@ZS)}$  = The  $V_{OUT}$  voltage when the DAC register code is at zero scale.

$V_{LSb(IDEAL)}$  = The theoretical voltage step-size.

## B.6 Total Unadjusted Error ( $E_T$ )

The Total Unadjusted Error ( $E_T$ ) is the difference between the ideal and the measured  $V_{OUT}$  voltage. Typically, calibration of the output voltage is implemented to improve system performance.

The error in bits is determined by the theoretical voltage step-size to give an error in LSb.

[Equation B-4](#) shows the Total Unadjusted Error calculation.

### EQUATION B-4: TOTAL UNADJUSTED ERROR CALCULATION

$$E_T = \frac{(V_{OUT\_Actual(@Code)} - V_{OUT\_Ideal(@Code)})}{V_{LSb(Ideal)}}$$

Where:

$E_T$  is expressed in LSb.

$V_{OUT\_Actual(@Code)}$  = The measured DAC output voltage at the specified code.


$V_{OUT\_Ideal(@Code)}$  = The calculated DAC output voltage at the specified code. (code  $\times V_{LSb(Ideal)}$ ).

$V_{LSb(Ideal)} = V_{REF}/\# \text{ Steps}$   
 12-bit =  $V_{REF}/4096$   
 10-bit =  $V_{REF}/1024$   
 8-bit =  $V_{REF}/256$

## B.7 Offset Error ( $E_{OS}$ )

The Offset Error is the delta voltage of the  $V_{OUT}$  voltage from the ideal output voltage at the specified code. This code is specified where the output amplifier is in the linear operating range; for the MCP48FXBX4/8, we specify code 100 (decimal). Offset error does not include Gain Error, see [Figure B-2](#).

This error is expressed in mV. Offset Error can be negative or positive. The Offset Error can be calibrated by software in application circuits.

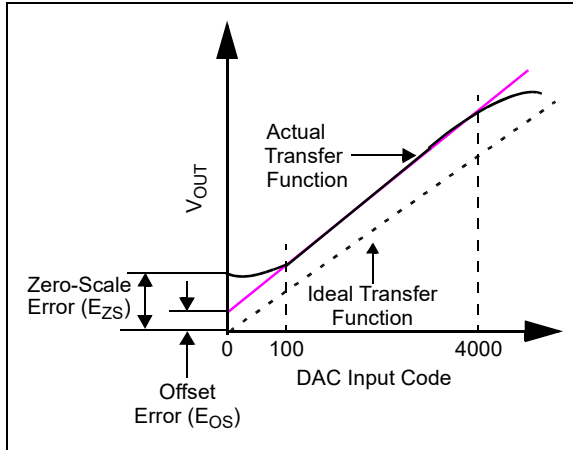

**FIGURE B-2:** Offset Error and Zero-Scale Error.


## B.8 Offset Error Drift ( $E_{OSD}$ )

The Offset Error Drift is the variation in Offset Error due to a change in ambient temperature. The Offset Error Drift is typically expressed in ppm/°C or  $\mu V/^\circ C$ .

## B.9 Gain Error ( $E_G$ )

Gain Error is a calculation based on the ideal slope using the voltage boundaries for the linear range of the output driver (ex.: code 100 and code 4000); see [Figure B-3](#). The Gain Error calculation nullifies the device's Offset Error.

Gain Error indicates how well the slope of the actual transfer function matches the slope of the ideal transfer function. Gain Error is usually expressed as a percent of full-scale range (% of FSR) or in LSB. FSR is the ideal full-scale voltage of the DAC (see [Equation B-5](#)).

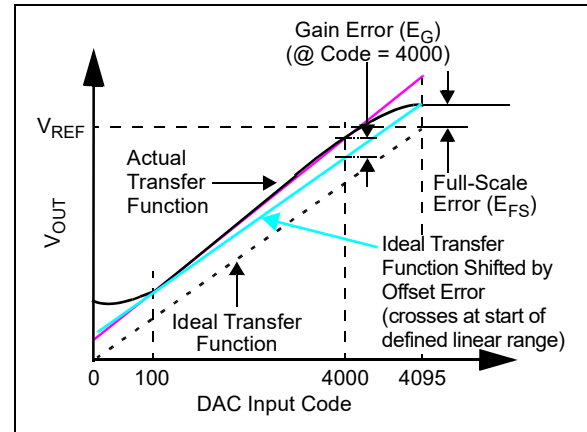

**FIGURE B-3:** Gain Error and Full-Scale Error Example.

## EQUATION B-5: EXAMPLE GAIN ERROR

$$E_G = \frac{(V_{OUT(@4000)} - V_{OS} - V_{OUT\_Ideal(@4000)})}{V_{Full-Scale Range}} \cdot 100$$

Where:

$E_G$  is expressed in % of FSR.

$V_{OUT(@4000)}$  = The measured DAC output voltage at the specified code.

$V_{OUT\_Ideal(@4000)}$  = The calculated DAC output voltage at the specified code ( $4000 \cdot V_{LSb(Ideal)}$ ).

$V_{OS}$  = Measured offset voltage.

$V_{Full-Scale Range}$  = Expected full-scale output value (such as the  $V_{REF}$  voltage).

## B.10 Gain Error Drift ( $E_{GD}$ )

The Gain Error Drift is the variation in Gain Error due to a change in ambient temperature. Gain Error Drift is typically expressed in ppm/°C (of FSR).

# MCP48FXBX4/8

## B.11 Integral Nonlinearity (INL)

The Integral Nonlinearity (INL) error is the maximum deviation of an actual transfer function from an ideal transfer function (straight line) passing through the defined end points of the DAC transfer function (after offset and gain errors have been removed).

In the MCP48FXBX4/8, INL is calculated using the defined end points, DAC code 100 and code 4000. INL can be expressed as a percentage of FSR or in LSb. INL is also called 'Relative Accuracy'. Equation B-6 shows how to calculate the INL error in LSb and Figure B-4 shows an example of INL accuracy.

Positive INL means higher  $V_{OUT}$  voltage than the ideal one. Negative INL means lower  $V_{OUT}$  voltage than the ideal one.

### EQUATION B-6: INL ERROR

$$E_{INL} = \frac{(V_{OUT} - V_{Calc\_Ideal})}{V_{LSb(Measured)}}$$

Where:

INL is expressed in LSb.

$$V_{Calc\_Ideal} = Code \times V_{LSb(Measured)} + V_{OS}$$

$V_{OUT(Code = n)}$  = The measured DAC output voltage with a given DAC register code.

$$V_{LSb(Measured)} = \text{For Measured: } (V_{OUT(4000)} - V_{OUT(100)})/3900.$$

$$V_{OS} = \text{Measured offset voltage.}$$



FIGURE B-4: INL Accuracy.

## B.12 Differential Nonlinearity (DNL)

The Differential Nonlinearity (DNL) error (see Figure B-5) is the measure of step-size between codes in an actual transfer function. The ideal step-size between codes is 1 LSb. A DNL error of zero would imply that every code is exactly 1 LSb wide. If the DNL error is less than 1 LSb, the DAC ensures monotonic output and no missing codes. Equation B-7 shows how to calculate the DNL error between any two adjacent codes in LSb.

### EQUATION B-7: DNL ERROR

$$E_{DNL} = \frac{(V_{OUT(code = n+1)} - V_{OUT(code = n)})}{V_{LSb(Measured)}} - 1$$

Where:

DNL is expressed in LSb.

$V_{OUT(code = n)}$  = The measured DAC output voltage with a given DAC register code.

$$V_{LSb(Measured)} = \text{For Measured: } (V_{OUT(4000)} - V_{OUT(100)})/3900.$$



FIGURE B-5: DNL Accuracy.

## B.13 Settling Time

The settling time is the time delay required for the  $V_{OUT}$  voltage to settle into its new output value. This time is measured from the start of code transition to when the  $V_{OUT}$  voltage is within the specified accuracy.

For the MCP48FXBX4/8, the settling time is a measurement of the time delay until the  $V_{OUT}$  voltage reaches within 0.5 LSB of its final value, when the volatile DAC register changes from 1/4 to 3/4 of the FSR (12-bit device: 400h to C00h).

## B.14 Major Code Transition Glitch

Major code transition glitch is the impulse energy injected into the DAC analog output when the code in the DAC register changes the state. It is normally specified as the area of the glitch in nV-Sec and is measured when the digital code is changed by 1 LSB at the major carry transition.

Example: 011...111 to 100...000  
or 100...000 to 011...111

## B.15 Digital Feedthrough

The digital feed-through is the glitch that appears at the analog output, caused by coupling from the digital input pins of the device. The area of the glitch is expressed in nV-Sec and is measured with a full-scale change on the digital input pins; example: all '0's to all '1's and vice versa. The digital feedthrough is measured when the DAC is not written to the output register.

## B.16 -3 dB Bandwidth

This is the frequency of the signal at the  $V_{REF}$  pin that causes the voltage at the  $V_{OUT}$  pin to fall a -3 dB value from a static value on the  $V_{REF}$  pin. The output decreases due to the RC characteristics of the resistor ladder and the characteristics of the output buffer.

## B.17 Power Supply Sensitivity (PSS)

PSS indicates how the output of the DAC is affected by changes in the supply voltage. PSS is the ratio of the change in  $V_{OUT}$  to a change in  $V_{DD}$  for midscale output of the DAC. The  $V_{OUT}$  is measured while the  $V_{DD}$  is varied from 5.5V to 2.7V as a step ( $V_{REF}$  voltage held constant) and is expressed in %/%, which is the % change of the DAC output voltage with respect to the % change of the  $V_{DD}$  voltage.

### EQUATION B-8: PSS CALCULATION

$$PSS = \frac{(V_{OUT@5.5V} - V_{OUT@2.7V}) / V_{OUT@5.5V}}{(5.5V - 2.7V) / (5.5V)}$$

Where:

PSS is expressed in %/ %.

$V_{OUT@5.5V}$  = The measured DAC output voltage with  $V_{DD} = 5.5V$ .

$V_{OUT@2.7V}$  = The measured DAC output voltage with  $V_{DD} = 2.7V$ .

## B.18 Power Supply Rejection Ratio (PSRR)

PSRR indicates how the output of the DAC is affected by changes in the supply voltage. PSRR is the ratio of the change in  $V_{OUT}$  to a change in  $V_{DD}$  for full-scale output of the DAC. The  $V_{OUT}$  is measured while the  $V_{DD}$  is varied  $\pm 10\%$  ( $V_{REF}$  voltage held constant) and expressed in dB or  $\mu V/V$ .

## B.19 $V_{OUT}$ Temperature Coefficient

The  $V_{OUT}$  temperature coefficient quantifies the error in the resistor ladder's resistance ratio (DAC register code value) and output buffer due to temperature drift.

## B.20 Absolute Temperature Coefficient

The absolute temperature coefficient quantifies the error in the end-to-end output voltage (nominal Output Voltage,  $V_{OUT}$ ) due to temperature drift. For a DAC, this error is typically not an issue due to the ratiometric aspect of the output.

## B.21 Noise Spectral Density

Noise spectral density is a measurement of the device's internally generated random noise and is characterized as a spectral density (voltage per  $\sqrt{Hz}$ ). It is measured by loading the DAC to the midscale value and measuring the noise at the  $V_{OUT}$  pin. It is measured in nV/ $\sqrt{Hz}$ .

# MCP48FXBX4/8

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <u>X</u>      | <u>— XX</u> | <u>X</u>          | <u>/XX</u> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------|-------------------|------------|
| Device                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Tape and Reel | Pin Count   | Temperature Range | Package    |
| <b>Device:</b> <p>MCP48FXB0X: Quad/Octal-Channel, 8-Bit DAC with SPI Interface</p> <p>MCP48FXB1X: Quad/Octal-Channel, 10-Bit DAC with SPI Interface</p> <p>MCP48FXB2X: Quad/Octal-Channel, 12-Bit DAC with SPI Interface</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |               |             |                   |            |
| <b>Tape and Reel:</b> <p>T = Tape and Reel</p> <p>Blank = Tube</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |               |             |                   |            |
| <b>Pin Count:</b> <p>20-Lead</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |             |                   |            |
| <b>Temperature Range:</b> <p>E = -40°C to +125°C (Extended)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |               |             |                   |            |
| <b>Package:</b> <p>MQ = Plastic Quad Flat, No Lead Package (VQFN), 5 x 5 mm, 20-Lead</p> <p>ST = Plastic Thin Shrink Small Outline Package (TSSOP), 20-Lead</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |               |             |                   |            |
| <b>Examples:</b> <p>a) MCP48FEB04-E/MQ: Quad-Channel, 8-Bit Nonvolatile DAC, Extended Temperature, 20-Lead VQFN.</p> <p>b) MCP48FEB08T-E/MQ: Octal-Channel, 8-Bit Nonvolatile DAC, Tape and Reel, Extended Temperature, 20-Lead VQFN.</p> <p>c) MCP48FEB18-20E/ST: Octal-Channel, 10-Bit Nonvolatile DAC, Extended Temperature, 20-Lead TSSOP.</p> <p>d) MCP48FEB18T-20E/ST: Octal-Channel, 10-Bit Nonvolatile DAC, Tape and Reel, Extended Temperature, 20-Lead TSSOP.</p> <p>e) MCP48FVB28-E/MQ: Octal-Channel, 12-Bit Volatile DAC, Extended Temperature, 20-Lead VQFN.</p> <p>f) MCP48FVB28T-E/MQ: Octal-Channel, 12-Bit Volatile DAC, Tape and Reel, Extended Temperature, 20-Lead VQFN.</p> |               |             |                   |            |
| <b>Note 1:</b> Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.                                                                                                                                                                                                                                                                                                                                                                                                               |               |             |                   |            |

# MCP48FXBX4/8

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-6143-2

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820