

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** TC7106ARCPL  
**Manufacturer:** Microchip Technology  
**Package:** 40-DIP (0.600" , 15.24mm)  
**Availability:** Please confirm with sales

**Product Page:**

<https://antrexco.com/product/details/microchip-technology/tc7106arcpl.html>

**Request a Quote:**

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---



# TC1014/TC1015/TC1185

## 50 mA, 100 mA and 150 mA CMOS LDOs with Shutdown and Reference Bypass

### Features

- AEC-Q100 Automotive Qualified, See [Product Identification System](#)
- Low Supply Current (50  $\mu$ A, typical)
- Low Dropout Voltage
- Choice of 50 mA (TC1014), 100 mA (TC1015) and 150 mA (TC1185) Output
- High Output Voltage Accuracy
- Standard or Custom Output Voltages
- Power-Saving Shutdown Mode
- Reference Bypass Input for Ultra Low-Noise Operation
- Overcurrent and Overtemperature Protection
- Space-Saving 5-Pin SOT-23 Package
- Pin-Compatible Upgrades for Bipolar Regulators
- Standard Output Voltage Options:
  - 1.8V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 3.0V, 3.3V, 3.6V, 4.0V, 5.0V

### Applications

- Battery-Operated Systems
- Portable Computers
- Medical Instruments
- Instrumentation
- Cellular/GSM/PHS Phones
- Linear Post-Regulator for SMPS
- Pagers


### General Description

The TC1014/TC1015/TC1185 are high accuracy (typically  $\pm 0.5\%$ ) CMOS upgrades for older (bipolar) Low Dropout Regulators (LDOs) such as the LP2980. Designed specifically for battery-operated systems, the devices' CMOS construction eliminates wasted ground current, significantly extending battery life. Total supply current is typically 50  $\mu$ A at full load (20 to 60 times lower than in bipolar regulators).

The devices' key features include ultra low-noise operation (plus optional Bypass input), fast response to step changes in load, and very low dropout voltage, typically 85 mV (TC1014), 180 mV (TC1015), and 270 mV (TC1185) at full load. Supply current is reduced to 0.5  $\mu$ A (max) and  $V_{OUT}$  falls to zero when the shutdown input is low. The devices incorporate both overtemperature and overcurrent protection.


The TC1014/TC1015/TC1185 are stable with an output capacitor of only 1  $\mu$ F and have a maximum output current of 50 mA, 100 mA and 150 mA, respectively. For higher output current regulators, refer to the Microchip Data Sheets: TC1107 ([www.microchip.com/DS21356](http://www.microchip.com/DS21356)), TC1108 ([www.microchip.com/DS21357](http://www.microchip.com/DS21357)), TC1173 ([www.microchip.com/DS21362](http://www.microchip.com/DS21362)) (IOUT = 300 mA).

### Package Type

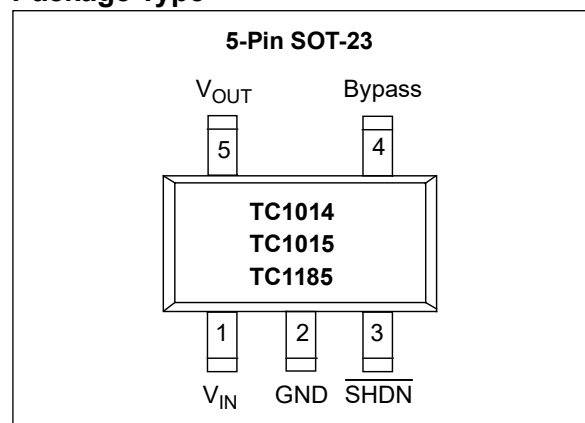

# TC1014/TC1015/TC1185

## Typical Application

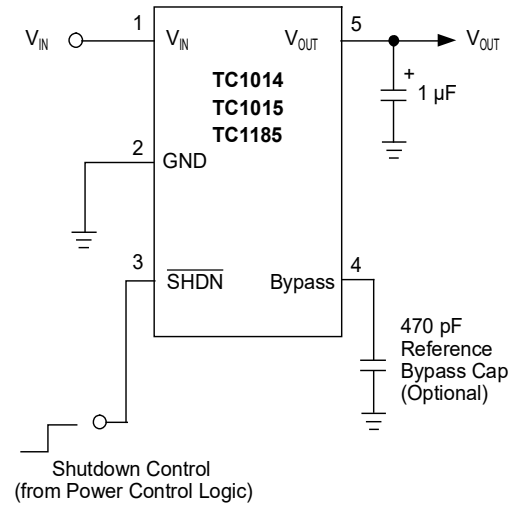

# TC1014/TC1015/TC1185

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings†

|                                             |                                      |
|---------------------------------------------|--------------------------------------|
| Input Voltage .....                         | 6.5V                                 |
| Output Voltage .....                        | (-0.3V) to ( $V_{IN} + 0.3V$ )       |
| Power Dissipation .....                     | Internally Limited ( <b>Note 7</b> ) |
| Maximum Voltage on Any Pin .....            | $V_{IN} + 0.3V$ to $-0.3V$           |
| Operating Temperature Range.....            | $-40^{\circ}C < T_J < 125^{\circ}C$  |
| Storage Temperature .....                   | $-65^{\circ}C$ to $+150^{\circ}C$    |
| ESD Protection on all pins <sup>(1)</sup> : |                                      |
| Human Body Model .....                      | $\pm 2000V$                          |
| Machine Model.....                          | $\pm 200V$                           |
| Charged Device Model .....                  | $\pm 2000V$                          |

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

**Note 1:** Testing was performed per AEC-Q100 standard. For additional information, please contact your local Microchip sales office.

## TC1014/TC1015/TC1185 ELECTRICAL SPECIFICATIONS

**Electrical Specifications:**  $V_{IN} = V_R + 1V$ ,  $I_L = 100 \mu A$ ,  $C_L = 1.0 \mu F$ ,  $\overline{SHDN} > V_{IH}$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted. Boldface type specifications apply for junction temperatures of  $-40^{\circ}C$  to  $+125^{\circ}C$ .

| Parameter                         | Sym.                                   | Min.                                  | Typ.                        | Max.                                             | Units            | Device                                     | Conditions                                                                                                                              |
|-----------------------------------|----------------------------------------|---------------------------------------|-----------------------------|--------------------------------------------------|------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Input Operating Voltage           | $V_{IN}$                               | <b>2.7</b>                            | —                           | <b>6.0</b>                                       | V                | —                                          | <b>Note 1</b>                                                                                                                           |
| Maximum Output Current            | $I_{OUTMAX}$                           | <b>50</b><br><b>100</b><br><b>150</b> | —<br>—<br>—                 | —<br>—<br>—                                      | mA               | TC1014<br>TC1015<br>TC1185                 |                                                                                                                                         |
| Output Voltage                    | $V_{OUT}$                              | $V_R - 2.5\%$                         | $V_R \pm 0.5\%$             | $V_R + 2.5\%$                                    | V                | —                                          | <b>Note 2</b>                                                                                                                           |
| $V_{OUT}$ Temperature Coefficient | $TCV_{OUT}$                            | —<br>—                                | 20<br><b>40</b>             | —<br>—                                           | ppm/ $^{\circ}C$ | —                                          | <b>Note 3</b>                                                                                                                           |
| Line Regulation                   | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$ | —                                     | 0.05                        | <b>0.35</b>                                      | %                | —                                          | $(V_R + 1V) \leq V_{IN} \leq 6V$                                                                                                        |
| Load Regulation                   | $\frac{\Delta V_{OUT}}{V_{OUT}}$       | —<br>—                                | 0.5<br>0.5                  | <b>2</b><br><b>3</b>                             | %                | TC1014;<br>TC1015<br>TC1185                | $I_L = 0.1 \text{ mA}$ to $I_{OUTMAX}$<br>$I_L = 0.1 \text{ mA}$ to $I_{OUTMAX}$<br><b>(Note 4)</b>                                     |
| Dropout Voltage                   | $V_{IN} - V_{OUT}$                     | —<br>—<br>—<br>—<br>—                 | 2<br>65<br>85<br>180<br>270 | —<br>—<br><b>120</b><br><b>250</b><br><b>400</b> | mV               | —<br>—<br>—<br>TC1015;<br>TC1185<br>TC1185 | $I_L = 100 \mu A$<br>$I_L = 20 \text{ mA}$<br>$I_L = 50 \text{ mA}$<br>$I_L = 100 \text{ mA}$<br>$I_L = 150 \text{ mA}$ <b>(Note 5)</b> |
| Supply Current ( <b>Note 8</b> )  | $I_{IN}$                               | —                                     | 50                          | <b>80</b>                                        | $\mu A$          | —                                          | $\overline{SHDN} = V_{IH}$ , $I_L = 0$                                                                                                  |

- Note 1:** The minimum  $V_{IN}$  has to meet two conditions:  $V_{IN} \geq 2.7V$  and  $V_{IN} \geq V_R + V_{DROPOUT}$ .
- Note 2:**  $V_R$  is the regulator output voltage setting. For example:  $V_R = 1.8V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 3.0V, 3.3V, 3.6V, 4.0V, 5.0V$ .
- Note 3:**  $TC V_{OUT} = \frac{(V_{OUTMAX} - V_{OUTMIN}) \times 10^6}{V_{OUT} \times \Delta T}$
- Note 4:** Regulation is measured at a constant junction temperature using low duty cycle pulse testing. Load regulation is tested over a load range from 1.0 mA to the maximum specified output current. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
- Note 5:** Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value at a 1V differential.
- Note 6:** Thermal Regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a current pulse equal to  $I_{LMAX}$  at  $V_{IN} = 6V$  for  $T = 10 \text{ ms}$ .
- Note 7:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction-to-air (i.e.,  $T_A, T_J, \theta_{JA}$ ). Exceeding the maximum allowable power dissipation causes the device to initiate thermal shutdown. Please see **Section 5.0 “Thermal Considerations”** for more details.
- Note 8:** Apply for Junction Temperatures of  $-40^{\circ}C$  to  $+85^{\circ}C$ .

# TC1014/TC1015/TC1185

## TC1014/TC1015/TC1185 ELECTRICAL SPECIFICATIONS (CONTINUED)

**Electrical Specifications:**  $V_{IN} = V_R + 1V$ ,  $I_L = 100 \mu A$ ,  $C_L = 1.0 \mu F$ ,  $SHDN > V_{IH}$ ,  $T_A = +25^\circ C$ , unless otherwise noted. Boldface type specifications apply for junction temperatures of  $-40^\circ C$  to  $+125^\circ C$ .

| Parameter                        | Sym.                                | Min. | Typ. | Max. | Units           | Device | Conditions                                                                |
|----------------------------------|-------------------------------------|------|------|------|-----------------|--------|---------------------------------------------------------------------------|
| Shutdown Supply Current          | $I_{INSD}$                          | —    | 0.05 | 0.5  | $\mu A$         | —      | $SHDN = 0V$                                                               |
| Power Supply Rejection Ratio     | PSRR                                | —    | 64   | —    | dB              | —      | $F_{RE} \leq 1 \text{ kHz}$                                               |
| Output Short Circuit Current     | $I_{OUTSC}$                         | —    | 300  | 450  | mA              | —      | $V_{OUT} = 0V$                                                            |
| Thermal Regulation               | $\frac{\Delta V_{OUT}}{\Delta P_D}$ | —    | 0.04 | —    | V/W             | —      | <a href="#">Note 6</a> , <a href="#">Note 7</a>                           |
| Thermal Shutdown Die Temperature | $T_{SD}$                            | —    | 160  | —    | $^\circ C$      | —      |                                                                           |
| Thermal Shutdown Hysteresis      | $\Delta T_{SD}$                     | —    | 10   | —    | $^\circ C$      | —      |                                                                           |
| Output Noise                     | eN                                  | —    | 600  | —    | nV/ $\sqrt{Hz}$ | —      | $I_L = I_{OUTMAX}$ ,<br>$F = 10 \text{ kHz}$<br>470 pF from Bypass to GND |
| SHDN Input High Threshold        | $V_{IH}$                            | 45   | —    | —    | % $V_{IN}$      | —      | $V_{IN} = 2.5V$ to $6.5V$                                                 |
| SHDN Input Low Threshold         | $V_{IL}$                            | —    | —    | 15   | % $V_{IN}$      | —      | $V_{IN} = 2.5V$ to $6.5V$                                                 |

- Note**
- The minimum  $V_{IN}$  has to meet two conditions:  $V_{IN} \geq 2.7V$  and  $V_{IN} \geq V_R + V_{DROPOUT}$ .
  - $V_R$  is the regulator output voltage setting. For example:  $V_R = 1.8V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 3.0V, 3.3V, 3.6V, 4.0V, 5.0V$ .
  - $TC V_{OUT} = \frac{(V_{OUTMAX} - V_{OUTMIN}) \times 10^6}{V_{OUT} \times \Delta T}$
  - Regulation is measured at a constant junction temperature using low duty cycle pulse testing. Load regulation is tested over a load range from 1.0 mA to the maximum specified output current. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  - Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value at a 1V differential.
  - Thermal Regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a current pulse equal to  $I_{LMAX}$  at  $V_{IN} = 6V$  for  $T = 10 \text{ ms}$ .
  - The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction-to-air (i.e.,  $T_A, T_J, \theta_{JA}$ ). Exceeding the maximum allowable power dissipation causes the device to initiate thermal shutdown. Please see [Section 5.0 "Thermal Considerations"](#) for more details.
  - Apply for Junction Temperatures of  $-40^\circ C$  to  $+85^\circ C$ .

## TEMPERATURE CHARACTERISTICS


**Electrical Specifications:**  $V_{IN} = V_R + 1V$ ,  $I_L = 100 \mu A$ ,  $C_L = 1.0 \mu F$ ,  $SHDN > V_{IH}$ ,  $T_A = +25^\circ C$ , unless otherwise noted. Boldface type specifications apply for junction temperatures of  $-40^\circ C$  to  $+125^\circ C$ .

| Parameter                           | Sym.          | Min. | Typ. | Max. | Units        | Conditions |
|-------------------------------------|---------------|------|------|------|--------------|------------|
| <b>Temperature Ranges:</b>          |               |      |      |      |              |            |
| Extended Temperature Range          | $T_A$         | -40  | —    | +125 | $^\circ C$   |            |
| Operating Temperature Range         | $T_A$         | -40  | —    | +125 | $^\circ C$   |            |
| Storage Temperature Range           | $T_A$         | -65  | —    | +150 | $^\circ C$   |            |
| <b>Thermal Package Resistances:</b> |               |      |      |      |              |            |
| Thermal Resistance, 5L-SOT-23       | $\theta_{JA}$ | —    | 256  | —    | $^\circ C/W$ |            |


## 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.


**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

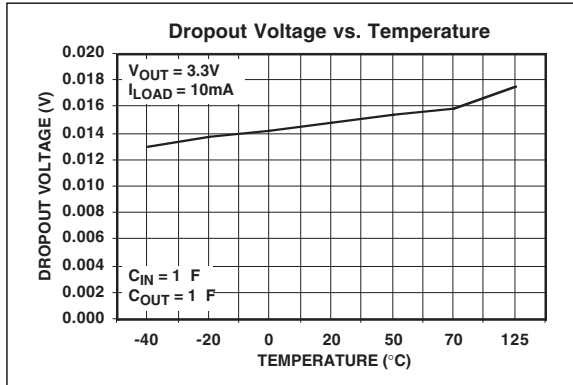


**FIGURE 2-1:** Dropout Voltage vs. Temperature.

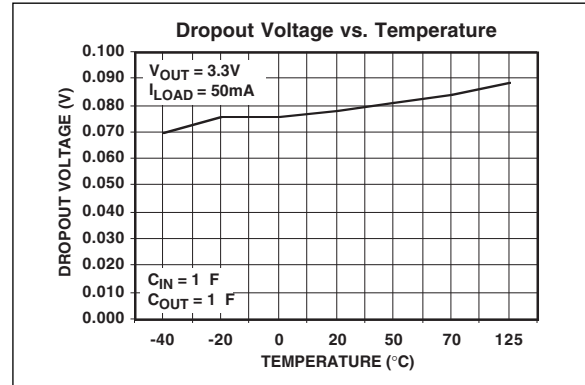


**FIGURE 2-4:** Dropout Voltage vs. Temperature.

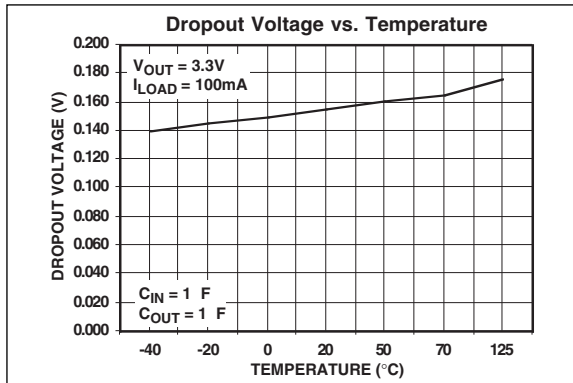


**FIGURE 2-2:** Dropout Voltage vs. Temperature.

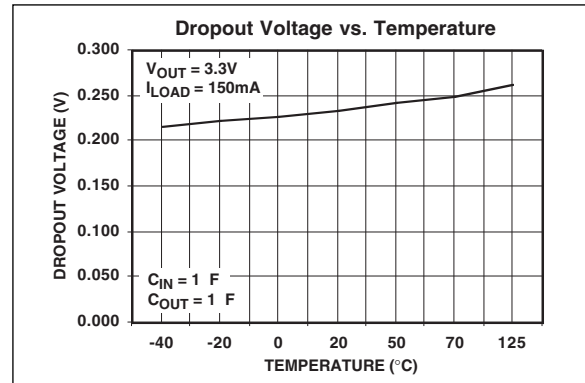

**FIGURE 2-5:** Dropout Voltage vs. Temperature.

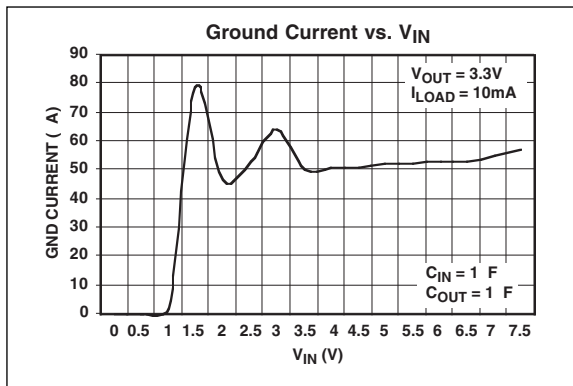

**FIGURE 2-3:** Ground Current vs. Input Voltage ( $V_{IN}$ ).

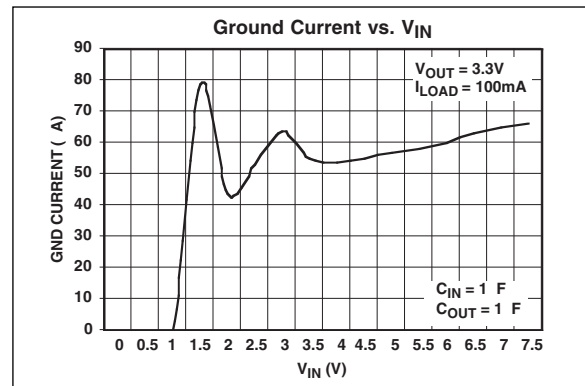


**FIGURE 2-6:** Ground Current vs. Input Voltage ( $V_{IN}$ ).


# TC1014/TC1015/TC1185

## TYPICAL PERFORMANCE CURVES (CONTINUED)


**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

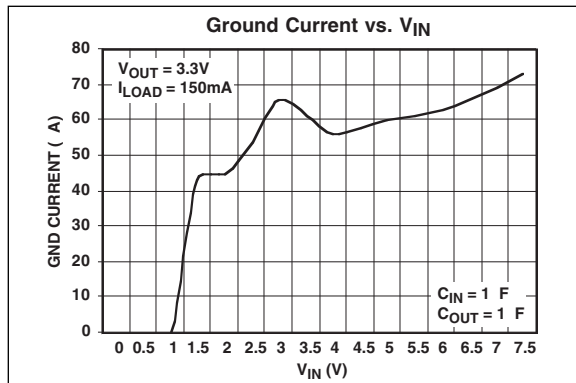


**FIGURE 2-7:** Ground Current vs. Input Voltage ( $V_{IN}$ ).

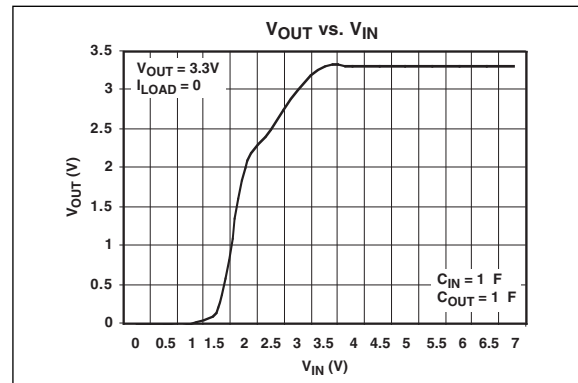


**FIGURE 2-10:** Output Voltage ( $V_{OUT}$ ) vs. Input Voltage ( $V_{IN}$ ).

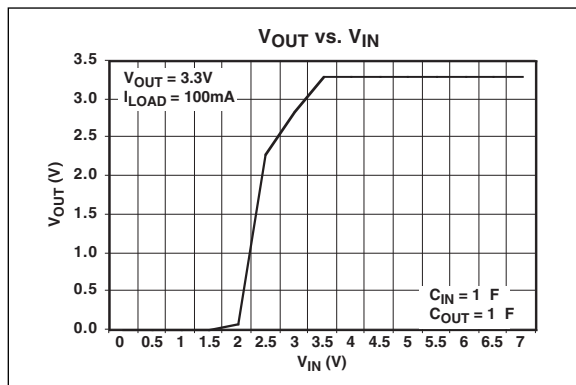

**FIGURE 2-8:** Output Voltage ( $V_{OUT}$ ) vs. Input Voltage ( $V_{IN}$ ).

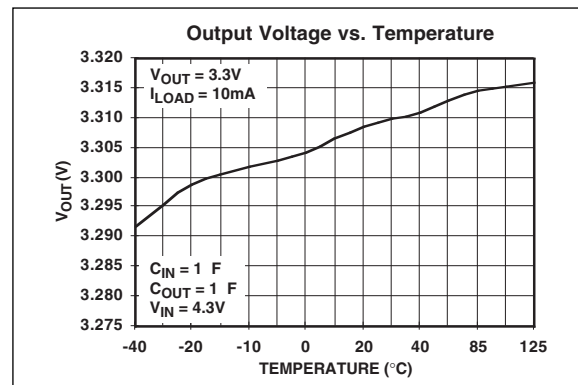


**FIGURE 2-11:** Output Voltage ( $V_{OUT}$ ) vs. Temperature.

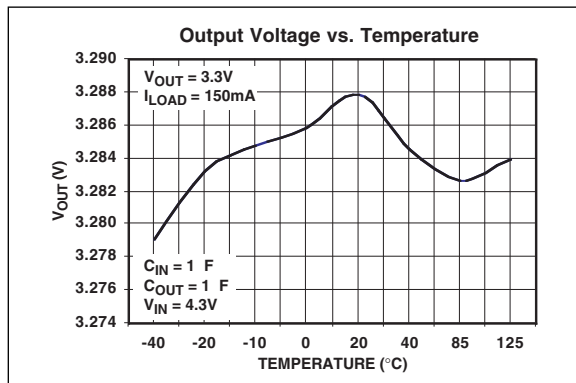


**FIGURE 2-9:** Output Voltage ( $V_{OUT}$ ) vs. Temperature.

## TYPICAL PERFORMANCE CURVES (CONTINUED)


**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

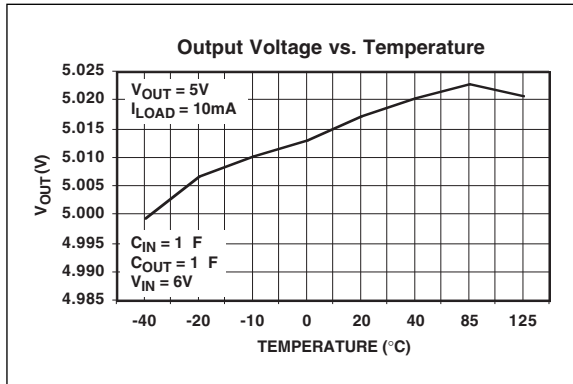


**FIGURE 2-12:** Output Voltage ( $V_{OUT}$ ) vs. Temperature.

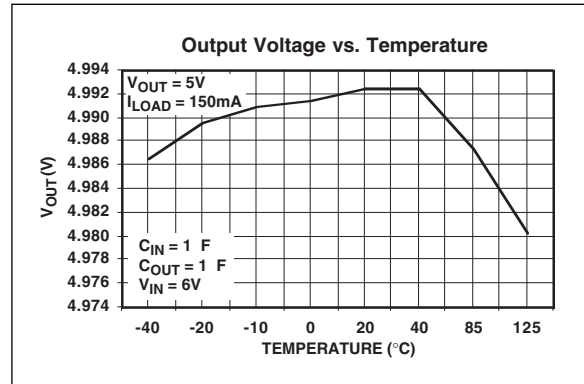


**FIGURE 2-14:** Output Voltage ( $V_{OUT}$ ) vs. Temperature.

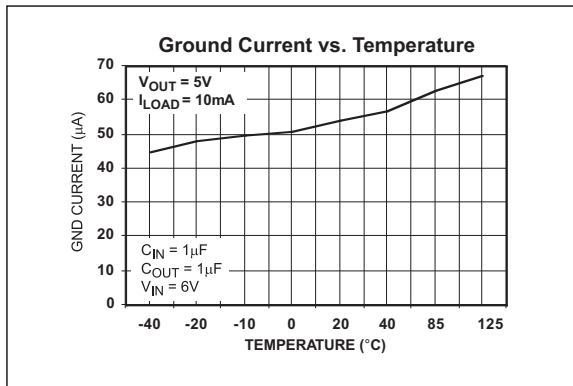

**FIGURE 2-13:**  $I_{GND}$  vs. Temperature.

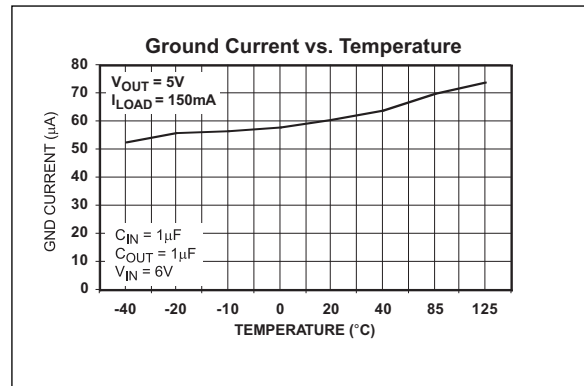

**FIGURE 2-15:**  $I_{GND}$  vs. Temperature.

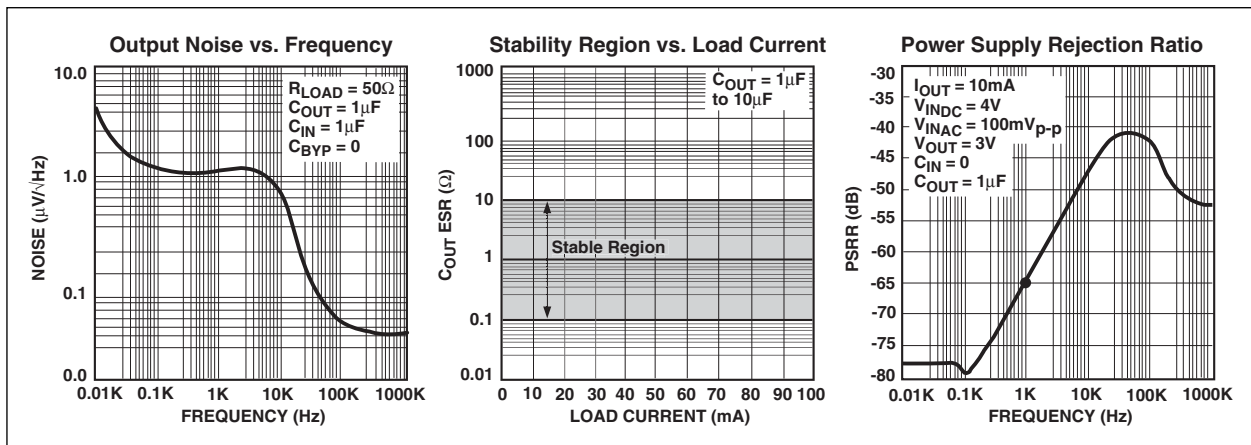


**FIGURE 2-16:** AC Characteristics.


# TC1014/TC1015/TC1185

## TYPICAL PERFORMANCE CURVES (CONTINUED)


**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

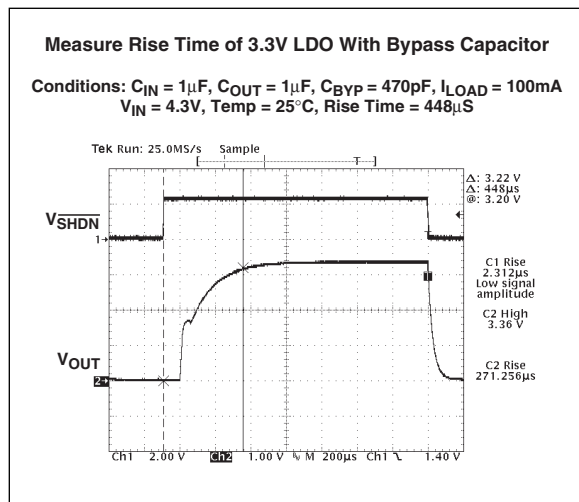


**FIGURE 2-17:** Measure Rise Time of 3.3V with Bypass Capacitor.

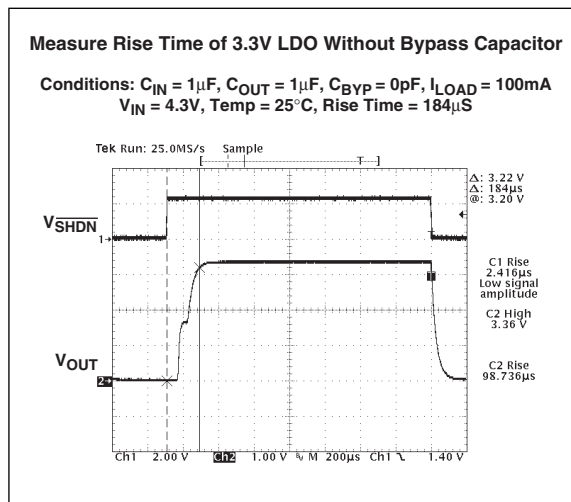

**FIGURE 2-19:** Measure Rise Time of 3.3V without Bypass Capacitor.

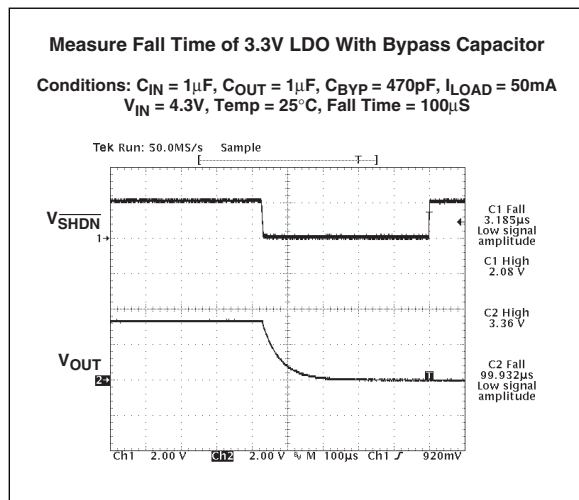


**FIGURE 2-18:** Measure Fall Time of 3.3V with Bypass Capacitor.

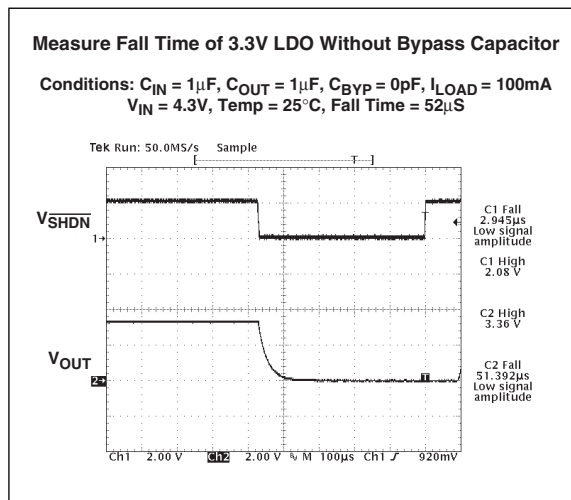


**FIGURE 2-20:** Measure Fall Time of 3.3V without Bypass Capacitor.

## TYPICAL PERFORMANCE CURVES (CONTINUED)


**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

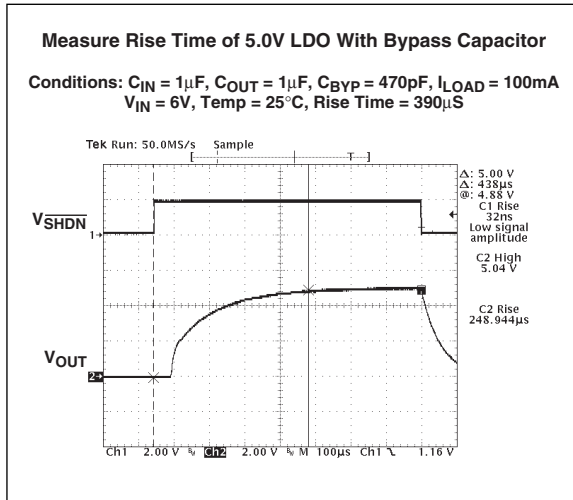


**FIGURE 2-21:** Measure Rise Time of 5.0V with Bypass Capacitor.

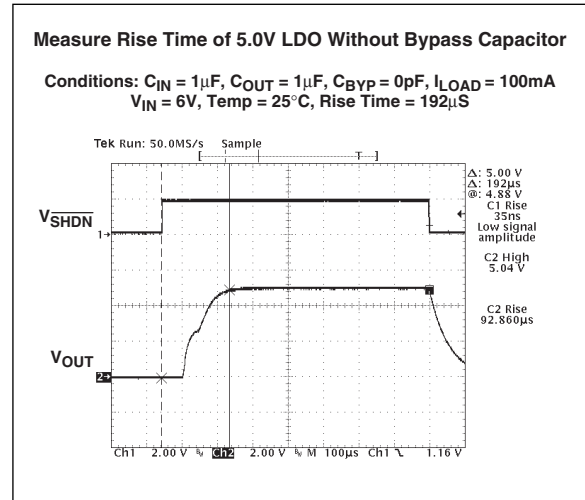

**FIGURE 2-23:** Measure Rise Time of 5.0V without Bypass Capacitor.

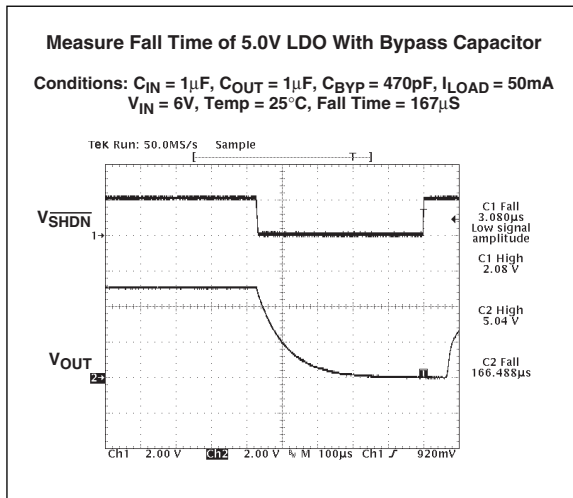

**FIGURE 2-22:** Measure Fall Time of 5.0V with Bypass Capacitor.

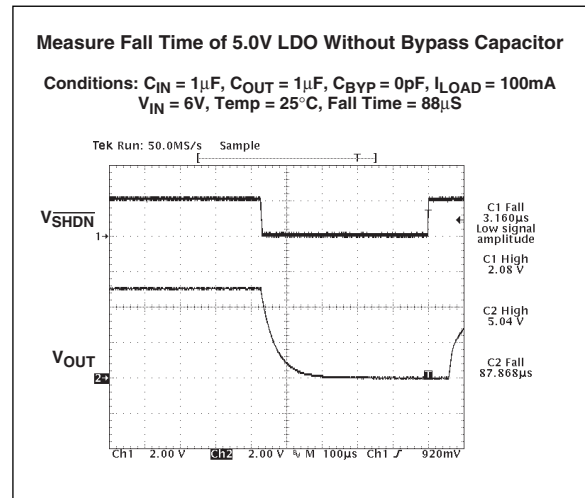


**FIGURE 2-24:** Measure Fall Time of 5.0V without Bypass Capacitor.


# TC1014/TC1015/TC1185

## TYPICAL PERFORMANCE CURVES (CONTINUED)


**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

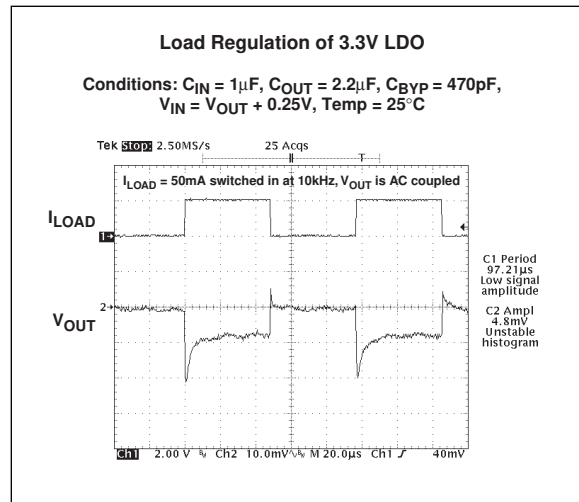


**FIGURE 2-25:** Load Regulation of 3.3V LDO.

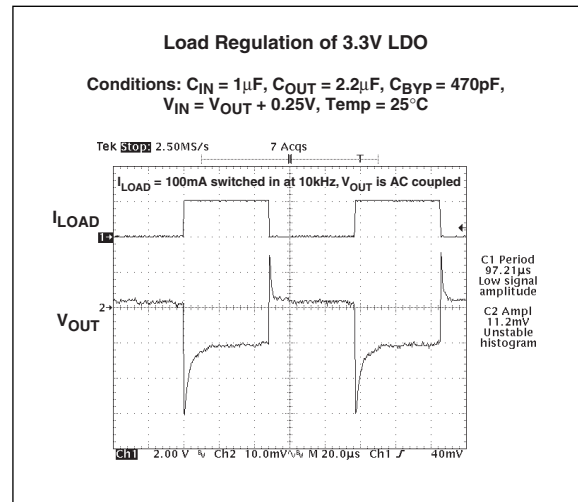

**FIGURE 2-27:** Load Regulation of 3.3V LDO.

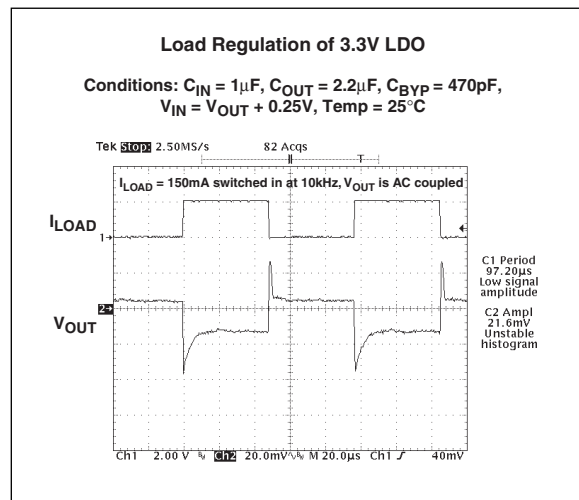


**FIGURE 2-26:** Load Regulation of 3.3V LDO.

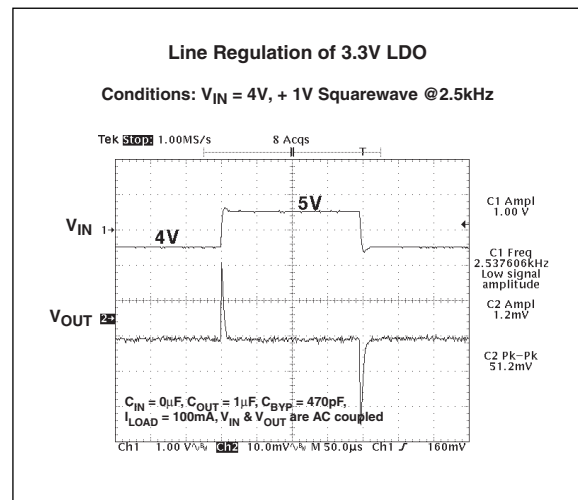


**FIGURE 2-28:** Load Regulation of 3.3V LDO.

## TYPICAL PERFORMANCE CURVES (CONTINUED)

**Note:** Unless otherwise specified, all parts are measured at temperature = +25°C.

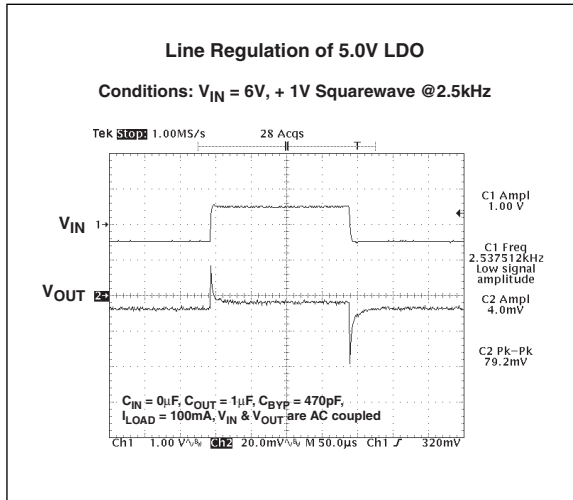

**FIGURE 2-29:** Line Regulation of 5.0V LDO.

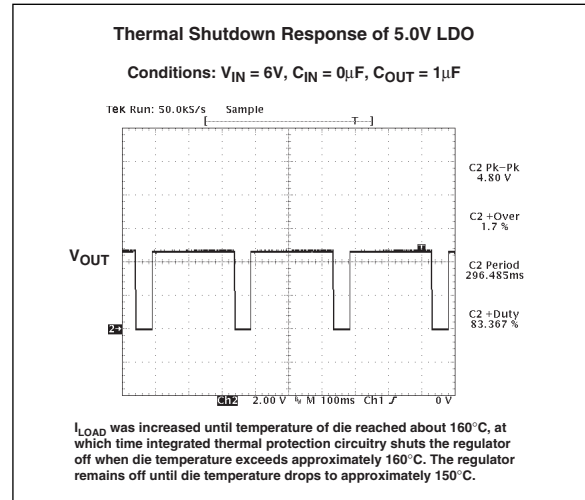

**FIGURE 2-30:** Thermal Shutdown Response of 5.0V LDO.

# TC1014/TC1015/TC1185

## 3.0 PIN DESCRIPTION

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

| Pin Number<br>(5-Pin SOT-23) | Symbol                   | Description                                                                                                                                                                                                                                                                             |
|------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                            | $V_{IN}$                 | Unregulated supply input                                                                                                                                                                                                                                                                |
| 2                            | GND                      | Ground terminal                                                                                                                                                                                                                                                                         |
| 3                            | $\overline{\text{SHDN}}$ | Shutdown control input; the regulator is fully enabled when a logic high is applied to this input. The regulator enters shutdown when a logic low is applied to this input. During shutdown, output voltage falls to zero and supply current is reduced to 0.5 $\mu\text{A}$ (maximum). |
| 4                            | Bypass                   | Reference bypass input; connecting a 470 pF to this input further reduces output noise.                                                                                                                                                                                                 |
| 5                            | $V_{OUT}$                | Regulated voltage output                                                                                                                                                                                                                                                                |

### 3.1 Input Voltage ( $V_{IN}$ )

Connect the  $V_{IN}$  pin to the unregulated source voltage. Like all low dropout linear regulators, low source impedance is necessary for the stable operation of the LDO. The amount of capacitance required to ensure low source impedance will depend on the proximity of the input source capacitors or battery type. For most applications, 1.0  $\mu\text{F}$  of capacitance will ensure stable operation of the LDO circuit. The type of capacitor used can be ceramic, tantalum or aluminum electrolytic. The low-ESR (Effective Series Resistance) characteristics of the ceramic will yield better noise and PSRR (Power Supply Ripple Rejection) performance at high frequency.

### 3.2 Ground Terminal (GND)

Connect the ground pin to the input voltage return. For the optimal noise and PSRR performance, the GND pin of the LDO should be tied to a quiet circuit ground. For applications have switching or noisy inputs, tie the GND pin to the return of the output capacitor. Ground planes help lower inductance and voltage spikes caused by fast transient load currents and are recommended for applications that are subjected to fast load transients.

### 3.3 Shutdown ( $\overline{\text{SHDN}}$ )

The Shutdown input is used to turn the LDO on and off. When the  $\overline{\text{SHDN}}$  pin is at a logic high level, the LDO output is enabled. When the  $\overline{\text{SHDN}}$  pin is pulled to a logic low, the LDO output is disabled. When disabled, the quiescent current used by the LDO is less than 0.5  $\mu\text{A}$  max.

### 3.4 Bypass

Connecting a low-value ceramic capacitor to the Bypass pin will further reduce output voltage noise and improve the PSRR performance of the LDO. While smaller and larger values can be used, these affect the speed at which the LDO output voltage rises when the input power is applied. The larger the bypass capacitor, the slower the output voltage will rise.


### 3.5 Output Voltage ( $V_{OUT}$ )

Connect the output load to  $V_{OUT}$  of the LDO. Also connect one side of the LDO output capacitor as close as possible to the  $V_{OUT}$  pin.

## 4.0 DETAILED DESCRIPTION

The TC1014, TC1015 and TC1185 are precision fixed output voltage regulators (if an adjustable version is needed, see the TC1070, TC1071 and TC1187 data sheet at [www.microchip.com/DS21353](http://www.microchip.com/DS21353)). Unlike bipolar regulators, the TC1014, TC1015 and TC1185 supply current does not increase with load current. In addition, the LDOs' output voltage is stable using 1  $\mu\text{F}$  of capacitance over the entire specified input voltage range and output current range.

Figure 4-1 shows a typical application circuit. The regulator is enabled anytime the shutdown input (SHDN) is at or above  $V_{IH}$ , and disabled when SHDN is at or below  $V_{IL}$ . SHDN may be controlled by a CMOS logic gate or I/O port of a microcontroller. If the SHDN input is not required, it should be connected directly to the input supply. While in shutdown, the supply current decreases to 0.05  $\mu\text{A}$  (typical) and  $V_{OUT}$  falls to zero volts.

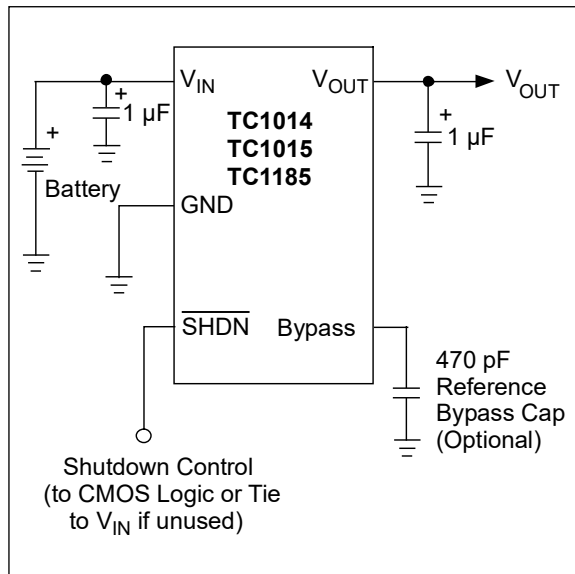

**FIGURE 4-1:** Typical Application Circuit.

## 4.1 Bypass Input

A 470 pF capacitor connected from the Bypass input to ground reduces noise present on the internal reference, which in turn, significantly reduces output noise. If output noise is not a concern, this input may be left unconnected. Larger capacitor values may be used, but results in a longer time period to rated output voltage when power is initially applied.

## 4.2 Output Capacitor

A 1  $\mu\text{F}$  (min) capacitor from  $V_{OUT}$  to ground is required. The output capacitor should have an effective series resistance greater than 0.1  $\Omega$  and less than 5  $\Omega$ . A 1  $\mu\text{F}$  capacitor should be connected from  $V_{IN}$  to GND if there is more than 10 inches of wire between the regulator and the AC filter capacitor, or if a battery is used as the power source. Aluminum electrolytic or tantalum capacitor types can be used (since many aluminum electrolytic capacitors freeze at approximately -30°C, solid tantalums are recommended for applications operating below -25°C). When operating from sources other than batteries, supply-noise rejection and transient response can be improved by increasing the value of the input and output capacitors and employing passive filtering techniques.

## 4.3 Input Capacitor

A 1  $\mu\text{F}$  capacitor should be connected from  $V_{IN}$  to GND if there is more than 10 inches of wire between the regulator and this AC filter capacitor, or if a battery is used as the power source. Aluminum electrolytic or tantalum capacitors can be used (since many aluminum electrolytic capacitors freeze at approximately -30°C, solid tantalum is recommended for applications operating below -25°C). When operating from sources other than batteries, supply-noise rejection and transient response can be improved by increasing the value of the input and output capacitors and employing passive filtering techniques.

## 5.0 THERMAL CONSIDERATIONS

### 5.1 Thermal Shutdown

Integrated thermal protection circuitry shuts the regulator off when die temperature exceeds 160°C. The regulator remains off until the die temperature drops to approximately 150°C.

### 5.2 Power Dissipation

The amount of power the regulator dissipates is primarily a function of input and output voltage, and output current. Equation 5-1 is used to calculate worst-case actual power dissipation:

#### EQUATION 5-1:

$$P_D \approx (V_{INMAX} - V_{OUTMIN}) I_{LOADMAX}$$

Where:

|               |                                       |
|---------------|---------------------------------------|
| $P_D$         | = Worst-case actual power dissipation |
| $V_{INMAX}$   | = Maximum voltage on $V_{IN}$         |
| $V_{OUTMIN}$  | = Minimum regulator output voltage    |
| $I_{LOADMAX}$ | = Maximum output (load) current       |

The maximum allowable power dissipation (Equation 5-2) is a function of the maximum ambient temperature ( $T_{AMAX}$ ), the maximum allowable die temperature ( $T_{JMAX}$ ) and the thermal resistance from junction-to-air ( $\theta_{JA}$ ). The 5-pin SOT-23 package has a  $\theta_{JA}$  of approximately 220°C/Watt.

#### EQUATION 5-2:

$$P_{DMAX} = \frac{(T_{JMAX} - T_{AMAX})}{\theta_{JA}}$$

Where all terms are previously defined.

Equation 5-1 can be used in conjunction with Equation 5-2 to ensure regulator thermal operation is within limits. For example:

Given:

|               |               |
|---------------|---------------|
| $V_{INMAX}$   | = 3.0V +10%   |
| $V_{OUTMIN}$  | = 2.7V - 2.5% |
| $I_{LOADMAX}$ | = 40 mA       |
| $T_{JMAX}$    | = 125°C       |
| $T_{AMAX}$    | = 55°C        |

Find:

1. Actual power dissipation
2. Maximum allowable dissipation

Actual power dissipation:

$$\begin{aligned} P_D &\approx (V_{INMAX} - V_{OUTMIN}) I_{LOADMAX} \\ &= [(3.0 \times 1.1) - (2.7 \times .975)] 40 \times 10^{-3} \\ &= 26.7 \text{ mW} \end{aligned}$$

Maximum allowable power dissipation:

$$\begin{aligned} P_{DMAX} &= \frac{(T_{JMAX} - T_{AMAX})}{\theta_{JA}} \\ &= \frac{(125 - 55)}{220} \\ &= 318 \text{ mW} \end{aligned}$$


In this example, the TC1014 dissipates a maximum of 26.7 mW below the allowable limit of 318 mW. In a similar manner, Equation 5-1 and Equation 5-2 can be used to calculate maximum current and/or input voltage limits.

### 5.3 Layout Considerations

The primary path of heat conduction out of the package is via the package leads. Layouts having a ground plane, wide traces at the pads, and wide power supply bus lines combine to lower  $\theta_{JA}$  and therefore increase the maximum allowable power dissipation limit.

## 6.0 PACKAGING INFORMATION

### 6.1 Package Marking Information



|       |                                                             |
|-------|-------------------------------------------------------------|
| ① & ② | represents part number code + temperature range and voltage |
| ③     | represents year and 2-month period code                     |
| ④     | represents lot ID number                                    |


**TABLE 6-1: PART NUMBER CODE AND TEMPERATURE RANGE**

| (V)  | TC1014<br>Code | TC1015<br>Code | TC1185<br>Code |
|------|----------------|----------------|----------------|
| 1.8  | AY             | BY             | NY             |
| 2.5  | A1             | B1             | N1             |
| 2.6  | NB             | BT             | NT             |
| 2.7  | A2             | B2             | N2             |
| 2.8  | AZ             | BZ             | NZ             |
| 2.85 | A8             | B8             | N8             |
| 3.0  | A3             | B3             | N3             |
| 3.3  | A5             | B5             | N5             |
| 3.6  | A9             | B9             | N9             |
| 4.0  | A0             | B0             | N0             |
| 5.0  | A7             | B7             | N7             |

# TC1014/TC1015/TC1185

## 5-Lead Plastic Small Outline Transistor (CXX) [SOT-23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

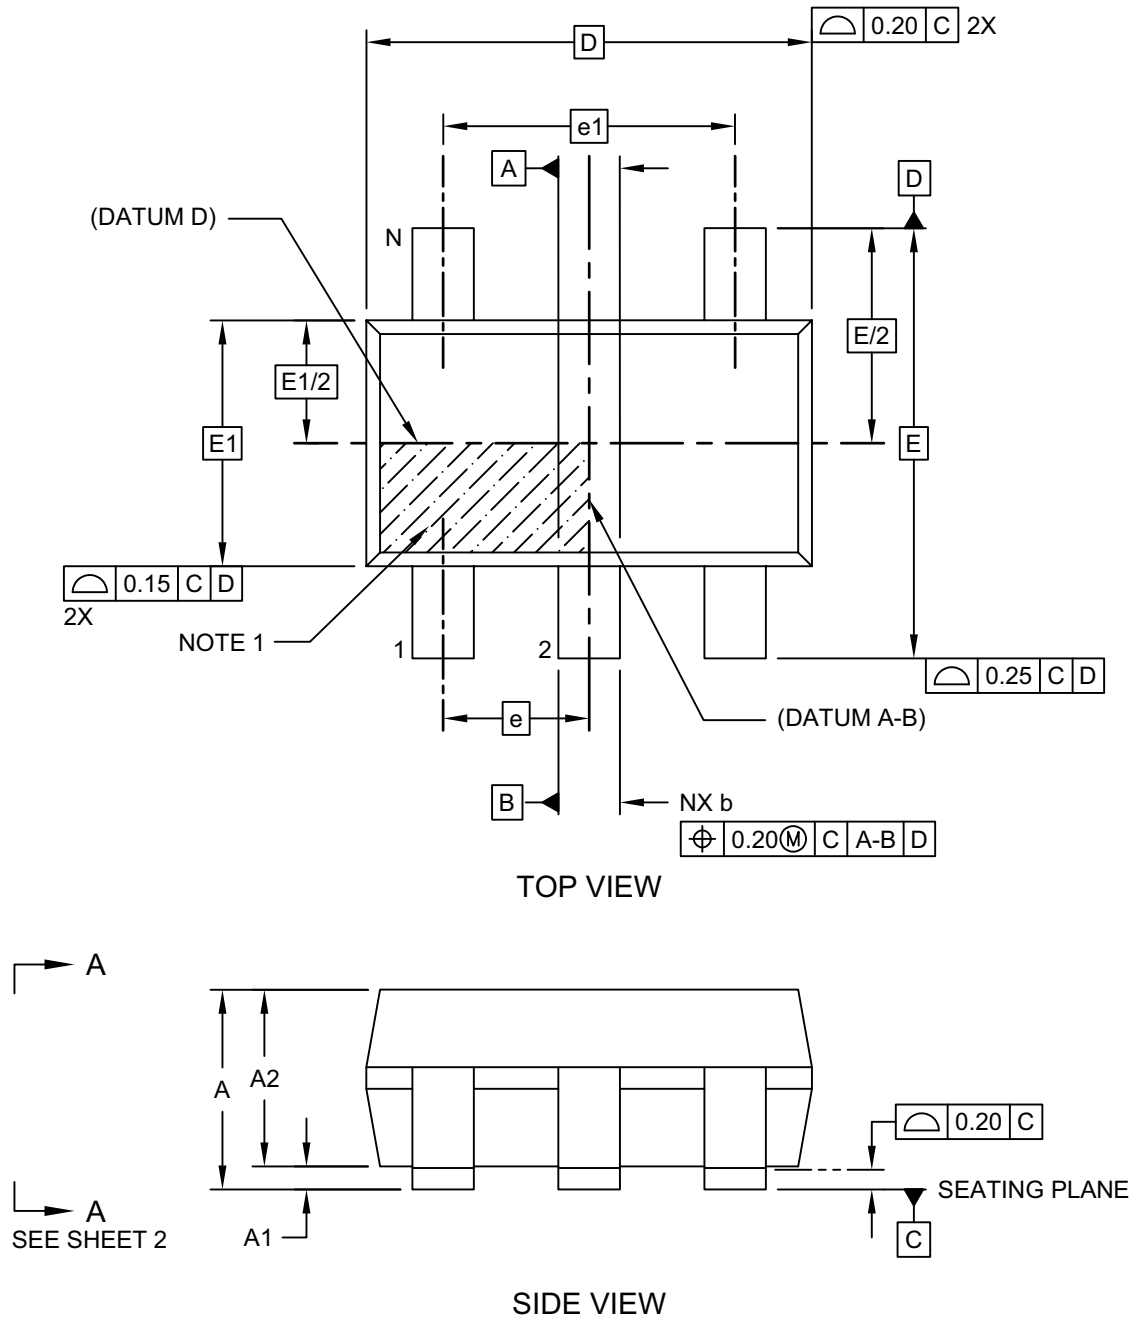


Microchip Technology Drawing C04-091-CXX Rev H Sheet 1 of 2

# TC1014/TC1015/TC1185

## 5-Lead Plastic Small Outline Transistor (CXX) [SOT-23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

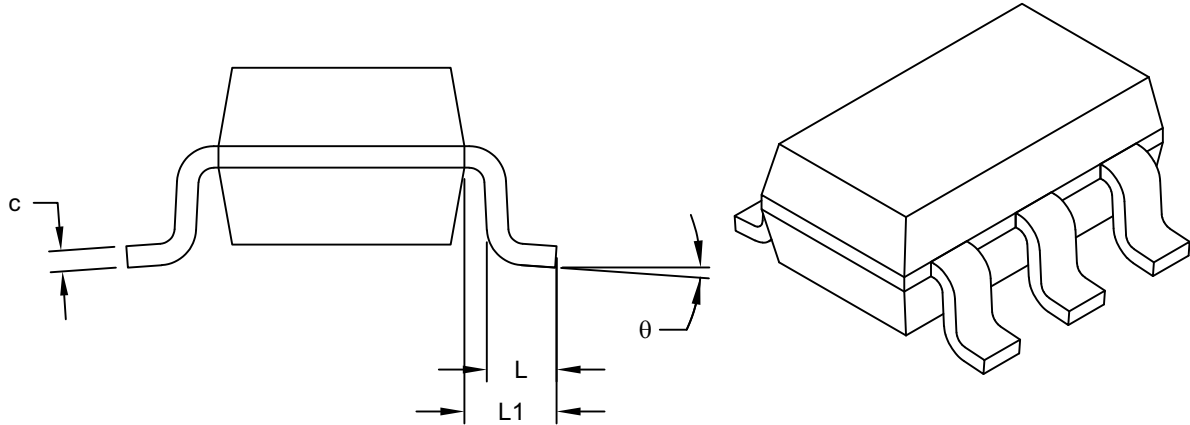

VIEW A-A  
SHEET 1

| Units                    |       | MILLIMETERS |     |      |
|--------------------------|-------|-------------|-----|------|
| Dimension Limits         |       | MIN         | NOM | MAX  |
| Number of Pins           | N     | 5           |     |      |
| Pitch                    | e     | 0.95 BSC    |     |      |
| Outside lead pitch       | e1    | 1.90 BSC    |     |      |
| Overall Height           | A     | 0.90        | -   | 1.45 |
| Molded Package Thickness | A2    | 0.89        | -   | 1.30 |
| Standoff                 | A1    | -           | -   | 0.15 |
| Overall Width            | E     | 2.80 BSC    |     |      |
| Molded Package Width     | E1    | 1.60 BSC    |     |      |
| Overall Length           | D     | 2.90 BSC    |     |      |
| Foot Length              | L     | 0.30        | -   | 0.60 |
| Footprint                | L1    | 0.60 REF    |     |      |
| Foot Angle               | theta | 0°          | -   | 10°  |
| Lead Thickness           | c     | 0.08        | -   | 0.26 |
| Lead Width               | b     | 0.20        | -   | 0.51 |

**Notes:**


- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-091-CXX Rev H Sheet 2 of 2

# TC1014/TC1015/TC1185

## 5-Lead Plastic Small Outline Transistor (CXX) [SOT-23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

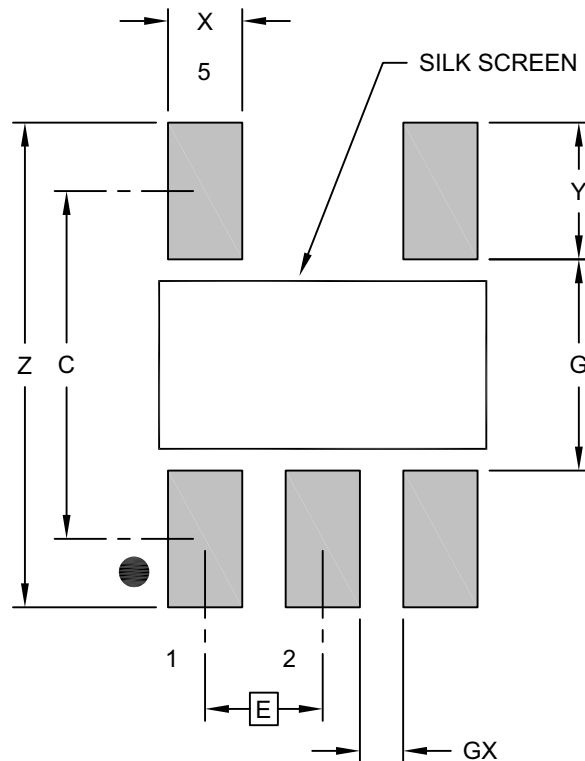

RECOMMENDED LAND PATTERN

| Dimension Limits        | Units | MILLIMETERS |      |      |
|-------------------------|-------|-------------|------|------|
|                         |       | MIN         | NOM  | MAX  |
| Contact Pitch           | E     | 0.95 BSC    |      |      |
| Contact Pad Spacing     | C     |             | 2.80 |      |
| Contact Pad Width (X5)  | X     |             |      | 0.60 |
| Contact Pad Length (X5) | Y     |             |      | 1.10 |
| Distance Between Pads   | G     | 1.70        |      |      |
| Distance Between Pads   | GX    | 0.35        |      |      |
| Overall Width           | Z     |             |      | 3.90 |


**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2091-CXX Rev H

## 6.2 Taping Form

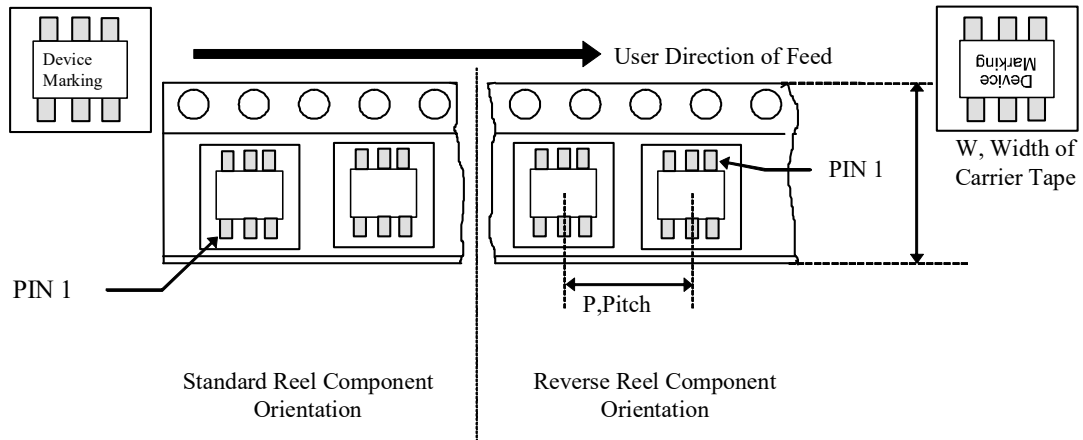

Carrier Tape, Number of Components per Reel and Reel Size

| Package      | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|--------------|-------------------|-----------|--------------------|-----------|
| 5-Pin SOT-23 | 8 mm              | 4 mm      | 3000               | 7 in      |

# TC1014/TC1015/TC1185

---

NOTES:

## APPENDIX A: REVISION HISTORY

### Revision F (November 2023)

- Added automotive qualification to [Features](#) and examples to [Product Identification System](#).
- Updated [Absolute Maximum Ratings†](#) to better describe the part.
- Updated [Section 6.0, Packaging Information](#).
- Made minor text and format changes throughout the document.

### Revision E (February 2007)

- Changed Dropout Voltage from mA to  $\mu$ A in [Section 1.0, Electrical Characteristics](#).
- Updated [Product Identification System](#), page 23.
- Updated [Section 6.0, Packaging Information](#).

### Revision D (April 2006)

- Removed “ERROR is open circuited” from  $\overline{\text{SHDN}}$  pin description in [Pin Function Table](#).
- Added verbiage for pinout descriptions in [Pin Function Table](#).
- Replaced verbiage in first paragraph of [Section 4.0, Detailed Description](#).
- Added [Section 4.3, Input Capacitor](#).

### Revision C (January 2006)

- Changed TR suffix to 713 suffix in Taping Form in Package Marking section.

### Revision B (May 2002)

- Converted Telcom data sheet to Microchip standard for Analog Handbook.

### Revision A (February 2001)

- Original release of this document under Telcom.

# TC1014/TC1015/TC1185

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u>    | <u>-X.X</u>                                                                                                                                                                                                                                                             | <u>X</u>          | <u>XXXXX</u> | <u>XXX</u>    |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------------|---------------|
| Device             | Output Voltage                                                                                                                                                                                                                                                          | Temperature Range | Package      | Qualification |
| Device:            | TC1014: 50 mA LDO with Shutdown and V <sub>REF</sub> Bypass<br>TC1015: 100 mA LDO with Shutdown and V <sub>REF</sub> Bypass<br>TC1185: 150 mA LDO with Shutdown and V <sub>REF</sub> Bypass                                                                             |                   |              |               |
| Output Voltage:    | 1.8 = 1.8V<br>2.5 = 2.5V<br>2.6 = 2.6V<br>2.7 = 2.7V<br>2.8 = 2.8V<br>2.85 = 2.85V<br>3.0 = 3.0V<br>3.3 = 3.3V<br>3.6 = 3.6V<br>4.0 = 4.0V<br>5.0 = 5.0V                                                                                                                |                   |              |               |
| Temperature Range: | V = -40° C to +125° C                                                                                                                                                                                                                                                   |                   |              |               |
| Package:           | CT713 = Plastic Small Outline Transistor (SOT-23), 5-lead, Tape and Reel                                                                                                                                                                                                |                   |              |               |
| Qualification*:    | Blank = Standard Part<br>VAO = AEC-Q100 Automotive Qualified<br><br>*All currently available VAO variants are shown in the examples.<br>Contact your local Microchip sales office to request automotive qualified variants for other packages types or voltage options. |                   |              |               |

| Examples for TC1014: |                                                                            |
|----------------------|----------------------------------------------------------------------------|
| a)                   | TC1014-1.8VCT713: 1.8V, 5LD SOT-23, Tape and Reel                          |
| b)                   | TC1014-2.85VCT713: 2.85V, 5LD SOT-23, Tape and Reel                        |
| c)                   | TC1014-3.3VCT713: 3.3V, 5LD SOT-23, Tape and Reel                          |
| d)                   | TC1014-3.0VCT713VAO: 3.3V, 5LD SOT23, Tape and Reel, Automotive Qualified  |
| e)                   | TC1014-3.3VCT713VAO: 3.0V, 5LD SOT23, Tape and Reel, Automotive Qualified  |
| Examples for TC1015: |                                                                            |
| a)                   | TC1015-1.8VCT713: 1.8V, 5LD SOT-23, Tape and Reel                          |
| b)                   | TC1015-2.85VCT713: 2.85V, 5LD SOT-23, Tape and Reel                        |
| c)                   | TC1015-3.0VCT713: 3.0V, 5LD SOT-23, Tape and Reel                          |
| d)                   | TC1015-3.3VCT713VAO: 3.3V, 5LD SOT-23, Tape and Reel, Automotive Qualified |
| Examples for TC1185: |                                                                            |
| a)                   | TC1185-1.8VCT713: 1.8V, 5LD SOT-23, Tape and Reel                          |
| b)                   | TC1185-2.8VCT713: 2.8V, 5LD SOT-23, Tape and Reel                          |
| c)                   | TC1185-5.0VCT713VAO: 5.0V, 5LD SOT-23, Tape and Reel, Automotive Qualified |

# TC1014/TC1015/TC1185

---

NOTES:

---

**Note the following details of the code protection feature on Microchip products:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
  - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
  - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
  - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
- 

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricon, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-3461-4

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820