

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	ISL90810WIU8Z
Manufacturer:	Renesas Electronics Corporation
Package:	8-TSSOP, 8-MSOP (0.118", 3.00mm Width)
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/renesas-electronics-corporation/isl90810wiu8z.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

ISL90810

Single Digitally Controlled Potentiometer (XDCP™) Low Noise/Low Power/I²C Bus/256 Taps

FN8234
Rev 3.00
September 10, 2015

The ISL90810 integrates a digitally controlled potentiometer (XDCP) on a monolithic CMOS integrated circuit.


The digitally controlled potentiometers are implemented with a combination of resistor elements and CMOS switches. The position of the wipers are controlled by the user through the I²C bus interface. Each potentiometer has an associated Wiper Register (WR) that can be directly written to and read by the user. The contents of the WR controls the position of the wiper. When powered on the ISL90810's wiper will always commence at mid-scale (128 tap position).

The DCP can be used as three-terminal potentiometer or as two-terminal variable resistor in a wide variety of applications including control, parameter adjustments, and signal processing.

Features

- 256 resistor taps - 0.4% resolution
- I²C serial interface with write/read capability
- Power-on preset to mid-scale (128 tap position)
- Wiper resistance: 70Ω typical @ 3.3V
- Standby current 5μA max
- Power supply: 2.7V to 5.5V
- 50kΩ, 10kΩ total resistance
- 8 Ld MSOP
- Pb-free plus anneal available (RoHS compliant)

Pinout

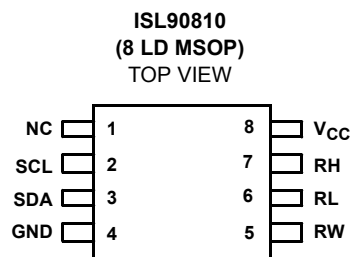


Ordering Information

PART NUMBER	PART MARKING	R _{TOTAL} (kΩ)	TEMP RANGE (°C)	PACKAGE	PKG. DWG#
ISL90810WIU8Z* (Note) (No longer available, recommended replacement: ISL90810UAU8Z-TK)	DEN	10	-40 to +85	8 Ld MSOP (Pb-free)	M8.118
ISL90810WU8Z* (Note) (No longer available, recommended replacement: ISL90810UAU8Z-TK)	810WA	10	-40 to +105	8 Ld MSOP (Pb-free)	M8.118
ISL90810UIU8Z* (Note)	DEM	50	-40 to +85	8 Ld MSOP (Pb-free)	M8.118
ISL90810UAU8Z* (Note)	810UA	50	-40 to +105	8 Ld MSOP (Pb-free)	M8.118

*Add "-TK" suffix for tape and reel.

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.


Block Diagram

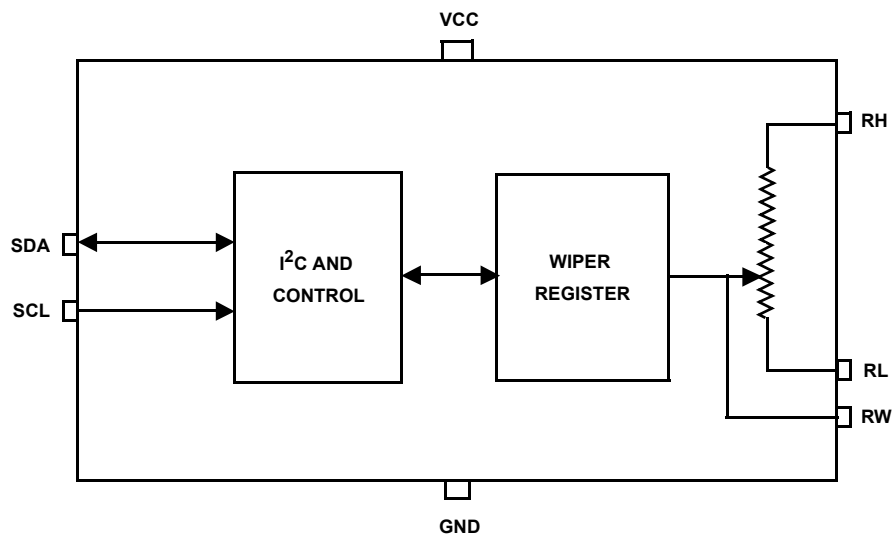

Pin Descriptions

MSOP PIN	SYMBOL	DESCRIPTION
1	NC	No connection
2	SCL	I ² C interface clock
3	SDA	Serial data I/O for the I ² C interface
4	GND	Ground
5	RW	“Wiper” terminal of the DCP
6	RL	“Low” terminal of the DCP
7	RH	“High” terminal of the DCP
8	V _{CC}	Power supply

Equivalent Circuitry

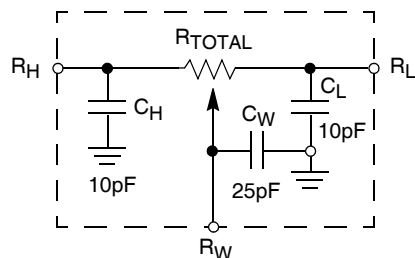

Absolute Maximum Ratings

Storage Temperature	-65°C to +150°C
Voltage at Any Digital Interface Pin	
With Respect to V_{SS}	-0.3V to $V_{CC}+0.3V$
V_{CC}	-0.3V to +6V
Voltage at Any DCP Pin With	
Respect to V_{SS}	-0.3V to V_{CC}
Lead Temperature (Soldering, 10s)	+300°C
I_W (10s)	±6mA
Latchup	Class II, Level A @ +105°C
ESD	
HBM	6kV
MM	500V

Thermal Information

Thermal Resistance (Typical, Note 1)	θ_{JA} (°C/W)
8 Ld MSOP Package	130
Maximum Junction Temperature (Plastic Package)	+150°C

Recommended Operating Conditions

Industrial	-40°C to +85°C
Automotive	-40°C to +105°C
V_{CC}	2.7V to 5.5V
Power Rating	5mW
Wiper Current	±3.0mA

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

1. θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Analog Specifications Over recommended operating conditions unless otherwise stated.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Notes 2)	MAX	UNIT
R_{TOTAL}	R_H to R_L Resistance	W, U versions respectively		10, 50		k Ω
	R_H to R_L Resistance Tolerance		-20		+20	%
R_W	Wiper resistance	$V_{CC} = 3.3V @ +25^\circ C$ Wiper current = V_{CC}/R_{TOTAL}		70	200	Ω
$C_H/C_L/C_W$	Potentiometer Capacitance (Note 14, Equivalent circuitry)			10/10/25		pF
I_{LkgDCP}	Leakage on DCP pins (Note 14)	Voltage at pin from GND to V_{CC}		0.1	1	μA
VOLTAGE DIVIDER MODE (0V @ R_L ; V_{CC} @ R_H ; measured at R_W , unloaded)						
INL (Note 7)	Integral Non-Linearity		-1		1	LSB (Note 3)
DNL (Note 6)	Differential Non-Linearity	Monotonic over all tap positions	W option	-0.75	+0.75	LSB (Note 3)
			U option	-0.5	+0.5	LSB (Note 3)
ZSerror (Note 4)	Zero-Scale Error	W option	0	1	7	LSB (Note 3)
		U option	0	0.5	2	
FSerror (Note 5)	Full-Scale Error	W option	-7	-1	0	LSB (Note 3)
		U option	-2	-0.5	0	
TC_V (Notes 8, 14)	Ratiometric Temperature Coefficient	DCP Register set to 80 hex		±4		ppm/°C
RESISTOR MODE (Measurements between R_W and R_L with R_H not connected, or between R_W and R_H with R_L not connected)						
RINL (Note 12)	Integral Non-Linearity	DCP register set between 20 hex and FF hex. Monotonic over all tap positions	-1		1	MI (Note 9)
RDNL (Note 6)	Differential Non-Linearity	DCP register set between 20 hex and FF hex. Monotonic over all tap positions	W option	-0.75	+0.75	MI (Note 9)
			U option	-0.5	+0.5	MI (Note 9)
Roffset (Note 10)	Offset	W option	0	1	7	MI (Note 9)
		U option	0	0.5	2	MI (Note 9)
TC_R (Notes 13, 14)	Resistance Temperature Coefficient	DCP register set between 20 hex and FF hex		±35		ppm/°C

Operating Specifications Over the recommended operating conditions unless otherwise specified.


SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNITS
I_{CC1}	V_{CC} Supply Current (Volatile Write/Read)	$f_{SCL} = 400\text{kHz}$; SDA = Open; (for I^2C , Active, Read and Volatile Write States only)		20	100	μA
I_{SB}	V_{CC} Current (Standby)	$V_{CC} = +5.5\text{V}$, I^2C Interface in Standby State, Temperature range from -40°C to $+85^\circ\text{C}$		2	5	μA
		$V_{CC} = +5.5\text{V}$, I^2C Interface in Standby State, Temperature range from -40°C to $+105^\circ\text{C}$		2	8	μA
		$V_{CC} = +3.6\text{V}$, I^2C Interface in Standby State, Temperature range from -40°C to $+85^\circ\text{C}$		0.8	2	μA
		$V_{CC} = +3.6\text{V}$, I^2C Interface in Standby State, Temperature range from -40°C to $+105^\circ\text{C}$		0.8	5	μA
I_{LkgDig}	Leakage Current at Pins SDA and SCL	Voltage at pin from GND to V_{CC}	-10		10	μA
t_{DCP} (Note 14)	DCP Wiper Response Time	SCL falling edge of last bit of DCP Data Byte to wiper change			1	μs
V_{por}	Power-On Recall Voltage	Minimum V_{CC} at which memory recall occurs	1.8		2.6	V
V_{CCRamp}	V_{CC} Ramp Rate		0.2			V/ms
t_D (Note 14)	Power-Up Delay	V_{CC} above V_{por} , to DCP Initial Value Register recall completed, and I^2C Interface in standby state			3	ms

SERIAL INTERFACE SPECIFICATIONS

V_{IL}	SDA, and SCL Input Buffer LOW Voltage		-0.3		$0.3 \cdot V_{CC}$	V
V_{IH}	SDA, and SCL Input Buffer HIGH Voltage		$0.7 \cdot V_{CC}$		$V_{CC} + 0.3$	V
Hysteresis (Note 14)	SDA and SCL Input Buffer Hysteresis		$0.05 \cdot V_{CC}$			V
V_{OL} (Note 14)	SDA Output Buffer LOW Voltage, Sinking 4mA		0		0.4	V
C_{pin} (Note 14)	SDA, and SCL Pin Capacitance				10	pF
f_{SCL}	SCL Frequency				400	kHz
t_{IN} (Note 14)	Pulse Width Suppression Time at SDA and SCL Inputs	Any pulse narrower than the max spec is suppressed.			50	ns
t_{AA} (Note 14)	SCL Falling Edge to SDA Output Data Valid	SCL falling edge crossing 30% of V_{CC} , until SDA exits the 30% to 70% of V_{CC} window.			900	ns
t_{BUF} (Note 14)	Time the Bus Must be Free Before the Start of a New Transmission	SDA crossing 70% of V_{CC} during a STOP condition, to SDA crossing 70% of V_{CC} during the following START condition.	1300			ns
t_{LOW}	Clock LOW Time	Measured at the 30% of V_{CC} crossing.	1300			ns
t_{HIGH}	Clock HIGH Time	Measured at the 70% of V_{CC} crossing.	600			ns
$t_{SU:STA}$	START Condition Setup Time	SCL rising edge to SDA falling edge. Both crossing 70% of V_{CC} .	600			ns
$t_{HD:STA}$	START Condition Hold Time	From SDA falling edge crossing 30% of V_{CC} to SCL falling edge crossing 70% of V_{CC} .	600			ns
$t_{SU:DAT}$	Input Data Setup Time	From SDA exiting the 30% to 70% of V_{CC} window, to SCL rising edge crossing 30% of V_{CC}	100			ns
$t_{HD:DAT}$	Input Data Hold Time	From SCL rising edge crossing 70% of V_{CC} to SDA entering the 30% to 70% of V_{CC} window.	0			ns
$t_{SU:STO}$	STOP Condition Setup Time	From SCL rising edge crossing 70% of V_{CC} , to SDA rising edge crossing 30% of V_{CC} .	600			ns

Operating Specifications Over the recommended operating conditions unless otherwise specified. (Continued)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNITS
$t_{HD:STO}$	STOP Condition Hold Time for Read, or Volatile Only Write	From SDA rising edge to SCL falling edge. Both crossing 70% of V_{CC} .	600			ns
t_{DH} (Note 14)	Output Data Hold Time	From SCL falling edge crossing 30% of V_{CC} , until SDA enters the 30% to 70% of V_{CC} window.	0			ns
t_R (Note 14)	SDA and SCL Rise Time	From 30% to 70% of V_{CC}	$20 + 0.1 * C_b$		250	ns
t_F (Note 14)	SDA and SCL Fall Time	From 70% to 30% of V_{CC}	$20 + 0.1 * C_b$		250	ns
C_b (Note 14)	Capacitive Loading of SDA or SCL	Total on-chip and off-chip	10		400	pF
R_{pu} (Note 14)	SDA and SCL Bus Pull-Up Resistor Off-Chip	Maximum is determined by t_R and t_F . For $C_b = 400\text{pF}$, max is about 2~2.5k Ω . For $C_b = 40\text{pF}$, max is about 15~20k Ω	1			k Ω

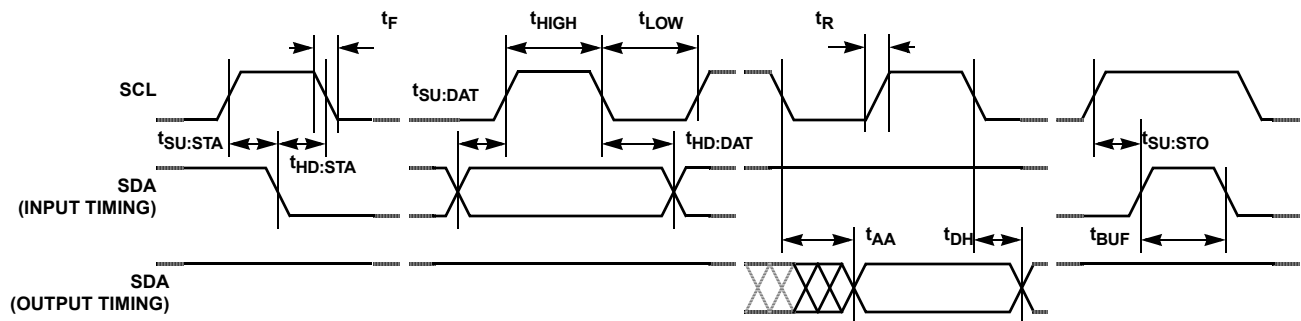SDA vs SCL Timing

NOTES:

- Typical values are for $T_A = +25^\circ\text{C}$ and 3.3V supply voltage.
- LSB: $[V(RW)_{255} - V(RW)_0]/255$. $V(RW)_{255}$ and $V(RW)_0$ are $V(RW)$ for the DCP register set to FF hex and 00 hex respectively. LSB is the incremental voltage when changing from one tap to an adjacent tap.
- ZS error = $V(RW)_0/\text{LSB}$.
- FS error = $[V(RW)_{255} - V_{CC}]/\text{LSB}$.
- $\text{DNL} = [V(RW)_i - V(RW)_{i-1}]/\text{LSB} - 1$, for $i = 1$ to 255. i is the DCP register setting.
- $\text{INL} = (V(RW)_i - i \cdot \text{LSB} - V(RW)_0)/\text{LSB}$, for $i = 1$ to 255.
- $\text{TC}_V = \frac{\text{Max}(V(RW)_i) - \text{Min}(V(RW)_i)}{[\text{Max}(V(RW)_i) + \text{Min}(V(RW)_i)]/2} \times \frac{10^6}{145^\circ\text{C}}$ for $i = 16$ to 240 decimal, $T = -40^\circ\text{C}$ to $+105^\circ\text{C}$. $\text{Max}()$ is the maximum value of the wiper voltage and $\text{Min}()$ is the minimum value of the wiper voltage over the temperature range.
- $\text{MI} = |R_{255} - R_0|/255$. R_{255} and R_0 are the measured resistances for the DCP register set to FF hex and 00 hex respectively. $\text{Roffset} = R_0/\text{MI}$, when measuring between RW and RL.
- $\text{Roffset} = R_{255}/\text{MI}$, when measuring between RW and RH.
- $\text{RDNL} = (R_i - R_{i-1})/\text{MI}$, for $i = 32$ to 255.
- $\text{RINL} = [R_i - (\text{MI} \cdot i) - R_0]/\text{MI}$, for $i = 32$ to 255.
- $\text{TC}_R = \frac{[\text{Max}(R_i) - \text{Min}(R_i)]}{[\text{Max}(R_i) + \text{Min}(R_i)]/2} \times \frac{10^6}{145^\circ\text{C}}$ for $i = 32$ to 255, $T = -40^\circ\text{C}$ to $+105^\circ\text{C}$. $\text{Max}()$ is the maximum value of the resistance and $\text{Min}()$ is the minimum value of the resistance over the temperature range.
- This parameter is not 100% tested.

Typical Performance Curves

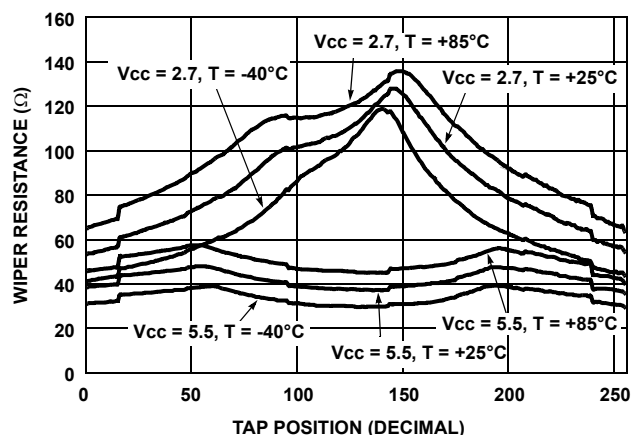


FIGURE 1. WIPER RESISTANCE vs TAP POSITION
[$I(RW) = V_{CC}/R_{total}$] FOR 50kΩ (U)

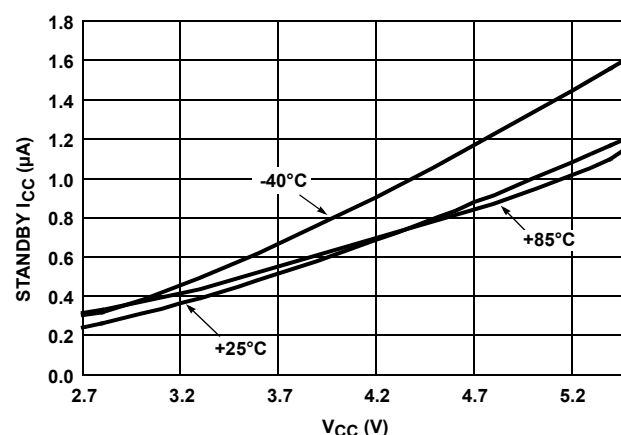


FIGURE 2. STANDBY I_{CC} vs V_{CC}

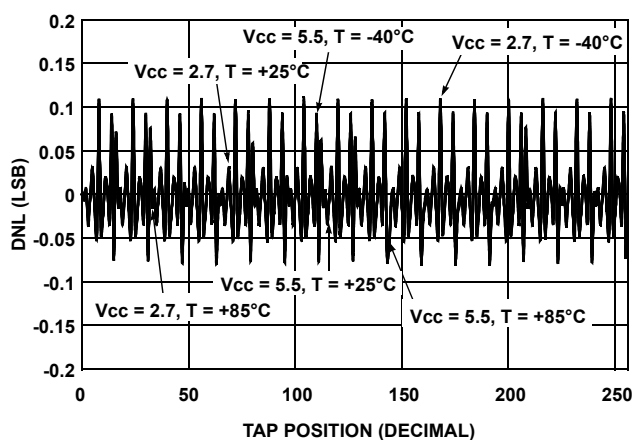


FIGURE 3. DNL vs TAP POSITION IN VOLTAGE DIVIDER
MODE FOR 10kΩ (W)

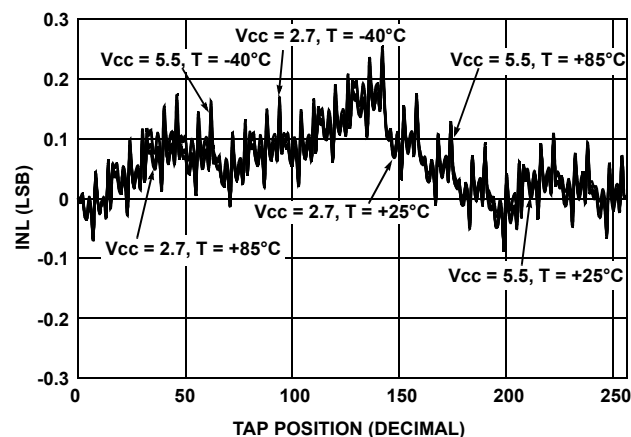


FIGURE 4. INL vs TAP POSITION IN VOLTAGE DIVIDER
MODE FOR 10kΩ (W)

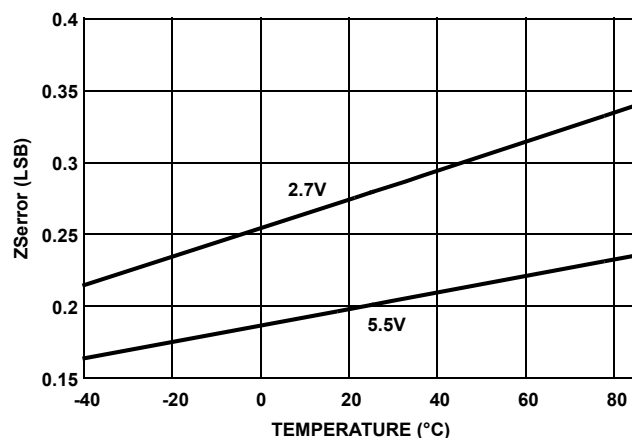


FIGURE 5. ZError vs TEMPERATURE

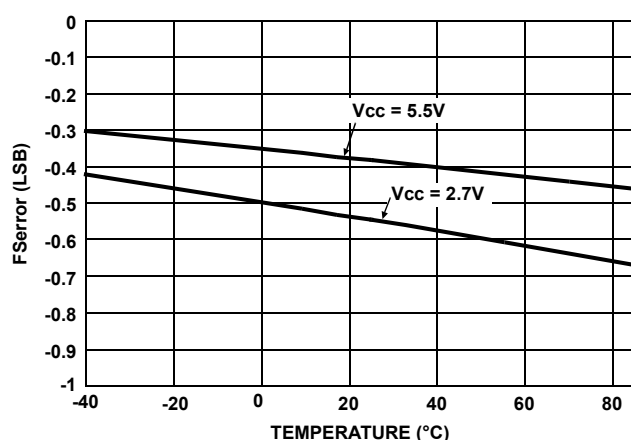


FIGURE 6. FError vs TEMPERATURE

Typical Performance Curves (Continued)

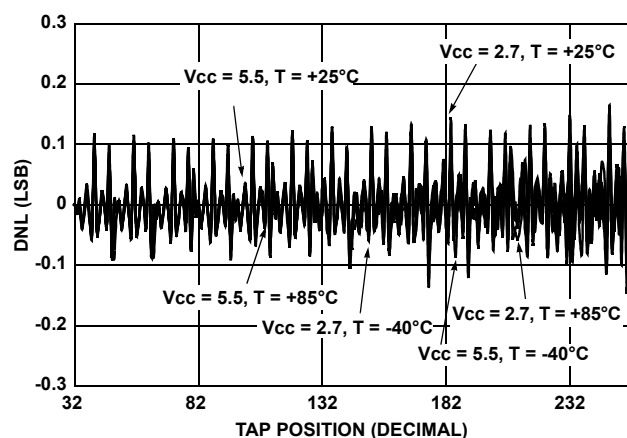


FIGURE 7. DNL vs TAP POSITION IN RHEOSTAT MODE FOR 50kΩ (U)

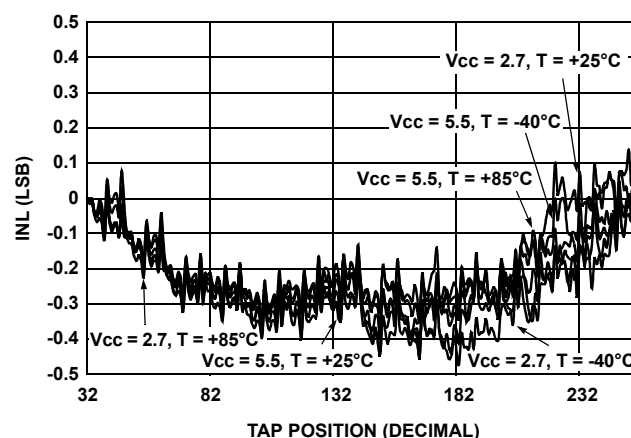


FIGURE 8. INL vs TAP POSITION IN RHEOSTAT MODE FOR 50kΩ (U)

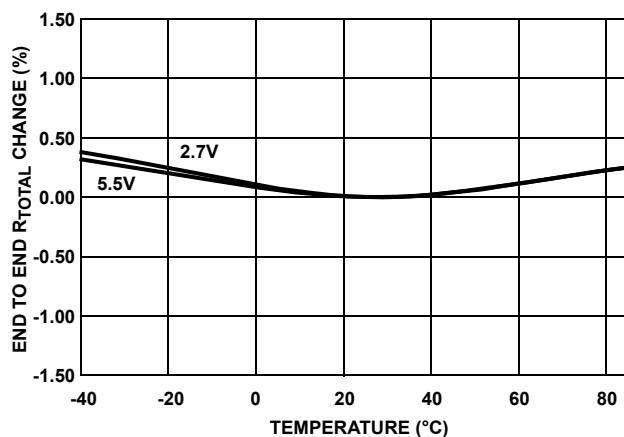


FIGURE 9. END TO END R_{TOTL} % CHANGE vs TEMPERATURE

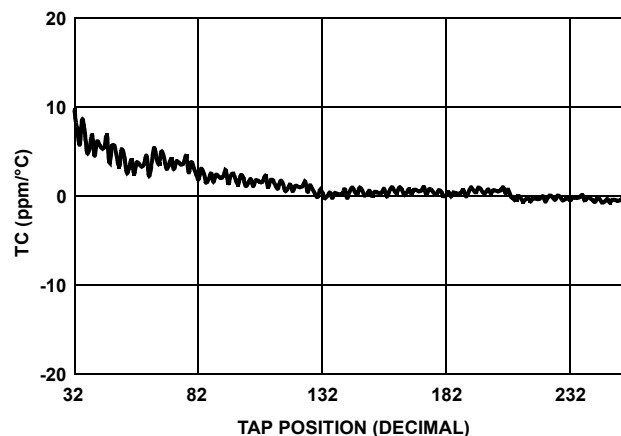


FIGURE 10. TC FOR VOLTAGE DIVIDER MODE IN ppm

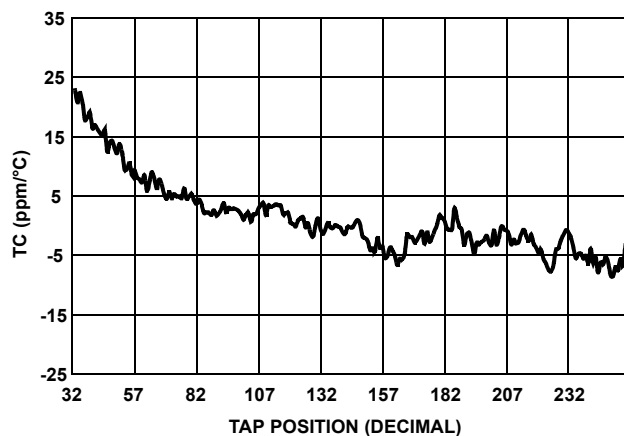


FIGURE 11. TC FOR RHEOSTAT MODE IN ppm

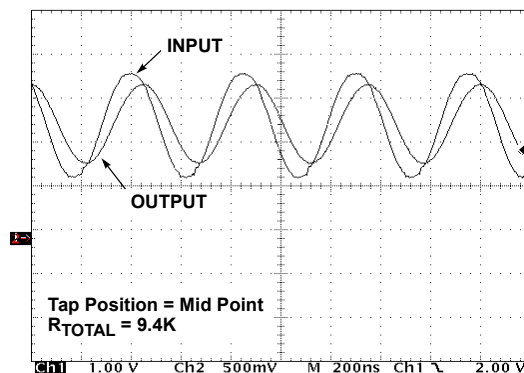


FIGURE 12. FREQUENCY RESPONSE (2.2MHz)

Typical Performance Curves (Continued)

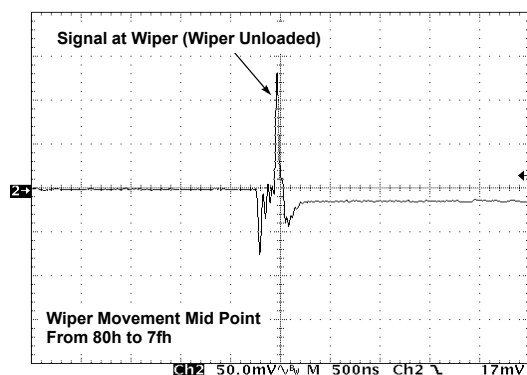


FIGURE 13. MIDSCALE GLITCH, CODE 80h TO 7fh (WIPER 0)

Principles of Operation

The ISL90810 is an integrated circuit incorporating one DCP with its associated registers, and an I²C serial interface providing direct communication between a host and the potentiometer.

DCP Description

The DCP is implemented with a combination of resistor elements and CMOS switches. The physical ends of the DCP are equivalent to the fixed terminals of a mechanical potentiometer (RH and RL pins). The RW pin of the DCP is connected to intermediate nodes, and is equivalent to the wiper terminal of a mechanical potentiometer. The position of the wiper terminal within the DCP is controlled by an 8-bit volatile Wiper Register (WR). When the WR of the DCP contains all zeroes (WR[7:0]: 00h), its wiper terminal (RW) is closest to its “Low” terminal (RL). When the WR of the DCP contains all ones (WR[7:0]: FFh), its wiper terminal (RW) is closest to its “High” terminal (RH). As the value of the WR increases from all zeroes (0 decimal) to all ones (255 decimal), the wiper moves monotonically from the position closest to RL to the closest to RH. At the same time, the resistance between RW and RL increases monotonically, while the resistance between RH and RW decreases monotonically.

While the ISL90810 is being powered up, The WR is reset to 80h (128 decimal), which locates RW roughly at the center between RL and RH.

The WR can be read or written to directly using the I²C serial interface as described in the following sections. The I²C interface Address Byte has to be set to 00hex to access the WR.

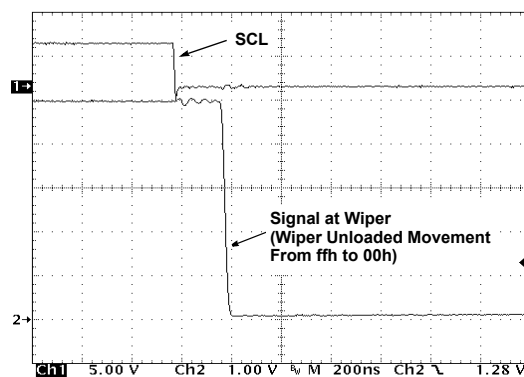


FIGURE 14. LARGE SIGNAL SETTLING TIME

I²C Serial Interface

The ISL90810 supports a bidirectional bus oriented protocol. The protocol defines any device that sends data onto the bus as a transmitter and the receiving device as the receiver. The device controlling the transfer is a master and the device being controlled is the slave. The master always initiates data transfers and provides the clock for both transmit and receive operations. Therefore, the ISL90810 operates as a slave device in all applications.

All communication over the I²C interface is conducted by sending the MSB of each byte of data first.

Protocol Conventions

Data states on the SDA line must change only during SCL LOW periods. SDA state changes during SCL HIGH are reserved for indicating START and STOP conditions (See Figure 15). On power-up of the ISL90810 the SDA pin is in the input mode.

All I²C interface operations must begin with a START condition, which is a HIGH to LOW transition of SDA while SCL is HIGH. The ISL90810 continuously monitors the SDA and SCL lines for the START condition and does not respond to any command until this condition is met (See Figure 15). A START condition is ignored during the power-up for the device.

All I²C interface operations must be terminated by a STOP condition, which is a LOW to HIGH transition of SDA while SCL is HIGH (See Figure 15). A STOP condition at the end of a read operation, or at the end of a write operation places the device in its standby mode.

An acknowledge (ACK) is a software convention used to indicate a successful data transfer. The transmitting device, either master or slave, releases the SDA bus after transmitting eight bits. During the ninth clock cycle, the receiver pulls the SDA line LOW to acknowledge the reception of the eight bits of data (See Figure 16).

The ISL90810 responds with an ACK after recognition of a START condition followed by a valid Identification Byte, and once again after successful receipt of an Address Byte. The ISL90810 also responds with an ACK after receiving a Data Byte of a write operation. The master must respond with an ACK after receiving a Data Byte of a read operation.

A valid Identification Byte contains 0101000 as the seven MSBs. The LSB is the Read/Write bit. Its value is “1” for a Read operation, and “0” for a Write operation (See Table 1)

The address byte is set to 00h and follows the identification byte. Read and write operations always point to address 00h, indicating the WR for the device.

TABLE 1. IDENTIFICATION BYTE FORMAT

0	1	0	1	0	0	0	R/W
(MSB)							(LSB)

Write Operation

A Write operation requires a START condition, followed by a valid Identification Byte, a valid Address Byte, a Data Byte, and a STOP condition. After each of the three bytes, the ISL90810 responds with an ACK. At this time the device enters its standby state (See Figure 17).

Data Protection

A valid Identification Byte, Address Byte, and total number of SCL pulses act as a protection for the registers. During a Write sequence, the Data Byte is loaded into an internal shift register as it is received. The Data Byte is transferred to the Wiper Register (WR) at the falling edge of the SCL pulse that loads the last bit (LSB) of the Data Byte.

Read Operation

A Read operation consists of a three byte instruction followed by one Data Byte (See Figure 18). The master initiates the operation issuing the following sequence: a START, the identification byte with the R/W bit set to "0", an Address Byte, a second START, and a second Identification byte with the R/W bit set to "1". After each of the three bytes, the ISL90810 responds with an ACK. The the ISL90810 transmits Data Bytes as long as the master responds with an ACK during the SCL cycle following the eighth bit of each byte. The master terminates the read operation (issuing a ACK and a STOP condition) following the last bit of the Data Byte (See Figure 18).

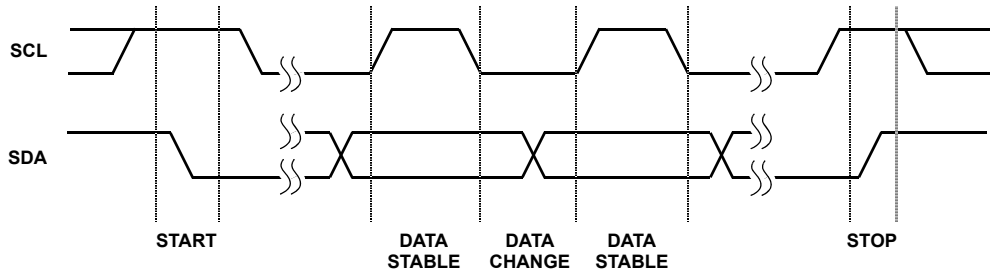


FIGURE 15. VALID DATA CHANGES, START, AND STOP CONDITIONS

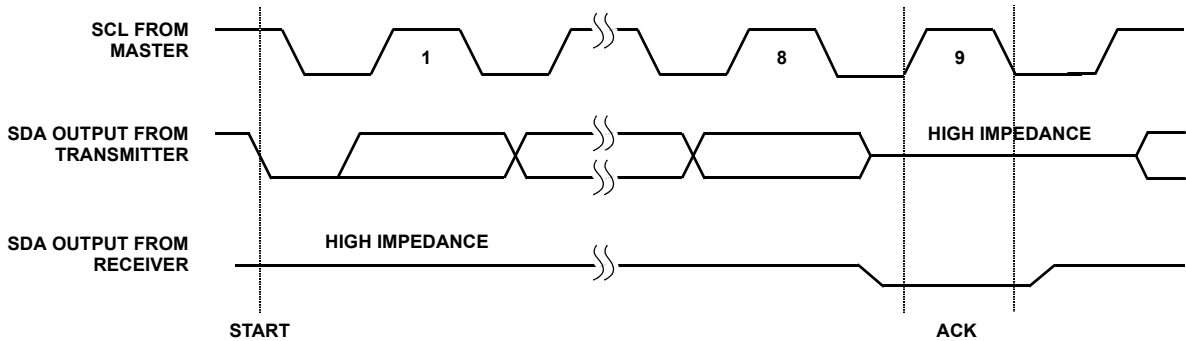


FIGURE 16. ACKNOWLEDGE RESPONSE FROM RECEIVER

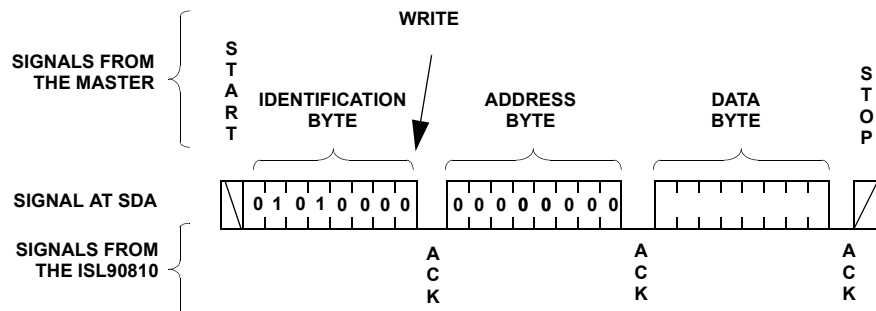


FIGURE 17. BYTE WRITE SEQUENCE

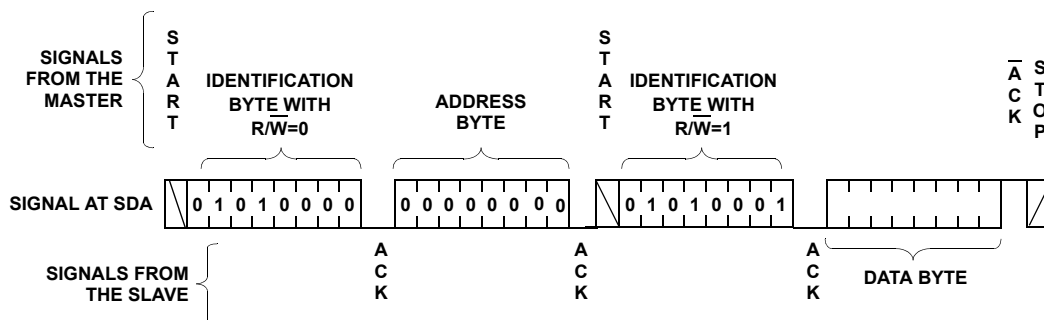


FIGURE 18. READ SEQUENCE

Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to the web to make sure that you have the latest revision.

DATE	REVISION	CHANGE
September 10, 2015	FN8234.3	Updated the Ordering Information table on page 1. Added Revision History and About Intersil sections. Updated Package Outline Drawing M8.118 to the latest revision. -Revision 2 to Revision 3 changes - Updated to new intersil format by adding land pattern and moving dimensions from table onto drawing. -Revision 3 to Revision 4 changes - Corrected lead width dimension typo in side view 1 from "0.25 - 0.036" to "0.25 - 0.36".

About Intersil

Intersil Corporation is a leading provider of innovative power management and precision analog solutions. The company's products address some of the largest markets within the industrial and infrastructure, mobile computing and high-end consumer markets.

For the most updated datasheet, application notes, related documentation and related parts, please see the respective product information page found at www.intersil.com.

You may report errors or suggestions for improving this datasheet by visiting www.intersil.com/ask.

Reliability reports are also available from our website at www.intersil.com/support.

© Copyright Intersil Americas LLC 2005-2015. All Rights Reserved.
All trademarks and registered trademarks are the property of their respective owners.

For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.



For information regarding Intersil Corporation and its products, see www.intersil.com

8 LEAD MINI SMALL OUTLINE PLASTIC PACKAGE

TOP VIEW

The top view drawing shows the component's footprint. Key dimensions and features include:

- Overall Width:** 3.0 ± 0.05
- Overall Height:** 4.9 ± 0.15
- Internal Width:** 3.0 ± 0.05
- Internal Height:** 3.0 ± 0.05
- Pin 1 ID:** A circular feature on the left side, labeled "PIN# 1 ID".
- Pin 1:** The leftmost pin, labeled "1".
- Pin 2:** The second pin from the left, labeled "2".
- Pin 8:** The rightmost pin, labeled "8".
- Pin 5:** The second pin from the right, labeled "5".
- Pin 4:** The third pin from the right, labeled "4".
- Pin 3:** The fourth pin from the right, labeled "3".
- Pin 2:** The fifth pin from the right, labeled "2".
- Pin 1:** The sixth pin from the right, labeled "1".
- Pin 1 ID:** A circular feature on the left side, labeled "PIN# 1 ID".
- Pin 1:** The leftmost pin, labeled "1".
- Pin 2:** The second pin from the left, labeled "2".
- Pin 3:** The third pin from the left, labeled "3".
- Pin 4:** The fourth pin from the left, labeled "4".
- Pin 5:** The fifth pin from the left, labeled "5".
- Pin 6:** The sixth pin from the left, labeled "6".
- Pin 7:** The seventh pin from the left, labeled "7".
- Pin 8:** The eighth pin from the left, labeled "8".
- Pin 9:** The ninth pin from the left, labeled "9".
- Pin 10:** The tenth pin from the left, labeled "10".
- Pin 11:** The eleventh pin from the left, labeled "11".
- Pin 12:** The twelfth pin from the left, labeled "12".
- Pin 13:** The thirteenth pin from the left, labeled "13".
- Pin 14:** The fourteenth pin from the left, labeled "14".
- Pin 15:** The fifteenth pin from the left, labeled "15".
- Pin 16:** The sixteenth pin from the left, labeled "16".
- Pin 17:** The seventeenth pin from the left, labeled "17".
- Pin 18:** The eighteenth pin from the left, labeled "18".
- Pin 19:** The nineteenth pin from the left, labeled "19".
- Pin 20:** The twentieth pin from the left, labeled "20".
- Pin 21:** The twenty-first pin from the left, labeled "21".
- Pin 22:** The twenty-second pin from the left, labeled "22".
- Pin 23:** The twenty-third pin from the left, labeled "23".
- Pin 24:** The twenty-fourth pin from the left, labeled "24".
- Pin 25:** The twenty-fifth pin from the left, labeled "25".
- Pin 26:** The twenty-sixth pin from the left, labeled "26".
- Pin 27:** The twenty-seventh pin from the left, labeled "27".
- Pin 28:** The twenty-eighth pin from the left, labeled "28".
- Pin 29:** The twenty-ninth pin from the left, labeled "29".
- Pin 30:** The thirtieth pin from the left, labeled "30".
- Pin 31:** The thirty-first pin from the left, labeled "31".
- Pin 32:** The thirty-second pin from the left, labeled "32".
- Pin 33:** The thirty-third pin from the left, labeled "33".
- Pin 34:** The thirty-fourth pin from the left, labeled "34".
- Pin 35:** The thirty-fifth pin from the left, labeled "35".
- Pin 36:** The thirty-sixth pin from the left, labeled "36".
- Pin 37:** The thirty-seventh pin from the left, labeled "37".
- Pin 38:** The thirty-eighth pin from the left, labeled "38".
- Pin 39:** The thirty-ninth pin from the left, labeled "39".
- Pin 40:** The fortieth pin from the left, labeled "40".
- Pin 41:** The forty-first pin from the left, labeled "41".
- Pin 42:** The forty-second pin from the left, labeled "42".
- Pin 43:** The forty-third pin from the left, labeled "43".
- Pin 44:** The forty-fourth pin from the left, labeled "44".
- Pin 45:** The forty-fifth pin from the left, labeled "45".
- Pin 46:** The forty-sixth pin from the left, labeled "46".
- Pin 47:** The forty-seventh pin from the left, labeled "47".
- Pin 48:** The forty-eighth pin from the left, labeled "48".
- Pin 49:** The forty-ninth pin from the left, labeled "49".
- Pin 50:** The fiftieth pin from the left, labeled "50".
- Pin 51:** The fifty-first pin from the left, labeled "51".
- Pin 52:** The fifty-second pin from the left, labeled "52".
- Pin 53:** The fifty-third pin from the left, labeled "53".
- Pin 54:** The fifty-fourth pin from the left, labeled "54".
- Pin 55:** The fifty-fifth pin from the left, labeled "55".
- Pin 56:** The fifty-sixth pin from the left, labeled "56".
- Pin 57:** The fifty-seventh pin from the left, labeled "57".
- Pin 58:** The fifty-eighth pin from the left, labeled "58".
- Pin 59:** The fifty-ninth pin from the left, labeled "59".
- Pin 60:** The sixtieth pin from the left, labeled "60".
- Pin 61:** The sixty-first pin from the left, labeled "61".
- Pin 62:** The sixty-second pin from the left, labeled "62".
- Pin 63:** The sixty-third pin from the left, labeled "63".
- Pin 64:** The sixty-fourth pin from the left, labeled "64".
- Pin 65:** The sixty-fifth pin from the left, labeled "65".
- Pin 66:** The sixty-sixth pin from the left, labeled "66".
- Pin 67:** The sixty-seventh pin from the left, labeled "67".
- Pin 68:** The sixty-eighth pin from the left, labeled "68".
- Pin 69:** The sixty-ninth pin from the left, labeled "69".
- Pin 70:** The seventieth pin from the left, labeled "70".
- Pin 71:** The seventy-first pin from the left, labeled "71".
- Pin 72:** The seventy-second pin from the left, labeled "72".
- Pin 73:** The seventy-third pin from the left, labeled "73".
- Pin 74:** The seventy-fourth pin from the left, labeled "74".
- Pin 75:** The seventy-fifth pin from the left, labeled "75".
- Pin 76:** The seventy-sixth pin from the left, labeled "76".
- Pin 77:** The seventy-seventh pin from the left, labeled "77".
- Pin 78:** The seventy-eighth pin from the left, labeled "78".
- Pin 79:** The seventy-ninth pin from the left, labeled "79".
- Pin 80:** The eightieth pin from the left, labeled "80".
- Pin 81:** The eighty-first pin from the left, labeled "81".
- Pin 82:** The eighty-second pin from the left, labeled "82".
- Pin 83:** The eighty-third pin from the left, labeled "83".
- Pin 84:** The eighty-fourth pin from the left, labeled "84".
- Pin 85:** The eighty-fifth pin from the left, labeled "85".
- Pin 86:** The eighty-sixth pin from the left, labeled "86".
- Pin 87:** The eighty-seventh pin from the left, labeled "87".
- Pin 88:** The eighty-eighth pin from the left, labeled "88".
- Pin 89:** The eighty-ninth pin from the left, labeled "89".
- Pin 90:** The ninetieth pin from the left, labeled "90".
- Pin 91:** The ninety-first pin from the left, labeled "91".
- Pin 92:** The ninety-second pin from the left, labeled "92".
- Pin 93:** The ninety-third pin from the left, labeled "93".
- Pin 94:** The ninety-fourth pin from the left, labeled "94".
- Pin 95:** The ninety-fifth pin from the left, labeled "95".
- Pin 96:** The ninety-sixth pin from the left, labeled "96".
- Pin 97:** The ninety-seventh pin from the left, labeled "97".
- Pin 98:** The ninety-eighth pin from the left, labeled "98".
- Pin 99:** The ninety-ninth pin from the left, labeled "99".
- Pin 100:** The hundredth pin from the left, labeled "100".
- Pin 101:** The hundred-first pin from the left, labeled "101".
- Pin 102:** The hundred-second pin from the left, labeled "102".
- Pin 103:** The hundred-third pin from the left, labeled "103".
- Pin 104:** The hundred-fourth pin from the left, labeled "104".
- Pin 105:** The hundred-fifth pin from the left, labeled "105".
- Pin 106:** The hundred-sixth pin from the left, labeled "106".
- Pin 107:** The hundred-seventh pin from the left, labeled "107".
- Pin 108:** The hundred-eighth pin from the left, labeled "108".
- Pin 109:** The hundred-ninth pin from the left, labeled "109".
- Pin 110:** The hundred-tenth pin from the left, labeled "110".
- Pin 111:** The hundred-eleventh pin from the left, labeled "111".
- Pin 112:** The hundred-twelfth pin from the left, labeled "112".
- Pin 113:** The hundred-thirteenth pin from the left, labeled "113".
- Pin 114:** The hundred-fourteenth pin from the left, labeled "114".
- Pin 115:** The hundred-fifteenth pin from the left, labeled "115".
- Pin 116:** The hundred-sixteenth pin from the left, labeled "116".
- Pin 117:** The hundred-seventeenth pin from the left, labeled "117".
- Pin 118:** The hundred-eighteenth pin from the left, labeled "118".
- Pin 119:** The hundred-nineteenth pin from the left, labeled "119".
- Pin 120:** The hundred-twentieth pin from the left, labeled "120".
- Pin 121:** The hundred-twenty-first pin from the left, labeled "121".
- Pin 122:** The hundred-twenty-second pin from the left, labeled "122".
- Pin 123:** The hundred-twenty-third pin from the left, labeled "123".
- Pin 124:** The hundred-twenty-fourth pin from the left, labeled "124".
- Pin 125:** The hundred-twenty-fifth pin from the left, labeled "125".
- Pin 126:** The hundred-twenty-sixth pin from the left, labeled "126".
- Pin 127:** The hundred-twenty-seventh pin from the left, labeled "127".

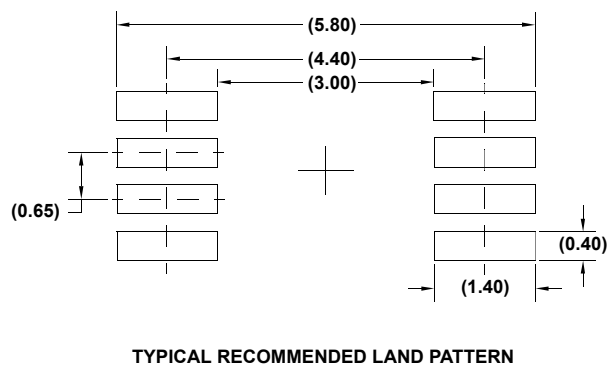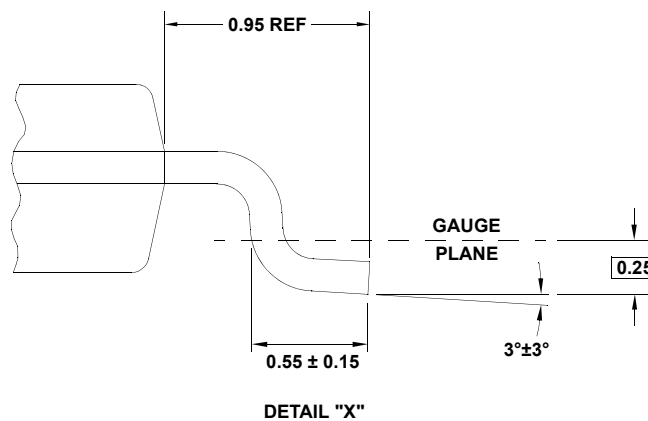

1. Dimensions are in millimeters.
2. Dimensioning and tolerancing conform to JEDEC MO-187-AA and AMSEY14.5m-1994.
3. Plastic or metal protrusions of 0.15mm max per side are not included.
4. Plastic interlead protrusions of 0.15mm max per side are not included.

6. Dimensions in () are for reference only.