

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** TSC2020IRTVR  
**Manufacturer:** Texas Instruments  
**Package:** 32-WFQFN Exposed Pad  
**Availability:** Please confirm with sales

**Product Page:**

<https://antrexco.com/product/details/texas-instruments/tsc2020irtvr.html>

**Request a Quote:**

Submit RFQ for this part



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

# Analog Matrix TOUCH SCREEN CONTROLLER with I<sup>2</sup>C™ Serial Interface for 3 × 5 Array

Check for Samples: [TSC2020](#)

## FEATURES

- Supports up to 3.5-Inch Analog Matrix Sensor with 3 × 5 Multiple Touch Resolution and 12-Bit Global Resolution
- Supports Both Finger and Stylus
- Ratiometric Conversion
- Single 1.6V to 3.6V Supply
- Preprocessing to Reduce Bus Activity
- I<sup>2</sup>C Interface Supports Standard, Fast, and High-Speed Modes
- Internal Detection of Screen Touch
- Register-Based, Programmable:
  - Sampling Rates, System Timing, Zoning, Normal/Fast Scan Mode
- On-Chip Temperature Measurement
- Auto Power-Down Control
- Low Power:
  - 70.72μW at 1.6V, at 8.2kSPS Eq Rate, ST
  - 87.5μW at 1.8V, at 8.2kSPS Eq Rate, ST
  - 675μW at 1.8V, at 250SSPS Worst-Case, MT (average 300μW at 1.8V, 50SSPS, 3T)
- Enhanced ESD Protection to Assist IEC Testing:
  - ±12kV Air
  - ±11kV Contact
- Packages: 5 × 5 QFN-32, 2.5 × 2.5 WCSP<sup>(1)</sup>

<sup>(1)</sup> WCSP (YZK) package available Q2, 2011.

U.S. Patent Nos. 6,246,394; 7,812,830; other patents pending.

## APPLICATIONS

- Smart Phones, Feature Phones
- MIDs, Netbooks, and eBooks
- Digital Picture Frames
- Portable Instruments
- MP3 Players, GPSs, PNDs, and PMPs


## DESCRIPTION

The TSC2020 is a very low power, resistive touch screen controller designed to work with power-sensitive, handheld applications that are based on advanced low-voltage processors. This device works with a supply voltage as low as 1.6V that can be supplied by a single-cell battery. The TSC2020 contains a complete, ultra-low power, 12-bit, analog-to-digital converter (ADC) including sensor drivers and the control logic to measure touch pressure. Unlike other resistive touch screen controllers, the TSC2020 is capable of detecting at least three touches simultaneously and delivers a very low power standby touch detection scheme. This flexibility allows for many new applications that require multiple touches but must remain at low power.

The TSC2020 supports the I<sup>2</sup>C serial bus and data transmission protocol for all three defined modes: standard, fast, and high-speed. The TSC2020 offers programmable resolution, single-/multi-touch modes to accommodate different screen types, sizes, and application needs.

The TSC2020 is available in a 32-pin 5 × 5 QFN package, and is characterized for the –40°C to +85°C industrial temperature range.

## Functional Block Diagram

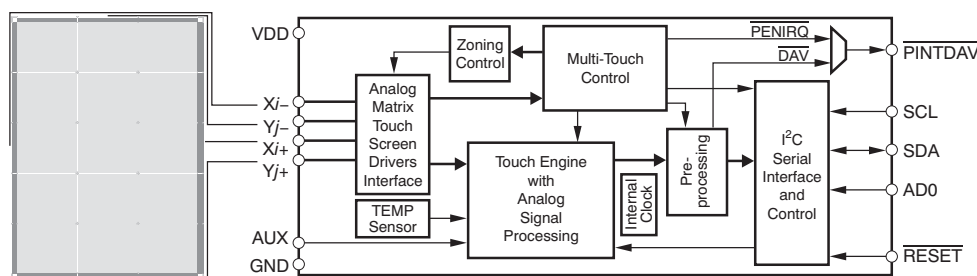

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

I<sup>2</sup>C is a trademark of NXP Semiconductors.

All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011, Texas Instruments Incorporated



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### ORDERING INFORMATION<sup>(1)</sup>

| PRODUCT  | TYPICAL INTEGRAL LINEARITY (LSB) | TYPICAL GAIN ERROR (LSB) | NO MISSING CODES RESOLUTION (BITS) | PACKAGE TYPE                                | PACKAGE DESIGNATOR | SPECIFIED TEMPERATURE RANGE | PACKAGE MARKING | ORDERING NUMBER     | TRANSPORT MEDIA, QUANTITY |
|----------|----------------------------------|--------------------------|------------------------------------|---------------------------------------------|--------------------|-----------------------------|-----------------|---------------------|---------------------------|
| TSC2020I | ±0.5                             | +0.1                     | 11                                 | 32-Pin,<br>0.75 × 5 × 5<br>Thin QFN         | RTV                | −40°C to +85°C              | TSC2020I        | TSC2020IRTVT        | Small Tape and Reel, 250  |
|          |                                  |                          |                                    |                                             |                    |                             | TSC2020IRTVR    | Tape and Reel, 3000 |                           |
|          |                                  |                          |                                    | 25-Pin<br>2.5 × 2.5<br>WCSP<br>5 × 5 Matrix | YZK <sup>(2)</sup> | −40°C to +85°C              | TSC2020I        | TSC2020IYZKT        | Small Tape and Reel, 250  |
|          |                                  |                          |                                    | TSC2020IYZKR                                |                    |                             |                 | Tape and Reel, 3000 |                           |

(1) For the most current package and ordering information, see the Package Option Addendum located at the end of this data sheet, or visit the device product folder at [www.ti.com](http://www.ti.com).

(2) WCSP (YZK) package available Q2, 2011.

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

Over operating free-air temperature range (unless otherwise noted).

|                                             |                                                                      | TSC2020                | UNIT |
|---------------------------------------------|----------------------------------------------------------------------|------------------------|------|
| Voltage range                               | Analog inputs $X_{i+}$ , $X_{i-}$ , $Y_{j+}$ , $Y_{j-}$ , AUX to GND | –0.4 to $V_{DD} + 0.1$ | V    |
|                                             | $V_{DD}$ to GND                                                      | –0.3 to 5              | V    |
| Digital pin voltages to GND                 |                                                                      | –0.3 to 5              | V    |
| Operating free-air temperature range, $T_A$ |                                                                      | –40 to +85             | °C   |
| Storage temperature range, $T_{STG}$        |                                                                      | –65 to +150            | °C   |
| Junction temperature, $T_J$ Max             |                                                                      | +150                   | °C   |
| IEC contact discharge <sup>(2)</sup>        | $X_{i+}$ , $X_{i-}$ , $Y_{j+}$ , $Y_{j-}$                            | ±11                    | kV   |
| IEC air discharge <sup>(2)</sup>            | $X_{i+}$ , $X_{i-}$ , $Y_{j+}$ , $Y_{j-}$                            | ±12                    | kV   |

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated is not implied. Exposure to absolute-maximum rated conditions for extended periods may affect device reliability.

(2) Test method based on IEC standard 61000-4-2. Contact Texas Instruments for test details.

### THERMAL INFORMATION

| THERMAL METRIC <sup>(1)</sup> |                                              | TSC2020 |         | UNITS |
|-------------------------------|----------------------------------------------|---------|---------|-------|
|                               |                                              | RTV     | YZK     |       |
|                               |                                              | 32 PINS | 25 PINS |       |
| $\theta_{JA}$                 | Junction-to-ambient thermal resistance       | 32.1    | 99.4    | °C/W  |
| $\theta_{JCTop}$              | Junction-to-case (top) thermal resistance    | 15.4    | 5.5     |       |
| $\theta_{JB}$                 | Junction-to-board thermal resistance         | 5.8     | 35      |       |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 0.2     | 13.0    |       |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 5.7     | 37.7    |       |
| $\theta_{JCbott}$             | Junction-to-case (bottom) thermal resistance | 1.2     | N/A     |       |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](http://www.ti.com/lit/an/spra953).

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup>    | Lead/<br>Ball Finish | MSL Peak Temp <sup>(3)</sup> | Samples<br>(Requires Login) |
|------------------|-----------------------|--------------|-----------------|------|-------------|----------------------------|----------------------|------------------------------|-----------------------------|
| TSC2020IRTVR     | ACTIVE                | WQFN         | RTV             | 32   | 3000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU            | Level-2-260C-1 YEAR          |                             |
| TSC2020IRTVT     | ACTIVE                | WQFN         | RTV             | 32   | 250         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU            | Level-2-260C-1 YEAR          |                             |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.



**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

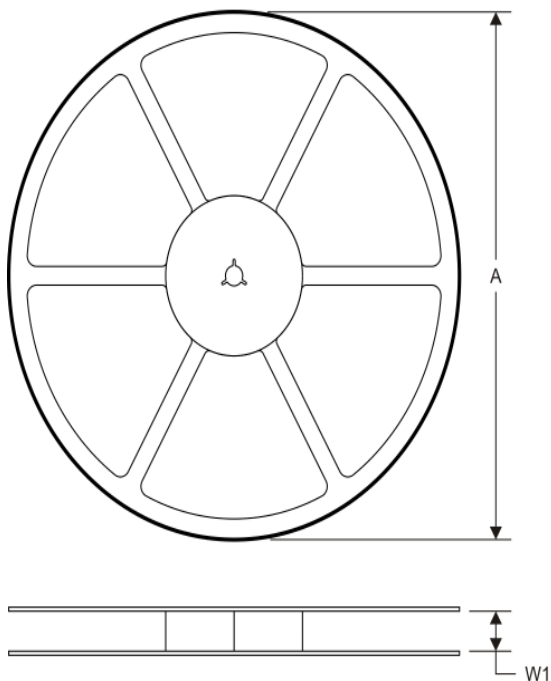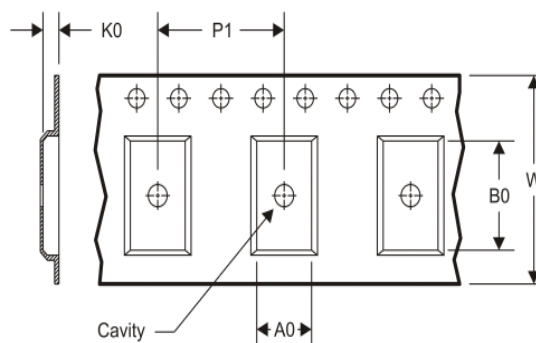**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


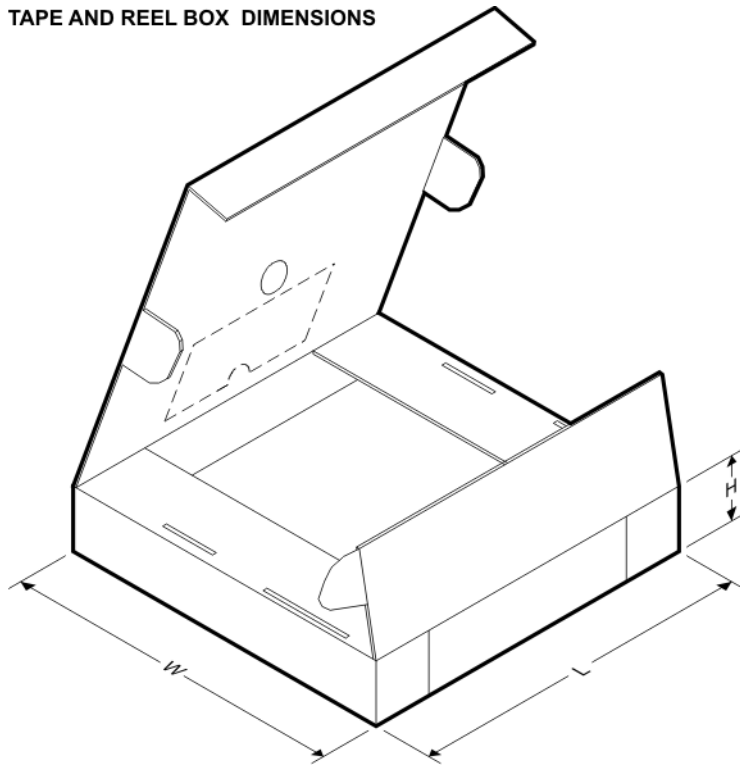
|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TSC2020IRTVR | WQFN         | RTV             | 32   | 3000 | 330.0              | 12.4               | 5.3     | 5.3     | 1.5     | 8.0     | 12.0   | Q2            |
| TSC2020IRTVT | WQFN         | RTV             | 32   | 250  | 180.0              | 12.4               | 5.3     | 5.3     | 1.5     | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TSC2020IRTVR | WQFN         | RTV             | 32   | 3000 | 367.0       | 367.0      | 35.0        |
| TSC2020IRTVT | WQFN         | RTV             | 32   | 250  | 210.0       | 185.0      | 35.0        |

RTV (S-PWQFN-N32)

PLASTIC QUAD FLATPACK NO-LEAD

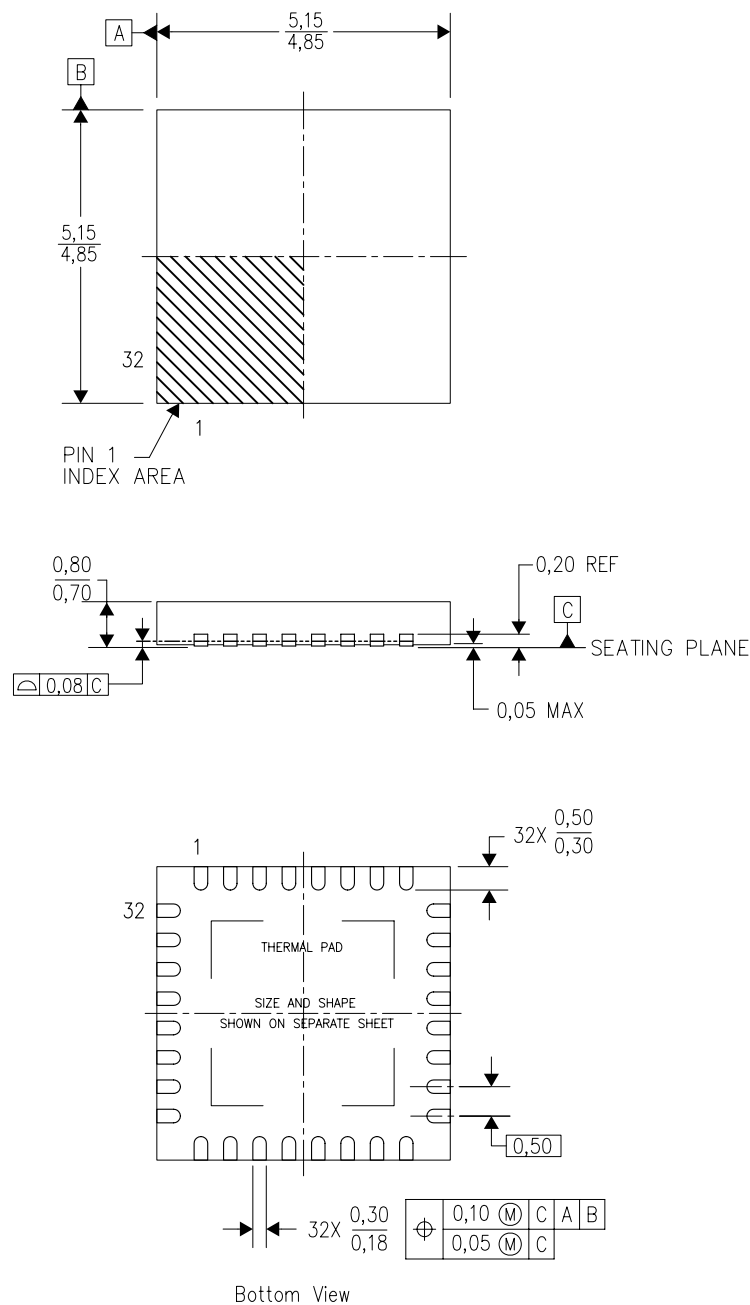

4206245/C 10/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5-1994.
  - B. This drawing is subject to change without notice.
  - C. Quad Flatpack, No-Leads (QFN) package configuration.
  - D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
  - F. Falls within JEDEC MO-220.

RTV (S-PWQFN-N32)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

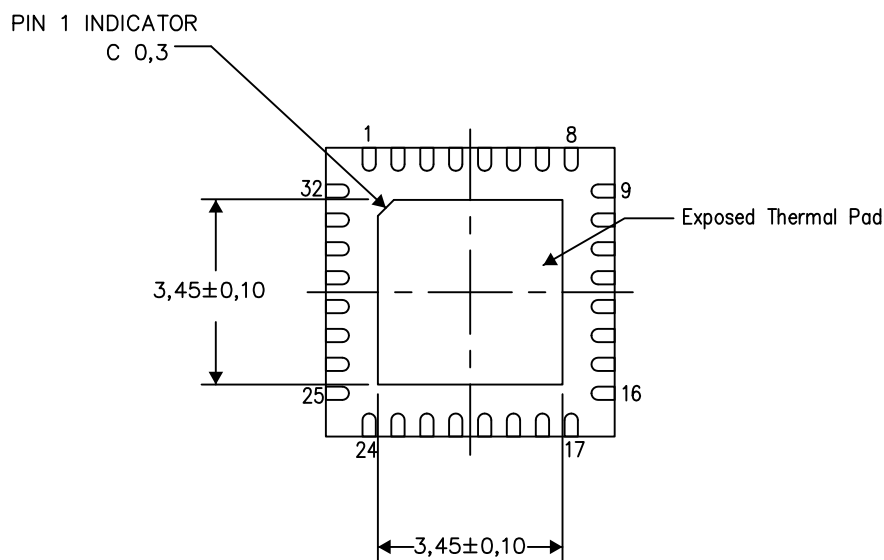

Bottom View


Exposed Thermal Pad Dimensions

4206250-2/K 09/12

NOTE: All linear dimensions are in millimeters

RTV (S-PWQFN-N32)

PLASTIC QUAD FLATPACK NO-LEAD

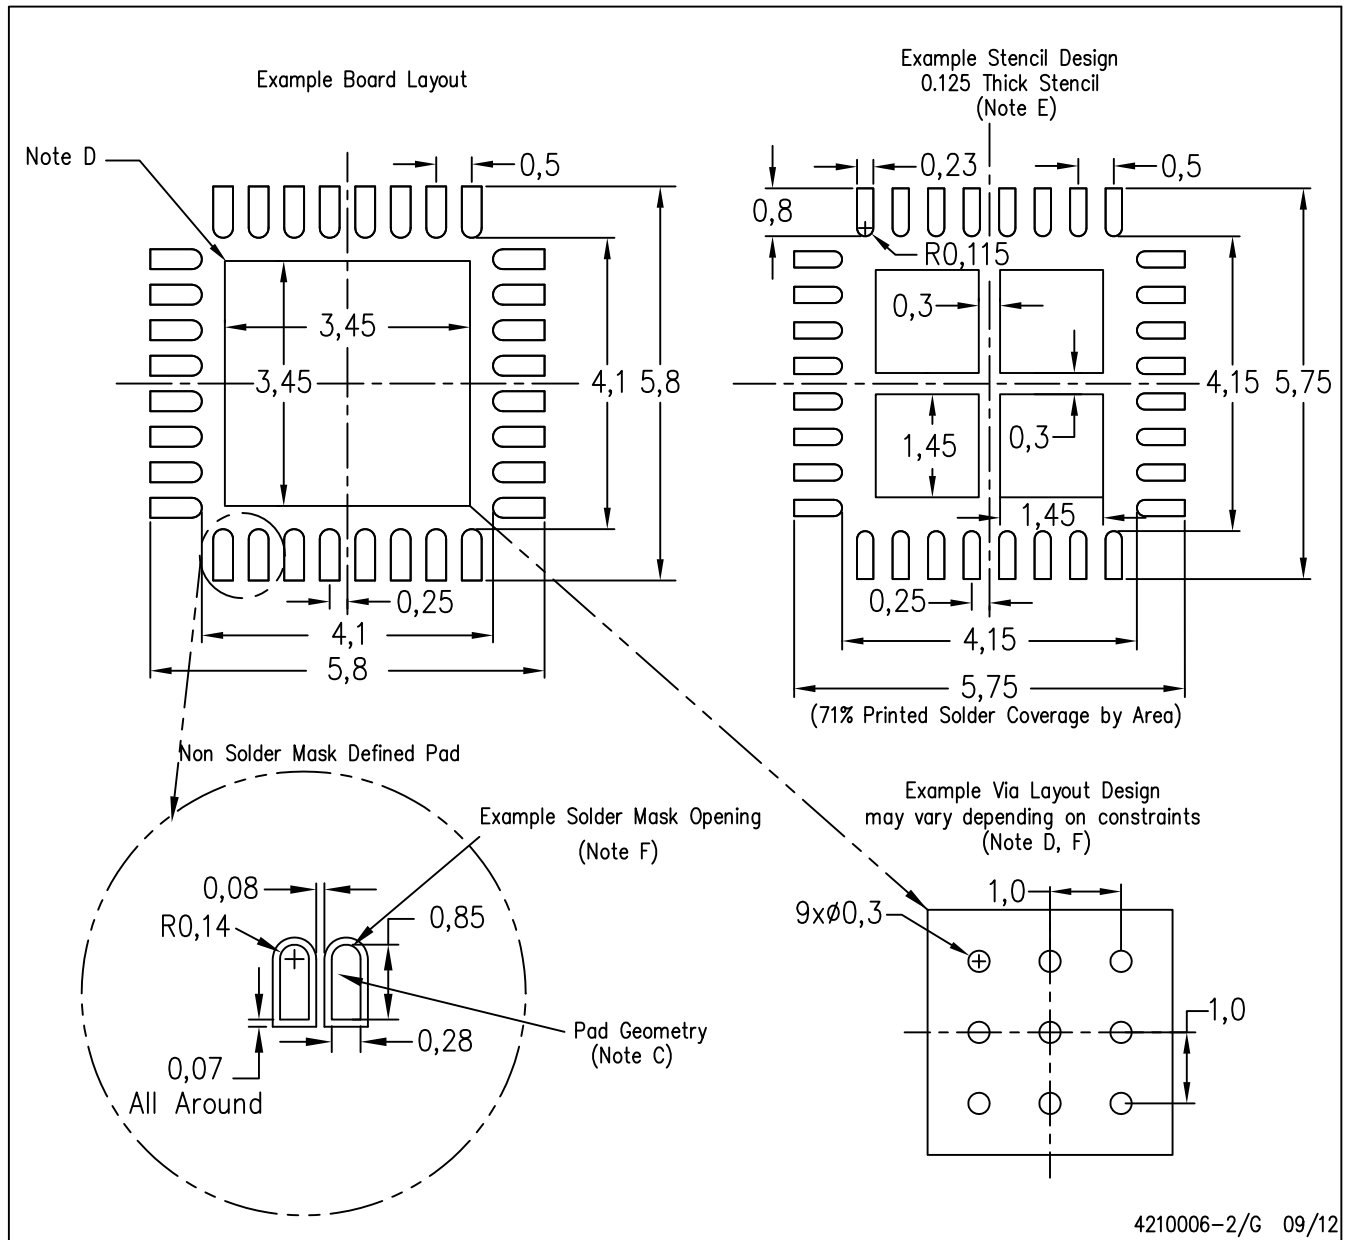

4210006-2/G 09/12

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SCBA017, SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)