

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 0ADEC9300-BE
Manufacturer: Bel Fuse Inc.
Package: Bulk
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/bel-fuse-inc/0adec9300-be.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Type 0ADEC / 0ADEP

Fast-Acting Fuse Series

HF  0ADEC/0ADEP Series, 6x32mm Ceramic Tube Fast-Acting Fuse RoHS Compliant

Description

A 500 VAC/VDC rated ceramic tube cartridge fuse in a compact 6.3 x 32mm package,

Features

- Fast-acting, high breaking capacity fuse
- Available in cartridge and pigtail axial lead
- Designed to UL 248-14
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Halogen Free
- Lead Free

Applications

- Industrial Power Supplies
- DC/DC modules

LEAD FREE = 
HALOGEN FREE = 



UK
CA c  CE

Physical Specifications

Materials	Body : Ceramic
	Cap: Silver Plated Caps
	Pigtail Leads : Tin Plated Copper
Marking	On Fuse :
	"bel"
	"0ADE", "Current Rating", "Voltage Rating", "Appropriate Safety Logos"
	On Label :
	"bel", "0ADEC" or "0ADEP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "  ", "  "(China RoHS compliant).

Electrical Characteristics

Testing Current	Opening Time
	Maximum
150%	30 minutes
200%	5 minutes
300%	10 seconds

Safety Agency Approvals

Safety Agency	Safety Agency Certificate	Ampere Rating / Voltage Rating	Ampere Range / Volt @ I.R. ability*
	E20624	10A-30A/500V AC/DC	10A-30A/500V@30KA AC /500V@20KA DC
*I.R.= Interrupting Rating = Short Circuit Rating(Amps)			

Environmental Specifications

Operating Temperature	-50°C to +105°C
Terminal Strength	MIL-STD-202G, Method 211 Test Condition A
Lead Solderability	MIL-STD-202, Method 208
Mechanical Vibration	MIL-STD-202, Method 201
Thermal Shock	MIL-STD-202, Method 107 Test Condition B (5 cycles -65°C to +125°C)
Humidity	MIL-STD-202, Method 103, Test Condition A (95%RH and 40°C for 240 hours)

Electrical Specifications

Part Number	Ampere Rating	Typical Cold Resistance (mOhms)	Voltage and Interrupting Ratings	Typical Pre–Arcing I²t (A²Sec)	Total I²t (A2sec)	
0ADEC9100-XX	10A	17.1	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	100	135	
0ADEP9100- XX						
0ADEC9120- XX	12A	12.3		140	180	
0ADEP9120- XX						
0ADEC9150- XX	15A	8.0		66	155	
0ADEP9150- XX						
0ADEC9160- XX	16A	8.0		62	150	
0ADEP9160- XX						
0ADEC9200- XX	20A	5.5		120	280	
0ADEP9200- XX						
0ADEC9250- XX	25A	4.6		200	470	
0ADEP9250- XX						
0ADEC9300- XX	30A	3.7		270	630	
0ADEP9300- XX						


Consult manufacturer for other ratings

*DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C


*Typical Pre-arcing I²t are measured at 10In Current

*Total I²t are measured at 500V IR test

Temperature Re-Rating Curve

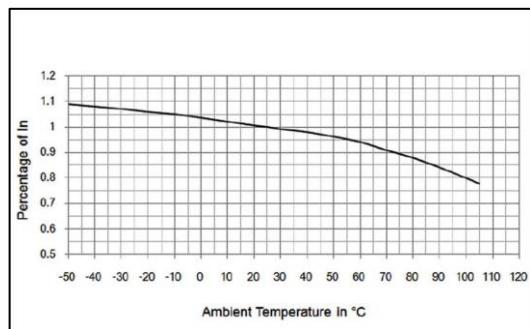

Average Time Current Curve

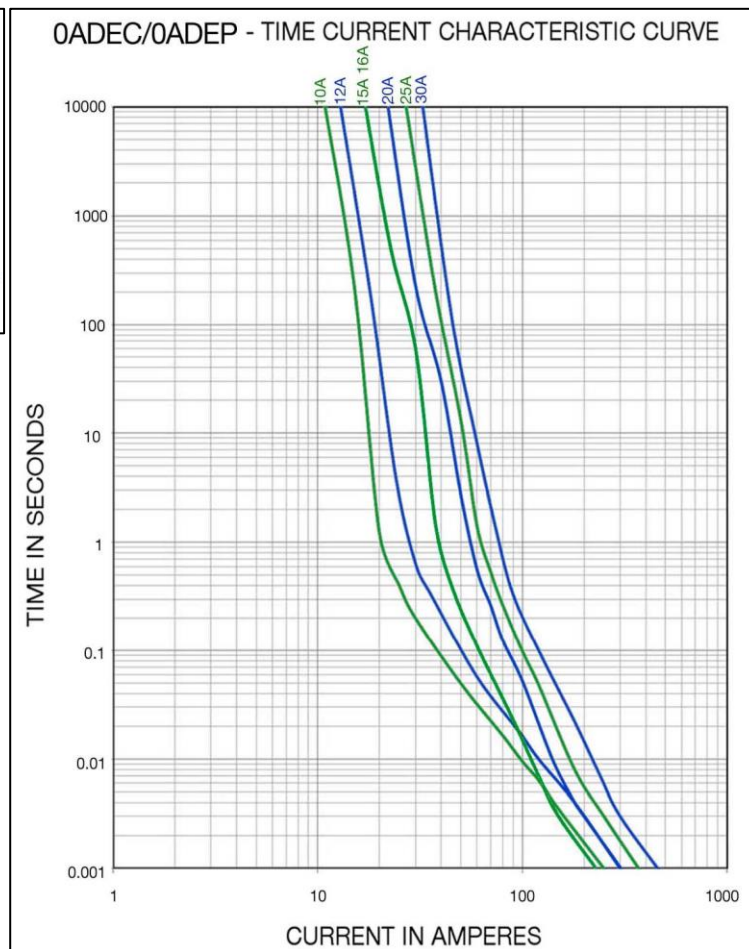

Soldering parameters for Pigtail Type

Wave Soldering Compatible: (260°C, 10 sec max)

Hand-Solder:

Solder Iron Temperature: (350°C +/- 5°C)

Heating Time: (5 sec max)

Type 0ADEC /0ADEP

4 / 4


Fuse FGNO Explanation

0ADE X [XXXX] -XX

0ADEC/P=0ADEC/P; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Amps	Bel FGNO[XXXX]
10	9100
12	9120
15	9150
16	9160
20	9200
25	9250
30	9300

Mechanical Dimensions

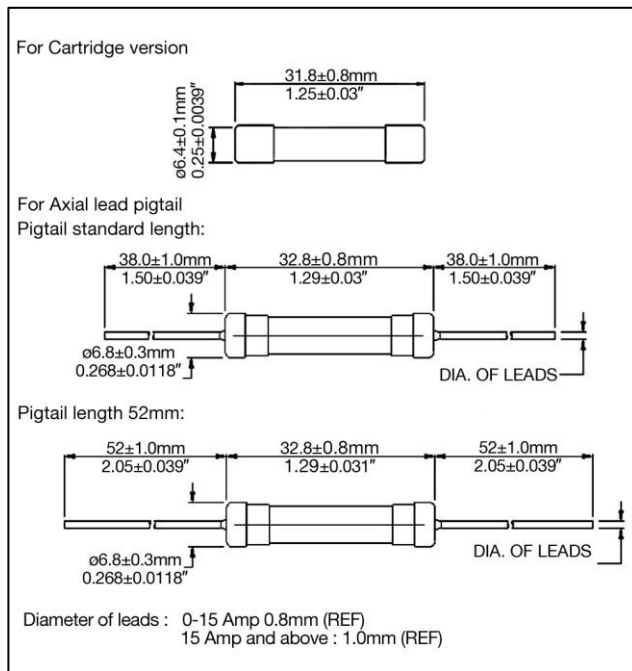

Ordering Information

0ADE X XXXX - X X

FUSE TYPE _____

0ADE

MOUNTING TAB STYLE _____

C = For Cartridge version
P = For Axial lead pigtail

AMPERE RATING _____

Refer to fuse FGNO explanation table

PACKAGING CODE _____

B = Bulk (Cartridge version)
R = Bulk (Pigtail standard length)
L = Bulk (Pigtail long length)

QUANTITY CODE _____

E = 1k / box

Packaging

Packaging Option	Quantity	Packaging Code
Bulk	1000	BE
Bulk (Pigtail standard length)	1000	RE
Bulk (Pigtail long length)	1000	LE