

# ANTREX Electronics

## Electronic Components Sourcing Information

---

### Product Reference Information

**Part Number:** 0ADEP9200-RE  
**Manufacturer:** Bel Fuse Inc.  
**Package:** Bulk  
**Availability:** Please confirm with sales

**Product Page:**

<https://antrexco.com/product/details/bel-fuse-inc/0adep9200-re.html>

**Request a Quote:**

[Submit RFQ for this part](#)



Scan for product page

### Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

### Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

# Type 0ADEC / 0ADEP

## Fast-Acting Fuse Series

HF  0ADEC/0ADEP Series, 6x32mm Ceramic Tube Fast-Acting Fuse RoHS Compliant

### Description

A 500 VAC/VDC rated ceramic tube cartridge fuse in a compact 6.3 x 32mm package,

### Features

- Fast-acting, high breaking capacity fuse
- Available in cartridge and pigtail axial lead
- Designed to UL 248-14
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Halogen Free
- Lead Free

### Applications

- Industrial Power Supplies
- DC/DC modules

LEAD FREE =   
HALOGEN FREE = 



UK  
CA c  CE

### Physical Specifications

|           |                                                                                                                                                                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials | Body : Ceramic                                                                                                                                                                                                                                                                                                                      |
|           | Cap: Silver Plated Caps                                                                                                                                                                                                                                                                                                             |
|           | Pigtail Leads : Tin Plated Copper                                                                                                                                                                                                                                                                                                   |
| Marking   | On Fuse :                                                                                                                                                                                                                                                                                                                           |
|           | "bel"                                                                                                                                                                                                                                                                                                                               |
|           | "0ADE", "Current Rating", "Voltage Rating", "Appropriate Safety Logos"                                                                                                                                                                                                                                                              |
|           | On Label :                                                                                                                                                                                                                                                                                                                          |
|           | "bel", "0ADEC" or "0ADEP", "Current Rating", "Voltage Rating", "Interrupting Rating",<br>"Appropriate Safety Logos" and "  ", "  "(China RoHS compliant). |

### Electrical Characteristics

| Testing Current | Opening Time |
|-----------------|--------------|
|                 | Maximum      |
| 150%            | 30 minutes   |
| 200%            | 5 minutes    |
| 300%            | 10 seconds   |

### Safety Agency Approvals

| Safety Agency                                                                       | Safety Agency Certificate | Ampere Rating / Voltage Rating | Ampere Range / Volt @ I.R. ability*   |
|-------------------------------------------------------------------------------------|---------------------------|--------------------------------|---------------------------------------|
|  | E20624                    | 10A-30A/500V AC/DC             | 10A-30A/500V@30KA AC<br>/500V@20KA DC |
| *I.R.= Interrupting Rating = Short Circuit Rating(Amps)                             |                           |                                |                                       |

## Environmental Specifications

|                       |                                                                            |
|-----------------------|----------------------------------------------------------------------------|
| Operating Temperature | -50°C to +105°C                                                            |
| Terminal Strength     | MIL-STD-202G, Method 211 Test Condition A                                  |
| Lead Solderability    | MIL-STD-202, Method 208                                                    |
| Mechanical Vibration  | MIL-STD-202, Method 201                                                    |
| Thermal Shock         | MIL-STD-202, Method 107 Test Condition B ( 5 cycles -65°C to +125°C )      |
| Humidity              | MIL-STD-202, Method 103, Test Condition A ( 95%RH and 40°C for 240 hours ) |

## Electrical Specifications

| Part Number   | Ampere Rating | Typical Cold Resistance (mOhms) | Voltage and Interrupting Ratings                                               | Typical Pre-Arcing I²t (A²Sec) | Total I²t (A²sec) |
|---------------|---------------|---------------------------------|--------------------------------------------------------------------------------|--------------------------------|-------------------|
| 0ADEC9100-XX  | 10A           | 17.1                            | See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings | 100                            | 135               |
| 0ADEP9100- XX |               |                                 |                                                                                |                                |                   |
| 0ADEC9120- XX | 12A           | 12.3                            |                                                                                | 140                            | 180               |
| 0ADEP9120- XX |               |                                 |                                                                                |                                |                   |
| 0ADEC9150- XX | 15A           | 8.0                             |                                                                                | 66                             | 155               |
| 0ADEP9150- XX |               |                                 |                                                                                |                                |                   |
| 0ADEC9160- XX | 16A           | 8.0                             |                                                                                | 62                             | 150               |
| 0ADEP9160- XX |               |                                 |                                                                                |                                |                   |
| 0ADEC9200- XX | 20A           | 5.5                             |                                                                                | 120                            | 280               |
| 0ADEP9200- XX |               |                                 |                                                                                |                                |                   |
| 0ADEC9250- XX | 25A           | 4.6                             |                                                                                | 200                            | 470               |
| 0ADEP9250- XX |               |                                 |                                                                                |                                |                   |
| 0ADEC9300- XX | 30A           | 3.7                             |                                                                                | 270                            | 630               |
| 0ADEP9300- XX |               |                                 |                                                                                |                                |                   |


Consult manufacturer for other ratings

\*DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C


\*Typical Pre-arcing I<sup>2</sup>t are measured at 10In Current

\*Total I<sup>2</sup>t are measured at 500V IR test

## Temperature Re-Rating Curve

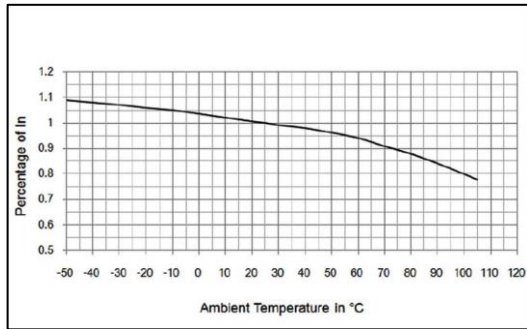

## Average Time Current Curve

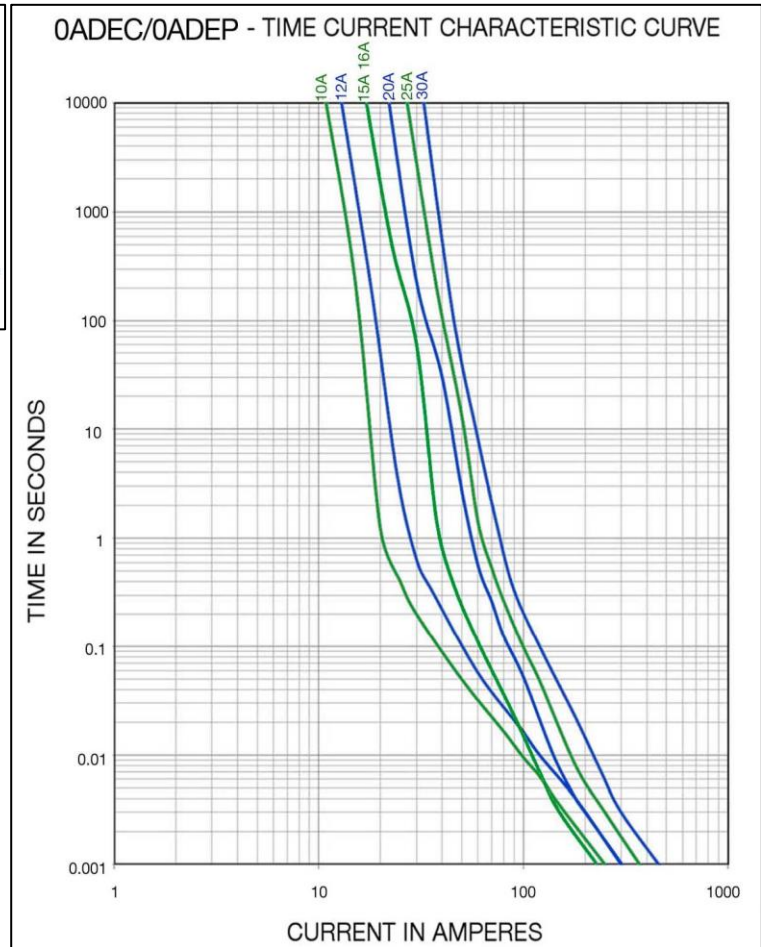

## Soldering parameters for Pigtail Type

Wave Soldering Compatible: (260°C, 10 sec max)

Hand-Solder:

Solder Iron Temperature: (350°C +/- 5°C)

Heating Time: ( 5 sec max)

# Type 0ADEC /0ADEP

4 / 4


## Fuse FGNO Explanation

0ADE X [XXXX] -XX

0ADEC/P=0ADEC/P; [XXXX]=Ampere Rating; XX=See Ordering Information as below

| Amps | Bel FGNO[XXXX] |
|------|----------------|
| 10   | 9100           |
| 12   | 9120           |
| 15   | 9150           |
| 16   | 9160           |
| 20   | 9200           |
| 25   | 9250           |
| 30   | 9300           |

## Mechanical Dimensions

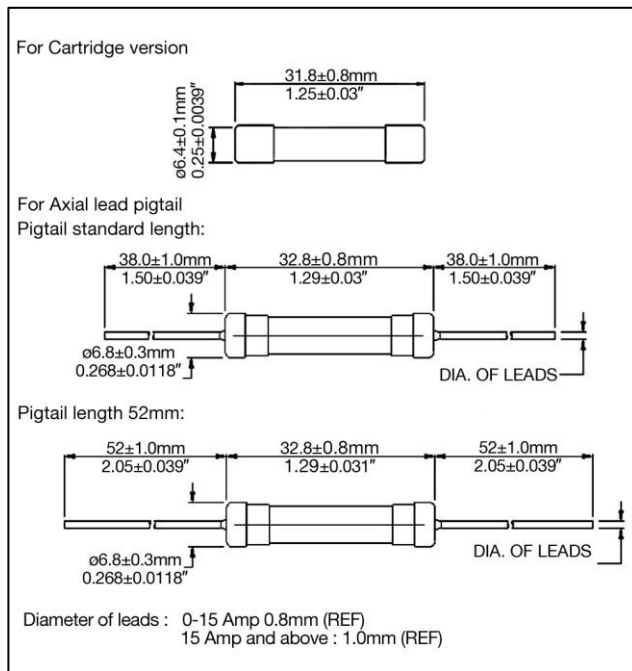

## Ordering Information

0ADE X XXXX - X X

FUSE TYPE \_\_\_\_\_

0ADE

MOUNTING TAB STYLE \_\_\_\_\_

C = For Cartridge version  
P = For Axial lead pigtail

AMPERE RATING \_\_\_\_\_

Refer to fuse FGNO explanation table

PACKAGING CODE \_\_\_\_\_

B = Bulk (Cartridge version)  
R = Bulk (Pigtail standard length)  
L = Bulk (Pigtail long length)

QUANTITY CODE \_\_\_\_\_

E = 1k / box

## Packaging

| Packaging Option               | Quantity | Packaging Code |
|--------------------------------|----------|----------------|
| Bulk                           | 1000     | BE             |
| Bulk (Pigtail standard length) | 1000     | RE             |
| Bulk (Pigtail long length)     | 1000     | LE             |