

# ANTREX Electronics

## Electronic Components Sourcing Information

---

### Product Reference Information

**Part Number:** 3JQ 150-R  
**Manufacturer:** Bel Fuse Inc.  
**Package:** Bulk  
**Availability:** Please confirm with sales

**Product Page:**

<https://antrexco.com/product/details/bel-fuse-inc/3jq-150-r.html>

**Request a Quote:**

[Submit RFQ for this part](#)



Scan for product page

### Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

### Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

100mA-400mA EOL – Last Buy Date is Jun 30, 2020  
No replacements for these ratings

## Type 2JQ / 3JQ Quick-Acting Fuse Series

HF  2JQ/3JQ Series, 5x15mm Glass Tube Quick-Acting Fuse

RoHS 2 Compliant

### Description

5x15mm Quick-Acting, glass tube body cartridge fuse designed, approved and complied with UL and CSA standard 248-14.

### Features

- Meet UL and CSA standard 248-14
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- RoHS 2 compliant
- Halogen Free
- Lead Free

### Applications


Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE =



HALOGEN FREE =

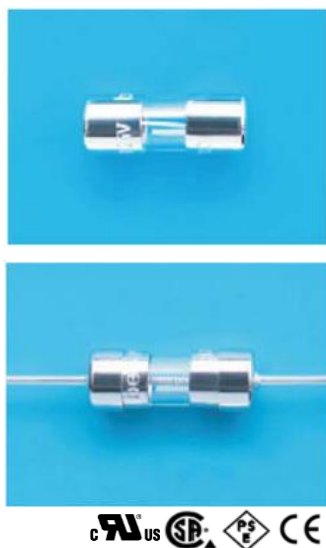

### Physical Specifications

|           |                                                                                                                                                               |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials | Body : Glass                                                                                                                                                  |
|           | Cap : Nickel Plated Brass Caps                                                                                                                                |
|           | Leads : Matte Tin Plated Copper                                                                                                                               |
| Marking   | On Fuse :                                                                                                                                                     |
|           | "bel", "JQ", "Current Rating", "Voltage Rating",                                                                                                              |
|           | "Appropriate Safety Logos", "✓" ( RoHS 2 compliant )                                                                                                          |
|           | On Label :                                                                                                                                                    |
|           | "bel", "2JQ" or "3JQ", "Current Rating", "Voltage Rating", "Interrupting Rating",<br>"Appropriate Safety Logos" and "✓", "PS E", "CE" (China RoHS compliant). |

### Electrical Characteristics (UL/CSA STD.248-14)

| Testing Current | Blow Time |         |
|-----------------|-----------|---------|
|                 | Minimum   | Maximum |
| 100%            | 4 hrs.    | N/A     |
| 135%            | N/A       | 1 hr.   |
| 200%            | N/A       | 1 sec   |

### Safety Agency Approvals

| Safety Agency                                                                       | Safety Agency Certificate                | Voltage Rating (V) | Ampere Range / Volt @ I.R. ability*     |
|-------------------------------------------------------------------------------------|------------------------------------------|--------------------|-----------------------------------------|
|  | E20624                                   | 100mA–7A /350V AC  | 100mA–7A / 350V AC@100A<br>140V DC@150A |
|  | LR39772                                  |                    | 100mA–7A / 350V AC@100A                 |
|  | JET1037-31003-1010<br>JET1037-31003-1011 |                    | 1A–5A / 125V AC@500A                    |
|                                                                                     | JET1037-31003-1007                       |                    | >5A–15A / 125V AC@300A                  |
| *I.R.= Interrupting Rating = Short Circuit Rating(Amps)                             |                                          |                    |                                         |

## Type 2JQ / 3JQ

## Environmental Specifications

|                           |                                                                                                     |
|---------------------------|-----------------------------------------------------------------------------------------------------|
| Shock Resistance          | MIL-STD-202G, Method 213B, Test Condition 1<br>(100 G's peak for 6 milliseconds; Sawtooth waveform) |
| Vibration Resistance      | MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).                                   |
| Salt Spray Resistance     | MIL-STD-202G, Method 101E, Test Condition B (48 hrs).                                               |
| Insulation Resistance     | MIL-STD-202G, Method 302, Test Condition A<br>(After Opening) 10,000 ohms minimum.                  |
| Solderability             | MIL-STD-202G, Method 208H                                                                           |
| Resistance to solder Heat | MIL-STD-202G, Method 210F, Test Condition B (260+/-5°C, 10+/-1 sec)                                 |
| Thermal Shock             | MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C).                                      |
| Operating Temperature     | -55°C to +125°C                                                                                     |
| Terminal Strength         | IEC-68-2-21                                                                                         |

## Electrical Specifications

| Catalog Number | Ampere Rating | Typical Cold Resistance (ohms) | Volt-drop @100%In (Volt) max. | Voltage and Interrupting Ratings                                                        | Melting I <sup>2</sup> T <10 m Sec (A <sup>2</sup> Sec) | Melting I <sup>2</sup> T @10 In (A <sup>2</sup> Sec) | Maximum Power Dissipation (W) | Agency Approvals                                                                    |                                                                                     |                                                                                     |
|----------------|---------------|--------------------------------|-------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                |               |                                |                               |                                                                                         |                                                         |                                                      |                               |  |  |  |
| JQ 100-R       | 100mA         | 4.80                           | 2.10                          | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 0.0010                                                  | 0.0010                                               | 0.029                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 125-R       | 125mA         | 4.29                           | 2.05                          |                                                                                         | 0.0019                                                  | 0.0020                                               | 0.035                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 150-R       | 150mA         | 3.35                           | 1.90                          |                                                                                         | 0.004                                                   | 0.004                                                | 0.041                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 200-R       | 200mA         | 2.01                           | 1.70                          |                                                                                         | 0.007                                                   | 0.008                                                | 0.048                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 250-R       | 250mA         | 1.54                           | 1.62                          |                                                                                         | 0.014                                                   | 0.015                                                | 0.057                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 300-R       | 300mA         | 1.18                           | 1.55                          |                                                                                         | 0.026                                                   | 0.029                                                | 0.067                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 350-R       | 350mA         | 0.98                           | 1.50                          |                                                                                         | 0.036                                                   | 0.040                                                | 0.072                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 400-R       | 400mA         | 0.46                           | 0.60                          |                                                                                         | 0.05                                                    | 0.06                                                 | 0.079                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 500-R       | 500mA         | 0.33                           | 0.55                          | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 0.10                                                    | 0.11                                                 | 0.092                         | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 600-R       | 600mA         | 0.26                           | 0.48                          |                                                                                         | 0.14                                                    | 0.16                                                 | 0.10                          | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 750-R       | 750mA         | 0.188                          | 0.45                          |                                                                                         | 0.26                                                    | 0.30                                                 | 0.12                          | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 800-R       | 800mA         | 0.170                          | 0.40                          |                                                                                         | 0.27                                                    | 0.40                                                 | 0.17                          | Y                                                                                   | Y                                                                                   |                                                                                     |
| JQ 1-R         | 1A            | 0.112                          | 0.40                          |                                                                                         | 0.62                                                    | 0.65                                                 | 0.21                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 1.25-R      | 1.25A         | 0.068                          | 0.17                          |                                                                                         | 0.80                                                    | 0.82                                                 | 0.26                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 1.5-R       | 1.5A          | 0.056                          | 0.16                          |                                                                                         | 1.4                                                     | 1.4                                                  | 0.32                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 1.6-R       | 1.6A          | 0.054                          | 0.16                          |                                                                                         | 1.8                                                     | 1.9                                                  | 0.35                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 2-R         | 2A            | 0.041                          | 0.16                          |                                                                                         | 2.3                                                     | 2.5                                                  | 0.39                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 2.5-R       | 2.5A          | 0.033                          | 0.15                          |                                                                                         | 4.0                                                     | 4.3                                                  | 0.48                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 3-R         | 3A            | 0.027                          | 0.15                          |                                                                                         | 4.6                                                     | 5.6                                                  | 0.59                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 3.5-R       | 3.5A          | 0.022                          | 0.14                          |                                                                                         | 9                                                       | 10                                                   | 0.66                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 4-R         | 4A            | 0.019                          | 0.14                          |                                                                                         | 12                                                      | 13                                                   | 0.73                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 5-R         | 5A            | 0.015                          | 0.13                          |                                                                                         | 20                                                      | 23                                                   | 0.9                           | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 6-R         | 6A            | 0.012                          | 0.13                          |                                                                                         | 35                                                      | 40                                                   | 1.1                           | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| JQ 7-R         | 7A            | 0.010                          | 0.12                          |                                                                                         | 46                                                      | 53                                                   | 1.2                           | Y                                                                                   | Y                                                                                   | Y                                                                                   |

Consult manufacturer for other ratings

EOL—

Last Buy Date is  
Jun 30, 2020

Specifications subject to change without notice


Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)


# Type 2JQ / 3JQ

3 / 4

Temperature Derating Curve

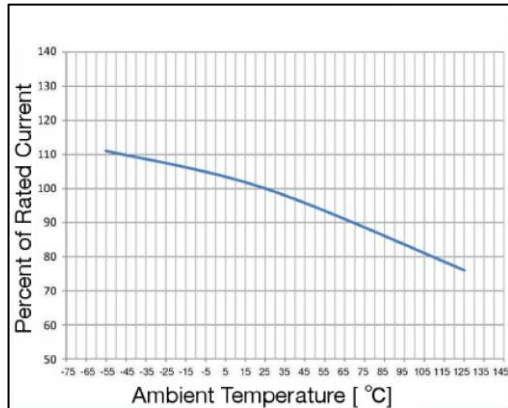


Average Time Current Curve

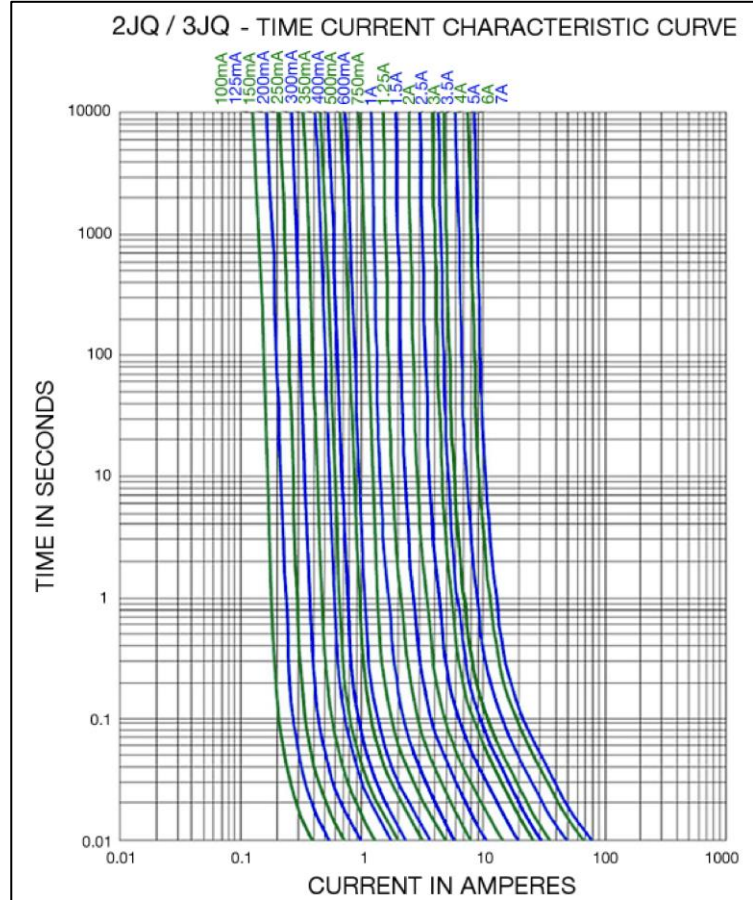

## Soldering Parameters

| Lead-free Wave Soldering Profile                   |                                              |
|----------------------------------------------------|----------------------------------------------|
| Wave Soldering Parameter                           |                                              |
| Average ramp-up rate                               | 200°C / second                               |
| Heating rate during preheat                        | typical 1 - 2°C / second<br>Max 4°C / second |
| Final preheat temperature                          | within 125°C of soldering temperature        |
| Peak temperature T <sub>p</sub>                    | 260°C                                        |
| Time within +0°C / -5°C of actual peak temperature | 10 seconds                                   |
| Ramp-down rate                                     | 5°C / second max.                            |

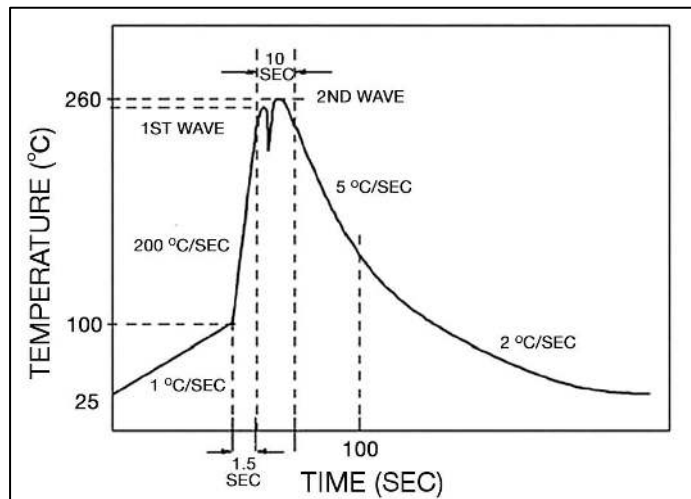

# Type 2JQ / 3JQ

4 / 4

## Fuse FGNO Explanation


0657 R [XXXX] -XX

0657R=2JQ/3JQ; [XXXX]=Ampere Rating; XX=See Ordering Information as below

| Fraction | Decimal | Milliamps | Bel FGNO[XXXX] |
|----------|---------|-----------|----------------|
| 1/10     | 0.100   | 100       | 0100           |
| 1/8      | .125    | 125       | 0125           |
| 15/100   | .150    | 150       | 0150           |
| 2/10     | .200    | 200       | 0200           |
| 1/4      | .250    | 250       | 0250           |
| 3/10     | .300    | 300       | 0300           |
| 35/100   | .350    | 350       | 0350           |
| 4/10     | .400    | 400       | 0400           |
| 1/2      | .500    | 500       | 0500           |
| 6/10     | .600    | 600       | 0600           |
| 3/4      | .750    | 750       | 0750           |
| 8/10     | .800    | 800       | 0800           |


| Fraction | Decimal | Amps | Bel FGNO[XXXX] |
|----------|---------|------|----------------|
|          | 1.0     | 1    | 1000           |
| 1-1/4    | 1.25    | 1.25 | 1250           |
| 1-1/2    | 1.50    | 1.5  | 1500           |
|          | 1.60    | 1.6  | 1600           |
|          | 2.0     | 2    | 2000           |
| 2-1/2    | 2.5     | 2.5  | 2500           |
|          | 3.0     | 3    | 3000           |
| 3-1/2    | 3.5     | 3.5  | 3500           |
|          | 4.0     | 4    | 4000           |
|          | 5.0     | 5    | 5000           |
|          | 6.0     | 6    | 6000           |
|          | 7.0     | 7    | 7000           |

## Mechanical Dimensions

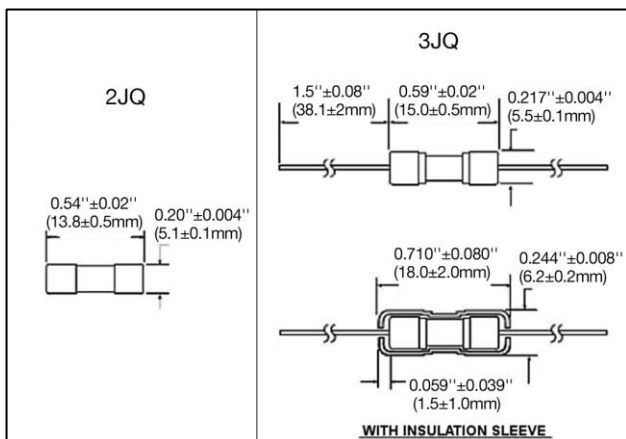

\*Diameter lead 0.032"±0.002" for all ratings

## Ordering Information

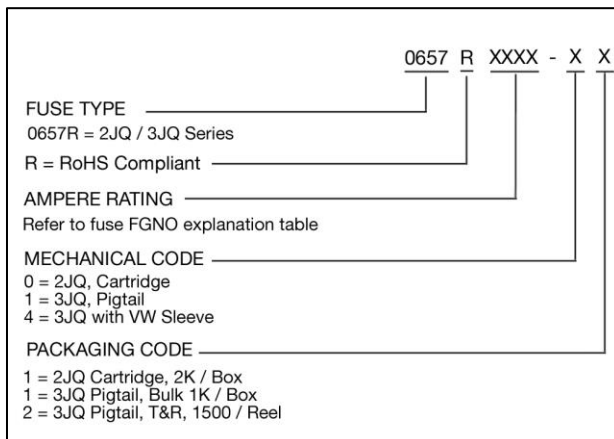

## Packaging

| Packaging Option                           | Packaging Specification | Quantity | Packaging Code | Inside Tape Spacing |
|--------------------------------------------|-------------------------|----------|----------------|---------------------|
| Bulk (bag)                                 | N/A                     | 2000     | 01             | N/A                 |
| Bulk (Pigtail Type)                        | N/A                     | 1000     | 11             | N/A                 |
| Bulk (Pigtail Type) with Insulation Sleeve | N/A                     | 1000     | 41             | N/A                 |
| Tape & Reel                                | EIA-296-F               | 1500     | 12             | 10mm Pitch and 53mm |
| Tape & Reel with Insulation Sleeve         | EIA-296-F               | 1500     | 42             | 10mm Pitch and 53mm |