

# ANTREX Electronics

## Electronic Components Sourcing Information

---

### Product Reference Information

**Part Number:** 5HF 250-R  
**Manufacturer:** Bel Fuse Inc.  
**Package:** Bulk  
**Availability:** Please confirm with sales

**Product Page:**

<https://antrexco.com/product/details/bel-fuse-inc/5hf-250-r.html>

**Request a Quote:**

[Submit RFQ for this part](#)



Scan for product page

### Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

### Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

EOL-Last Buy Date is September 30, 2024

The replacement series is the 0650C(0650Cxxxx-xx)/0650P(0650Pxxxx-xx)

No replacement for the 5HF/5HFP 400mA

# Type 5HF / 5HFP

## Quick-acting Fuse Series (High -Breaking Capacity)

**HF** **Pb** 5HF/5HFP Series, 5x20mm Ceramic Tube Quick-acting Fuse

RoHS Compliant

### Description

5x20mm quick-acting, high breaking capacity, ceramic body cartridge fuse designed, approved and complied with IEC 60127-2, standard sheet 1.

### Features

- High breaking capacity (250V ac @1500A)
- Meet IEC standard 60127-2, sheet 1
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Halogen Free
- Lead Free

### Applications

Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE = **Pb**

HALOGEN FREE = **HF**



### Physical Specifications

|           |                                                                                                                                                                 |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials | Body : Ceramic                                                                                                                                                  |
|           | Cap : Nickel Plated Brass Caps                                                                                                                                  |
|           | Leads : Matte Tin Plated Copper                                                                                                                                 |
| Marking   | On Fuse :                                                                                                                                                       |
|           | "bel", "F", "Current Rating", "H", "250V",                                                                                                                      |
|           | "Appropriate Safety Logos", "✓" ( RoHS compliant)                                                                                                               |
|           | On Label :                                                                                                                                                      |
|           | "bel", "5HF" or "5HFP", "F", "Current Rating", "H", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "✓", "RoHS" (China RoHS compliant). |

### Electrical Characteristics (IEC-127-2 STANDARD SHEET 1) Safety Agency Approvals

| Rated Current  | 1.5 In |      | 2.1 In |     | 2.75 In |      | 4 In |     | 10 In |
|----------------|--------|------|--------|-----|---------|------|------|-----|-------|
|                | MIN    | MAX  | MIN    | MAX | MIN     | MAX  | MIN  | MAX |       |
| 400mA to 3.15A | 1      | 30   | 10     | 2   | 3       | 300  | 20   |     |       |
| 4A to 6.3A     | 1      | 30   | 10     | 3   | 3       | 300  | 20   |     |       |
| 8A to 12A      | 1      | 30   | 40     | 20  | 10      | 1000 | 30   |     |       |
|                | hr.    | min. | ms     | sec | ms      | ms   | ms   |     |       |

In clause 9.2, the test voltage for 5HFP ratings from 1A to 6.3A is 63VDC.

| Safety Agency                                                                       | Safety Agency Certificate                | Ampere Rating/<br>Voltage Rating | Ampere Range / Volt<br>@ I.R. ability* |
|-------------------------------------------------------------------------------------|------------------------------------------|----------------------------------|----------------------------------------|
|  | 40000506                                 | 400mA-10A<br>/250V AC            | 1A-6.3A / 250V AC@1500A                |
|  | E20624                                   |                                  | 400mA-10A/250V AC@1500A                |
|  | LR39772                                  |                                  |                                        |
|  | Self-declaration No:<br>2020970207000019 |                                  | 400mA-10A/250V AC@1500A                |
| *I.R = Interrupting Rating = Short Circuit Rating(Amps)                             |                                          |                                  |                                        |

# Type 5HF / 5HFP

2 / 4

## Environmental Specifications

|                           |                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------|
| Shock Resistance          | MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform) |
| Vibration Resistance      | MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).                                |
| Salt Spray Resistance     | MIL-STD-202G, Method 101E, Test Condition B (48 hrs).                                            |
| Insulation Resistance     | MIL-STD-202G, Method 302, Test Condition B (After Opening) 100,000 ohms minimum.                 |
| Solderability             | MIL-STD-202G, Method 208H                                                                        |
| Resistance to solder Heat | MIL-STD-202G, Method 210F, Test Condition B. (260+/-5°C, 10+/-1 sec)                             |
| Thermal Shock             | MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C).                                   |
| Operating Temperature     | -55°C to +125°C                                                                                  |
| Terminal Strength         | IEC-68-2-21                                                                                      |

## Electrical Specifications

| Catalog Number | Ampere Rating | Typical Cold Resistance (ohms) | Volt-drop @100%In (Volt) max. | Voltage and Interrupting Ratings                                                        | Melting I <sup>2</sup> T <10 mSec (A <sup>2</sup> Sec) | Melting I <sup>2</sup> T @10 In (A <sup>2</sup> Sec) | Maximum Power Dissipation (W) | Agency Approvals                                                                    |                                                                                     |                                                                                     |                                                                                     |
|----------------|---------------|--------------------------------|-------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                |               |                                |                               |                                                                                         |                                                        |                                                      |                               |  |  |  |  |
| 5HF(P) 400-R   | 400mA         | 0.46                           | 0.34                          | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 0.09                                                   | 0.08                                                 | 0.92                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |                                                                                     |
| 5HF(P) 500-R   | 500mA         | 0.34                           | 0.32                          |                                                                                         | 0.16                                                   | 0.15                                                 | 1.11                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |                                                                                     |
| 5HF(P) 630-R   | 630mA         | 0.225                          | 0.29                          |                                                                                         | 0.29                                                   | 0.27                                                 | 1.35                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |                                                                                     |
| 5HF(P) 800-R   | 800mA         | 0.192                          | 0.23                          |                                                                                         | 0.36                                                   | 0.35                                                 | 0.58                          | Y                                                                                   | Y                                                                                   | Y                                                                                   |                                                                                     |
| 5HF(P) 1-R     | 1A            | 0.139                          | 0.19                          |                                                                                         | 0.65                                                   | 0.63                                                 | 0.69                          | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 1.25-R  | 1.25A         | 0.097                          | 0.17                          |                                                                                         | 1.2                                                    | 1.2                                                  | 0.81                          | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 1.6-R   | 1.6A          | 0.072                          | 0.16                          |                                                                                         | 2.1                                                    | 2.1                                                  | 0.96                          | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 2-R     | 2A            | 0.052                          | 0.14                          |                                                                                         | 3.8                                                    | 3.8                                                  | 1.1                           | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 2.5-R   | 2.5A          | 0.039                          | 0.13                          |                                                                                         | 6.8                                                    | 6.8                                                  | 1.3                           | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 3.15-R  | 3.15A         | 0.029                          | 0.13                          |                                                                                         | 12                                                     | 12                                                   | 1.6                           | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 4-R     | 4A            | 0.022                          | 0.13                          |                                                                                         | 22                                                     | 22                                                   | 1.9                           | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 5-R     | 5A            | 0.016                          | 0.13                          |                                                                                         | 39                                                     | 40                                                   | 2.2                           | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 6.3-R   | 6.3A          | 0.011                          | 0.10                          |                                                                                         | 70                                                     | 73                                                   | 2.7                           | Y                                                                                   | Y                                                                                   | Y                                                                                   | Y                                                                                   |
| 5HF(P) 8-R     | 8A            | 0.010                          | 0.11                          |                                                                                         | 126                                                    | 131                                                  | 3.1                           | Y                                                                                   | Y                                                                                   | Y                                                                                   |                                                                                     |
| 5HF(P) 10-R    | 10A           | 0.007                          | 0.10                          |                                                                                         | 227                                                    | 238                                                  | 3.7                           | Y                                                                                   | Y                                                                                   | Y                                                                                   |                                                                                     |
| 5HF(P) 12-R    | 12A           | 0.005                          | 0.09                          |                                                                                         | 408                                                    | 430                                                  | 4.4                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |

Consult manufacturer for other ratings


No replacement for the 400mA

The replacement series is the 0650C/0650P

# Type 5HF / 5HFP

3 / 4

## Temperature Derating Curve

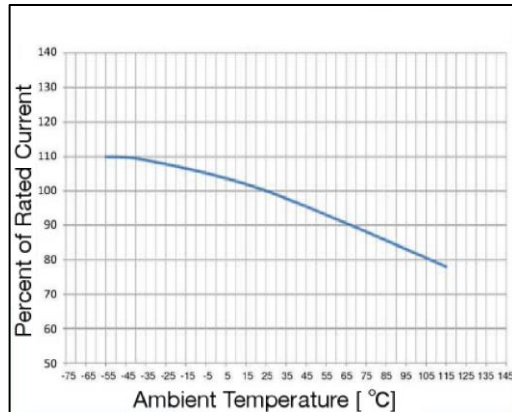

## Average Time Current Curve



## Soldering Parameters

| Lead-free Wave Soldering Profile                   |                                              |
|----------------------------------------------------|----------------------------------------------|
| Wave Soldering Parameter                           |                                              |
| Average ramp-up rate                               | 200°C / second                               |
| Heating rate during preheat                        | typical 1 - 2°C / second<br>Max 4°C / second |
| Final preheat temperature                          | within 125°C of soldering temperature        |
| Peak temperature T <sub>p</sub>                    | 260°C                                        |
| Time within +0°C / -5°C of actual peak temperature | 10 seconds                                   |
| Ramp-down rate                                     | 5°C / second max.                            |



# Type 5HF / 5HFP

4 / 4

## Fuse FGNO Explanation

0650 R [XXXX] -XX

0650R=5HF/5HFP; [XXXX]=Ampere Rating; XX=See Ordering Information as below

| Fraction | Decimal | Milliamps | Bel FGNO[XXXX] |
|----------|---------|-----------|----------------|
| 4/10     | .400    | 400       | 0400           |
| 1/2      | .500    | 500       | 0500           |
|          | .630    | 630       | 0630           |
| 8/10     | .800    | 800       | 0800           |

| Fraction | Decimal | Amps | Bel FGNO[XXXX] |
|----------|---------|------|----------------|
|          | 1.0     | 1    | 1000           |
| 1-1/4    | 1.25    | 1.25 | 1250           |
|          | 1.60    | 1.6  | 1600           |
|          | 2.0     | 2    | 2000           |
| 2-1/2    | 2.5     | 2.5  | 2500           |
|          | 3.15    | 3.15 | 3150           |
|          | 4.0     | 4    | 4000           |
|          | 5.0     | 5    | 5000           |
|          | 6.3     | 6.3  | 6300           |
|          | 8.0     | 8    | 8000           |
|          |         | 10   | 9100           |
|          |         | 12   | 9120           |

## Mechanical Dimensions



\*Ratings 6.3A and less have 0.032" ± 0.002" diameter lead;

\*Ratings 8A and above have 0.039" ± 0.002" diameter lead.

## Ordering Information



## Packaging

| Packaging Option    | Packaging Specification | Quantity | Packaging Code | Inside Tape Spacing |
|---------------------|-------------------------|----------|----------------|---------------------|
| Bulk                | N/A                     | 1000     | 12             | N/A                 |
| Bulk (Pigtail Type) | N/A                     | 500      | 13             | N/A                 |
| Tape & Reel         | EIA-296-F               | 1500     | 16             | 10mm Pitch and 63mm |