

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	5HT 1.6
Manufacturer:	Bel Fuse Inc.
Package:	Bulk
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/bel-fuse-inc/5ht-1-6.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request


Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

5HTD0903

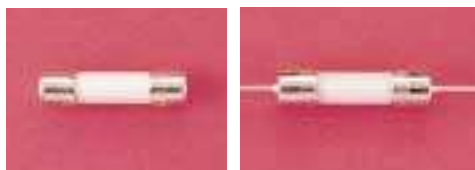

Electrical Characteristics (IEC-127-2 STANDARD SHEET 5)

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
1A to 3.15A	1	30	1	80	95	5	10	100		
4A and above	1	30	1	80	150	5	20	100		
	hr.	min.	sec	sec	ms	sec	ms	ms		

Approvals

Safety Agency Approvals	Amp range / Volt @ I.R. ability
Certificate No. 9351184; 9431177 & 9447122 Licence No. 40000505 Certificate No. E1262	1A - 6.3A / 250V AC@ 1,500A
Recognized File No. E20624 Acceptance File No. LR39772	1A - 10A / 250V AC@ 1,500A
File No. JET1037-31003-1004, JET1037-31003-1005	1A - 5A / 250V AC@ 1,500A
Licence No. 2002010207021531	250mA - 10A / 250V AC@ 1,500A

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Ceramic body / Nickel Plated Brass Caps

Lead wire:

Tin-lead plated Copper,

Diameter 0.032", 6.3A and less

Diameter 0.040", 8A and above

Marking

On fuse:

"bel", "T", "Current Rating", "H", "250V", and "Appropriate Safety Logos"

On label:

Above info plus "5HT" or "5HTP", "CC", "CC" and interrupting rating

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Volt) max.	Melting I ² T < 10 mSec (A ² Sec)	Melting I ² T @10 In (A ² Sec)	Maximum Power Dissipation (W)
5HT (P) 1	1A	0.20	0.25	1.7	1.7	0.73
5HT (P) 1.25	1.25A	0.14	0.22	3.0	3.2	0.81
5HT (P) 1.6	1.6A	0.10	0.19	5.4	5.9	0.91
5HT (P) 2	2A	0.07	0.17	9.7	11.0	1.0
5HT (P) 2.5	2.5A	0.05	0.15	17.4	20.3	1.1
5HT (P) 3.15	3.15A	0.037	0.13	31	38	1.2
5HT (P) 4	4A	0.026	0.1	56	69	1.4
5HT (P) 5	5A	0.019	0.1	101	128	1.5
5HT (P) 6.3	6.3A	0.013	0.1	181	237	1.7
5HT (P) 8	8A	0.009	0.1	330	439	2.7
5HT (P) 10	10A	0.007	0.1	601	812	2.9

Consult manufacturer for other ratings

Packaging

1. In bulk:

5HT - 1,000 pcs per box; 5HTP - 500 pcs per box

2. On Axial Tape & Reel:


1,500 pcs per reel

3. Tape & Reel specification:

per EIA-296-E & IEC 286-1


@ 10mm Pitch and 63.5mm inside Tape Spacing

Mechanical Dimensions

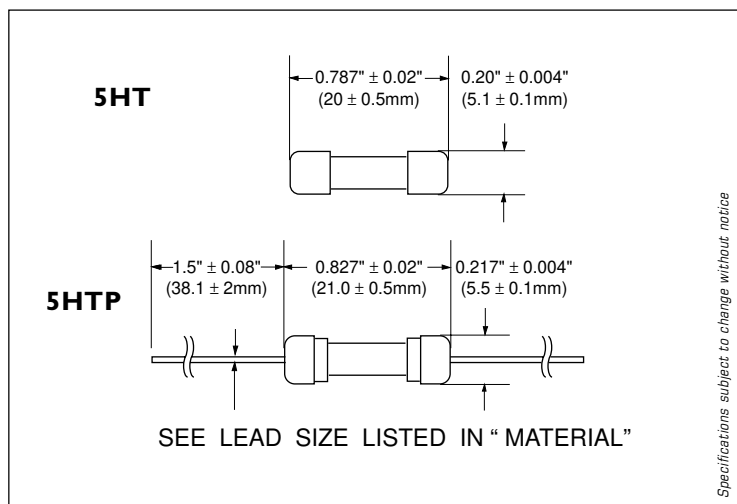

ORDERING INFORMATION SEE PAGES 67 & 68

5HT / 5HTP - TIME CURRENT CHARACTERISTIC CURVE

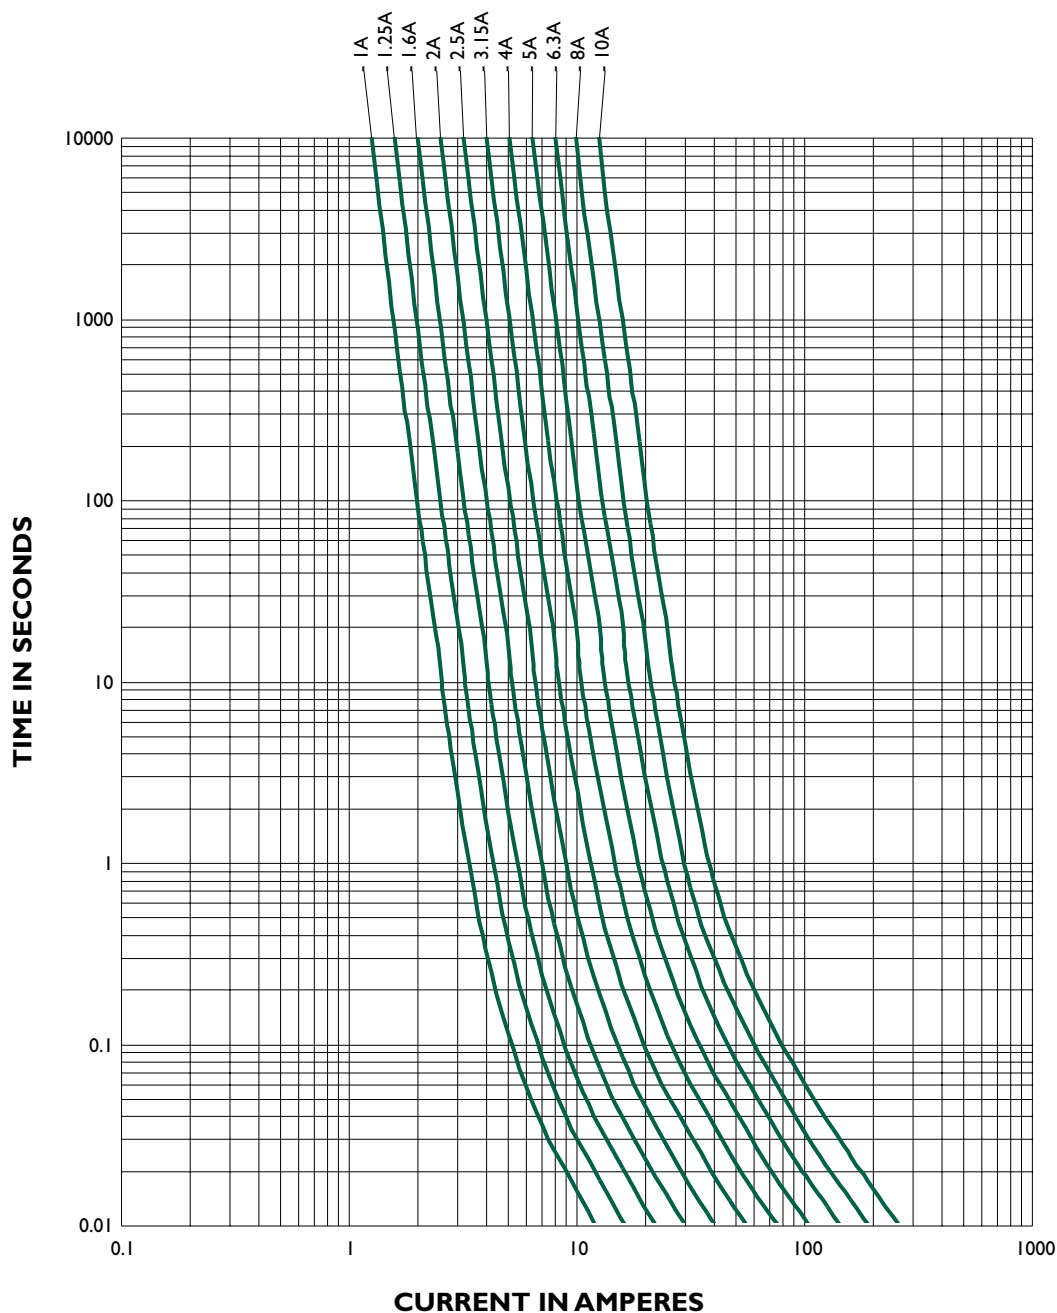

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Corporate Office Bel Fuse Inc.

206 Van Vorst Street, Jersey City, NJ 07302
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: belfuse@belfuse.com
Website: www.belfuse.com

Far East Office Bel Fuse Ltd.

8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.

Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366