

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 5MFP 2-R
Manufacturer: Bel Fuse Inc.
Package: Bulk
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/bel-fuse-inc/5mfp-2-r.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Type 5MF / 5MFP

Fast Blow Fuse Series

HF P6 5MF/5MFP Series, 5x20mm Glass Tube Fast Blow Fuse

RoHS Compliant

Description

5x20mm Fast Blow, glass tube body cartridge fuse designed, approved and complied with UL and CSA standard 248-14.

Features


- Meet UL and CSA standard 248-14
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Halogen Free
- Lead Free

Applications

Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE = P6
HALOGEN FREE = HF

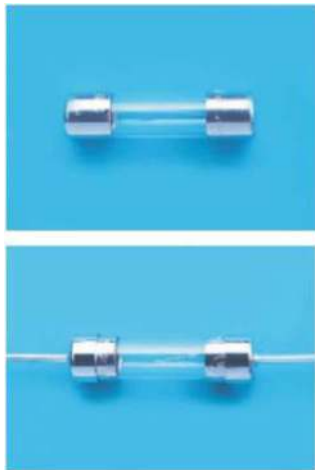

Physical Specifications

Materials	Body : Glass
	Cap: Nickel Plated Brass Caps
	Leads: Matte Tin Plated Copper
Marking	On Fuse :
	"bel", "5MF", "Current Rating", "Voltage Rating", "Appropriate Safety Logos", "✓" (RoHS compliant)
	On Label :
	"bel", "5MF" or "5MFP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "✓", "P6" (China RoHS compliant).

Electrical Characteristics (UL/CSA STD.248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 Hrs.	N/A
135%	N/A	1 Hr.
200%	N/A	5 sec

Safety Agency Approvals

Safety Agency	Safety Agency Certificate	Ampere Rating/ Voltage Rating	Ampere Range / Volt @ I.R. ability*
UL US	E20624	400mA-3A/250V AC	400mA-3A/250V AC@200A 400mA-8A/125V AC@10,000A
CSA	LR39772	3.15A-8A/125V AC	

*I.R.= Interrupting Rating = Short Circuit Rating(Amps)

Type 5MF / 5MFP

2 / 4

Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform)
Vibration Resistance	MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test Condition B (48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G, Method 210F, Test Condition B (260+/-5°C, 10+/-1 sec)
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C).
Operating Temperature	-55°C to +125°C
Terminal Strength	IEC-68-2-21

Electrical Specifications

Catalog Number	Ampere Rating	Typical Cold Resistance (ohms)	Volt-drop @100%In (Volt) max.	Voltage and Interrupting Ratings	Melting I ² T <10 mSec (A ² Sec)	Melting I ² T @10 In (A ² Sec)	Maximum Power Dissipation (W)	Agency Approvals	
									
5MF(P) 400-R	400mA	0.65	0.74	See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	0.080	0.084	0.20	Y	Y
5MF(P) 500-R	500mA	0.49	0.78		0.122	0.118	0.33	Y	Y
5MF(P) 600-R	600mA	0.394	0.77		0.195	0.195	0.44	Y	Y
5MF(P) 700-R	700mA	0.305	0.73		0.265	0.267	0.65	Y	Y
5MF(P) 800-R	800mA	0.243	0.61		0.40	0.40	0.54	Y	Y
5MF(P) 1-R	1A	0.118	0.22		0.88	0.85	0.26	Y	Y
5MF(P) 1.25-R	1.25A	0.085	0.21		1.5	1.5	0.31	Y	Y
5MF(P) 1.5-R	1.5A	0.067	0.17		2.6	2.6	0.36	Y	Y
5MF(P) 2-R	2A	0.046	0.16		4.4	4.5	0.44	Y	Y
5MF(P) 2.5-R	2.5A	0.037	0.16		7.6	7.8	0.52	Y	Y
5MF(P) 3-R	3A	0.030	0.17		13	14	0.59	Y	Y
5MF(P) 3.5-R	3.5A	0.025	0.15		17	18	0.65	Y	Y
5MF(P) 4-R	4A	0.019	0.14		22	24	0.72	Y	Y
5MF(P) 5-R	5A	0.016	0.15		38	41	0.84	Y	Y
5MF(P) 6-R	6A	0.012	0.13		65	72	0.96	Y	Y
5MF(P) 7-R	7A	0.011	0.13		88	97	1.10	Y	Y
5MF(P) 8-R	8A	0.009	0.13		113	126	1.23	Y	Y

Consult manufacturer for other ratings




Specifications subject to change without notice

Bel Fuse Inc.
300 Executive Drive, Suite 300,
West Orange, NJ 07052 USA


+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

Type 5MF / 5MFP

Temperature Derating Curve

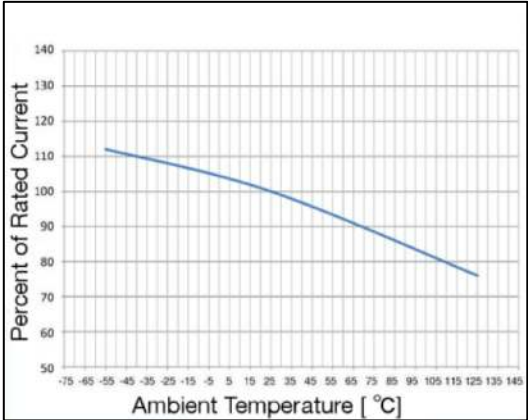

Average Time Current Curve

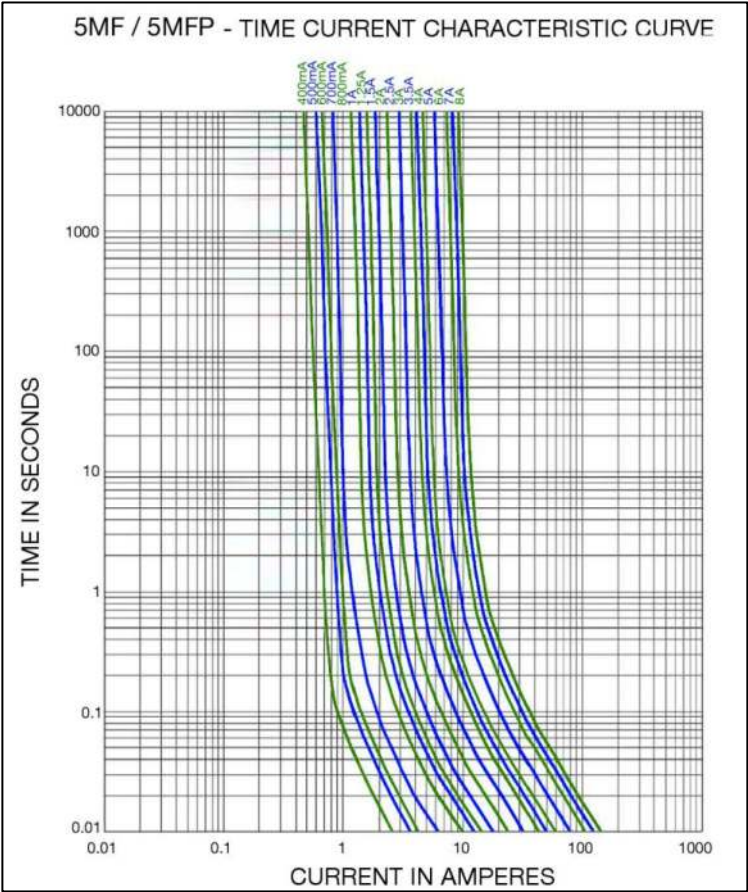

Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Soldering Parameter	
Average ramp-up rate	200°C / second
Heating rate during preheat	typical 1 - 2°C / second Max 4°C / second
Final preheat temperature	within 125°C of soldering temperature
Peak temperature Tp	260°C
Time within +0°C / -5°C of actual peak temperature	10 seconds
Ramp-down rate	5°C / second max.

