

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 2015-09-SMH-RPLF

Manufacturer: Bourns Inc.

Package: Tape & Reel (TR)

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/bourns-inc/2015-09-smh-rplf.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.



Features

- Bourns® FLAT® GDT technology
- Flexible mounting options
- Volume- and space-saving design
- Improved impulse performance
- 5 kA 8/20 μ s rated
-  UL Recognized
- RoHS compliant*



This series is obsolete and not recommended for new designs. The **2017 Series** is the suggested alternative.

2015 Series Gas Discharge Tube Surge Arrestor with FLAT® Technology

Description

Bourns sets a new industry standard by offering this 2-electrode Gas Discharge Tube (GDT) in an innovative flat package design. The Model 2015 Series with FLAT® Technology provides a volume and space-saving solution for high density and space-restricted PCB applications. The series is offered in a leadless version for cartridge or clamp fit applications. Surface mount versions are available in vertical and horizontal mounting configurations.

Characteristics

Test Methods per ITU-T K.12, IEEE C62.31 and IEC 61643-311 GDT standards.

Characteristic	Model No.			
	2015-09	2015-15	2015-23	2015-35
DC Sparkover $\pm 20\%$ @ 100 V/s (1)	90 V	150 V	230 V	350 V
DC Sparkover End-of-Life Values (2)				
Maximum (99 % of values)	<120 V	<195 V	<300 V	<455 V
Minimum (99 % of values)	> 65 V	>110 V	>170 V	>260 V
Impulse Sparkover Voltage (3)				
100 V/ μ s Typical	400 V	400 V	450 V	600 V
1 kV/ μ s Typical	700 V	650 V	650 V	800 V

Characteristic	Model No.		
	2015-42	2015-50	2015-60
DC Sparkover $\pm 20\%$ @ 100 V/s (1)	420 V	500 V	600 V
DC Sparkover End-of-Life Values (2)			
Maximum (99 % of values)	<550 V	<650 V	<780 V
Minimum (99 % of values)	>360 V	>400 V	>450 V
Impulse Sparkover Voltage (3)			
100 V/ μ s Typical	650 V	700 V	750 V
1 kV/ μ s Typical	850 V	900 V	950 V

Insulation Resistance (IR)	100 V (50 V for Model 2015-09)	> 1 G Ω
Glow Voltage	10 mA	~ 70 V
Arc Voltage	>1 A	~ 10 V
Capacitance.....	1 MHz	< 1.9 pF
Impulse Discharge Current.....	10000 A, 8/20 μ s	1 operation
	5000 A, 8/20 μ s	> 10 operations
	1000 A, 10/350 μ s	1 operation
	100 A, 10/1000 μ s	> 300 operations
	10 A, 10/1000 μ s	> 1500 operations
Glow-Arc Transition Current		< 0.5 A
Alternating Discharge Current	5 Arms, 1 s	> 10 operations
Operating Temperature.....		-55 to +85 °C
Storage Temperature		-55 to +105 °C
Climatic Category (IEC 60068-1).....		40/90/21
Pushover Strength (4)		5 kg

Notes:

UL Recognized component, UL File E153537

- (1) In ionized mode.
- (2) IR after life $> 10^6 \Omega$.
- (3) At delivery AQL 0.65 Level II, DIN ISO 2859. Impulse Sparkover voltage is defined as typical values of distribution.
- (4) Pushover Strength test performed on a board-mounted Model 2015-xx-SMC (Vertical Mount).

- Bourns recommends reflowing surface mount devices per IPC/JEDEC J-STD-020 rev D.

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

"FLAT" is a registered trademark of Bourns, Inc. in the U.S. and other countries.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

- Telecom CPE
- Industrial Communications
- Surge Protective Devices
- High density PCB assemblies


BOURNS®

Pad Layouts


2015-xx--SMH-RPLF

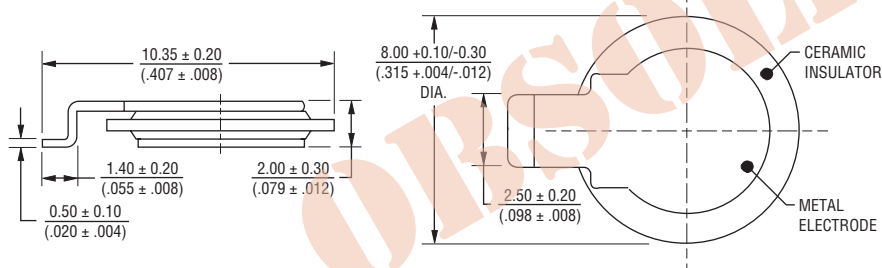

2015-xx-SMC-RPLF

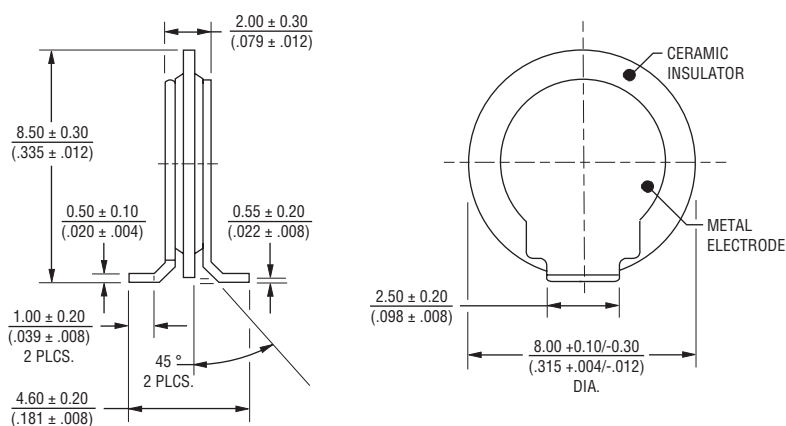

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

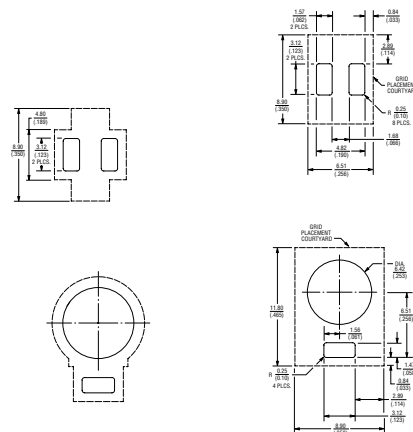

Specifications are subject to change without notice. Actual device performance may vary over time. Actual device performance in their specific applications.

How to Order**2015 - xx - xxx - RP LF**

Series

Designator

2015 = 2-electrode
GDT with
FLAT®
Technology,
5 kA 8/20 μ s rated

Voltage (Divided by 10)

09 = 90 V	42 = 420 V
15 = 150 V	50 = 500 V
23 = 230 V	60 = 600 V
35 = 350 V	

Configuration


A = No Leads, (Clamp-Cartridge)
SMH = Horizontal Mount SMD
SMC = Vertical Mount SMD

Packaging

RP = Reelpack (Standard)

RoHS Compliancy

LF = RoHS Compliant Product

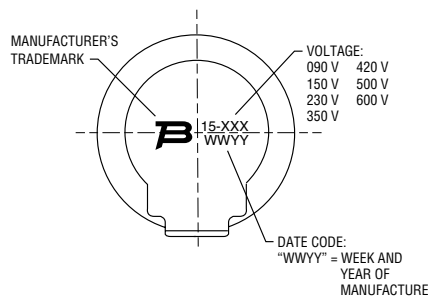Typical Part Marking

2015 Series Gas Discharge Tube Surge Arrestor with FLAT® Technology


BOURNS®

Packaging Specifications


Model 2015-xx-SMC-RPLF: The standard tape and reel packaging contains 500 pieces per 13-inch reel.

Model 2015-xx-SMH-RPLF and 2015-xx-A-RPLF: The standard tape and reel packaging contains 2,000 pieces per 13-inch reel.

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

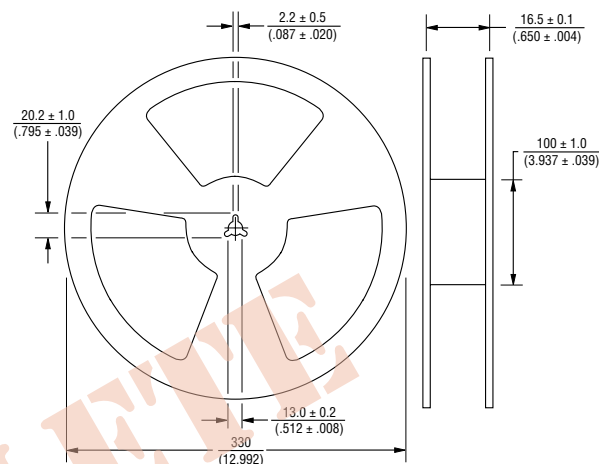


2015-xx-SMC-RPLF

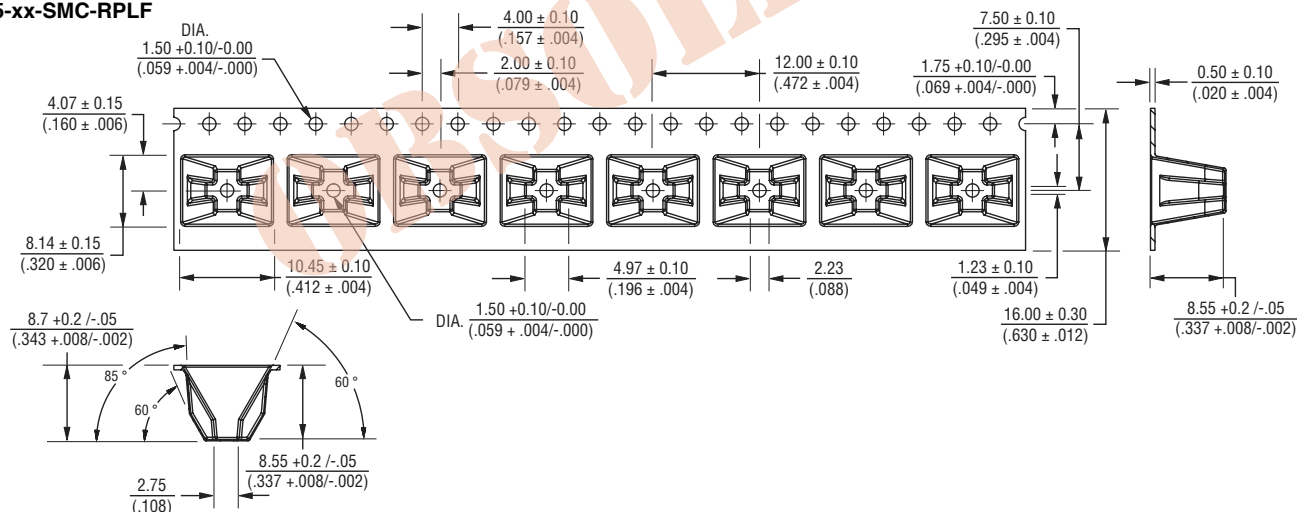

2015-xx-SMH-RPLF

2015-xx-A-RPLF

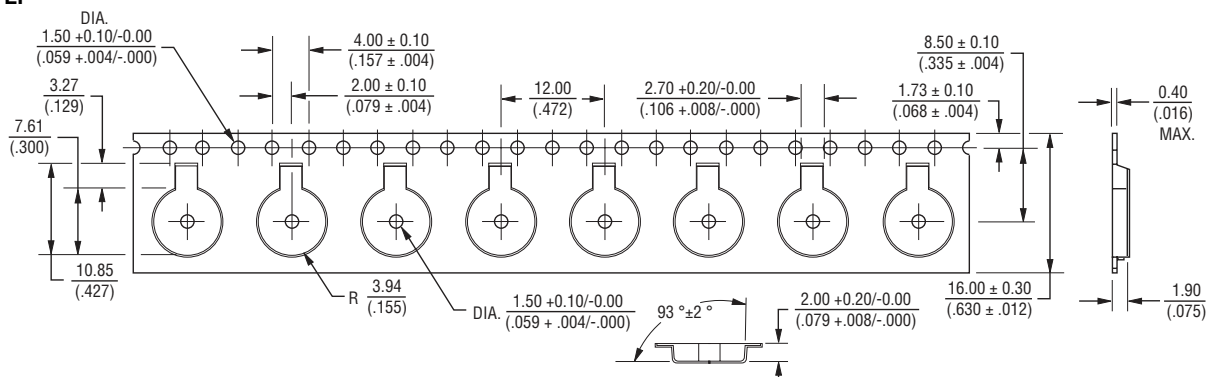

REV. 05/16

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.