

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: CGF0804TFH-900-2L

Manufacturer: Bourns Inc.

Package: 0303 (0808 Metric)

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/bourns-inc/cgf0804tfh-900-2l.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.



Features

- Combined Protection Technology (CPT) design
- Common mode filter
- ESD protection
- Fast response time
- Low capacitance
- RoHS compliant*



This model is currently available but not recommended for new designs.

Applications

- USB 2.0
- HDMI
- MIPI
- MHL

ChipGuard® CGF Series ESD/EMI Filter

Description

The Bourns® ChipGuard® CGF Series utilizes Combined Protection Technology (CPT) to create an ESD protection device and common mode filter in a single space-saving device. This series features very low capacitance and superior common mode noise rejection, making it ideal for use in high-speed differential data lines.

Electrical Characteristics @ 25 °C (unless otherwise noted)

Parameter	Min.	Typ.	Max.	Unit
Common Mode Impedance @100 MHz	67.5	90	112.5	Ohms
Cut-off Frequency		3		GHz
DC Resistance	1.8	2.7	3.5	Ohms
Insulation Resistance	10			Megohms
Capacitance @ 1 MHz, Any Pin to Ground)		0.6		pF
Clamping Voltage @ 60 ns after ESD Event		20		V
Leakage Current @ 5 V, Any Pin to Ground)			1	μA


Absolute Maximum Ratings @ 25 °C (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Rated Voltage	V_{DC}	5	V
Rated Current	I_{DC}	100	mA

General Characteristics

Operating Temperature.....-40 °C to +85 °C
 Storage Temperature.....-40 °C to +125 °C
 Response Time.....<1 ns
 Performance Standard IEC 61000-4-2, Level 4

Circuit Diagram

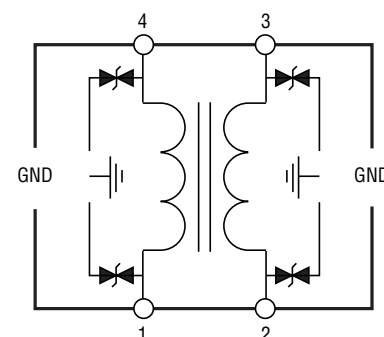

How to Order

CG F 0804 TFH - 900 - 2L

ChipGuard®
 Product Designator _____
 Common Mode Filter Designator _____
 Package Dimension Code _____
 Technology _____
 TFH = Thin Film High-Speed
 Common Mode Impedance @ 100 MHz (90° ±10°) _____
 Lines _____
 2L = 2 Line (0804 Package)

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com


*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


Impedance vs. Frequency Characteristics

Test Instrument: HP4291A Impedance/Material Analyzer

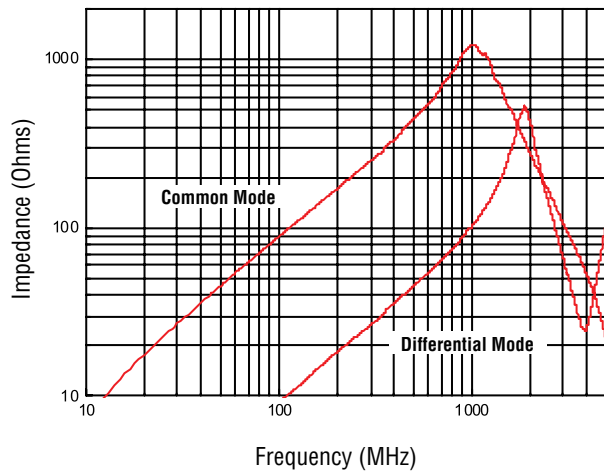


Insertion Loss vs. Frequency Characteristics


Test Instrument: Agilent E4071C ENA-L Network Analyzer

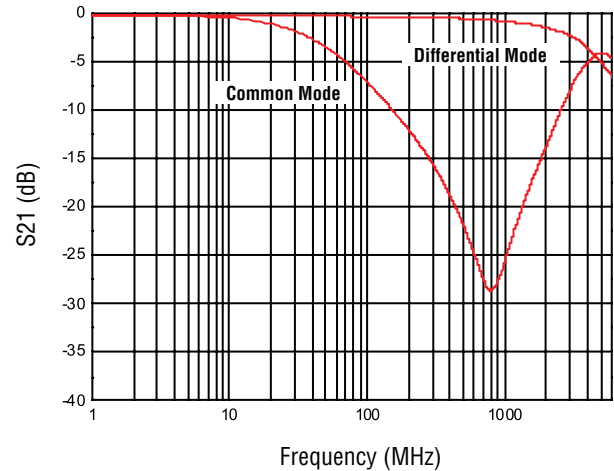


Product Dimensions

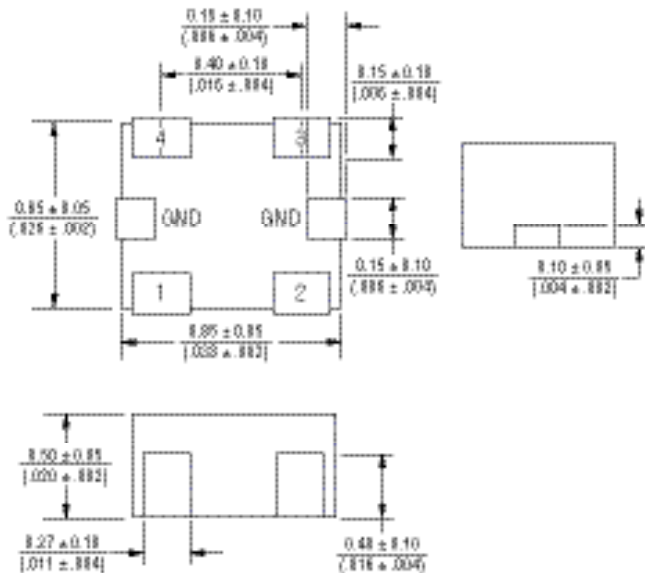

Recommended Pad Layout

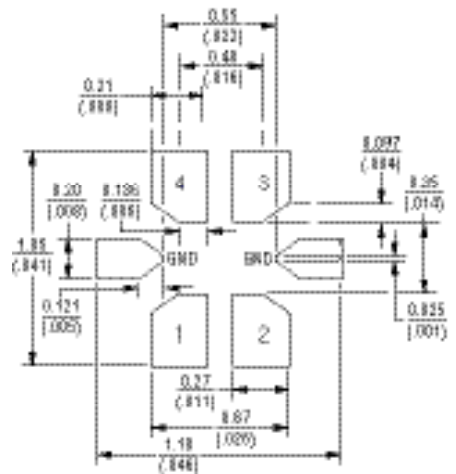


Solder Reflow Recommendations

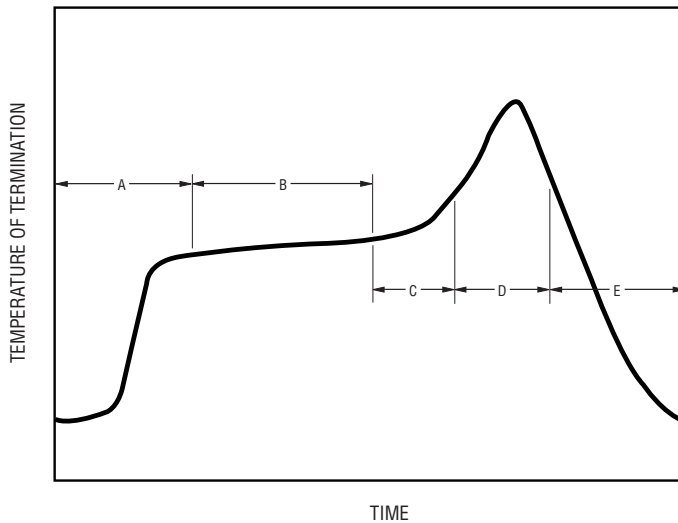

A	1st Rising Temperature	The Normal to Preheating Temperature	30 s to 60 s
B	Preheating	140 °C to 160 °C	60 s to 120 s
C	2nd Rising Temperature	Preheating to 200 °C	20 s to 40 s
D	Main Heating	if 220 °C if 230 °C if 240 °C if 250 °C if 260 °C	50 s ~ 60 s 40 s ~ 50 s 30 s ~ 40 s 20 s ~ 40 s 20 s ~ 40 s
E	Regular Cooling	200 °C to 100 °C	1 °C/s ~ 4 °C/s

Per J-STD-020C

Packaging Dimensions

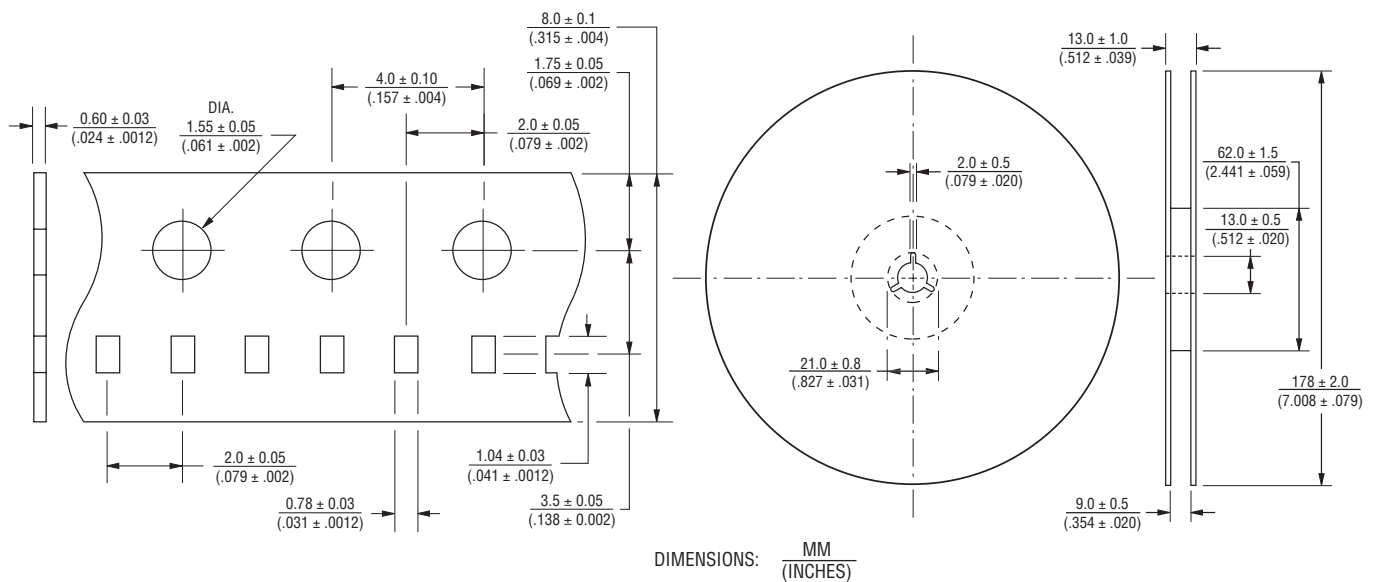

STANDARD = 10,000 pieces per reel