

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: SA2-A-7200-CBB-STD

Manufacturer: Bourns Inc.

Package: Bag


Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/bourns-inc/sa2-a-7200-cbb-std.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review


CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

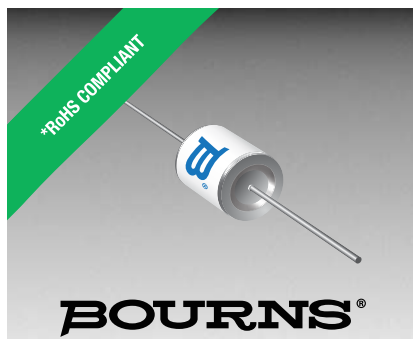

Features

- High insulation resistance
- Quick response, long service life
- Wide operating temperature range
- AEC-Q200 compliant
- RoHS compliant*

Applications

- Street lighting
- Medical devices (low/medium risk)**
- Air conditioning
- Power supplies
- Projectors
- Welders

SA2-A Series High Voltage Gas Discharge Tube

Description

Bourns® SA2-A Series two-electrode High Voltage Gas Discharge Tube devices are designed for high isolation applications. The AEC-Q200 compliant series offers high insulation resistance over a wide temperature range and is offered with DC breakdowns from 2.4 kV to 7.2 kV. Other customized voltages between 2 kV and 7.2 kV are available upon request.

Agency Recognition

Agency	Category	Agency File No.
UL	UL 1449	E313168

Additional Information

Click these links for more information:



Electrical Characteristics

Part No.	Device Specifications									Life Ratings		
	DC Breakdown Voltage @ 500 V/s ⁽¹⁾				Impulse Breakdown	Ramp	Insulation Resistance @ 250 Vdc	Arc Voltage @ 5 A min.	Capacitance @ 1 MHz	Nominal Impulse Discharge		Nom. DC Break- down After Life
	Min.	Typ.	Max.	Tol.	Max.	Typ.	Min.	Typ.	Max.	1 Operation	20 Operations	
SA2-A-3000-Dxx-STD	2550	3000	3600	-15 % to +20 %	4500 V	@7.5 kV/ μ s	10 G Ohm	20 V	1 pF	10 kA, 8/20 μ s	5 kA, 8/20 μ s, ±10 operations in each polarity	>2.4 kV
SA2-A-3000-Cxx-STD	2400	3000	3600	-20 % to +20 %		>2.3 kV						
SA2-A-3600-Dxx-STD	3060	3600	4320	-15 % to +20 %	5400 V	@7.5 kV/ μ s						>3.0 kV
SA2-A-3600-Cxx-STD	2880	3600	4320	-20 % to +20 %		>2.8 kV						
SA2-A-4000-Dxx-STD	3400	4000	4800	-15 % to +20 %	6000 V	@7.5 kV/ μ s						>3.3 kV
SA2-A-4000-Cxx-STD	3200	4000	4800	-20 % to +20 %		>3.1 kV						
SA2-A-5500-Dxx-STD	4675	5500	6600	-15 % to +20 %	8000 V	@7.5 kV/ μ s						>4.4 kV
SA2-A-5500-Cxx-STD	4400	5500	6600	-20 % to +20 %		>4.2 kV						
SA2-A-5900-Dxx-STD	5015	5900	7080	-15 % to +20 %	8000 V	@7.5 kV/ μ s						>4.9 kV
SA2-A-5900-Cxx-STD	4720	5900	7080	-20 % to +20 %		>4.6 kV						
SA2-A-6000-Dxx-STD	5100	6000	7200	-15 % to +20 %	8000 V	@7.5 kV/ μ s						>5.0 kV
SA2-A-6000-Cxx-STD	4800	6000	7200	-20 % to +20 %		>4.7 kV						
SA2-A-6200-Dxx-STD	5270	6200	7440	-15 % to +20 %	8000 V	@7.5 kV/ μ s						>5.2 kV
SA2-A-6200-Cxx-STD	4960	6200	7440	-20 % to +20 %		>4.9 kV						
SA2-A-6300-Dxx-STD	5355	6300	7560	-15 % to +20 %	9200 V	@7.5 kV/ μ s						>5.3 kV
SA2-A-6300-Cxx-STD	5040	6300	7560	-20 % to +20 %		>5.0 kV						
SA2-A-7200-Dxx-STD	6120	7200	8640	-15 % to +20 %	10000 V	@1 kV/ μ s						>6.3 kV
SA2-A-7200-Cxx-STD	5760	7200	8640	-20 % to +20 %		>6.0 kV						

Note: The Model SA2-A-7200 specification is based on the customer providing sufficient encapsulation/working environment for the component to avoid outside surface breakdown (e.g., non-contaminated equivalent surface in RH 40 % reaches breakdown at 10-12 kV).

(1) In ionized mode.

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

Europe: Tel: +36 88 885 877 • Email: europus@bourns.com

Mexico: Tel: +52 614 478 0400 • Email: mexicus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com
www.bourns.com

* RoHS Directive 2015/863, Mar 31, 2015 and Annex.

** Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

SA2-A Series High Voltage Gas Discharge Tube

BOURNS®

Product Characteristics

Operating Temperature Range	-40 °C to +125 °C
Storage Temperature Range	-40 °C to +125 °C
Device Plating.....	Matte-Sn
Moisture Sensitivity Level	1
ESD Classification (HBM).....	6

How to Order

SA 2 - A - nnnn - x x x - STD

Series Designator	
No. of Electrodes	
2 = 2 Electrodes	
AEC-Q200 Compliant	
Breakdown Voltage	
3000 = 3000 V 5900 = 5900 V	
3600 = 3600 V 6000 = 6000 V	
4000 = 4000 V 6200 = 6200 V	
4000 = 4000 V 6300 = 6300 V	
5500 = 5500 V 7200 = 7200 V	
Tolerance	
C = -20 % to +20 %	
D = -15 % to +20 %	
Lead Shape	
B = Bent Leads*	
C = No Leads*	
L = Straight Leads**	
Packaging	
B = Bulk	
T = Tape & Reel	
Standard or Modified Product Indicator	
STD = Standard	

* Available in bulk packaging only.

** Bulk packaging available for straight lead devices ≤3600 V. Devices >3600 V available in tape and reel only.

Typical Part Marking

..... **B** SA2-A-xxxx **RL**

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

SA2-A Series High Voltage Gas Discharge Tube

BOURNS®

Environmental Characteristics

Characteristic	Test Condition
High Temperature Exposure	Dry heat (+150 °C ± 3 °C) Exposure time 1000 hrs. STP: MIL-STD-202 Method 108
Low Temperature Exposure	Cold (-40°C ± 3 °C) Exposure time 100 hrs. STP: IEC 60068-2-1
Temperature Cycling	1000 cycles (-40 °C to +125 °C) unpowered STP: JESD22 Method JA-104
Humidity Bias	1000 hours 85 °C ± 3 °C / RH 85 % ± 3 % Rated 1 kVrms @ 1 mA STP: MIL-STD-202 Method 103
High Temperature Operating Life	1000 hours (T _A = 125 °C) Rated 1 kVrms @ 1 mA STP: MIL-STD-202 Method 108
Terminal Strength	Test leaded device lead integrity only Conditions: A (2.27 kg), C (227 g) STP: MIL-STD-202 Method 211
Resistance to Solvents	Also, aqueous wash chemical - OKEM Clean or equivalent STP: MIL-STD-202 Method 215
Mechanical Shock	Figure 1 of Method 213 LEADED: Condition C STP: MIL-STD-202 Method 213
Vibration	5 g's for 20 minutes, 12 cycles each of 3 orientations, test from 10-2000 Hz STP: MIL-STD-202 Method 204
Resistance to soldering Heat	LEADED Condition B No Pre-Heat of samples STP: MIL-STD-202 Method 210
ESD	AEC-Q200-002 or ISO/DIS10605
Solderability	LEADED Method A @ 235 °C, Category 3 STP: J-STD-002
Flammability	V-0 STP: UL-94

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

SA2-A Series High Voltage Gas Discharge Tube


BOURNS®

Product Dimensions


SA2-A-xxxx-xLx-STD

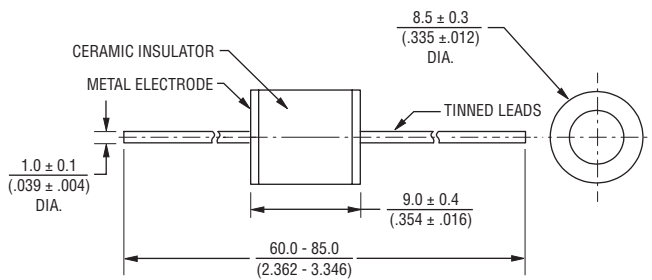

SA2-A-xxxx-xBx-STD

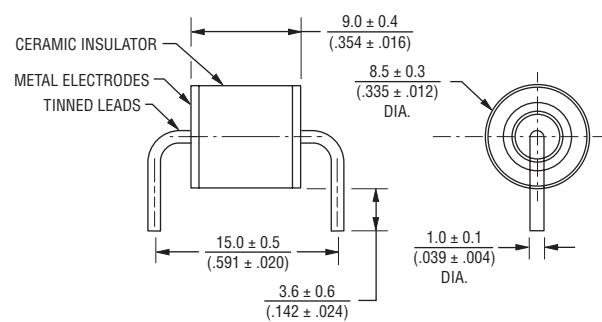

SA2-A-xxxx-xCx-STD

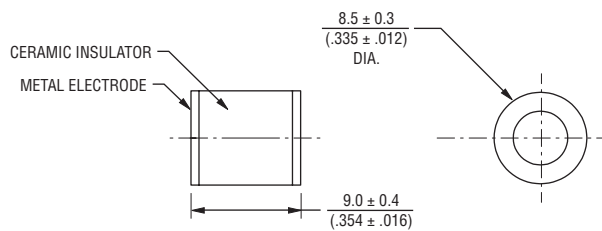

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Packaging Specifications


Model SA2-A-xxxx-xLB-STD ships standard bulk pack, 250 units per box / 5 bags of 50 units*.

Model SA2-A-xxxx-xBB/xCB-STD ships standard bulk pack, 500 units per box / 5 bags of 100 units.

The optional tape and reel packaging contains 1,000 pcs./reel for Model SA2-A-xxxx-xLT-STD.

* Straight lead versions >3600 V available in bulk or tape and reel packaging; all other models available in bulk packaging only.

SA2-A-xxxx-xLT-STD

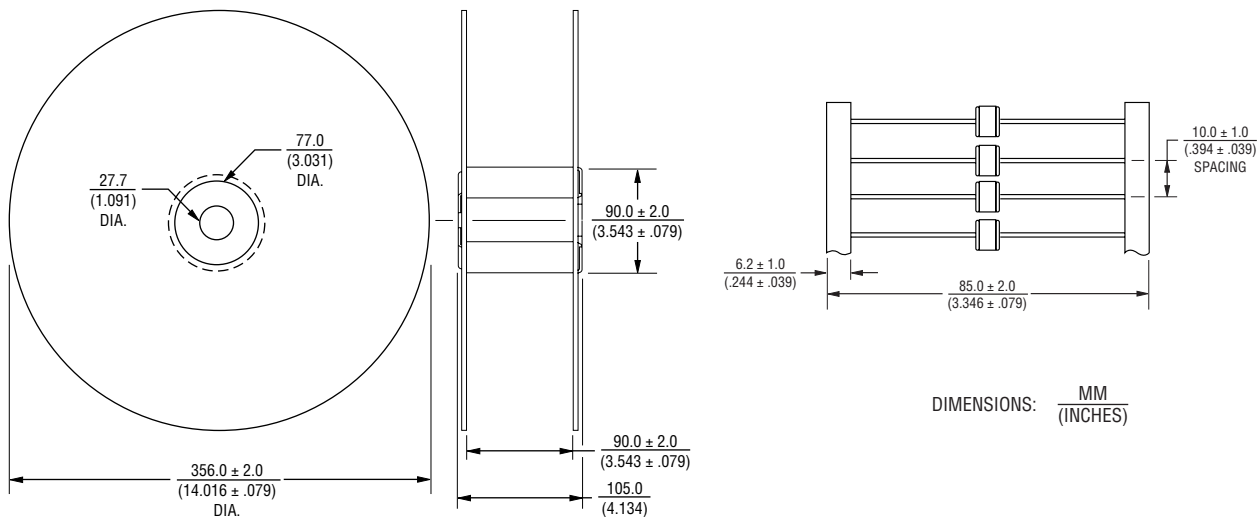

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

REV. A 09/24

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain "typical" applications are based on Bourns' knowledge of typical requirements in generic applications. Bourns assumes that "typical" applications include failsafe/backup features to address critical risks to users and are designed to allow rework of Bourns® product to avoid scrap of a device solely due to malfunctioning Bourns® product. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Thus, users should always verify the actual performance of the Bourns® product in their specific devices and applications and make their own independent judgments regarding the suitability of Bourns® product and the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real-world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification even if such industry standard or qualification is a "state of art". Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage, such as without limitation nuclear, life-critical medical and certain automotive and aviation applications. Except as set forth in the bullet points below or unless expressly and specifically approved in writing on a case-by-case basis by an authorized Bourns' representative, use of any Bourns® products in such unauthorized high-risk applications is at the user's sole risk.

- Bourns considers implantable/invasive devices and devices/procedures designed as life-supporting or life-sustaining by the U.S. Food and Drug Administration or equivalent organizations outside of the United States as "life-critical" medical applications. Bourns expressly identifies those Bourns® standard products that are suitable for use in typical medical applications that are not life-critical in its publication entitled "Bourns Medical Grade Component Guide."
- Bourns expressly identifies those Bourns® standard products that are suitable for use in typical automotive applications associated with any Automate Safety Integrity Level (ASIL) in its publication entitled "Bourns Automotive Grade Component Guide." Bourns' designation of Bourns® product as compliant with the AEC-Q standard does not by itself mean that Bourns has approved such product for use in an automotive application.
- Bourns expressly identifies Bourns® standard products that are suitable for use in the typical aviation applications/systems requiring System Design Assurance Level (RTCA DO-254 DAL) of C, D or E in its publication entitled "Bourns Civilian Aerospace/Aviation Grade Component Guide." Bourns does not test its products for compliance with United States Federal Aviation Administration standards or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aviation applications. Use of Bourns® standard components in aviation applications associated with RTCA DO-254 DAL A or B without proper approval noted above shall be at the user's sole risk.
- Bourns will review and authorize on a case-by-case basis the use of Bourns® standard products which are at least AEC-Q compliant in space-related civil applications (rockets, satellites) with a negotiated cross-waiver and indemnity agreement.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Use of Bourns® products or Bourns' technology in military/defense applications must be reviewed with Bourns for compliance with applicable export control laws and embargoes. Users shall not sell, transfer, export or re-export (which includes transfers within a country) any Bourns® products or technology or technical data for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology or technical data in any facility which engages in activities relating to such devices. Further, Bourns® products and Bourns' technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products and technology may not, without prior authorization from Bourns and/or the Government of a country where such product/technology is designed and/or manufactured, be resold, transferred, or re-exported (including within the same country) to any party not eligible to receive commodities, software, and technical data originating in such country.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties (those not based on parameters specified in Bourns' data sheets and/or specifications), including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <https://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <https://www.bourns.com/docs/Legal/disclaimer.pdf>