

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: BK/EFF-4

Manufacturer: Eaton - Electronics Division

Package: Bulk

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/eaton-electronics-division/bk-eff-4.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.


The original manufacturer datasheet follows from the next page.

Radial Lead Micro Fuse

Quick-Acting (F)

250mA to 5A, 250 Volts AC

PRELIMINARY DATA

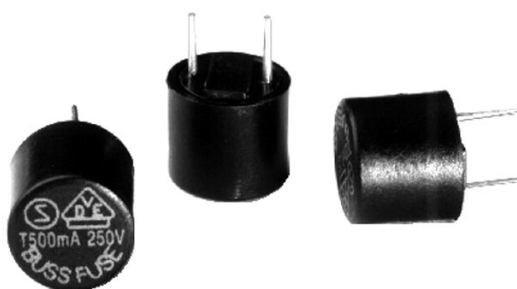

CATALOG SYMBOL: EFF
RADIAL LEAD MICRO FUSE
250mA TO 5A

250 VOLTS AC


QUICK-ACTING (F)

DESCRIPTION: Fuses are quick-acting, radial lead micro fuses in accordance with the specifications of IEC127-3, standard sheet 3 (Type F).

PACKAGING: Fuses can be provided:
1. in Bulk (short lead only) or
2. on tape in standard ammo-pack boxes, to IEC 286-2.

WEIGHT: 573 grams per 1000.

Dimensional Data

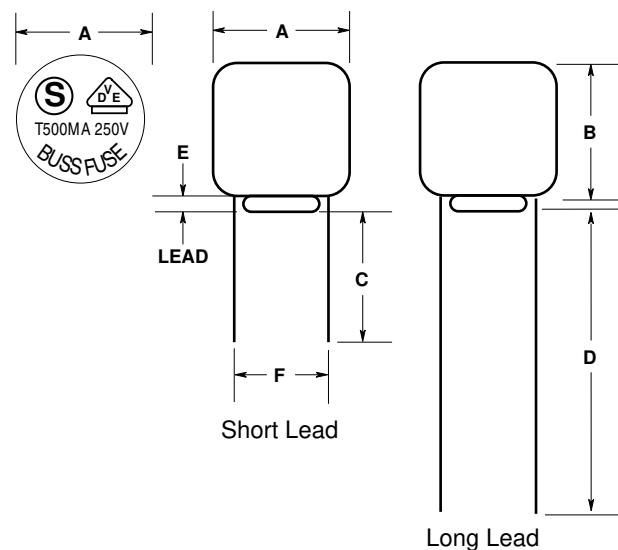

Dimensions
mm (inches)

	Short Lead	Long Lead
A	8.35 (.3285)	8.35 (.3285)
B	7.7 (.303)	7.7 (.303)
C	4.3 (.1695)	—
D	—	18.8 (.74)
E	0.5 (.0195)	0.5 (.197)
F	5.0 (.0235)	5.0 (.0235)
Ø	0.6	0.6

Catalog Number*	Rating	Typical mV Drop Measured at 75% Normal Ambient	Melting I ² t A ² Sec.
EFF250	250mA	260	0.05
EFF315	315mA	250	0.08
EFF400	400mA	240	0.14
EFF500	500mA	230	0.22
EFF630	630mA	110	0.17
EFF800	800mA	100	0.25
EFF1	1A	90	0.04
EFF1.25	1.25A	87	0.66
EFF1.6	1.6A	85	1
EFF2	2A	84	2
EFF2.5	2.5A	82	3
EFF3.15	3.15A	81	5
EFF4	4A	80	9
EFF5	5A	78	15

* Please add the following prefix to the catalog number to denote packaging required:

AP - Ammo-pack taped 1000 per box or,

BK - In bulk 100 per bag (short lead only).

For example: AP/EFF800 for Ammo-pack and BK/EFF800 for Bulk Pack.

	150%	210%	275%		400%		1000%
Rated Current	Min.	Max.	Min.	Max.	Min.	Max.	Max.
250mA to 5A	1 hr.	30 min.	10 ms.	3 sec.	3 ms.	300 ms.	20 ms.

All are 250V AC

Radial Lead Micro Fuse


Quick-Acting (F)

250mA to 5A, 250 Volts AC

PRELIMINARY DATA



Time-Current Characteristics—Total Clear

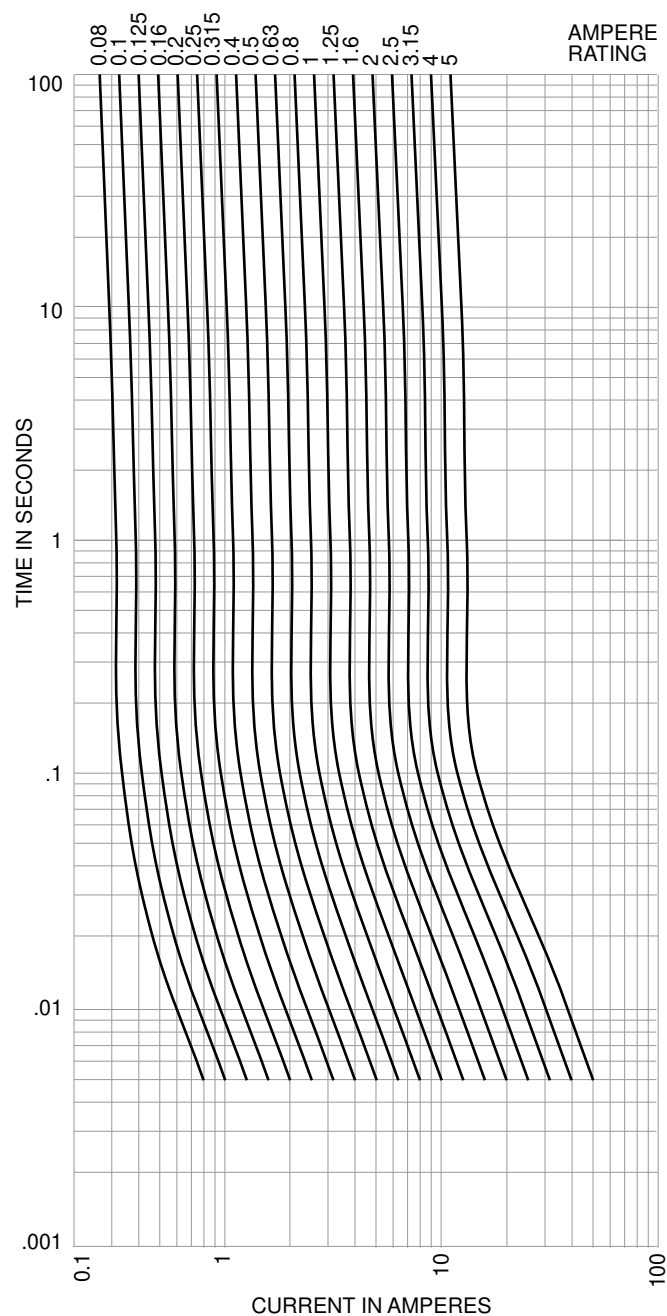

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.