

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** HTC-50M

**Manufacturer:** Eaton - Electronics Division

**Package:** Bulk

**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/eaton-electronics-division/htc-50m.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

# HTC

## PCB Fuse accessories for 5 mm fuses

RoHS

### PCB Fuse blocks



#### HTC-150M

- UL 4248 rating: 250 V, 20 A
- IEC 60217-6 rating: 250 V, 6.3 A, 1.6 W
- Self-certified voltage rating: 500 V, 20 A
- Tin plated brass terminals
- cURus: Guide IZLT2 & IZLT8, File # 14853
- Cover available:
  - HTC-150M (Transparent)
  - Flammability rating: UL94-V2
  - HTC-140M (Beige/Natural)
  - Flammability rating: UL94-V0



#### HTC-78M

- UL 4248 rating: 250 V, 20 A
- IEC 60127-6 rating: 250 V, 6.3 A, 1.6 W
- Self-certified voltage rating: 500 V, 20 A
- cURus: Guide IZLT2 & IZLT8, File # 14853
- Cover available:
  - HTC-100M
  - Flammability rating: UL94-V0



#### HTC-60M

- UL 4248 rating: 250 V, 20 A
- IEC 60127-6 rating: 250 V, 6.3 A, 1.6 W
- Tin plated bronze terminals

### PCB Fuse clips



#### HTC-200M






- Tin plated bronze
- Tape and fan fold packed



#### HTC-210M

- Tin plated brass

### Dimensions- inches (mm)

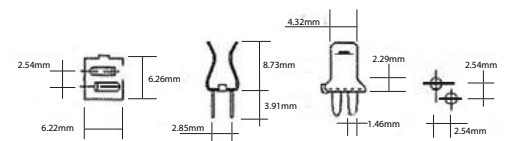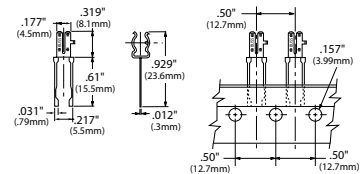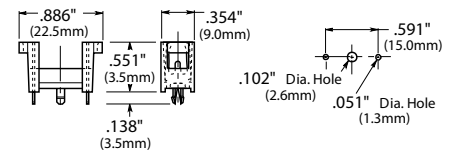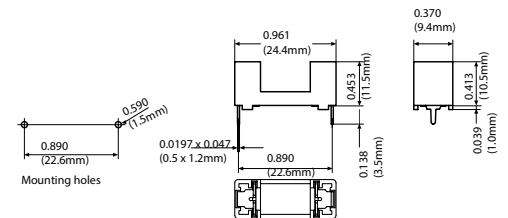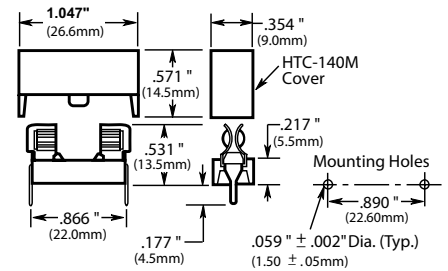

## PCB Fuse holders


## Dimensions- inches (mm)

### HTC-45M


- 250 V, 10 A, 2.5 W
- Bayonet cap/carrier
- Operating temperature range: -30 °C to + 85 °C
- cURus: Guide IZLT2 & IZLT8 File # 14853

### HTC-50M

- 250 V, 10 A, 2.5 W
- Bayonet cap/carrier
- Operating temperature range: -30 °C to + 85 °C
- cURus: Guide IZLT2 & IZLT8 File # 14853

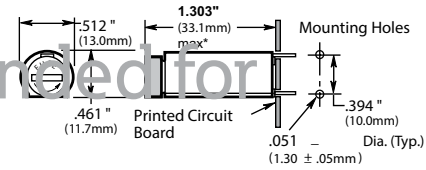

\* Maximum dimension with fuse is installed

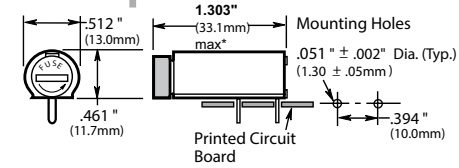

\* Maximum dimension with fuse is installed

## Common HTC specifications

- Solerability: In accordance with IEC 68-2-20
- Molded materials: UL94 V-0

## Packaging codes

| Packaging code prefix | Description                                                                 |
|-----------------------|-----------------------------------------------------------------------------|
| Blank                 | 10 pieces packed into a carton (HTC-15M and HTC-60M only)                   |
| BK-                   | 100 pieces packed into a cardboard shelf package (HTC-15M and HTC-60M only) |
| BK1-                  | 1000 pieces packed into a poly bag                                          |
| AP                    | 1000 pieces per box in Ammo pack (HTC-200M only)                            |

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2020 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2110  
August 2020

Eaton is a registered trademark.

All other trademarks are property  
of their respective owners.

Follow us on social media to get the  
latest product and support information.

