

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: ECS-RTC-3225-5609-TR

Manufacturer: ECS Inc.

Package: 10-SMD, No Lead

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/ecs-inc/ecs-rtc-3225-5609-tr.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.


The original manufacturer datasheet follows from the next page.

The ECS-RTC-3225-5609 Real Time Clock Module (I²C-Bus) with built in 32.768 kHz TCXO. It supports calendar (year, month, day, hour, minute, second), clock and timer functions.

ECS-RTC-3225-5609

Low Power Consumption I²C RTC

ECS-RTC-3225-5609



- Low Frequency Resonator
- RoHS Compliant
- Extended temp range

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-RTC-3225-5609			UNITS
		MIN	TYP	MAX	
Power Supply Voltage	Normal mode	2.5	3.0	5.0	V
Power Supply Voltage	V _{DD} =V _{BAT}	1.6	3.0	5.0	V
Backup Battery	V _{BAT}	1.6	3.0	5.0	V
Current Consumption I _{DD}	Battery Supply		2.0	3.0	μA
Stability	-20 ~ +70°C			±5	ppm
	-40 ~ -20°C			±20	Ppm
	+70 ~ +85°C			±20	Ppm
Oscillation start time	@ +25°C			1	s
Aging				±3	Ppm
Operating Temperature	T _{opr}	-40		+85	°C
Storage Temperature	T _{stg}	-40		+85	°C

Block Diagram


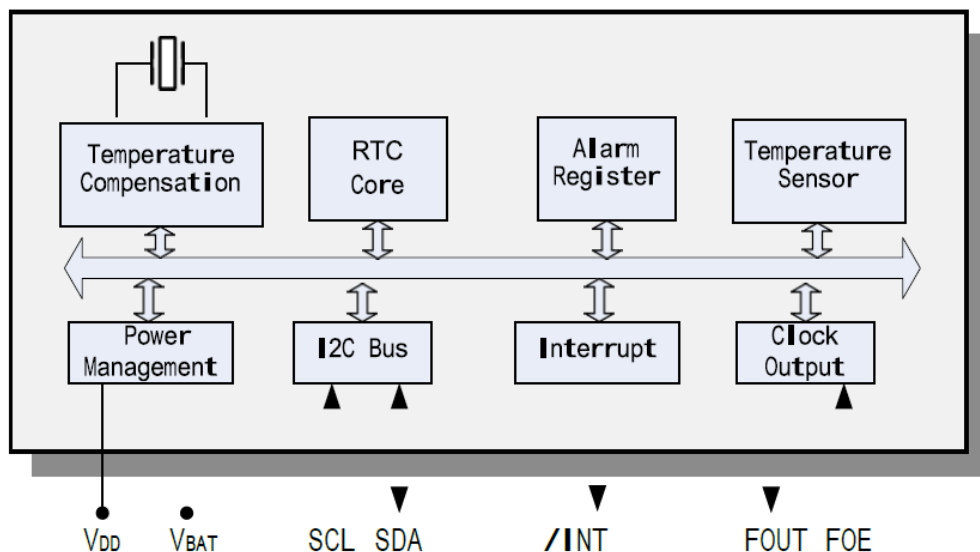


Figure 1) Top, and Side Views


PART NUMBER: ECS-RTC-3225-5609-TR

Dimensions (mm)

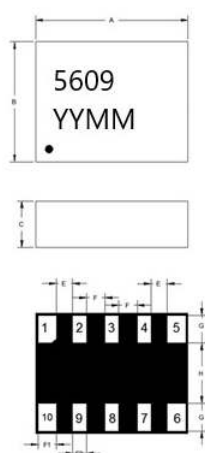

Dimension	Min.	Typ.	Max.
A	3.0	3.2	3.4
B	2.3	2.5	2.7
C	—	1.0	—
E	—	0.30	—
F	—	0.4	—
G	—	0.6	—
H	—	1.3	—
F1	—	0.45	—
F2	—	0.30	—

(Unit: mm)



Dimension	Max.
A	0.9
B	1.1
C	0.4
D	0.3
E	0.7

(Unit: mm)

Figure 1) Top, Side, Bottom View

Figure 2) Suggested Soldering Pattern

Pin Number	Pin Name	I/O	Description
1	FOE	In	FOUT output control pin. "1" - enable FOUT, "0" - FOUT Hi-Z
2	V _{DD}	-	Power supply
3	V _{BAT}	-	Backup battery pin. Connect to large-capacity capacitors or a backup battery. Connect to V _{DD} when switchover function is not necessary
4	FOUT	Out	Frequency output. Controlled by FOE. Frequency can be set by FSEL bits.
5	SCL	In	I ² C clock signal
6	T1	-	Manufacturer test only. Ensure to be floating
7	SDA	In/Out	I ² C data signal
8	T2	-	Manufacturer test only. Ensure to be floating
9	GND	-	Ground
10	/INT	Out	Interrupt Output, Open-Drain

Figure 3) Pin Function