

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** 2403 260 00051

**Manufacturer:** Knowles

**Package:** Tape & Reel (TR)

**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/knowles/2403-260-00051.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects


### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---

2403 260 00051

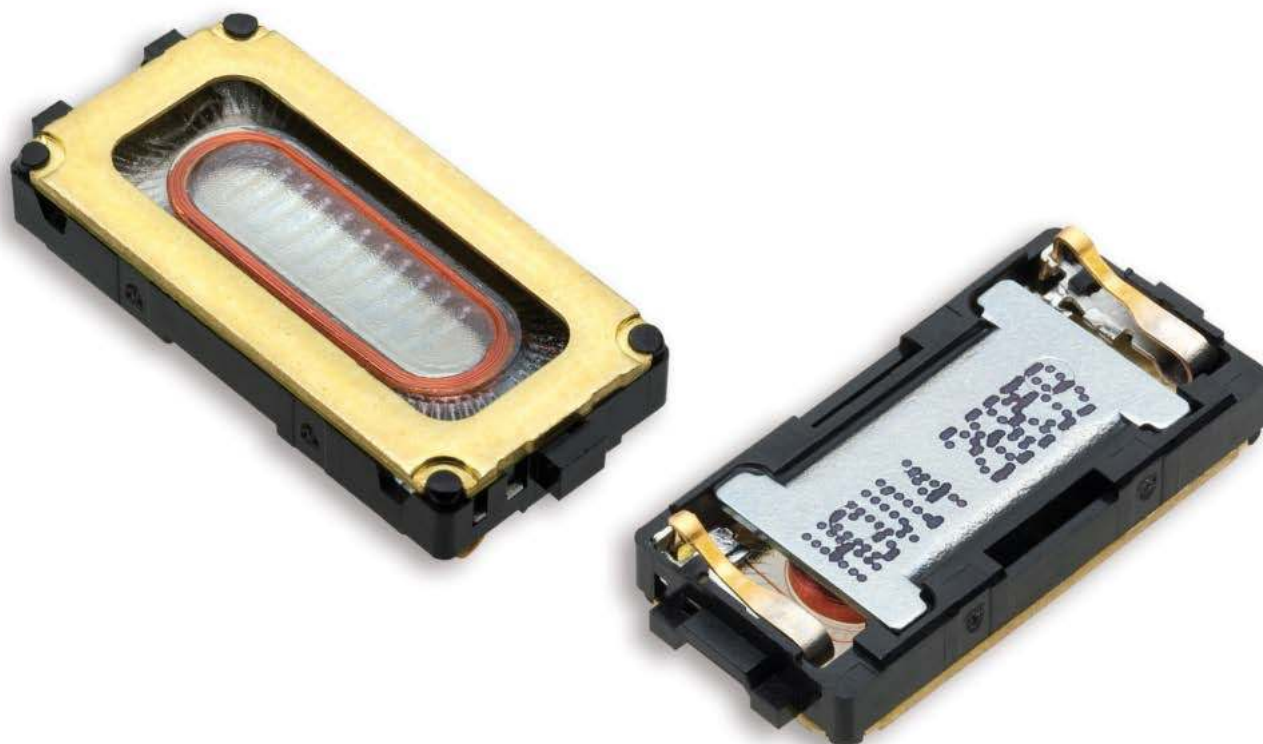

## RECEIVER-612-2-SC

2403 260 00051

## Contents

|      |                                               |    |
|------|-----------------------------------------------|----|
| 1.   | Theory of operation.....                      | 3  |
| 2.   | Mechanical Layout and Dimensions.....         | 4  |
| 2.1. | Main Dimensions.....                          | 4  |
| 2.2. | PWB Layout .....                              | 5  |
| 2.3. | Spring Force.....                             | 5  |
| 2.4. | Force on component .....                      | 6  |
| 2.5. | Part Marking/Labeling.....                    | 7  |
| 2.6. | Material List.....                            | 8  |
| 3.   | Electrical and Acoustical Specifications..... | 9  |
| 3.1. | Frequency response .....                      | 9  |
| 3.2. | Electro-Acoustic Parameters .....             | 10 |
| 3.3. | Power handling.....                           | 10 |
| 3.4. | Measurement setup .....                       | 11 |
| 3.5. | Measured Parameters.....                      | 11 |
| 3.6. | Measurement adapter .....                     | 12 |
| 4.   | Environmental Conditions.....                 | 13 |
| 4.1. | Storage.....                                  | 13 |
| 4.2. | Transportation.....                           | 13 |
| 4.3. | Functionality.....                            | 13 |
| 5.   | Environmental tests .....                     | 14 |
| 5.1. | Qualification tests.....                      | 14 |
| 5.2. | Reliability tests .....                       | 14 |
| 5.3. | Sample Size, Sequence .....                   | 14 |
| 5.4. | Period of Shelf-Life .....                    | 14 |
| 5.5. | Testing Procedures.....                       | 14 |
| 6.   | Related Documents .....                       | 18 |
| 7.   | Change History .....                          | 19 |
| 8.   | Disclaimer .....                              | 19 |

2403 260 00051


## 1. Theory of operation

Receiver 612-2-SC is a high end micro size receiver specifically designed for mobile phone and other applications where high quality sound is needed and only very little space for components is available.

2403 260 00051



## 2. Mechanical Layout and Dimensions

### 2.1. Main Dimensions

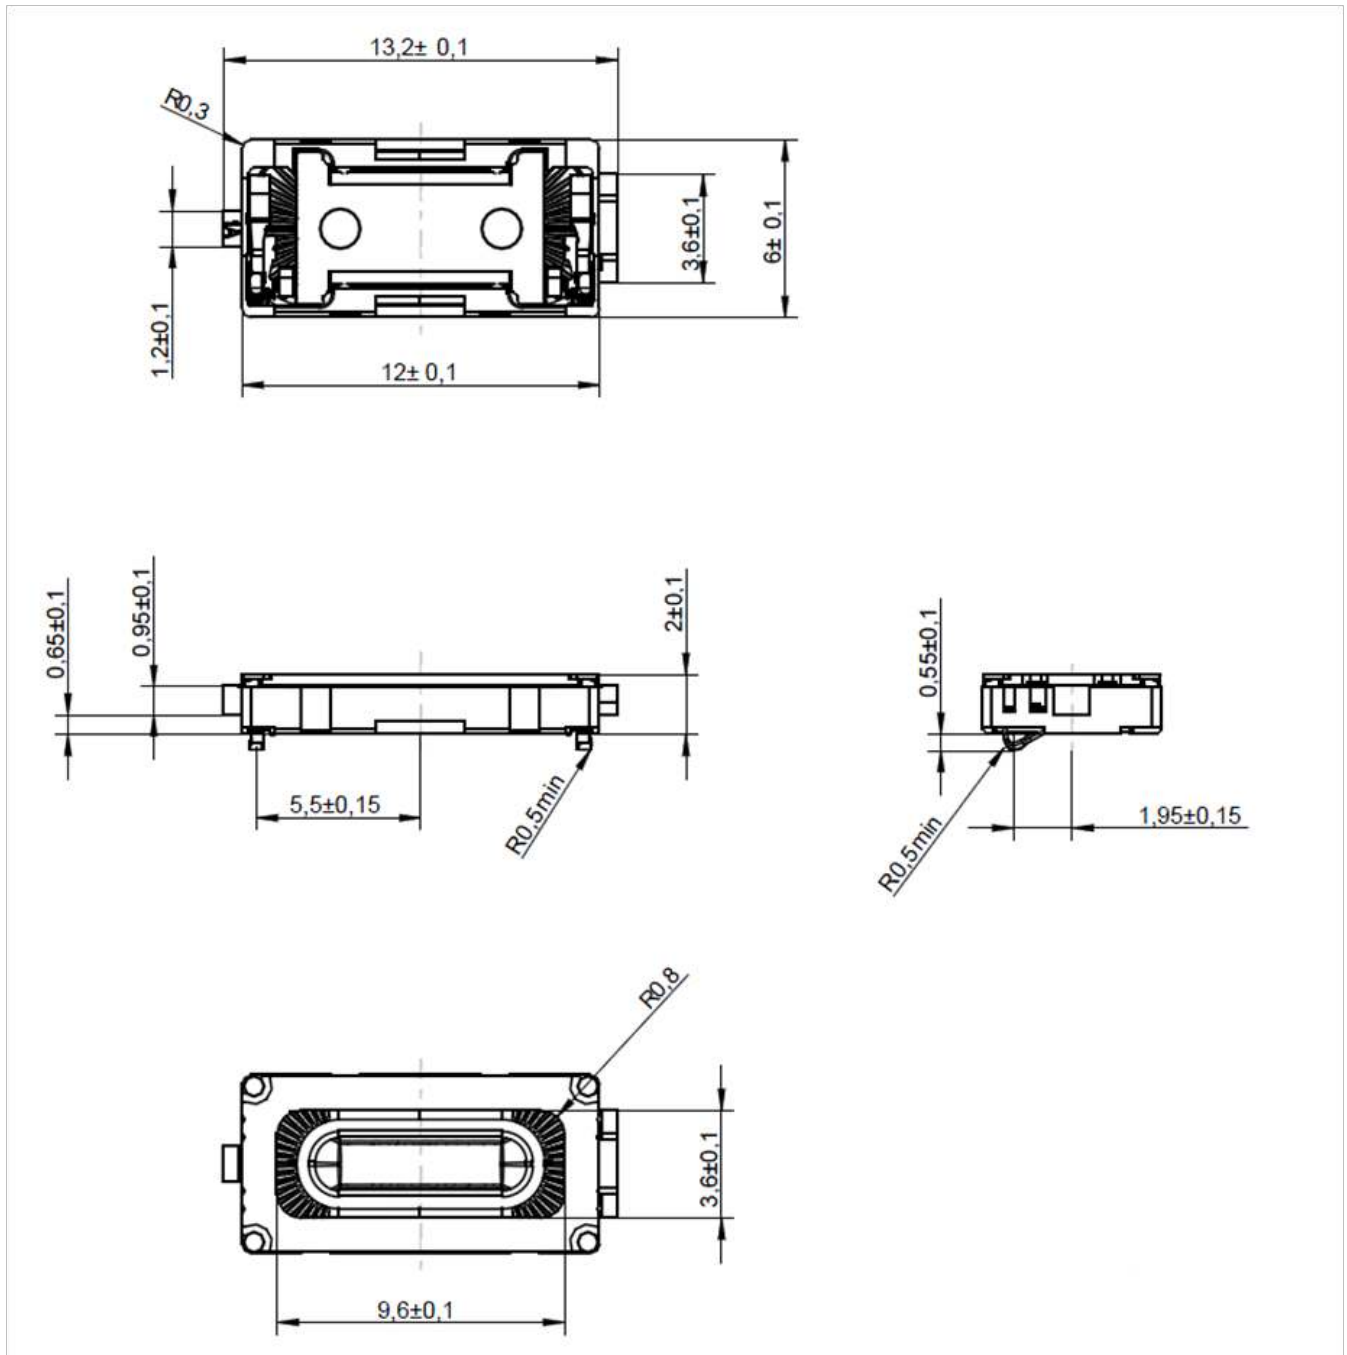

# 2403 260 00051


## 2.2. PWB Layout

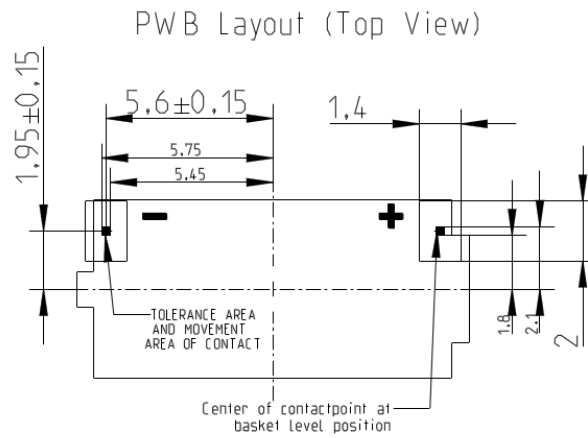

POSITIVE VOLTAGE ON PIN+  
MOVES MEMBRANE IN DIRECTION OF ARROW


## 2.3. Spring Force

RA 6x12x2 springforces

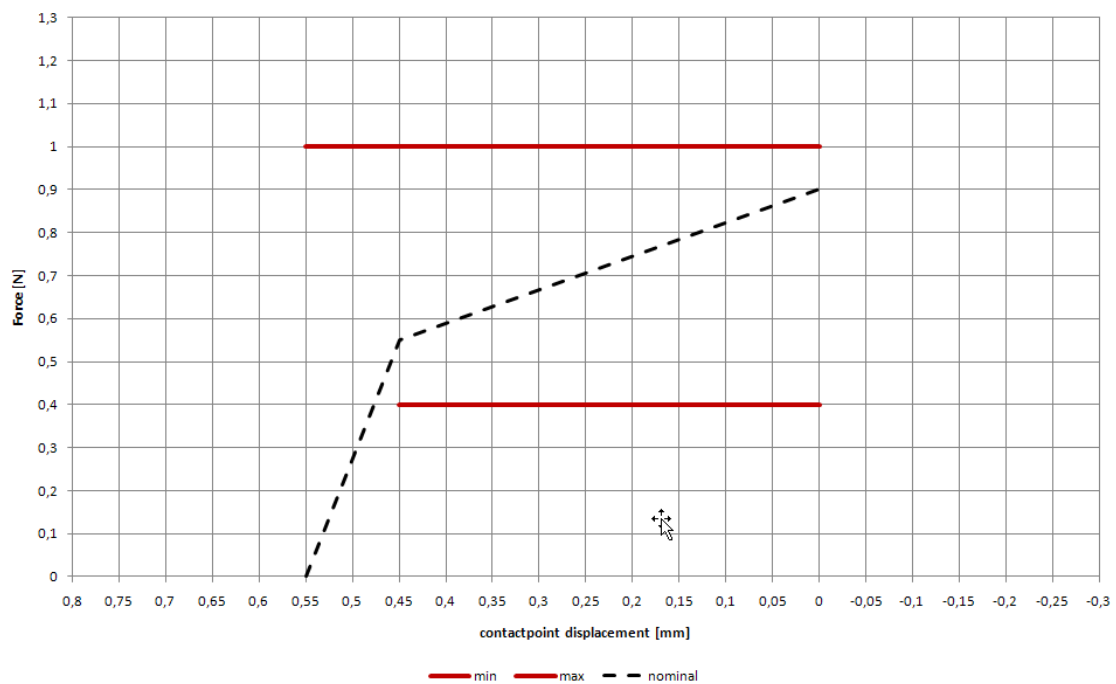

2403 260 00051

## 2.4. Force on component

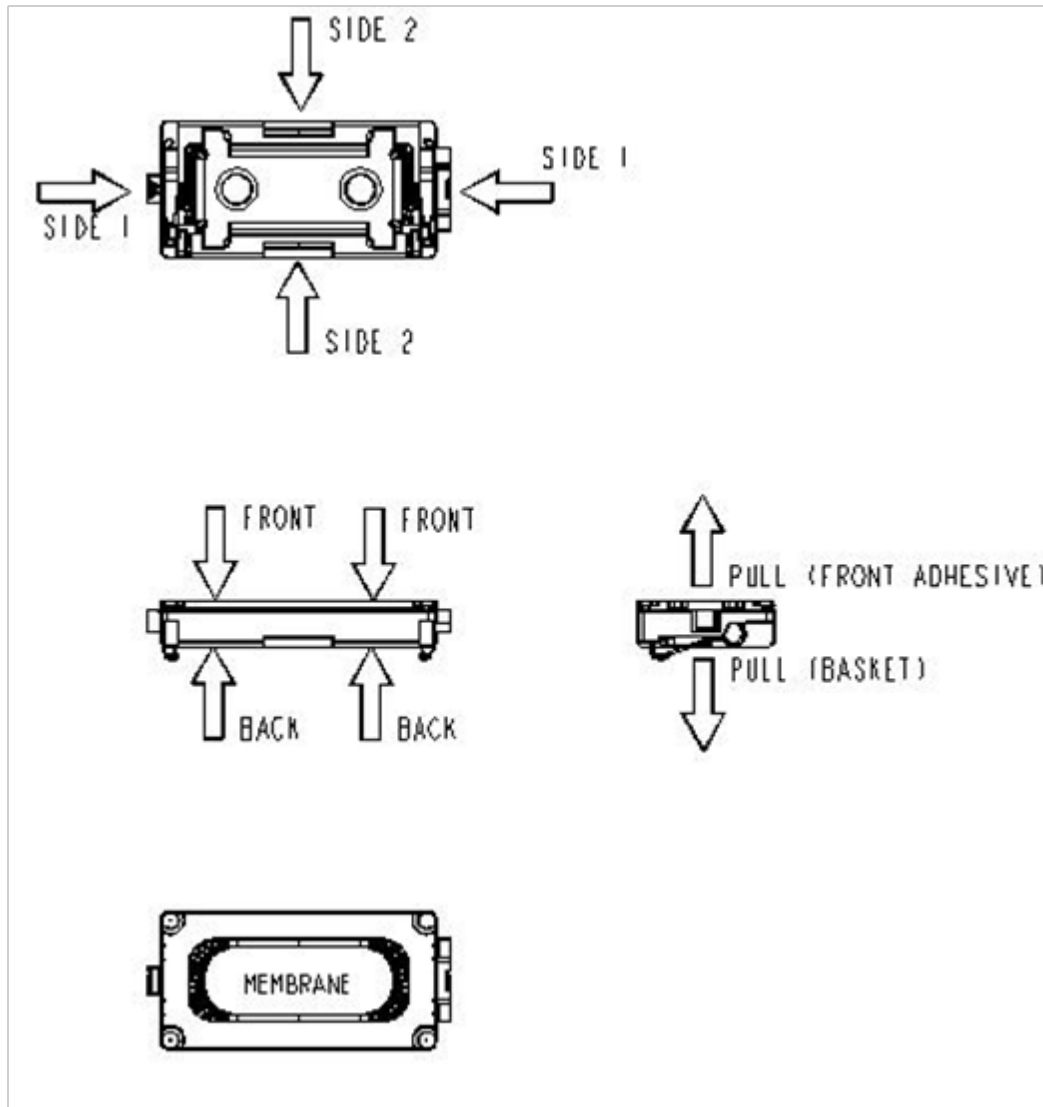


| FORCES ON DIFFERENT STATE OF COMPONENT |                                             |                         |                        |
|----------------------------------------|---------------------------------------------|-------------------------|------------------------|
| STATE                                  | MIN. SURFACE OF PREASURE [mm <sup>2</sup> ] | MAX PERMANENT FORCE [N] | MAX HANDLING FORCE [N] |
| FROM FRONT TO BACK                     | -                                           | 10                      | 15                     |
| FROM SIDE 1 TO SIDE 1                  | 3                                           | 10                      | 15                     |
| FROM SIDE 2 TO SIDE 2                  | 10                                          | 10                      | 15                     |
| POT                                    | -                                           | 0                       | 10                     |
| MEMBRANE                               | -                                           | 0                       | 0                      |
| PULL OF FORCE (Cover)                  | -                                           | 0                       | 5                      |

2403 260 00051


## 2.5. Part Marking/Labeling

The samples have a serial number on bottom (pot) side

### VARIANT A - Laser Printing

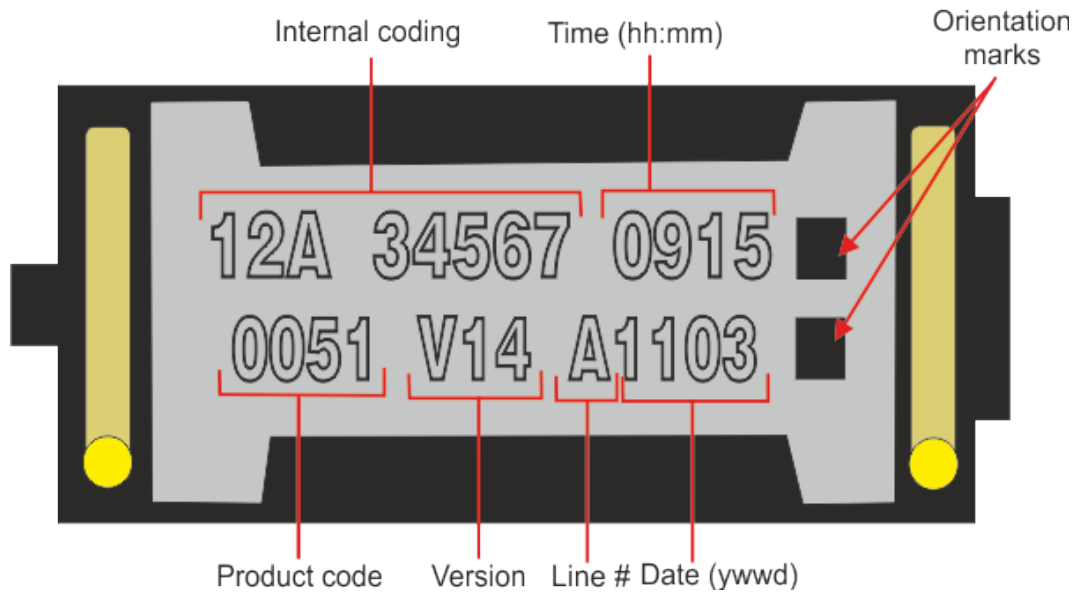

### VARIANT B - Inkjet Printing

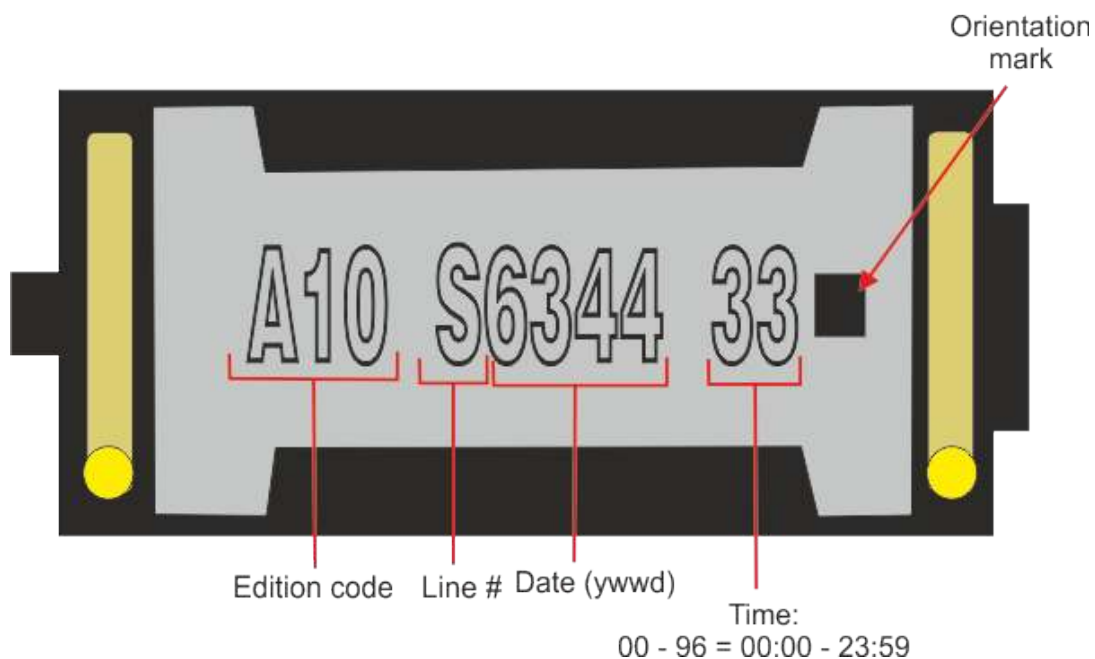

2403 260 00051

## 2.6. Material List


- |                          |                              |
|--------------------------|------------------------------|
| 1. Material of basket:   | Polycarbonate (Halogen free) |
| 2. Material of membrane: | Polyarylate-Compound         |
| 3. Material of pot:      | soft magnetic Iron           |
| 4. Material of magnet:   | Nd Fe B                      |
| 5. Material of contact   | CrNi Steel gold plated       |
| 6. Material of cover:    | Brass                        |
| 7. Dimensions:           | 6x12x2 mm                    |
| 8. Mass:                 | 0,35 g                       |

2403 260 00051

### 3. Electrical and Acoustical Specifications

#### 3.1. Frequency response

Typical frequency response measured on baffle according to chapter 2.4  
(distance  $d = 1\text{cm}$ ,  $p = 10\text{mW}$ , without back cavity)

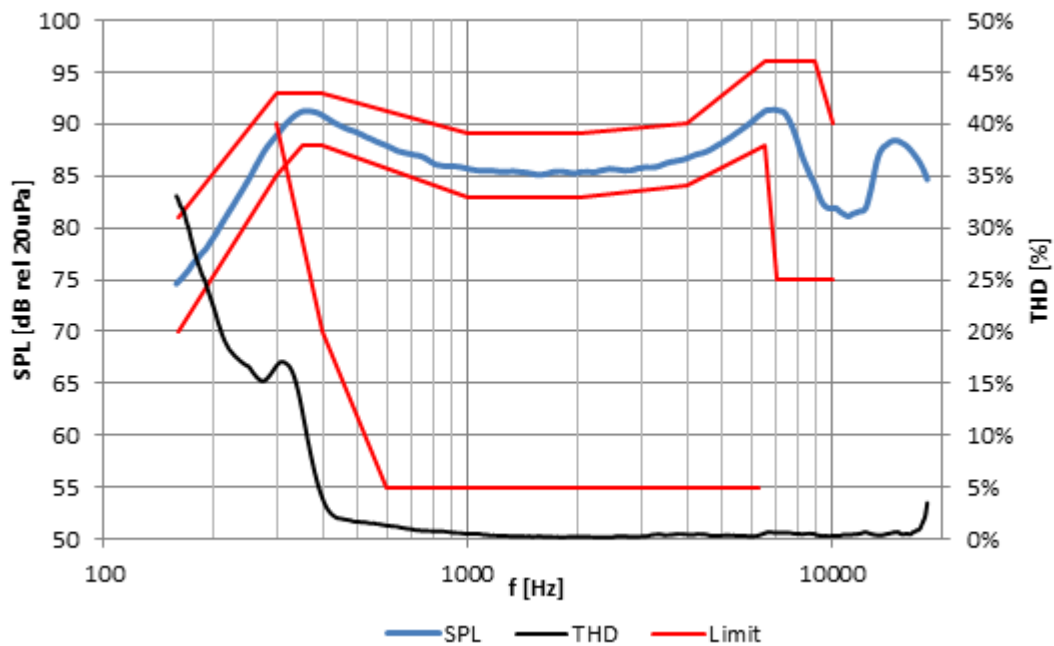

| Tolerance window |                                 |                                 |        |                    |
|------------------|---------------------------------|---------------------------------|--------|--------------------|
| f [Hz]           | lower limit [dB SPL] (floating) | upper limit [dB SPL] (floating) | f [Hz] | upper limit [%THD] |
| 160              | 70                              | 80                              | 300    | 40                 |
| 300              | 85                              | 94                              | 400    | 20                 |
| 350              | 88                              | -                               | 600    | 5                  |
| 400              | 88                              | 94                              | 6300   | 5                  |
| 1000             | 83                              | 87                              |        |                    |
| 2500             | 83                              | 87                              |        |                    |
| 4000             | 84                              | 89                              |        |                    |
| 7500             | 88                              | 96                              |        |                    |
| 8000             | 75                              | -                               |        |                    |
| 10000            | 75                              | 96                              |        |                    |

2403 260 00051

### 3.2. Electro-Acoustic Parameters

Loudspeaker mounted in adapter acc. to 2.6.


|                                                                                              |                                                                   |           |
|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------|-----------|
| 1. Rated impedance                                                                           | Z:                                                                | 32Ω       |
| 2. Voice coil resistance                                                                     | R:                                                                | 28.8Ω±10% |
| 3. Resonance frequency (measured @10mW)                                                      | f <sub>0</sub> :                                                  | 350Hz±15% |
| 4. Maximum usable excursion x <sub>max</sub>                                                 | p-p:                                                              | 0.6mm p-p |
| 5. Nominal characteristic sensitivity (calculated for 1W in 1m)<br>average from 1kHz to 3kHz |                                                                   | 65±2dB    |
| 5.1. Measured characteristic sensitivity (at 10mW in 1cm)<br>average from 1kHz to 3kHz       |                                                                   | 85±2dB    |
| 6. THD                                                                                       | according chapter 2.1.                                            |           |
| 7. Rub & buzz                                                                                | < 60dB SPL (300Hz -1500Hz) in 1cm at 10mW (566mV <sub>eff</sub> ) |           |

All acoustic measurements at 23±2°C

### 3.3. Power handling


Receiver mounted in lifetime test device (open rear/open front)

1. Max short term power 75mW (RMS)  
Signal: pink noise HP 2<sup>nd</sup> order 800Hz, LP 10<sup>th</sup> order 6,3kHz, crest factor 2
2. Max continuous power (500h) 10mW (RMS)  
Signal: pink noise shaped according to diagram below:  
HP 10<sup>th</sup> order 100Hz, HP 2<sup>nd</sup> order 400Hz, LP 10<sup>th</sup> order 6,3kHz, crest factor 2

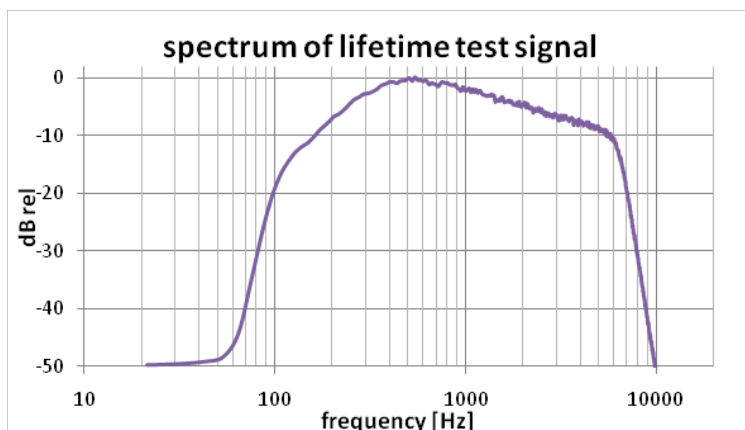

2403 260 00051

### 3.4. Measurement setup

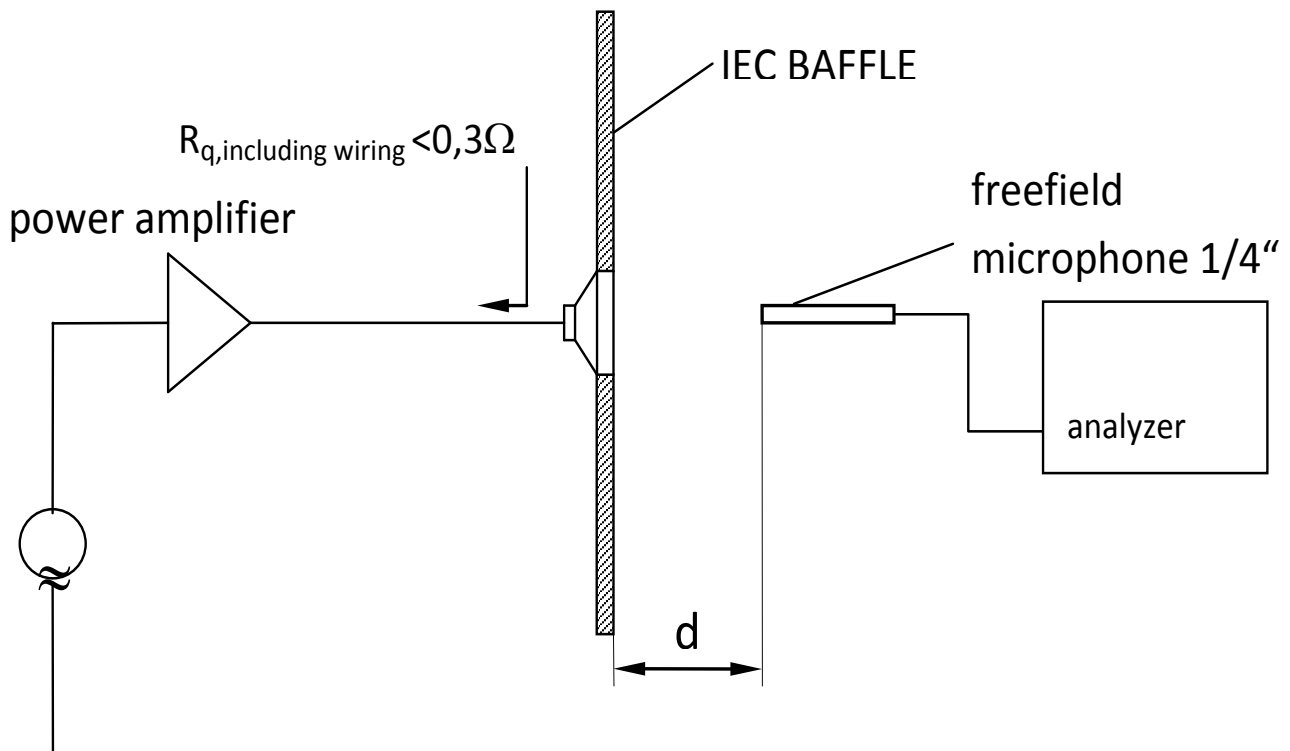

### 3.5. Measured Parameters

#### 3.5.1. Sensitivity

SPL is expressed in dB rel 20μPa, computed according to IEC 268-5.

Measurement set up and parameters according chapter 3.4.

This test is performed for 100% of products in the production line.

#### 3.5.2. Frequency response

Frequency response is measured according test set up in chapter 3.4 data sheet and checked against the tolerance window defined in chapter 3.1. This Test is performed for 100% of products in the production line.

#### 3.5.3. Total harmonic distortion (THD)







Is measured according IEC 268-5 (2nd to 5th harmonics) and test set up in chapter 3.4. This test is performed for 100% of products in the production line.

#### 3.5.4. Rub& Buzz

Rub & Buzz will be measured in the Inline-measuring device with a sinusoidal sweep. Rub & Buzz is defined as the maximum level of no harmonic energy, expressed as signal to non-harmonic content ratio, in a certain frequency-range. Signal and evaluation criteria are according to chapter 3.2. This test is performed for 100% of products in the production line.

2403 260 00051

### 3.6. Measurement adapter

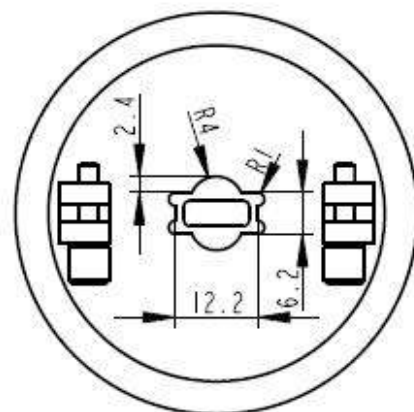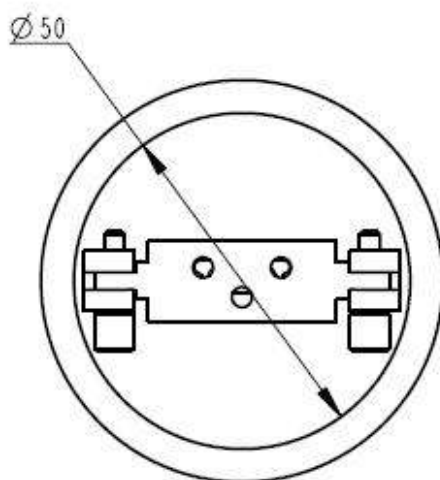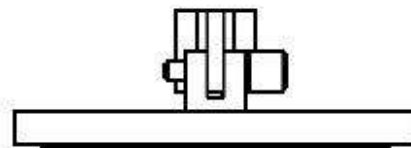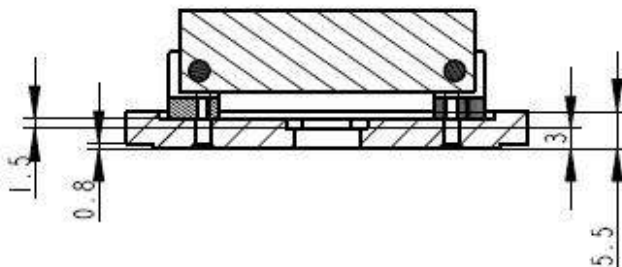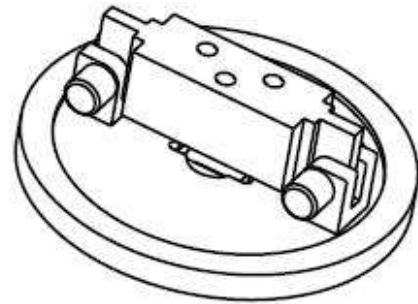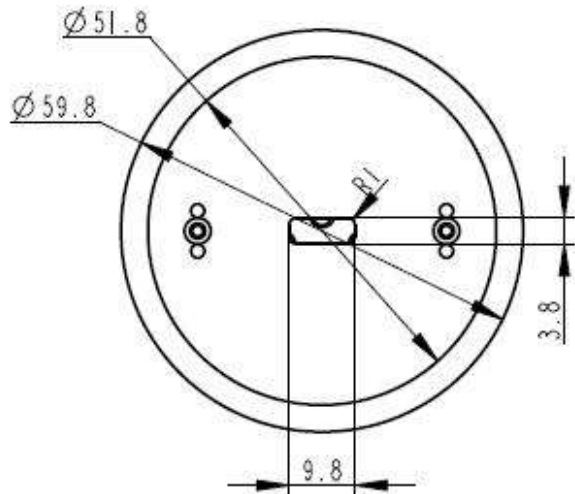

2403 260 00051

## 4. Environmental Conditions

### 4.1. Storage

The transducer fulfils the specified data after treatment according to the conditions of

**ETS 300 019-2-1**      Specification of environmental test: Storage  
Test spec. T 1.2: Weather protected, not temperature controlled storage locations.

### 4.2. Transportation

The transducer fulfils the specified data after treatment according to the conditions of

**ETS 300 019-2-2**      Specification of environmental test: Transportation  
Test Spec. T 2.3: Public Transportation

### 4.3. Functionality

The transducer fulfils the specified data after treatment according to the conditions of

**ETS 300 019-2-5**      Specification of environmental test: Ground vehicle installations  
Test spec. T 5.1: Protected installation

**ETS 300 019-2-7**      Specification of environmental test: Portable and non-stationary use  
Test spec. T 7.3E: Partly weather protected and non-weather protected locations.

2403 260 00051

## 5. Environmental tests

### 5.1. Qualification tests

According to our milestone plan (Product Creation Process), a complete qualification test will be done at design validation of products manufactured under serial conditions.

1x per year and product family a requalification takes place. The qualification process covers all tests described under 5.5 and a complete inspection.

### 5.2. Reliability tests

1x per month and product family samples are taken and submitted to tests described under 5.5.2

### 5.3. Sample Size, Sequence

Unless otherwise stated 20 arbitrary new samples will be used to perform each test for both, qualification and requalification test as described under 5.1 and 5.2.

### 5.4. Period of Shelf-Life

The period of shelf-life is 2 years.

### 5.5. Testing Procedures

#### 5.5.1. Storage Tests

##### 5.5.1.1. Low Temperature Storage Test

| Parameter                                      | Test Method and Conditions            | Duration | Evaluation Standard                                                                                                                                              |
|------------------------------------------------|---------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low Temperature Storage<br>(Ref. EN 60068-2-1) | -40°C<br>rel. humidity not controlled | 168h     | Measurements after 2 hours recovery time.<br>All samples fully operable.<br>All acoustical parameters according specification with tolerances increased by 50 %. |

##### 5.5.1.2. High Temperature Storage Test

| Parameter                               | Test Method and Conditions            | Duration | Evaluation Standard                                                                                                                                              |
|-----------------------------------------|---------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dry Heat Storage<br>(Ref. EN 60068-2-2) | +85°C<br>rel. humidity not controlled | 168h     | Measurements after 2 hours recovery time.<br>All samples fully operable.<br>All acoustical parameters according specification with tolerances increased by 50 %. |

2403 260 00051

### 5.5.1.3. Temperature Cycle Test

| Parameter                                     | Test Method and Conditions                                     | Duration                             | Evaluation Standard                                                                                                                                              |
|-----------------------------------------------|----------------------------------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Change of Temperature<br>(Ref. EN 60068-2-14) | -40°C/+85°C<br>Transition time <3 min.<br>See Figure 5-1 below | 5 cycles<br>>2h for each temperature | Measurements after 2 hours recovery time.<br>All samples fully operable.<br>All acoustical parameters according specification with tolerances increased by 50 %. |

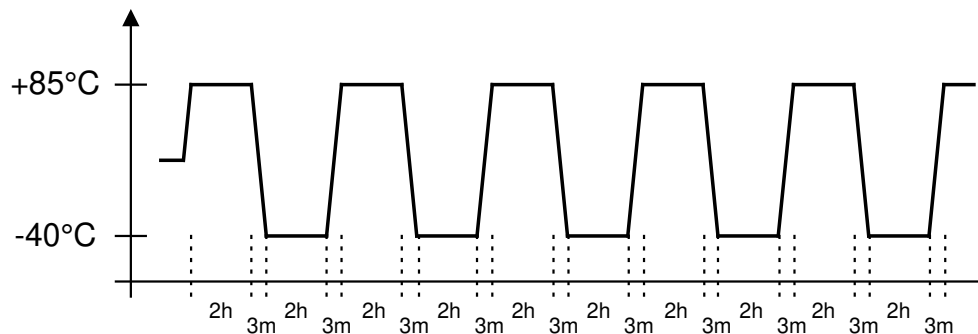



Figure 5-1: Temperature Cycle Test

### 5.5.1.4. Temperature / Humidity Cycle Test

| Parameter                                  | Test Method and Conditions                                                                                                        | Duration                             | Evaluation Standard                                                                                                                                              |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Damp heat, cyclic<br>(Ref. IEC 60068-2-30) | +25°C/+55°C<br>90% to 95% RH.<br>Temp. change time <3h<br>See Figure 5-2 below<br><u>Caution:</u> no condensed water on products! | 6 cycles.<br>24h at each temperature | Measurements after 2 hours recovery time.<br>All samples fully operable.<br>All acoustical parameters according specification with tolerances increased by 50 %. |

Figure 5-2: Temperature / Relative Humidity Cycle Test

### 5.5.2.

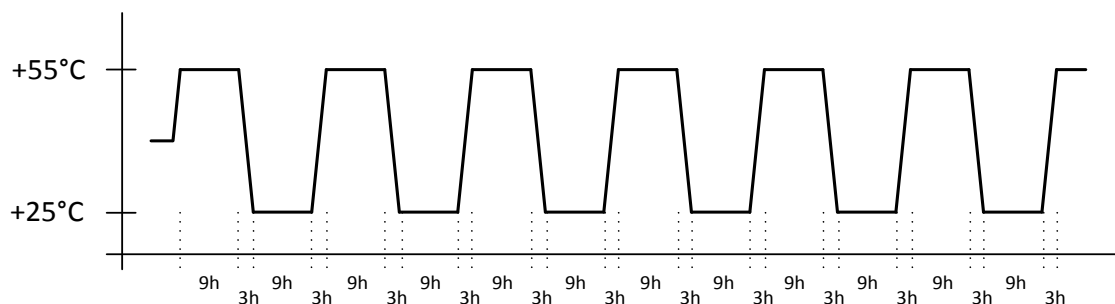

2403 260 00051

**Operating Tests****5.5.2.1. Cold Operation Test**

| Parameter                                  | Test Method and Conditions                                       | Duration | Evaluation Standard                                                                                                                                                                                     |
|--------------------------------------------|------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cold Operation Test<br>(Ref. EN 60068-2-1) | -20°C<br>rel. humidity not controlled<br>signal acc. Chapter 3.3 | 72h      | Measurements after 2 hours recovery time.<br>All samples fully operable.<br>THD may be increased after test. All other acoustical parameters according specification with tolerances increased by 50 %. |

**5.5.2.2. Dry Heat Operation Test**

| Parameter                                 | Test Method and Conditions                                       | Duration | Evaluation Standard                                                                                                                                                                                                                        |
|-------------------------------------------|------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dry Heat Operation<br>(Ref. EN 60068-2-2) | +70°C<br>rel. humidity not controlled<br>signal acc. Chapter 3.3 | 500h     | Measurements after 2 hours recovery time.<br>All samples fully operable.<br>The allowable change in sensitivity shall not be greater than 3 dB. All other acoustical parameters according specification with tolerances increased by 50 %. |

**5.5.3. Salt Mist Test**

| Parameter                                             | Test Method and Conditions                                                                                         | Duration | Evaluation Standard                                                                                                                                                                                                                                               |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Salt Mist<br>(Ref. IEC60068-2-52,<br>Kb / Severity 2) | The part must be subjected to 2 hours spray of 5% NaCl salt mist, at 35°C then be left at 40°C and 95% RH for 22h. | 3 cycles | The samples shall be washed after the test with distilled water and dried at T < 50°C.<br>Component may have reduced performance, but must still function properly. The allowable sensitivity difference shall not be greater than ±3dB from initial sensitivity. |

2403 260 00051

**5.5.4. Shock Resistance Test (Free Fall Test) - unprotected product**

| Parameter                                                | Test Method and Conditions                                                                  | Conditions / Sample size                                               | Evaluation Standard                                                                                                                                                           |
|----------------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mechanical shock<br>(Ref. IEC60068-2-32 Ed), Procedure 1 | Drop of sample without fixation of release plane from a height of 1.5m onto concrete floor. | Each 3 shocks in both directions of the 3 axes.<br>(18 drops in total) | Component may have reduced performance, but must still function properly. The allowable sensitivity difference shall not be greater than $\pm 3$ dB from initial sensitivity. |

**5.5.5. Impact Durability Test (Tumble Test) – protected product**

| Parameter                                                                         | Test Method and Conditions                                                               | Conditions / Sample size                   | Evaluation Standard                                                                                                                                                           |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Impact durability (in a Tumble Tester)<br>(Ref. IEC60068-2-32 Ed)<br>(SPR a7.1.1) | Speaker <i>in drop test box</i> or representative mechanics. Random drops on steel base. | 30 units<br>180 drops, 1m<br>DUT power off | Component may have reduced performance, but must still function properly. The allowable sensitivity difference shall not be greater than $\pm 3$ dB from initial sensitivity. |

**5.5.6. Resistance to Electrostatic Discharge**

| Parameter                                                  | Test Method and Conditions                                                                                                                                                                                                                                      | Conditions / Sample size                                 | Evaluation Standard                                                                                                |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Resistance to ESD<br>IEC61000-4-2 Level 4<br>(SPR c 2.5.1) | One pole is grounded and the ESD pulse is applied to the other pole. The speaker must be stressed first with one polarisation and then with the other polarisation. DUT must be discharged between each ESD exposure.<br>Level 4: contact +/- 8kV, air +/- 15kV | 10 exposures on each polarity / 5 units<br>DUT Power off | All samples fully operable.<br>All acoustical parameters according specification with tolerances increased by 50%. |

2403 260 00051

## 6. Related Documents

|                        |                                                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IEC 268-5</b>       | Sound System equipment<br>Part 5: Loudspeaker                                                                                                           |
| <b>IEC 68-2</b>        | Environmental testing                                                                                                                                   |
| <b>EN 60068-2</b>      | Environmental testing                                                                                                                                   |
| <b>ISO 2859 - 1</b>    | Sampling procedures for inspection by attributes<br>Part 1: Sampling plans indexed by acceptable quality level (AQL) for lot-by-lot inspection          |
| <b>ISO 3951</b>        | Sampling procedures and charts for inspection by variables for percent defectives.                                                                      |
| <b>ETS 300 019-2-1</b> | Specification of environmental test: Storage<br>Test spec. T 1.2: Weather protected, not temperature controlled storage locations                       |
| <b>ETS 300 019-2-2</b> | Specification of environmental test: Transportation<br>Test spec. T 2.3: Public Transportation                                                          |
| <b>ETS 300 019-2-5</b> | Specification of environmental test: Ground vehicle installations<br>Test spec. T 5.1: Protected installation                                           |
| <b>ETS 300 019-2-7</b> | Specification of environmental test: Portable and non-stationary use<br>Test spec. T 7.3E: Partly weather protected and non-weather protected locations |

2403 260 00051

## 7. Change History

| Status   | Version | Date     | ECR  | Comment / Changes                                                         | Initials of owner |
|----------|---------|----------|------|---------------------------------------------------------------------------|-------------------|
| Obsolete | A       | 19.08.10 | 2909 | First release                                                             | CP/ET/AS          |
| Obsolete | B       | 07.01.11 | 3055 | Update frequency response/lifetime test signal                            | AH                |
| Obsolete | C       | 24.03.11 | 3125 | Update printing code/migration to Knowles template                        | SA/CP             |
| Obsolete | D       | 26.05.11 | 3180 | Update printing code illustration/shelf life                              | CP/PD             |
| Obsolete | E       | 26.07.11 | 3207 | Shelf life 2 years                                                        | CP                |
| Release  | F       | 03.01.12 | 3428 | Correct THD curve/new frontpage picture<br>Change of short term max power | OL/CP/AH          |

## 8. Disclaimer

Stresses above the Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only. The device may not function when operated at these or any other conditions beyond those indicated under “Electrical and Acoustical Specifications”. Exposure beyond those indicated under “Electrical and Acoustical Specifications” for extended periods may affect device reliability.

This product is not qualified for use in automotive applications

Frequency range in telecom application:  
300 Hz – 3,4 kHz

The information contained in this literature is based on our experience to date and is believed to be reliable and it is subject to change without notice. It is intended as a guide for use by persons having technical skill at their own discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements consult factory. This publication is not to be taken as a license to operate under, or recommendation to infringe any existing patents. This supersedes and voids all previous literature.

