

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information


Part Number: WP-25993-D63
Manufacturer: Knowles
Package: Tray
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/knowles/wp-25993-d63.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects


Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.




WP-25993-D63

SHT 1.1

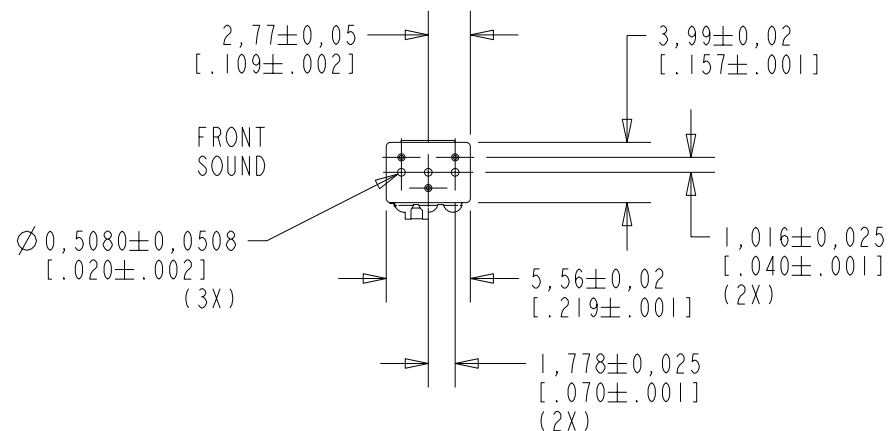


NOTE:

1. INCREASED PRESSURE AT THE FRONT SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

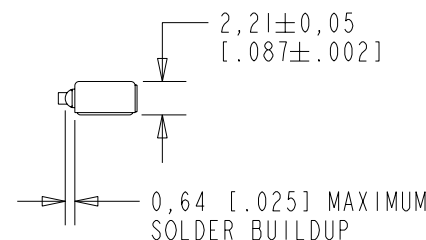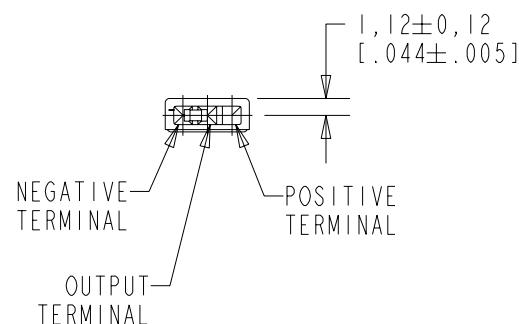

NOMINAL WEIGHT
.13 GRAM

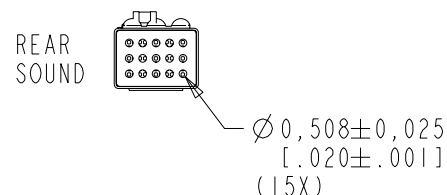


DIMENSIONS IN MILLIMETERS [INCHES]


KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Released	A
A	MI0101749	12-28-07		
SCALE: 2:1			DR. BY SDZ	DATE 12-28-07
DO NOT SCALE DRAWING			CK. BY GJP	DATE 1-02-07
TITLE: MICROPHONE		WP-25993-D63		APP. BY GJP
OUTLINE DRAWING		SHT 1.1		DATE 1-02-07

SENSITIVITY IN dB RELATIVE TO 1.0 VOLT/0.1 Pa (N/M²)
FOR CONDITIONS SHOWN BELOW.

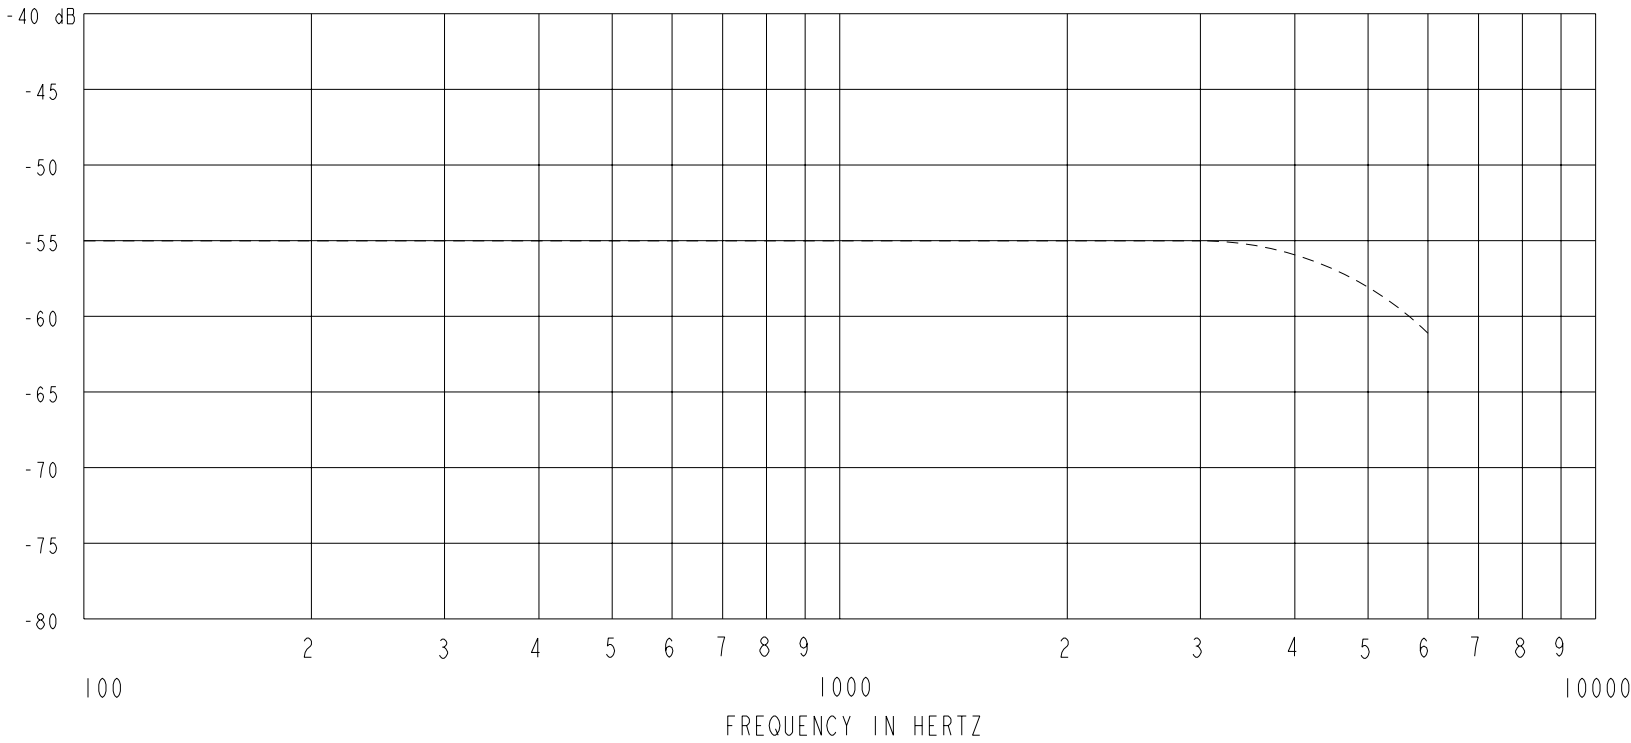

FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
100	---	-55.0	---	-2.0	+2.0
1000	-59.0	-55.0	-51.0	0.0	0.0
4000	---	-57.0	---	-5.0	+1.0



NOTES:

1. CASE CONNECTED TO NEGATIVE TERMINAL.
2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
3. SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
4. PRESSURE DIFFERENCE SENSITIVITY TESTED WITH REAR SOUND PORT SEALED TO AIR VOLUME OF AT LEAST 0.5 CC.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	OUTPUT IMPEDANCE OHMS		
			MIN.	NOM.	MAX.
KA, JA	1.3V	300uA MAX.	1000	2000	3000

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
			Released		A
A	MI0101749	12-28-07			
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE	
			SDZ	12-28-07	
TITLE: MICROPHONE			CK. BY	DATE	
			GJP	1-02-07	
PERFORMANCE SPECIFICATION			APP. BY	DATE	
			GJP	1-02-07	

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

WP-25993-D63
SHT 2.1