

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** VCAS120618E380RP  
**Manufacturer:** KYOCERA AVX  
**Package:** 1206 (3216 Metric)  
**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/kyocera-avx/vcas120618e380rp.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

# TransGuard® Automotive Series

## Multilayer Varistors for Automotive Applications



### GENERAL DESCRIPTION

The TransGuard Automotive Series are zinc oxide (ZnO) based ceramic semiconductor devices with non-linear, bi-directional voltage-current characteristics.

They have the advantage of offering bi-directional overvoltage protection as well as EMI/RFI attenuation in a single SMT package. The Automotive Series high current and high energy handling capability make them well suited for protection against automotive related transients.

KYOCERA AVX VG series parts (large case size, high energy) are glass encapsulated. These parts provide the same high reliability as traditional VC series parts. The glass encapsulation provides also enhanced resistance against harsh environment or process such as acids, salts, chlorite flux.

Operating Temperature: -55°C to +125°C

### FEATURES

- High Reliability
- High Energy Absorption (Load Dump)
- High Current Handling
- AEC Q200 Qualified
- Bi-Directional protection
- EMI/RFI attenuation
- Multi-strike capability
- Sub 1nS response to ESD strike
- ISO 7637-2:2004
- JASO D001 1994

### APPLICATIONS

- Internal Combustion Engine (ICE) Vehicles
- Hybrid Electric Vehicles (HEV)
- Plug-in Hybrid Electric Vehicles (PHEV)
- Commercial Vehicles
  - CAN, LIN, FLEXRAY based modules
  - Sensors
  - Module load dump protection
  - Motor/inductive load transient suppression



### HOW TO ORDER

| VC                                                             | AS                | 1206                                                         | 18                                                                                                                                        | D                                                                                                                                        | 400                                                                                                                  | R                                                                                                         | P                                                                                                                                                        |                                                                                                                                    |                                                                                                                                                     |                                                                               |
|----------------------------------------------------------------|-------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Varistor Chip                                                  | Automotive Series | Case Size                                                    | Working Voltage                                                                                                                           | Energy Rating                                                                                                                            | Clamping Voltage                                                                                                     | Package                                                                                                   | Termination                                                                                                                                              |                                                                                                                                    |                                                                                                                                                     |                                                                               |
| VC = Varistor Chip<br>VG = Varistor Glass<br>Encapsulated Chip |                   | 0402<br>0603<br>0805<br>1206<br>1210<br>1812<br>2220<br>3220 | 03 = 3.3Vdc<br>05 = 5.6Vdc<br>09 = 9Vdc<br>12 = 12Vdc<br>14 = 14Vdc<br>16 = 16Vdc<br>18 = 18Vdc<br>22 = 22Vdc<br>26 = 26Vdc<br>30 = 30Vdc | 31 = 31Vdc<br>34 = 34Vdc<br>38 = 38Vdc<br>42 = 42Vdc<br>45 = 45Vdc<br>48 = 48Vdc<br>56 = 56Vdc<br>60 = 60Vdc<br>65 = 65Vdc<br>85 = 85Vdc | A = 0.1J<br>B = 0.2J<br>C = 0.3J<br>D = 0.4J<br>E = 0.5J<br>F = 0.7J<br>H = 1.2J<br>J = 1.5J<br>K = 0.6J<br>L = 0.8J | S = 1.9-2.0J<br>X = 0.05J<br>M = 1J<br>N = 1.1J<br>U = 4.0-5.0J<br>P = 2.5-3.7J<br>Y = 6.5-12J<br>Z = 13J | 140 = 14V<br>150 = 18V<br>220 = 22V<br>250 = 27V<br>300 = 32V<br>380 = 38V<br>390 = 42V<br>400 = 42V<br>440 = 44V<br>490 = 49V<br>540 = 54V<br>570 = 57V | 580 = 60V<br>620 = 67V<br>650 = 67V<br>770 = 77V<br>800 = 80V<br>900 = 90V<br>101 = 100V<br>111 = 110V<br>131 = 135V<br>151 = 150V | D = 7" (1000)*<br>R = 7" (4000)*<br>T = 13" (10,000)*<br>W = 7" (10,000)**<br>0402 only<br><br>*Not available for 0402<br>**Only available for 0402 | P = Ni/Sn plated<br>Z = FLEXITERM®*<br><br>*Only available for 0603-1210 case |

# TransGuard® Automotive Series

## Multilayer Varistors for Automotive Applications



### ELECTRICAL CHARACTERISTICS

| Part Number       | V <sub>w</sub> (DC) | V <sub>w</sub> (AC) | V <sub>B</sub> | V <sub>C</sub> | I <sub>vc</sub> | I <sub>L</sub> | E <sub>T</sub> | E <sub>LD</sub> | I <sub>P</sub> | Cap   | Freq | V <sub>Jump</sub> | P <sub>Diss. Max</sub> |
|-------------------|---------------------|---------------------|----------------|----------------|-----------------|----------------|----------------|-----------------|----------------|-------|------|-------------------|------------------------|
|                   | Vdc                 | Vac                 | V              | V              | A               | μA             | J              | J               | A              | pF    | V    | W                 |                        |
| VCAS060303A140    | 3.3                 | 2.3                 | 6.0±20%        | 14             | 1               | 50             | 0.1            | -               | 30             | 1450  | K    | -                 | 0.002                  |
| VCAS080503A140    | 3.3                 | 2.3                 | 6.0±20%        | 14             | 1               | 50             | 0.1            | -               | 40             | 1000  | K    | -                 | 0.002                  |
| VCAS080503C140    | 3.3                 | 2.3                 | 6.0±20%        | 14             | 1               | 50             | 0.3            | -               | 120            | 4500  | K    | -                 | 0.006                  |
| VCAS120603A140    | 3.3                 | 2.3                 | 6.0±20%        | 14             | 1               | 50             | 0.1            | -               | 40             | 1500  | K    | -                 | 0.002                  |
| VCAS120603D140    | 3.3                 | 2.3                 | 6.0±20%        | 14             | 1               | 50             | 0.4            | -               | 150            | 4000  | K    | -                 | 0.009                  |
| VCAS040205X150 __ | 5.6                 | 4                   | 8.5±20%        | 18             | 1               | 35             | 0.05           | -               | 20             | 175   | M    | -                 | 0.001                  |
| VCAS060305A150 __ | 5.6                 | 4                   | 8.5±20%        | 18             | 1               | 35             | 0.1            | -               | 30             | 750   | K    | -                 | 0.001                  |
| VCAS080505A150 __ | 5.6                 | 4                   | 8.5±20%        | 18             | 1               | 35             | 0.1            | -               | 40             | 1100  | K    | -                 | 0.001                  |
| VCAS080505C150 __ | 5.6                 | 4                   | 8.5±20%        | 18             | 1               | 35             | 0.3            | -               | 120            | 3000  | K    | -                 | 0.005                  |
| VCAS120605A150 __ | 5.6                 | 4                   | 8.5±20%        | 18             | 1               | 35             | 0.1            | -               | 40             | 1200  | K    | -                 | 0.002                  |
| VCAS120605D150 __ | 5.6                 | 4                   | 8.5±20%        | 18             | 1               | 35             | 0.4            | -               | 150            | 3000  | K    | -                 | 0.008                  |
| VCAS040209X200 __ | 9                   | 6.4                 | 12.7±15%       | 22             | 1               | 25             | 0.05           | -               | 20             | 175   | M    | -                 | 0.001                  |
| VCAS060309A200 __ | 9                   | 6.4                 | 12.7±15%       | 22             | 1               | 25             | 0.1            | -               | 30             | 550   | K    | -                 | 0.002                  |
| VCAS080509A200 __ | 9                   | 6.4                 | 12.7±15%       | 22             | 1               | 25             | 0.1            | -               | 40             | 750   | K    | -                 | 0.002                  |
| VCAS080512A250 __ | 12                  | 8.5                 | 16±15%         | 27             | 1               | 25             | 0.1            | -               | 40             | 525   | K    | -                 | 0.002                  |
| VCAS040214X300 __ | 14                  | 10                  | 18.5±12%       | 32             | 1               | 15             | 0.05           | -               | 20             | 85    | K    | 16                | 0.001                  |
| VCAS060314A300 __ | 14                  | 10                  | 18.5±12%       | 32             | 1               | 15             | 0.1            | -               | 30             | 350   | K    | 16                | 0.002                  |
| VCAS080514A300 __ | 14                  | 10                  | 18.5±12%       | 32             | 1               | 15             | 0.1            | -               | 40             | 325   | K    | 16                | 0.002                  |
| VCAS080514C300 __ | 14                  | 10                  | 18.5±12%       | 32             | 1               | 15             | 0.3            | -               | 120            | 900   | K    | 20                | 0.006                  |
| VCAS120614A300 __ | 14                  | 10                  | 18.5±12%       | 32             | 1               | 15             | 0.1            | -               | 40             | 600   | K    | 20                | 0.002                  |
| VCAS120614D300 __ | 14                  | 10                  | 18.5±12%       | 32             | 1               | 15             | 0.4            | -               | 150            | 1050  | K    | 20                | 0.008                  |
| VCAS060316B400 __ | 16                  | 11                  | 25.5±10%       | 42             | 1               | 10             | 0.2            | 0.25            | 30             | 150   | K    | 27.5              | 0.003                  |
| VCAS120616K380 __ | 16                  | 11                  | 25.5±10%       | 38             | 1               | 10             | 0.6            | 1.5             | 200            | 930   | K    | 27.5              | 0.01                   |
| VCAS121016J390 __ | 16                  | 11                  | 25.5±10%       | 42             | 5               | 10             | 1.6            | 3               | 500            | 3100  | K    | 27.5              | 0.03                   |
| VGAS121016S390    | 16                  | 14                  | 24.5±10%       | 40             | 2.5             | 15             | 2              | 5               | 500            | 3000  | K    | 27.5              | 0.01                   |
| VGAS181216P390    | 16                  | 11                  | 24.5±10%       | 40             | 5               | 15             | 2.9            | 10              | 1000           | 7000  | K    | 27.5              | 0.07                   |
| VCAS222016Y390    | 16                  | 11                  | 24.5±10%       | 40             | 10              | 15             | 10.2           | 37              | 2000           | 2500  | K    | 27.5              | 10.2                   |
| VGAS222016Y390    | 16                  | 11                  | 24.5±10%       | 40             | 10              | 15             | 10.2           | 37              | 2000           | 2500  | K    | 27.5              | 0.08                   |
| VGAS181216P400 __ | 16                  | 11                  | 24.5±10%       | 42             | 5               | 10             | 2.9            | 10              | 1000           | 5000  | K    | 27.5              | 0.07                   |
| VCAS222016W400    | 16                  | 11                  | 24.5±10%       | 42             | 10              | 15             | 7.6            | 20              | 2000           | 2000  | K    | 27.5              | 7.6                    |
| VGAS222016W400    | 16                  | 11                  | 24.5±10%       | 42             | 10              | 15             | 7.6            | 20              | 2000           | 2000  | K    | 27.5              | 7.6                    |
| VGAS222016Y400    | 16                  | 11                  | 24.5±10%       | 42             | 10              | 10             | 7.2            | 25              | 1500           | 13000 | K    | 25.5              | 0.1                    |
| VCAS222016Z400    | 16                  | 11                  | 24.5±10%       | 42             | 10              | 15             | 16             | 45              | 2000           | 2800  | K    | 27.5              | 16                     |
| VGAS222016Z400    | 16                  | 11                  | 24.5±10%       | 42             | 10              | 15             | 16             | 45              | 2000           | 2800  | K    | 27.5              | 16                     |
| VCAS040218X400 __ | 18                  | 13                  | 25.5±10%       | 42             | 1               | 10             | 0.05           | 0.05            | 20             | 65    | M    | 27.5              | 0.001                  |
| VCAS060318A400 __ | 18                  | 13                  | 25.5±10%       | 42             | 1               | 10             | 0.1            | 0.25            | 30             | 150   | K    | 27.5              | 0.003                  |
| VCAS080518A400 __ | 18                  | 13                  | 25.5±10%       | 42             | 1               | 10             | 0.1            | 0.3             | 30             | 225   | K    | 27.5              | 0.002                  |
| VCAS080518C400 __ | 18                  | 13                  | 25.5±10%       | 42             | 1               | 10             | 0.3            | 1               | 120            | 550   | K    | 27.5              | 0.007                  |
| VCAS120618A400 __ | 18                  | 13                  | 25.5±10%       | 42             | 1               | 10             | 0.1            | 0.5             | 30             | 350   | K    | 27.5              | 0.002                  |
| VCAS120618D400 __ | 18                  | 13                  | 25.5±10%       | 42             | 1               | 10             | 0.4            | 1.5             | 150            | 900   | K    | 27.5              | 0.008                  |
| VCAS120618E380 __ | 18                  | 13                  | 25.5±10%       | 38             | 1               | 10             | 0.5            | 1.5             | 200            | 930   | K    | 27.5              | 0.01                   |
| VCAS121018J390 __ | 18                  | 13                  | 25.5±10%       | 42             | 5               | 10             | 1.6            | 3               | 500            | 3100  | K    | 27.5              | 0.03                   |
| VGAS181218P440    | 18                  | 14                  | 27.5±10%       | 44             | 5               | 15             | 2.9            | 6               | 800            | 5000  | K    | 27.5              | 0.05                   |
| VGAS222022Y490    | 22                  | 17                  | 30±10%         | 49             | 10              | 15             | 6.8            | 25              | 1200           | 12000 | K    | 27.5              | 0.03                   |
| VCAS060326A580 __ | 26                  | 18                  | 34.5±10%       | 60             | 1               | 10             | 0.1            | 0.1             | 30             | 155   | K    | 27.5              | 0.002                  |
| VCAS080526A580 __ | 26                  | 18                  | 34.5±10%       | 60             | 1               | 10             | 0.1            | 0.15            | 30             | 120   | K    | 27.5              | 0.002                  |
| VCAS080526C580 __ | 26                  | 18                  | 34.5±10%       | 60             | 1               | 10             | 0.3            | 0.5             | 100            | 250   | K    | 27.5              | 0.006                  |
| VCAS120626D580 __ | 26                  | 18                  | 34.5±10%       | 60             | 1               | 10             | 0.4            | 1               | 120            | 500   | K    | 27.5              | 0.008                  |
| VCAS120626F540 __ | 26                  | 18                  | 33.0±10%       | 54             | 1               | 15             | 0.7            | 1.5             | 200            | 600   | K    | 27.5              | 0.008                  |
| VCAS121026H560 __ | 26                  | 18                  | 34.5±10%       | 60             | 5               | 10             | 1.2            | 3               | 300            | 2150  | K    | 27.5              | 0.018                  |
| VGAS181226P570    | 26                  | 23                  | 35.0±10%       | 57             | 5               | 15             | 2.5            | 8               | 600            | 3000  | K    | 30                | 0.015                  |
| VGAS222026Y570    | 26                  | 23                  | 35±10%         | 57             | 10              | 15             | 6.8            | 25              | 1100           | 7000  | K    | 30                | 0.03                   |
| VGAS322026Z570    | 26                  | 23                  | 35±10%         | 57             | 10              | 15             | 13             | 50              | 1800           | 15000 | K    | 30                | 0.04                   |
| VCAS060330A650 __ | 30                  | 21                  | 41.0±10%       | 67             | 1               | 10             | 0.1            | 0.15            | 30             | 125   | K    | 29                | 0.002                  |
| VCAS080530A650 __ | 30                  | 21                  | 41.0±10%       | 67             | 1               | 10             | 0.1            | 0.15            | 30             | 90    | M    | 29                | 0.002                  |
| VCAS080530C650 __ | 30                  | 21                  | 41.0±10%       | 67             | 1               | 10             | 0.3            | 0.5             | 80             | 250   | K    | 29                | 0.005                  |
| VCAS120630D650 __ | 30                  | 21                  | 41.0±10%       | 67             | 1               | 10             | 0.4            | 1               | 120            | 400   | K    | 29                | 0.008                  |
| VCAS121030H620 __ | 30                  | 21                  | 41.0±10%       | 67             | 5               | 10             | 1.2            | 3               | 280            | 1850  | K    | 30                | 0.018                  |
| VCAS121030S620 __ | 30                  | 21                  | 41.0±10%       | 67             | 5               | 10             | 1.9            | 3               | 300            | 1500  | K    | 29                | 0.038                  |
| VCAS080531C650 __ | 31                  | 25                  | 39.0±10%       | 65             | 1               | 10             | 0.3            | 0.5             | 80             | 250   | K    | 29                | 0.005                  |
| VCAS120631M650 __ | 31                  | 25                  | 39.0±10%       | 65             | 1               | 15             | 1              | 1.5             | 200            | 500   | K    | 29                | 0.008                  |

# TransGuard® Automotive Series

## Multilayer Varistors for Automotive Applications



### ELECTRICAL CHARACTERISTICS

| Part Number       | V <sub>w</sub> (DC)<br>V <sub>dc</sub> | V <sub>w</sub> (AC)<br>V <sub>ac</sub> | V <sub>B</sub><br>V | V <sub>C</sub><br>V | I <sub>vc</sub><br>A | I <sub>L</sub><br>μA | E <sub>T</sub><br>J | E <sub>LD</sub><br>J | I <sub>P</sub><br>A | Cap<br>pF | Freq<br>V | V <sub>Jump</sub><br>W | P <sub>Diss. Max</sub> |
|-------------------|----------------------------------------|----------------------------------------|---------------------|---------------------|----------------------|----------------------|---------------------|----------------------|---------------------|-----------|-----------|------------------------|------------------------|
| VGAS121031R650    | 31                                     | 25                                     | 39±10%              | 65                  | 2.5                  | 15                   | 1.7                 | 4.5                  | 300                 | 1200      | K         | 30                     | 0.05                   |
| VGAS181231P650    | 31                                     | 25                                     | 39.0±10%            | 65                  | 5                    | 15                   | 3.7                 | 8                    | 800                 | 2600      | K         | 30                     | 0.06                   |
| VGAS222031Y650    | 31                                     | 25                                     | 39±10%              | 65                  | 10                   | 15                   | 9.6                 | 23                   | 1200                | 6100      | K         | 30                     | 0.03                   |
| VCAS120634N770 __ | 34                                     | 30                                     | 47.0±10%            | 77                  | 1                    | 15                   | 1.1                 | 1.5                  | 200                 | 400       | K         | 48                     | 0.008                  |
| VGAS121034S770 __ | 34                                     | 30                                     | 47.0±10%            | 77                  | 2.5                  | 15                   | 2                   | 3                    | 400                 | 1000      | K         | 48                     | 0.04                   |
| VGAS181234U770 __ | 34                                     | 30                                     | 47.0±10%            | 77                  | 5                    | 15                   | 5                   | 6.1                  | 800                 | 1500      | K         | 48                     | 0.08                   |
| VGAS222034Y770    | 34                                     | 30                                     | 47.0±10%            | 77                  | 10                   | 15                   | 12                  | 25                   | 2000                | 6300      | K         | 48                     | 0.240                  |
| VGAS322034Z770    | 34                                     | 30                                     | 47±10%              | 77                  | 10                   | 15                   | 13                  | 50                   | 2000                | 18000     | K         | 48                     | 0.26                   |
| VCAS080538C770 __ | 38                                     | 30                                     | 47.0±10%            | 77                  | 1                    | 10                   | 0.3                 | -                    | 80                  | 200       | K         | 48                     | 0.006                  |
| VCAS120642L800 __ | 42                                     | 32                                     | 51.0±10%            | 80                  | 1                    | 15                   | 0.8                 | -                    | 180                 | 600       | K         | 48                     | 0.016                  |
| VCAS120642K900    | 42                                     | 32                                     | 56±10%              | 90                  | 1                    | 15                   | 0.6                 | -                    | 200                 | 260       | K         | 48                     | 0.012                  |
| VGAS181242U900    | 42                                     | 35                                     | 56.0±10%            | 90                  | 5                    | 15                   | 4.0                 | 6                    | 500                 | 1200      | K         | 48                     | 0.015                  |
| VGAS222042Y900    | 42                                     | 37                                     | 56±10%              | 90                  | 10                   | 15                   | 12                  | 24                   | 1000                | 5000      | K         | 48                     | 0.06                   |
| VCAS120645K900    | 45                                     | 35                                     | 56±10%              | 90                  | 1                    | 25                   | 0.6                 | -                    | 200                 | 260       | K         | 48                     | 0.012N                 |
| VCAS120648D101 __ | 48                                     | 34                                     | 62.0±10%            | 100                 | 1                    | 10                   | 0.4                 | -                    | 100                 | 225       | K         | 48                     | 0.008                  |
| VCAS121048H101 __ | 48                                     | 34                                     | 62.0±10%            | 100                 | 1                    | 10                   | 1.2                 | -                    | 250                 | 500       | K         | 48                     | 0.022                  |
| VCAS120656F111 __ | 56                                     | 40                                     | 68.0±10%            | 110                 | 1                    | 15                   | 0.7                 | -                    | 100                 | 180       | K         | 48                     | 0.014                  |
| VGAS181256U111    | 56                                     | 40                                     | 68±10%              | 110                 | 5                    | 15                   | 4.8                 | -                    | 500                 | 1100      | K         | 48                     | 0.04                   |
| VCAS120660M131 __ | 60                                     | 50                                     | 82.0±10%            | 135                 | 1                    | 15                   | 1                   | -                    | 150                 | 250       | K         | 48                     | 0.008                  |
| VCAS121060J121    | 60                                     | 42                                     | 76±10%              | 120                 | 5                    | 10                   | 1.5                 | -                    | 250                 | 400       | K         | 48                     | 0.03                   |
| VGAS121065P131    | 65                                     | 50                                     | 82±10%              | 135                 | 2.5                  | 15                   | 2.7                 | -                    | 350                 | 600       | K         | 48                     | 0.05                   |
| VGAS181265U131    | 65                                     | 50                                     | 82±10%              | 135                 | 5                    | 15                   | 4.5                 | -                    | 400                 | 800       | K         | 48                     | 0.03                   |
| VGAS222065Y131    | 65                                     | 50                                     | 82±10%              | 135                 | 10                   | 15                   | 6.5                 | -                    | 1100                | 3000      | K         | 48                     | 0.06                   |
| VCAS121085S151 __ | 85                                     | 60                                     | 100.0±10%           | 150                 | 1                    | 35                   | 2                   | -                    | 250                 | 275       | K         | 48                     | 0.040                  |
| VGAS181285U161    | 85                                     | 60                                     | 100±10%             | 165                 | 5                    | 15                   | 4.5                 | -                    | 400                 | 500       | K         | 48                     | 0.04                   |

|                     |                                                           |                   |                                                                                |
|---------------------|-----------------------------------------------------------|-------------------|--------------------------------------------------------------------------------|
| V <sub>w</sub> (DC) | DC Working Voltage (V)                                    | E <sub>T</sub>    | Transient Energy Rating (J, 10x1000μs)                                         |
| V <sub>w</sub> (AC) | AC Working Voltage (V)                                    | I <sub>P</sub>    | Peak Current Rating (A, 8x20μs)                                                |
| V <sub>B</sub>      | Typical Breakdown Voltage (V @ 1mA <sub>DC</sub> )        | Cap               | Typical Capacitance (pF) @ frequency specified and 0.5 V <sub>RMS</sub> , 25°C |
| V <sub>C</sub>      | Clamping Voltage [V @ I <sub>IV</sub> ]                   | V <sub>Jump</sub> | Jump Start (V)                                                                 |
| I <sub>vc</sub>     | Test Current for V <sub>C</sub>                           | P                 | Power Dissipation (W)                                                          |
| I <sub>L</sub>      | Maximum Leakage Current at the working voltage, 25°C (μA) |                   |                                                                                |

# TransGuard® Automotive Series

## Multilayer Varistors for Automotive Applications



### AUTOMOTIVE SERIES – LOAD DUMP TEST ACCORDING TO ISO DP7637 REV 2 PULSE 5



When using the test method indicated below, the amount of Energy dissipated by the varistor must not exceed the Load Dump Energy value specified in the product table.

### LOAD DUMP LIBRARY TYPICAL MAX VZ VERSUS PULSE DURATION AND RI

#### 12V SYSTEMS

| VCAS060316B400 | 0.5Ω | 1Ω | 4Ω  |
|----------------|------|----|-----|
| 100ms          | 37   | 38 | 42  |
| 200ms          | 36   | 37 | 41  |
| 400ms          | 35   | 36 | 39  |
| VCAS120616K380 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 42   | 45 | 55  |
| 200ms          | 40   | 43 | 50  |
| 400ms          | 39   | 40 | 45  |
| VCAS121016J390 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 48   | 53 | 74  |
| 200ms          | 46   | 50 | 64  |
| 400ms          | 43   | 46 | 56  |
| VGAS181216P400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 46   | 52 | 72  |
| 200ms          | 37   | 41 | 59  |
| 400ms          | 32   | 35 | 51  |
| VGAS222016Y400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 53   | 60 | 77  |
| 200ms          | 50   | 55 | 73  |
| 400ms          | 47   | 50 | 66  |
| VCAS040218X400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 38   | 39 | 40  |
| 200ms          | 37   | 37 | 38  |
| 400ms          | 34   | 35 | 36  |
| VCAS060318A400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 37   | 38 | 42  |
| 200ms          | 36   | 37 | 41  |
| 400ms          | 35   | 36 | 39  |
| VCAS080518A400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 37   | 39 | 40  |
| 200ms          | 35   | 38 | 39  |
| 400ms          | 33   | 37 | 38  |
| VCAS080518C400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 40   | 41 | 48  |
| 200ms          | 39   | 40 | 45  |
| 400ms          | 38   | 39 | 42  |
| VCAS120618A400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 43   | 45 | 55  |
| 200ms          | 41   | 43 | 48  |
| 400ms          | 40   | 41 | 45  |
| VCAS120618D400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 42   | 45 | 55  |
| 200ms          | 40   | 42 | 50  |
| 400ms          | 39   | 40 | 45  |
| VCAS120618E380 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 42   | 45 | 55  |
| 200ms          | 40   | 43 | 50  |
| 400ms          | 39   | 40 | 45  |
| VCAS121018J390 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 48   | 53 | 74  |
| 200ms          | 46   | 50 | 64  |
| 400ms          | 43   | 46 | 56  |
| VCAS222016W400 | 0.5Ω | 1Ω | 4Ω  |
| 100ms          | 62   | 80 | 172 |
| 400ms          | 48   |    | 90  |

#### 12V SYSTEMS (continued)

| VCAS222016Y390 | 0.5Ω | 1Ω  | 4Ω  |
|----------------|------|-----|-----|
| 100ms          | 78   | 105 | 213 |
| 400ms          | 51   |     | 128 |
| VCAS222016Z400 | 0.5Ω | 1Ω  | 4Ω  |
| 100ms          | 82   | 110 | 213 |
| 400ms          | 55   |     | 134 |

#### 24V SYSTEMS

| VCAS060326A580 | 1Ω  | 4Ω  | 8Ω  |
|----------------|-----|-----|-----|
| 100ms          | 51  | 56  | 58  |
| 200ms          | 50  | 54  | 56  |
| 400ms          | 49  | 51  | 53  |
| VCAS080526A580 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 51  | 53  | 59  |
| 200ms          | 49  | 51  | 57  |
| 400ms          | 48  | 50  | 51  |
| VCAS080526C580 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 51  | 54  | 62  |
| 200ms          | 49  | 51  | 56  |
| 400ms          | 48  | 49  | 51  |
| VCAS120626D580 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 52  | 60  | 68  |
| 200ms          | 50  | 57  | 65  |
| 400ms          | 47  | 54  | 61  |
| VCAS121026H560 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 61  | 74  | 91  |
| 200ms          | 59  | 69  | 82  |
| 400ms          | 55  | 64  | 70  |
| VCAS060330A650 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 57  | 59  | 63  |
| 200ms          | 56  | 58  | 61  |
| 400ms          | 54  | 57  | 58  |
| VCAS080530A650 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 58  | 62  | 66  |
| 200ms          | 56  | 61  | 64  |
| 400ms          | 53  | 57  | 61  |
| VCAS080530C650 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 58  | 61  | 63  |
| 200ms          | 57  | 58  | 62  |
| 400ms          | 55  | 56  | 59  |
| VCAS120630D650 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 61  | 70  | 75  |
| 200ms          | 57  | 66  | 69  |
| 400ms          | 56  | 62  | 64  |
| VCAS121030H620 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 70  | 77  | 98  |
| 200ms          | 64  | 70  | 89  |
| 400ms          | 56  | 65  | 70  |
| VGAS181234U770 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 87  | 110 | 125 |
| 200ms          | 82  | 97  | 114 |
| 400ms          | 75  | 85  | 95  |
| VGAS222034Y770 | 1Ω  | 4Ω  | 8Ω  |
| 100ms          | 100 | 125 | 165 |
| 200ms          | 91  | 115 | 155 |
| 400ms          | 84  | 104 | 120 |

TransGuard® Automotive Series
Multilayer Varistors for Automotive Applications



LOAD DUMP TEST – JASO D001-1994




| Type of Test |     | Test Conditions |         |        |                    |          |                                      | Number of Pulses |
|--------------|-----|-----------------|---------|--------|--------------------|----------|--------------------------------------|------------------|
|              |     | $V_p$ (V)       | t (s)   | f (Hz) | $R_l$ ( $\Omega$ ) | Waveform | Transient Voltage Generating Circuit |                  |
| TypeA        | A-1 | 70              | 200,000 | -      | 0.8                | Fig. 4   | Fig. 5 & Fig. 6                      | 1                |
|              | A-2 | 110             | 2.5     |        | 0.4                |          | Fig. 6                               | 10               |
| TypeB        | B-1 | 80              | 60,000  | 1/30   | 8                  | Fig. 7   | Fig. 8                               | 100              |
|              | B-2 | -260            | 2,000   |        | 80                 |          |                                      |                  |

LOAD DUMP LIBRARY  
QUALIFIED TO JASO D001-1994

| VCAS222016Z400 | 0.5 $\Omega$ | 1 $\Omega$ | 4 $\Omega$ |
|----------------|--------------|------------|------------|
| 100ms          | 82           | 110        | 213        |
| 400ms          | 55           |            | 134        |

TransGuard® Automotive Series

Multilayer Varistors for Automotive Applications

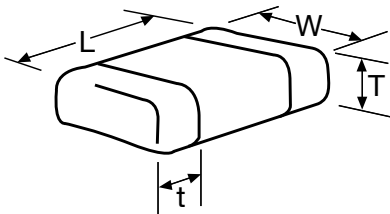

DIMENSIONS: MM (INCHES)

| Style             |             | 0402                       | 0603                       | 0805                       | 1206                                                                     | 1210                       | 1812                       | 2220                       | 3220                       |
|-------------------|-------------|----------------------------|----------------------------|----------------------------|--------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| (L) Length        | mm<br>(in.) | 1.00±0.10<br>(0.040±0.004) | 1.60±0.15<br>(0.063±0.006) | 2.01±0.20<br>(0.079±0.008) | 3.20±0.20<br>(0.126±0.008)                                               | 3.20±0.20<br>(0.126±0.008) | 4.50±0.30<br>(0.177±0.012) | 5.70±0.40<br>(0.224±0.016) | 8.20±0.40<br>(0.323±0.016) |
| (W) Width         | mm<br>(in.) | 0.50±0.10<br>(0.020±0.004) | 0.80±0.15<br>(0.031±0.006) | 1.25±0.20<br>(0.049±0.008) | 1.60±0.20<br>(0.063±0.008)                                               | 2.49±0.20<br>(0.098±0.008) | 3.20±0.30<br>(0.126±0.012) | 5.00±0.40<br>(0.197±0.016) | 5.00±0.40<br>(0.197±0.016) |
| (T) Max Thickness | mm<br>(in.) | 0.6<br>(0.024)             | 0.9<br>(0.035)             | 1.02<br>(0.040)            | 1.02 (0.040)<br>1.27 (0.050) <sup>1)</sup><br>1.70 (0.067) <sup>2)</sup> | 1.70<br>(0.067)            | 2.00<br>(0.080)            | 2.50<br>(0.098)            | 2.50 max. (0.098 max.)     |
| (t) Land Length   | mm<br>(in.) | 0.25±0.15<br>(0.010±0.006) | 0.35±0.15<br>(0.014±0.006) | 0.71 max. (0.028 max.)     | 0.94 max. (0.037 max.)                                                   | 1.14 max. (0.045 max.)     | 1.00 max. (0.039 max.)     | 1.00 max. (0.039 max.)     | 1.30 max. (0.051 max.)     |

1) Applicable for: VCAS120618E380  
2) Applicable for: VCAS120626F540, VCAS120631M650, VCAS120638N770, VCAS120642L800, VCAS120645K900, VCAS120656F111, VCAS120660M131



SOLDERING PAD: MM (INCHES)

| Pad Layout | 0402         | 0603         | 0805         | 1206         | 1210         | 1812         | 2220         | 3220          |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
| A          | 1.61 (0.024) | 0.89 (0.035) | 1.02 (0.040) | 1.02 (0.040) | 1.02 (0.040) | 1.00 (0.039) | 1.00 (0.039) | 2.21 (0.087)  |
| B          | 1.51 (0.020) | 0.76 (0.030) | 1.02 (0.040) | 2.03 (0.080) | 2.03 (0.080) | 3.60 (0.142) | 4.60 (0.18)  | 5.79 (0.228)  |
| C          | 1.70 (0.067) | 2.54 (0.100) | 3.05 (0.120) | 4.06 (0.160) | 4.06 (0.160) | 5.60 (0.220) | 6.60 (0.26)  | 10.21 (0.402) |
| D          | 1.51 (0.020) | 0.76 (0.030) | 1.27 (0.050) | 1.65 (0.065) | 2.54 (0.100) | 3.00 (0.118) | 5.00 (0.20)  | 5.50 (0.217)  |



FORWARD TRANSMISSION CHARACTERISTICS (S21)



FORWARD TRANSMISSION CHARACTERISTICS (S21)



V-I CHARACTERISTICS

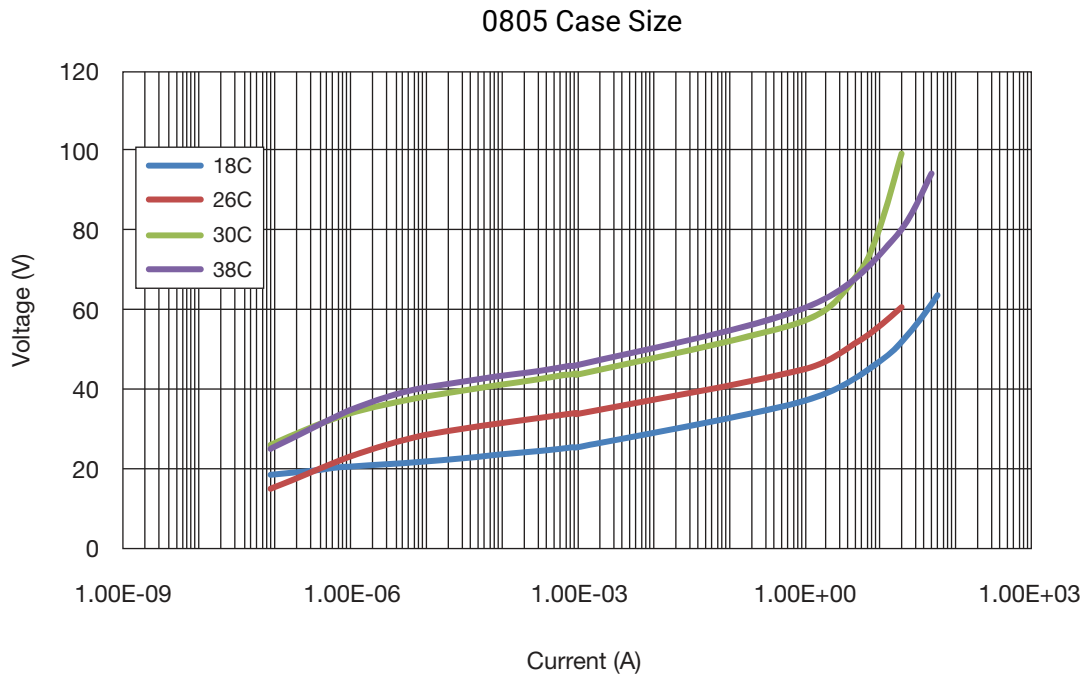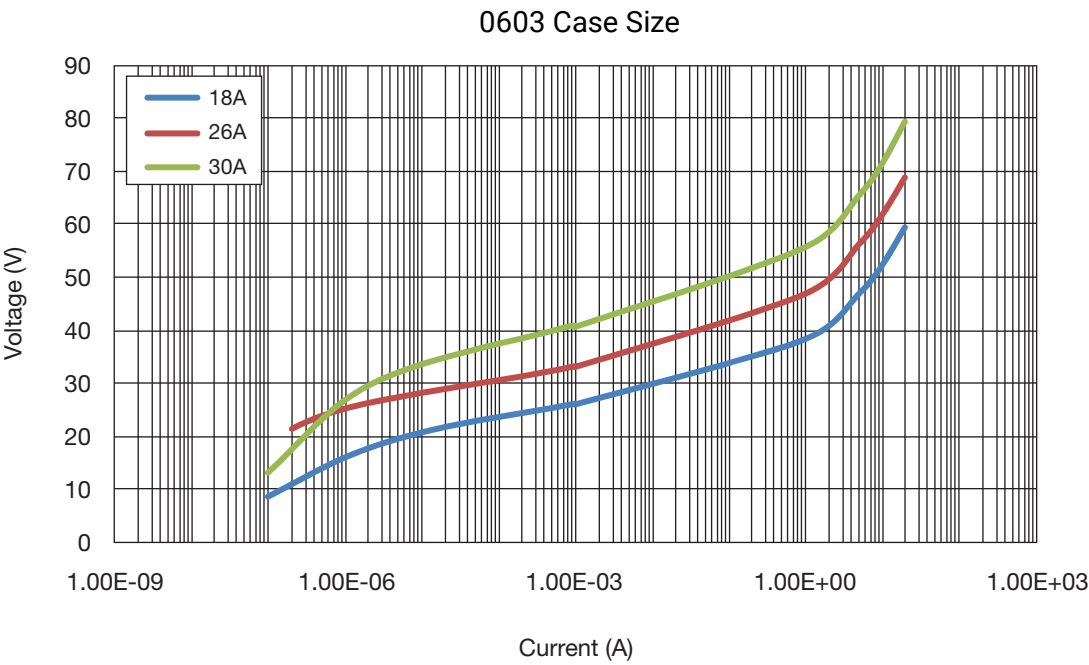

TransGuard® Automotive Series  
Multilayer Varistors for Automotive Applications



FORWARD TRANSMISSION CHARACTERISTICS (S21)

1206 Case Size



1210 Case Size



ESD V-I CHARACTERISTICS

8 kV ESD Vc  
(150pF/300ohm IEC Network)



TYPICAL VOLTAGE AT 8 KV PULSE

| 8kV Pulse                   | Peak Voltage (V) | 30ns Voltage (V) | 100ns Voltage (V) |
|-----------------------------|------------------|------------------|-------------------|
| No Part<br>(No Suppression) | 2130             | 1370             | 517               |
| 120618A400                  | 171              | 123              | 65                |
| 120618D400                  | 177              | 133              | 66                |
| 120618E380                  | 161              | 121              | 63                |
| 120626D580                  | 203              | 155              | 88                |
| 120626F540                  | 201              | 159              | 84                |
| 120630D650                  | 249              | 177              | 106               |
| 120656F111                  | 366              | 262              | 169               |

ESD 8 kV IEC 61000-4-2 150pF / 330Ω Resistor  
VC060318A400

