

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: VCH4AG150R4MATWA
Manufacturer: KYOCERA AVX
Package: 0402 (1005 Metric)
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/kyocera-avx/vch4ag150r4matwa.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

AntennaGuard® Series Sub pF

Ultra-low Capacitance Multilayer Varistors


ESD Protection for any Circuit Sensitive to Capacitance



GENERAL DESCRIPTION

KYOCERA AVX offers ultra-low capacitance ESD protection in the Sub 1pF range for use in circuits that are sensitive to capacitance. The Sub pF Varistor (SPV) is available in 0.8pF and 0.4pF capacitance values in a compact 0402 low profile package. SPV devices provide excellent response time to ESD strikes to protect sensitive circuits from over voltage conditions.

The development of new information processing technologies call for ever increasing digital system speeds. Higher speeds necessitate the use of ultra-low capacitance values in order to minimize signal distortion.



FEATURES

- High Reliability
- Capacitance <1pF
- Bi-Directional protection
- Fastest response time to ESD strikes
- Multi-strike capability
- Low insertion loss
- Low profile 0402 case size

APPLICATIONS

- Antennas
- Optics
- HDMI
- RF circuits
- FlexRay
- Portable devices
- Analog sensors
- Any circuit sensitive to capacitance

HOW TO ORDER

VC	H4	AG	10	0R8	M	A	T	W	A
Varistor Chip	Chip Size	Varistor Series	Working Voltage	Capacitance	Tolerance	N/A	Termination	Reel Size	Reel Quantity
	H2 = 0201 H4 = Thin 0402	AntennaGuard	10 = 10V 15 = 15V 18 = 18V	0R8 = 0.8pF 0R7 = 0.7pF 0R4 = 0.47pF	M = ±20%		T = Ni/Sn	W = 7"	A = 10k


ANTENNAGUARD CATALOG PART NUMBERS/ELECTRICAL VALUES

Part Number	V _w (DC)	V _B	I _L	Cap	Cap Tolerance	3db Freq (MHz)	Case Size
VCH4AG100R8MA	≤10	125	<10 nA	0.8	±20%	5800	LP 0402
VCH4AG150R8MA	≤15	125	<10 nA	0.8	±20%	5800	LP 0402
VCH4AG150R4MA	≤15	135	<100 nA	0.47	±20%	6700	LP 0402
VCH2AG180R7MA	≤18	135	<5μA	0.7	±20%	10800	0201


V _w (DC)	DC Working Voltage (V)
V _B	Typical Breakdown Voltage (V @ 1mADC)
I _L	Typical leakage current at the working voltage
Cap	Typical capacitance (pF) @ frequency specified and 0.5VRMS
Freq	Frequency at which capacitance is measured (M = 1MHz)





S21 TRANSMISSION CHARACTERISTICS
-SPV

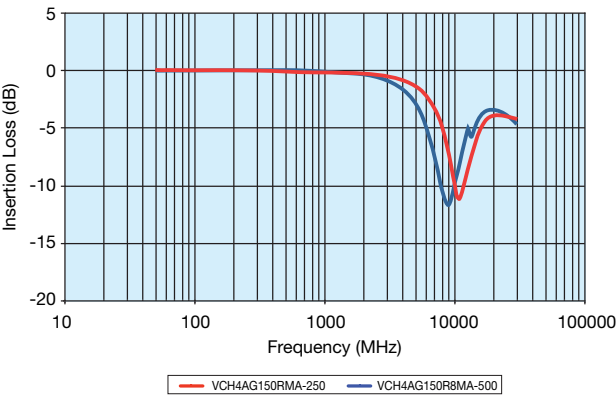

V/I CURVE - SPV

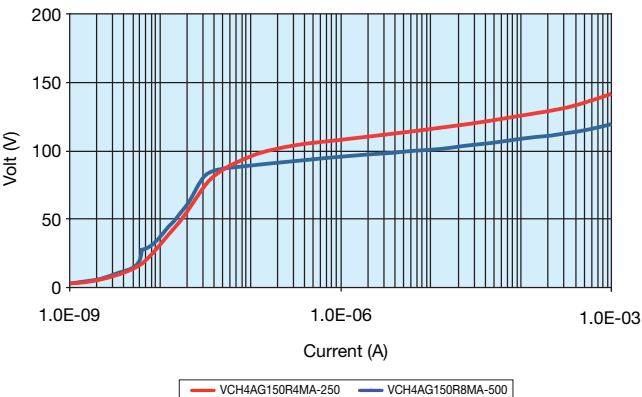

ESD WAVE ABSORPTION CHARACTERISTICS

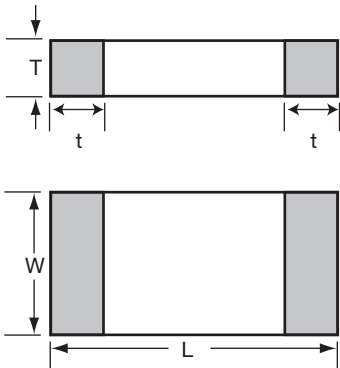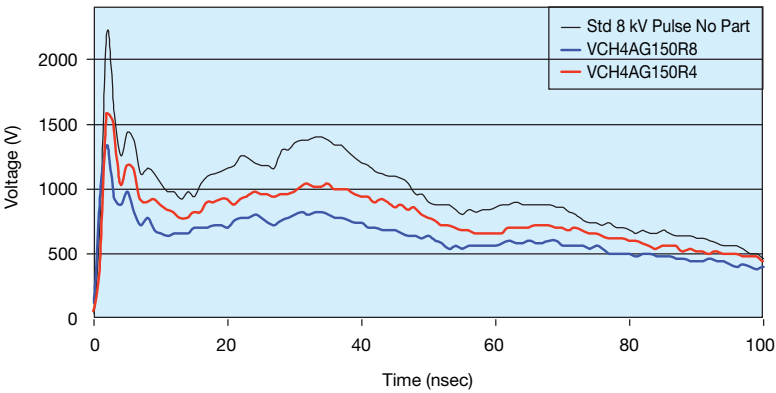

mm (inches)	
Size (EIA)	0402
Length (L)	1.00 ±0.10 (0.040 ± 0.004)
Width (W)	0.50 ±0.10 (0.020 ±0.004)
Max Thickness (T)	0.35 (0.014)
Terminal (t)	0.25±0.15 (0.010±0.006)