

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 025707.5PXPV
Manufacturer: Littelfuse Inc.
Package: Bulk
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/littelfuse-inc/025707-5pxpv.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

ATO® BLADE FUSE RATED 32V



Description

Developed by Littelfuse for the automotive industry, the ATO® fuse has become the original equipment circuit protection standard for foreign and domestic automobiles and trucks. Readily identifiable and easily replaced, this fuse can be specified for a variety of low voltage electronic applications.

Specifications

Voltage Rating:	32 VDC
Interrupting Rating:	1000A @ 32 VDC
Operating Temperature Range:	-40°C to +105°C
Terminals:	Sn plated zinc alloy
Housing Terminals:	Polyethersulfone, Polysulfone, and Polycarbonate
Complies with:	ISO 8820-3 UL 248 Special Purpose Fuses

Ordering Information

Part Number	Package Size
0257xxx.PXPV	2000
0257xxx.U	500
0257xxx.L	50

Time-Current Characteristics

% of Rating	Current Rating	Opening Time Min / Max (s)
100	35-40	360,000 s / -
110	1-30	360,000 s / -
135	1-2 3-40	500 ms / 600 s 0.750 s / 600 s
200	1-2 3-40	100 ms / 5.0 s 0.150 s / 5.0 s
350	1-2 3-40	20 ms / 500 ms 80 ms / 500 ms
600	1-30 35-40	- / 100 ms - / 150 ms

Ratings

Part Number	Current Rating	Housing Color	Typ. Voltage Drop	Cold Resistance	I ² t
0257001._	1 A	Black	176 mV	123 mΩ	0.4 A²s
0257002._	2 A	Grey	141 mV	53.5 mΩ	1.4 A²s
0257003._	3 A	Purple	137 mV	31.1 mΩ	7.4 A²s
0257004._	4 A	Pink	136 mV	22.8 mΩ	14 A²s
0257005._	5 A	Brown	128 mV	17.85 mΩ	26 A²s
025707.5._	7.5 A	Dark Brown	116 mV	10.91 mΩ	60 A²s
0257010._	10 A	Red	109 mV	7.70 mΩ	115 A²s
0257015._	15 A	Blue	102 mV	4.80 mΩ	340 A²s
0257020._	20 A	Yellow	98 mV	3.38 mΩ	520 A²s
0257025._	25 A	White	92 mV	2.52 mΩ	1080 A²s
0257030._	30 A	Teal	84 mV	1.97 mΩ	1510 A²s
0257035._	35 A	Dark Green	87 mV	1.61 mΩ	2280 A²s
0257040._	40 A	Orange	96 mV	1.44 mΩ	3310 A²s


Corresponding holder see Section "Fuse Holders."

ATO[®] BLADE FUSE RATED 32V




Dimensions

Dimensions in mm

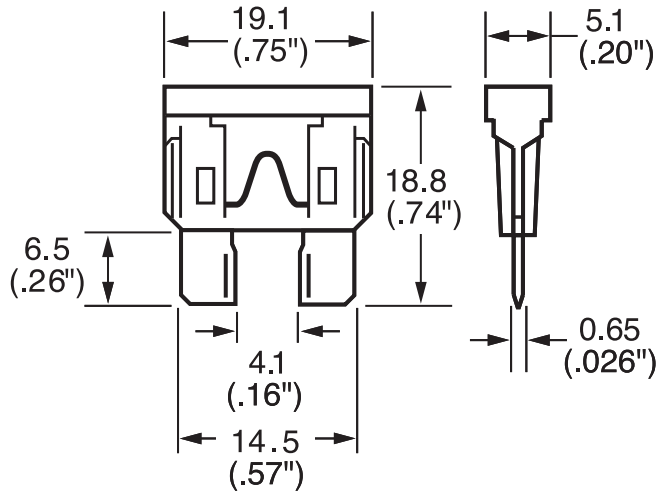

Temperature Derating Curve

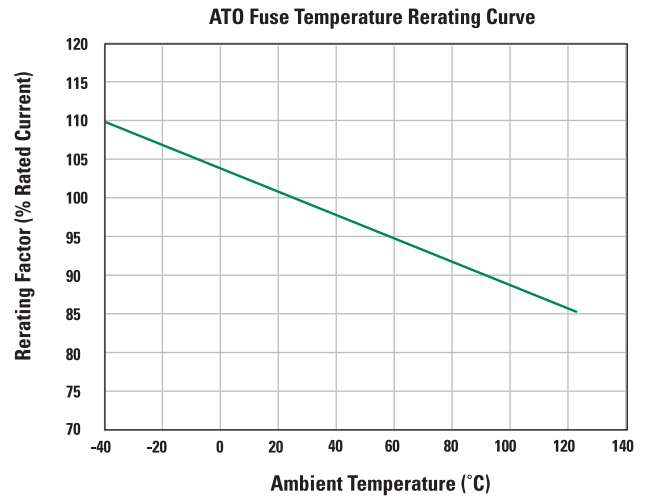

Time-Current Characteristic Curves

