

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 0375015.H
Manufacturer: Littelfuse Inc.
Package: Bulk
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/littelfuse-inc/0375015-h.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects


Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.


PART NUMBER	AMPS	VOLTS	FUSE SUB-ASSEMBLY	CATALOG NUMBER	DESCRIPTION	UPC CODE	CE LOGO	CSA LOGO	I.R. REQ'D	UL LISTED 717H MINATURE FUSE LOGO
0375012.H	12	125	375012-010	375012	FUSE 125V SB PT 3AG 12A	079458 09687	YES	YES	10,000A 125V AC	YES
0375015.H	15	125	375015-010	375015	FUSE 125V SB PT 3AG 15A	079458 09688	YES	YES	10,000A 125V AC	YES

LTR	DATE	REVISION	CHK	APD
A	06/17/04	61475 - RELEASED	PJM	
B	07/20/05	84407B-DLT 914-796, 934-027, 934-033 ADD 934-055 MODIFY LABEL & PKG NOTE	PJM	
C	11/30/05	84645B-CHG 32.39 TO 32.72	PJM	

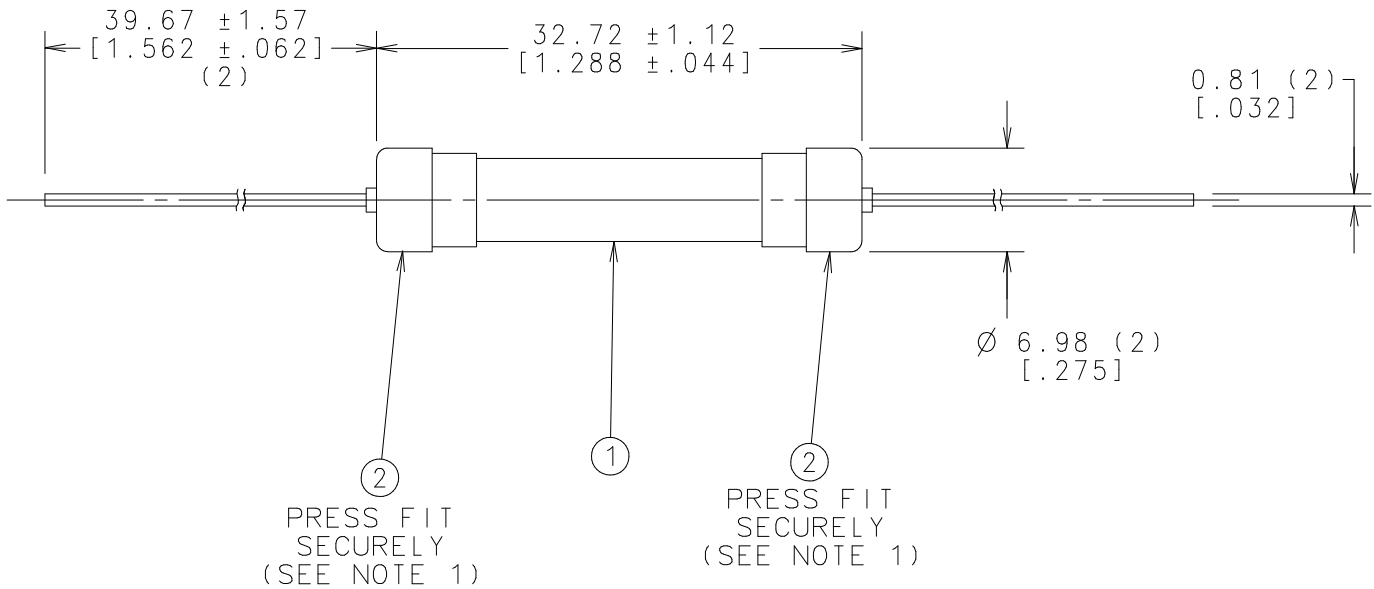

NOTES:

- OUTER CAP & LEAD ASS'Y SHALL WITHSTAND A PULL TEST OF 10 LBS. WITHOUT SEPERATING FROM FUSE CAP.
- MEASURE COLD RESISTANCE PER ES-001038.

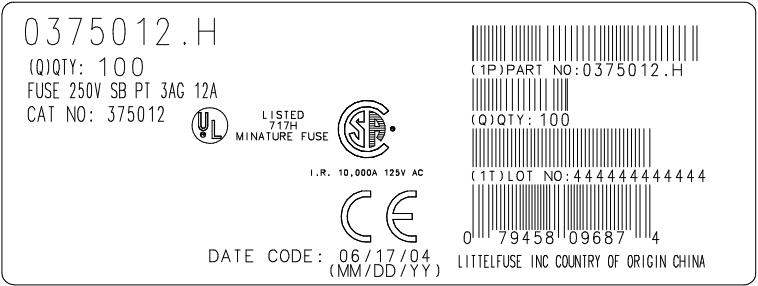

NOTE: LABEL ILLUSTRATION(S) IS FOR REFERENCE ONLY. THE ACTUAL COPY AND REGULATORY MARKINGS WILL VARY BY THE INDIVIDUAL PART NUMBER. SEE CHART. LABEL SIZE: 4.0" X 1.5"


H-PACK GLASS FUSE PACKAGING

PACK 100 FUSES IN BOX 896-180.

LABEL WITH LABEL PRINTED AS SHOWN.

LABEL TO BE APPLIED TO THE END OF THE BOX WITH BAR CODE PORTION WRAPPED AROUND THE SIDE.

-	896-180	CARTON	10	EA
2	934-054	CAP & LEAD	2000	EA
1	SEE CHART	FUSE SUB-ASSEMBLY	1000	EA
NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
O	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE			
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.			
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			
COPIES TO		MATL SPEC		
1	9	18	FINISH	
2	10	19		
3	12	20		
4	13	21	DRW	PJM
5	14	23	DATE	06/17/04
6	15	33	SCALE	2:1
7	16	43	CHK	DATE
8	17	53	DATE	SUPER DR
		APPD	DATE	FINISH GOOD WT
		DATE	GRAMS/PIECE	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		
		TWO PLACE DEC ±.25 [.01]		
		THREE PLACE DEC ±.001 [.004]		
		FRACTION ±		
		ANGULAR ±1°		
3RD ANGLE PROJECTION		TITLE		
		3AG SLO-BLO FUSE, H-PACKED		
		REVISION		DRWG. NO.
		C		0375000.H
				FINAL SERIES