

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	51900001009
Manufacturer:	Littelfuse Inc.
Package:	Tape & Reel (TR), Cut Tape (CT)
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/littelfuse-inc/51900001009.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:



This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Clip / No. 520

PC Mount, 5x20mm Fuses

Specifications

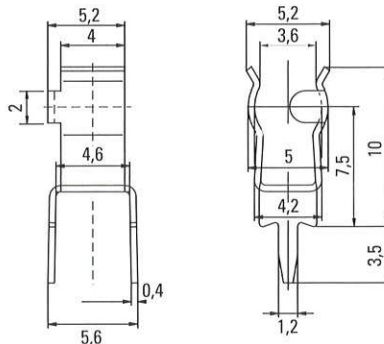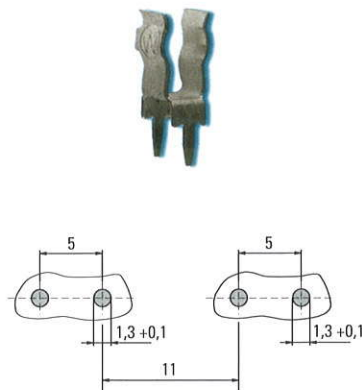

Mounting

PC Board, 5mm pin spacing
Solder pins 0.4 x 1.2mm

Materials

Clip: Copper alloy
Solderable, tinned

Electrical Data (23°C)

Rated Voltage: 250V
Max. Current/Power: 6.3A/2.5W

Minimum Cross Section

Conducting path - 0.2mm²

Unit Weight

0.4g

Packaging

Bulk (5000 pcs.)

Order Number

Clip No. 520 0000 100

Clip / No. 521

PC Mount, 5x20mm Fuses 90° Pin Shift

Mounting

PC Board, 5mm pin spacing
Solder pins 0.4 x 1.2mm

Materials

Clip: Copper alloy
Solderable, tinned

Electrical Data (23°C)

Rated Voltage: 250V
Max. Current/Power: 6.3A/2.5W

Minimum Cross Section

Conducting path - 0.2mm²

Unit Weight



0.4g

Packaging

Bulk (5000 pcs.)

Order Number

Clip No. 521 0000 100

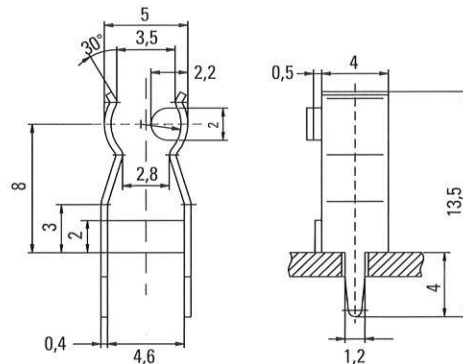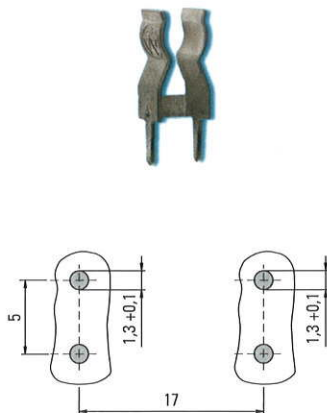

Clip / No. 519

PC Mount, 5x20mm Fuses Taped

Mounting

PC Board, 5mm pin spacing
Solder pins 0.3 x 0.5mm

Materials

Clip: Copper alloy
Solderable, tinned

Electrical Data (23°C)

Rated Voltage: 250V
Max. Current/Power: 2.5A/1W

Minimum Cross Section

Conducting path - 0.1mm²

Unit Weight

0.5g

Packaging

Tape/Reel (1000 pcs.)

Order Number

Clip No. 519 0000 100

