

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: SRP200

Manufacturer: Littelfuse Inc.

Package: Strap

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/littelfuse-inc/srp200.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: SRP200

DOCUMENT: SCD 21790
 PCN: 194020
 REV LETTER: G
 REV DATE: JULY 25, 2002
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 30V MAX

Current: 100A MAX

Leads:

Nickel: 0.125 mm nom.

Tape:

Polyester

Marking:

— Manufacturer's Mark
 X 200 — Part Identification
 □ □ □ □ — Lot Identification

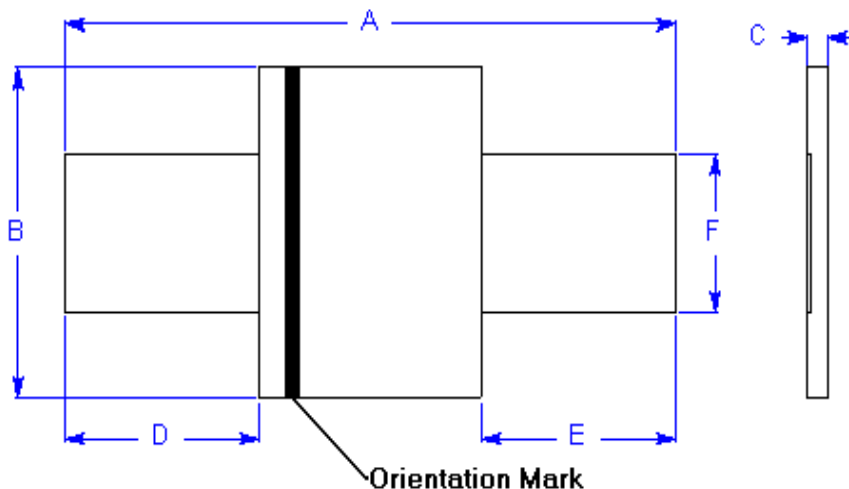


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	21.3	23.4	10.2	11.0	0.5	1.1	5.0	7.6	5.0	7.6	4.8	5.4
in*:	(0.84)	(0.92)	(0.40)	(0.43)	(0.02)	(0.04)	(0.20)	(0.30)	(0.20)	(0.30)	(0.19)	(0.21)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION	
	AMPS AT 0°C		AMPS AT 20°C		AMPS AT 60°C		AMPS AT 80°C		SECONDS AT 20°C, 10 A		OHMS AT 20°C		OHMS AT 20°C		WATTS AT 20°C, 15V	
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	MIN	MAX	TYP	MAX
2.0	2.5	5.1	2.0	4.4	1.4	3.0	--	--	1.8	4.0	0.030	0.060	0.030	0.100	1.6	1.9

Reference Documents:

Precedence:

Effectivity:

CAUTION:

PS300

This specification takes precedence over documents referenced herein.

Reference documents shall be the issue in effect on the date of invitation for bid.

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.