

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 1N3893

Manufacturer: Microchip Technology

Package: DO-203AA, DO-4, Stud

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/microchip-technology/1n3893.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.



FAST RECOVERY RECTIFIERS

Qualified per MIL-PRF-19500/304*

Qualified Levels*:
JAN, JANTX, and
JANTXV

DESCRIPTION

This 1N3889 – 1N3891 and 1N3893 family of rectifier devices are suitable for applications in DC power supplies, inverters, converters, choppers and ultrasonic systems as well as other applications. It can also be used as a free-wheeling diode. They are military qualified up to a JANTXV level on select part numbers and they are available in both standard and reverse polarities. Microsemi also offers numerous other products to meet higher and lower power voltage regulation applications.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Very low forward voltage.
- Fast recovery time.
- Low thermal resistance.
- Both polarities available.
- JAN, JANTX, and JANTXV qualifications also available per MIL-PRF-19500/304.
*(Excludes part number 1N3889.)
- RoHS compliant devices available by adding "e3" suffix.

APPLICATIONS / BENEFITS

- Available in 12 or 20 amp current ratings.
- Short reverse recovery time.
- High surge capability.
- Hermetically sealed.

MAXIMUM RATINGS @ $T_C = 25^\circ\text{C}$ unless otherwise noted

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J & T_{STG}	-65 to +175	$^\circ\text{C}$
Thermal Resistance Junction-to-Case non "A" "A"	$R_{\theta JC}$	2.0 1.5	$^\circ\text{C/W}$
Reverse Voltage 1N3890 A/R/AR 1N3891 A/R/AR 1N3893 A/R/AR	V_R	100 200 400	V
Working Peak Reverse Voltage 1N3889 A/R/AR 1N3890 A/R/AR 1N3891 A/R/AR 1N3893 A/R/AR	V_{RWM}	50 100 200 400	V (pk)
Repetitive Peak Reverse Voltage 1N3889 A/R/AR 1N3890 A/R/AR 1N3891 A/R/AR 1N3893 A/R/AR	V_{RRM}	50 100 200 400	V
Average Forward Current, 180 degrees conduction angle, 60 Hz, half sine wave non "A" "A" @ $T_C = 100^\circ\text{C}$	I_O	12 20	A
Maximum Non-Repetitive Sinusoidal Surge Current @ $T_C = 100^\circ\text{C}$ (8.3 ms, half sine) non "A" "A"	I_{FSM}	175 250	A (pk)

NOTES: 1. Derate linearly 2 % of I_O / $^\circ\text{C}$ for $T_C > 100^\circ\text{C}$, see [Figure 5](#).



**DO-203AA (DO-4)
Package**

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

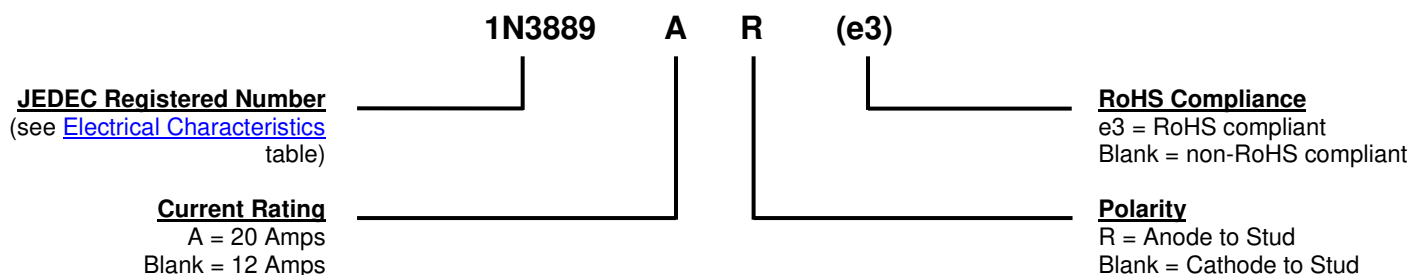
www.microsemi.com

MECHANICAL and PACKAGING

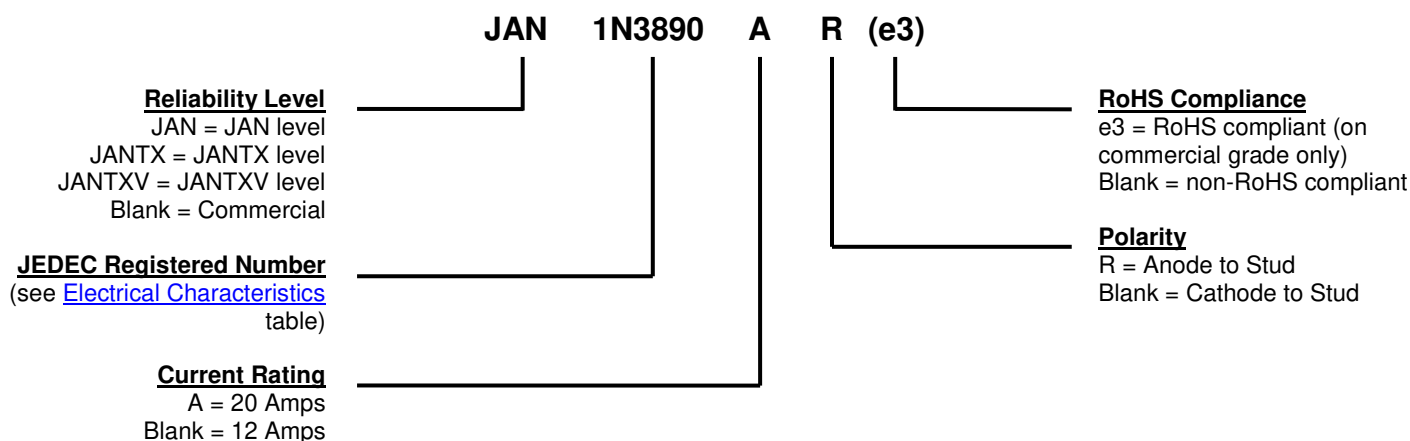
- CASE: Hermetically sealed metal and glass case body with 10-32 UNF3A threaded stud.
- TERMINALS: Tin-lead plated or RoHS compliant matte-tin plating on nickel. Solder dipped eyelet.
- MARKING: Manufacturer's ID, part number, date code, polarity symbol.
- WEIGHT: 5 grams (approximate).
- Maximum Stud Torque: 10-15 inch pounds.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

Applicable to 1N3889 only:



Applicable to 1N3890, 1N3891 and 1N3893 only:



SYMBOLS & DEFINITIONS	
Symbol	Definition
C_J	Junction Capacitance: The junction capacitance in pF at a specified frequency.
$I_{F(AV)}$	Average Forward Current: The average forward current dc value, no alternating component.
I_{FSM}	Maximum Forward Surge Current: The forward current, surge peak or rated forward surge current.
I_{RM}	Maximum Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.
t_{rr}	Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified decay point after a peak reverse current occurs.
V_{FM}	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
V_{RRM}	Repetitive Peak Reverse Voltage: The peak reverse voltage including all repetitive transient voltages but excluding all non-repetitive transient voltages.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range excluding all transient voltages (ref JEDEC282-B). Also sometimes known as PIV.

ELECTRICAL CHARACTERISTICS @ $T_A = 25^\circ\text{C}$ unless otherwise noted

Type	Typical Junction Capacitance C_J	Average Forward Current $I_{F(AV)}$	Maximum Forward Voltage V_{FM}	Maximum Reverse Current I_{RM}		Maximum Reverse Recovery Time t_{rr}
		$T_C = 100^\circ\text{C}$	$T_C = 25^\circ\text{C}$	$T_C = 25^\circ\text{C}$	$T_C = 150^\circ\text{C}$	
1N3889(R)	115 pF ⁽¹⁾	12 A	1.5 V @ $I_{FM} = 20\text{ A}$ ⁽²⁾	10 μA @ V_{RRM}	2 mA @ V_{RRM}	200 ns ⁽³⁾

NOTES: 1. $V_R = 10\text{ V}$, $f = 1\text{ Mhz}$, $T_J = 25^\circ\text{C}$.

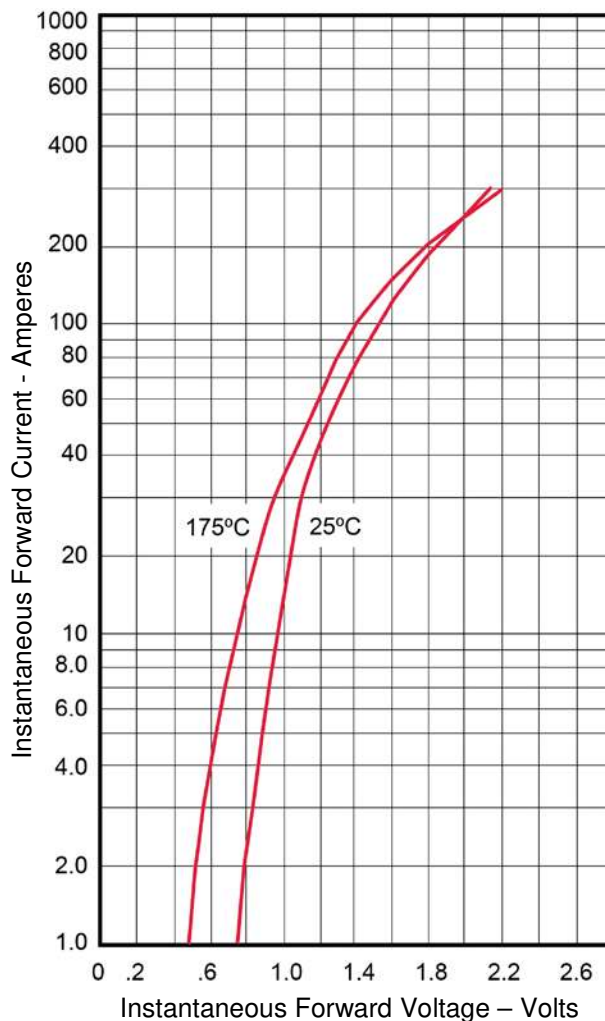
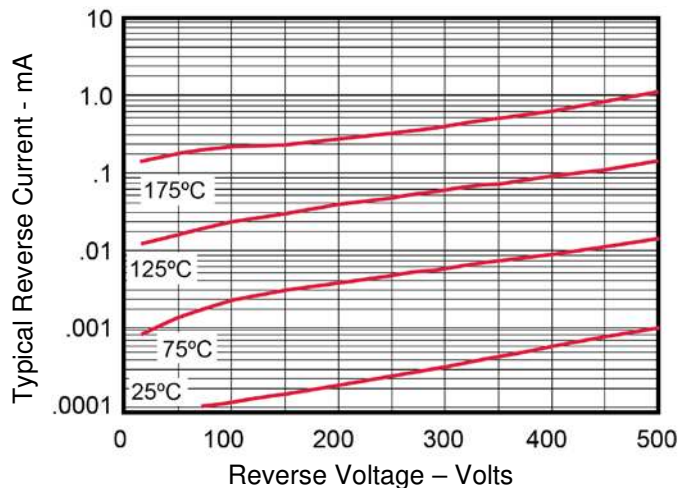
2. $I_{FM} = 38\text{ A}$, $T_J = 25^\circ\text{C}$. Pulse test: pulse width 300 μsec , duty cycle 2%.

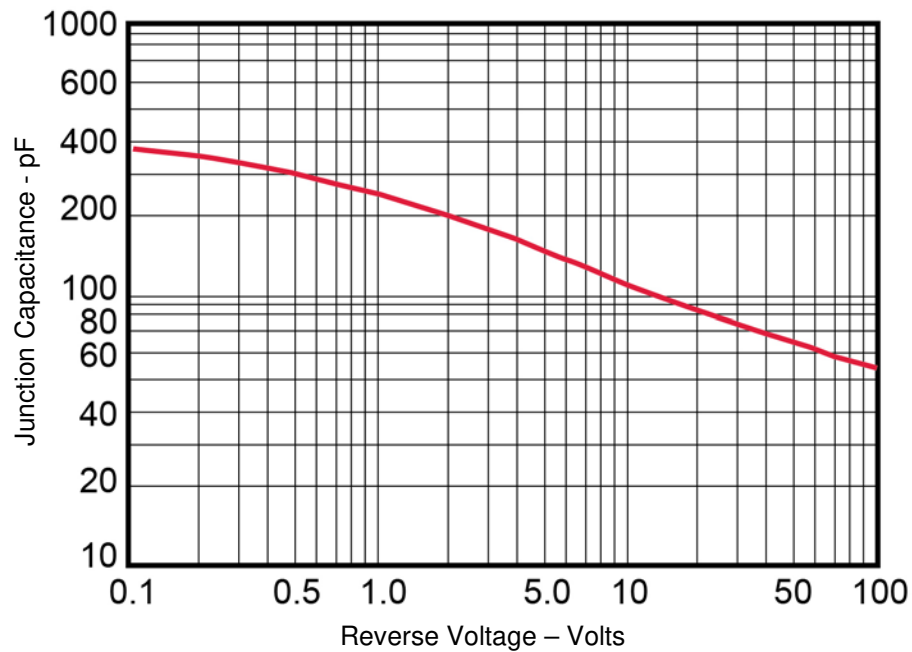
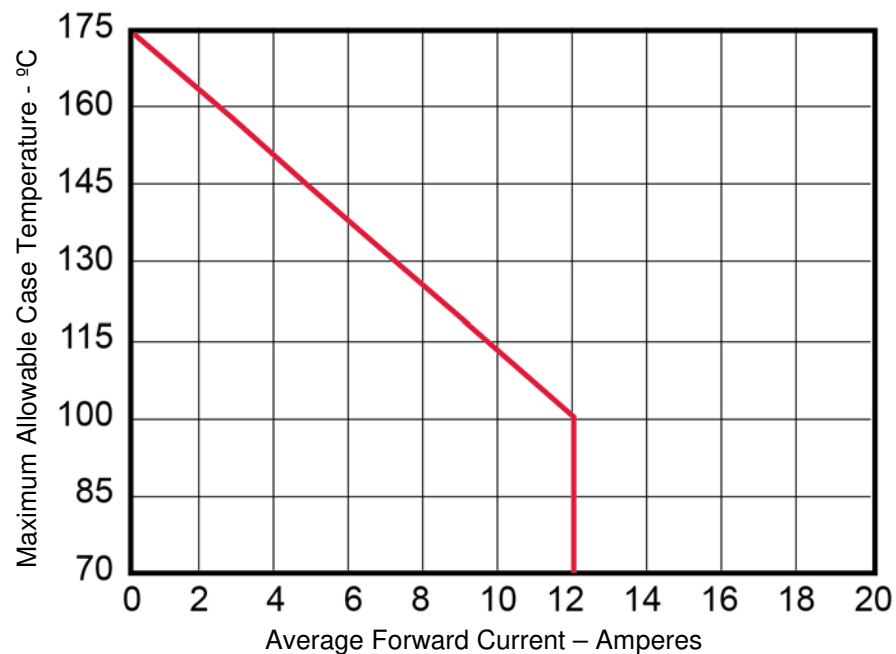
3. $I_F = 1\text{ A}$, $V_R = 30\text{ A}$, $di/dt = 25\text{ A}/\mu\text{s}$, $T_C = 55^\circ\text{C}$.

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Forward Voltage $I_{FM} = 38\text{ A}$, $T_C = 25^\circ\text{C}$ *	V_{FM}		1.5	V
Forward Voltage $I_{FM} = 250\text{ A}$, $T_C = 150^\circ\text{C}$ **	V_{FM}		2.75	V
Reverse Current $V_{RM} = 100\text{ V}$, $T_C = 25^\circ\text{C}$ $V_{RM} = 200\text{ V}$, $T_C = 25^\circ\text{C}$ $V_{RM} = 400\text{ V}$, $T_C = 25^\circ\text{C}$ 1N3890 / A / R / AR 1N3891 / A / R / AR 1N3893 / A / R / AR	I_{RM}		10	μA
Reverse Current $V_{RM} = 100\text{ V}$, $T_C = 150^\circ\text{C}$ $V_{RM} = 200\text{ V}$, $T_C = 150^\circ\text{C}$ $V_{RM} = 400\text{ V}$, $T_C = 150^\circ\text{C}$ 1N3890 / A / R / AR 1N3891 / A / R / AR 1N3893 / A / R / AR	I_{RM}		2	mA
Reverse Recovery Time $V_{RM} = 30\text{ V}$, $I_F = 1\text{ A}$, $T_C = 55^\circ\text{C}$ * 1N3890, 1N3891, 1N3893 1N3890A, 1N3891A, 1N3893A / AR	T_{rr}		200 150	ns

* Pulse test: Pulse width 300 μsec , duty cycle 2%.

** Pulse test: Pulse width 800 μsec .

GRAPHS

FIGURE 1 – Typical Forward Characteristics

FIGURE 2 – Typical Reverse Characteristics

GRAPHS (continued)

FIGURE 3 – Typical Junction Capacitance

FIGURE 4 – Forward Current Derating

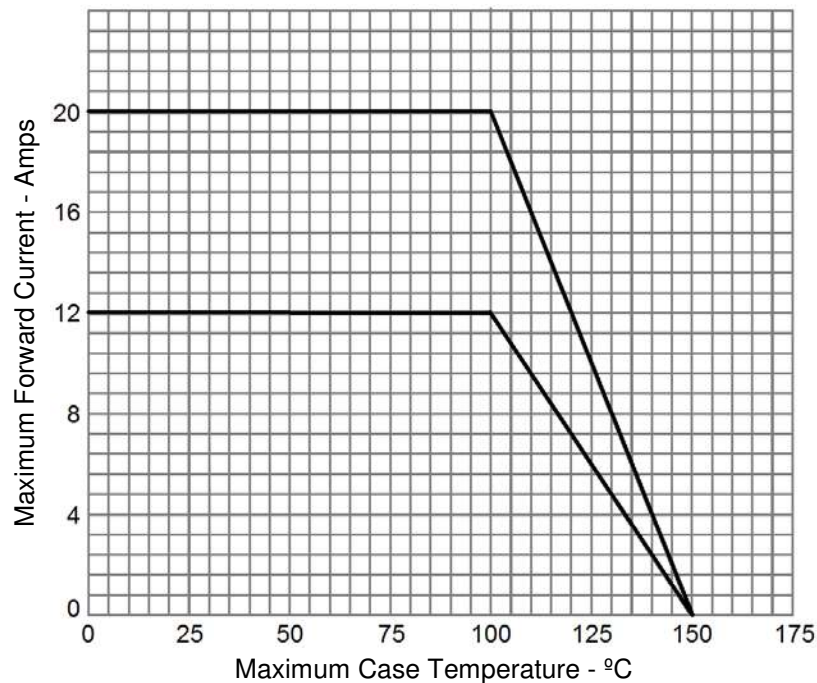
GRAPHS (continued)


Figure 5 – Maximum Forward Current vs. Maximum Case Temperature

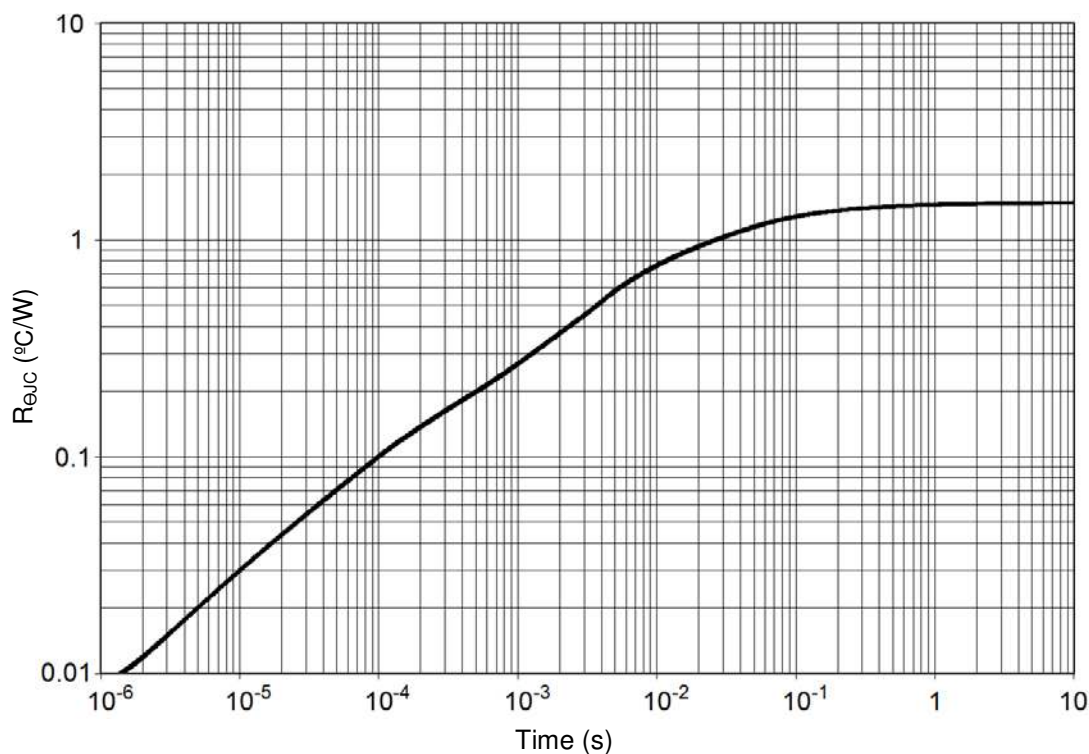
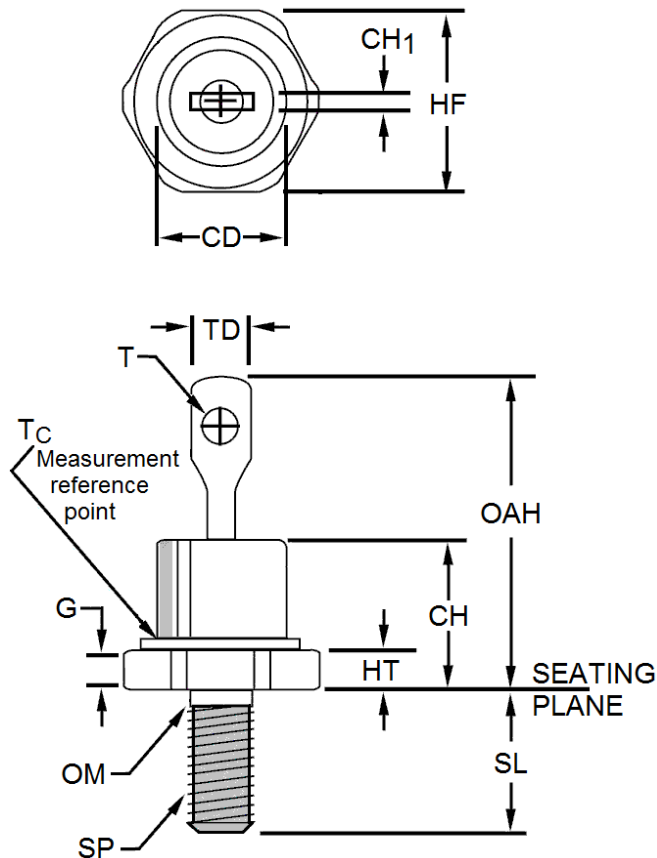


Figure 6 – Thermal Impedance for “A” type devices

PACKAGE DIMENSIONS


Ltr	Dimensions				Notes
	Inch		Millimeters		
	Min	Max	Min	Max	
CD		.424		10.77	
CH		.405		10.29	
CH ₁	.020	.065	0.51	1.65	9
G	.060		1.52		
HF	.424	.437	10.77	11.10	
HT	.075	.175	1.90	4.44	
OAH		.800		20.32	
OM	.163	.189	4.14	4.80	4
SL	.422	.453	10.72	11.50	
SP					5, 6, 7, 8
T	.060		1.52		
TD		.250		6.35	

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Angular orientation of this terminal is undefined. Square or radius on end of terminals is optional.
4. Diameter variations within these limits are permitted.
5. The ANSI thread reference is 0.190-32 UNF-2A.
6. Max pitch diameter of plated threads shall be basic pitch diameter 0.169 inch (4.29 mm) reference FED-STD-H28 (Screw Thread Standards for Federal Services.)
7. Units must not be damaged by torque of 15 inch-pounds applied to 0.190-32 UNF-2B nut assembled on thread.
8. Complete threads to extend to within 0.078 inch (1.98 mm) of the seating plane.
9. Terminal-end shape is unrestricted.
10. Reversed (anode to stud) units shall be marked with an "R" following the last digit in the type number.
11. Forward polarity (cathode to stud) marking is not shown.