

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 1N4500/TR
Manufacturer: Microchip Technology
Package: DO-204AH, DO-35, Axial
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/microchip-technology/1n4500-tr.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.



TECHNICAL DATA SHEET

6 Lake Street, Lawrence, MA 01841
1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
Website: <http://www.microsemi.com>

SWITCHING DIODE

- METALLURGICALLY BONDED
- HERMETICALLY SEALED
- DOUBLE PLUG CONSTRUCTION

Qualified per MIL-PRF-19500/403

DEVICES

1N4500

QUALIFIED LEVELS

JAN
JANTX

MAXIMUM RATING AT 25°C

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +200°C
Surge Current A, sine 1S: 0.5A
Surge Current A, sine 1μS: 4A
Leakage Current: 100nA 75V, T_A = +25°C

DC ELECTRICAL CHARACTERISTICS

V _F				I _R				V _{BR}			
Ambient (°C)	I _F mA	Min V	Max V	Ambient (°C)	V _R V(dc)	Min μA	Max nA	Ambient (°C)	I _R μA	Min V	Max V
25	.250	0.47	0.56	25	75	--	100	25	100	80	--
25	1	0.52	0.60								
25	10	0.64	0.72								
25	20	0.67	0.77								
25	300	--	1.10								

NOTE: (1) Derate 2.0mAdc/°C for T_A > =25°C


AC ELECTRICAL CHARACTERISTICS AT 25°C

	Min	Max	Unit
Capacitance @ 0V	--	4.0	pF
I _F = I _R = 10mA R _L = 100 ohms	--	6.0	ns



DO-35

PACKAGE DIMENSIONS

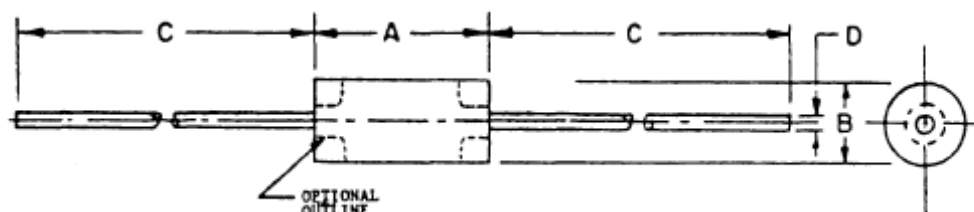

NOTES:

1. Metric equivalents (to the nearest .01mm) are give for general information only and are based upon 1 inch = 25.4mm.
2. Both leads shall be within the specified limits (see 3.3.1).
3. The maximum diameter of dimension B shall apply for dimension A.
4. The minimum diameter for dimension B shall apply over at least .075 (1.91mm) of dimension A.
5. The specified lead diameter applies in the zone between .050 (1.27mm) and 1.00 (25.4mm) from the diode body to the end of the lead. Outside of this zone the lead diameter shall not exceed diameter B.

Ltr	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
A		.160		4.06	
B		.075		1.99	3, 4
C	1.000	1.500	25.40	38.10	2
D	.018	.022	.46	.56	5, 2

FIGURE 1: Physical dimensions diode: TYPE 1N4500

DESIGN DATA

Case: Hermetically sealed glass package per MIL-PRF-19500/403. DO-35 outline.

Lead Material: Copper clad steel

Lead Finish: Tin / Lead

Marking: 70°C/W maximum

Polarity: Cathode end is banded.