

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information


**Part Number:** MCP33151-10-E/MN  
**Manufacturer:** Microchip Technology  
**Package:** 10-WFDFN Exposed Pad  
**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/microchip-technology/mcp33151-10-e-mn.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---

## 1 Msps/500 ksps, 14/12-Bit Single-Ended Input SAR ADC

### Features


- Sample Rate (Throughput):
  - MCP33151/41-10: 1 Msps
  - MCP33151/41-05: 500 ksps
- 14/12-Bit Resolution with No Missing Codes
- No Latency Output
- Wide Operating Voltage Range:
  - Analog supply voltage ( $AV_{DD}$ ): 1.8V
  - Digital input/output interface voltage ( $DV_{IO}$ ): 1.7 - 5.5V
  - External reference ( $V_{REF}$ ):  $AV_{DD}-5.1V$
- Pseudodifferential Input Operation with Single-Ended Configuration:
  - Input full-scale range: 0V to  $+V_{REF}$
- Ultra-Low Current Consumption (typical):
  - During input acquisition (standby):  $\sim 1.5 \mu A$
  - During conversion:
    - MCP33151/41-10:  $\sim 0.66 \text{ mA}$
    - MCP33151/41-05:  $\sim 0.33 \text{ mA}$
- SPI-Compatible Serial Communication:
  - SCLK clock rate: up to 100 MHz
- 3-Wire with Optional BUSY Indicator
- ADC Self-Calibration for Offset, Gain, and Linearity Errors:
  - During power-up (automatic)
  - On-Demand via user's command during normal operation
- Built-In Data Accumulator
  - Integrate up to 1024 consecutive converted samples
  - Increase ENOB up to 18 bits by automatically averaging conversion results

- AEC-Q100 Qualified:
  - Temperature grade 1:  $-40^{\circ}C$  to  $+125^{\circ}C$
- Package Options: MSOP-10 and TDFN-10

### Typical Applications

- High-Precision Data Acquisition
- Medical Instruments
- Test Equipment
- Electric Vehicle Battery Management Systems
- Motor Control Applications
- Switch-Mode Power Supply Applications
- Battery-Powered Equipment

### Package Types

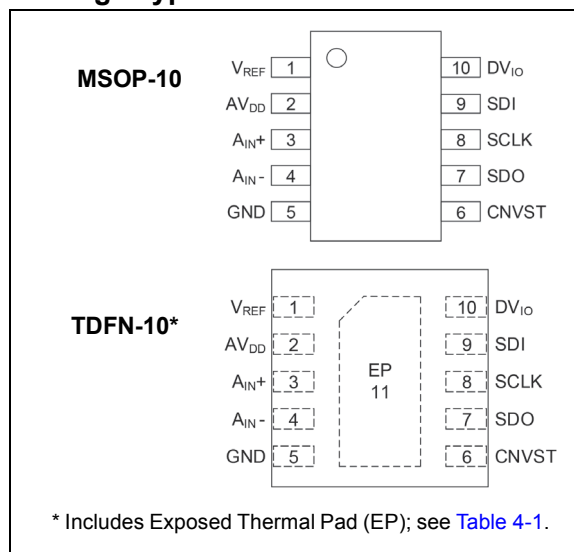


### MCP331X1-XX Device Offering (Note 1)

| Part Number | Resolution | Sample Rate | Input Type   | Input Range | Performance (Typical) |           |          |            |            |
|-------------|------------|-------------|--------------|-------------|-----------------------|-----------|----------|------------|------------|
|             |            |             |              |             | SNR (dBFS)            | SFDR (dB) | THD (dB) | INL (LSB)  | DNL (LSB)  |
| MCP33151-10 | 14-bit     | 1 Msps      | Single-Ended | 0V to 5.1V  | 80.4                  | 103.9     | -102.5   | $\pm 0.39$ | $\pm 0.11$ |
| MCP33141-10 | 12-bit     | 1 Msps      | Single-Ended | 0V to 5.1V  | 73.3                  | 102.0     | -100.4   | $\pm 0.09$ | $\pm 0.05$ |
| MCP33151-05 | 14-bit     | 500 kSPS    | Single-Ended | 0V to 5.1V  | 80.4                  | 102.7     | -100.9   | $\pm 0.39$ | $\pm 0.11$ |
| MCP33141-05 | 12-bit     | 500 kSPS    | Single-Ended | 0V to 5.1V  | 73.3                  | 99.9      | -99.2    | $\pm 0.09$ | $\pm 0.05$ |

**Note 1:** SNR, SFDR, and THD are measured with  $f_{IN} = 10 \text{ kHz}$ ,  $V_{IN} = -1 \text{ dBFS}$ ,  $V_{REF} = 5.1V$ .

# MCP33151/41-XX

## Typical Application Diagram

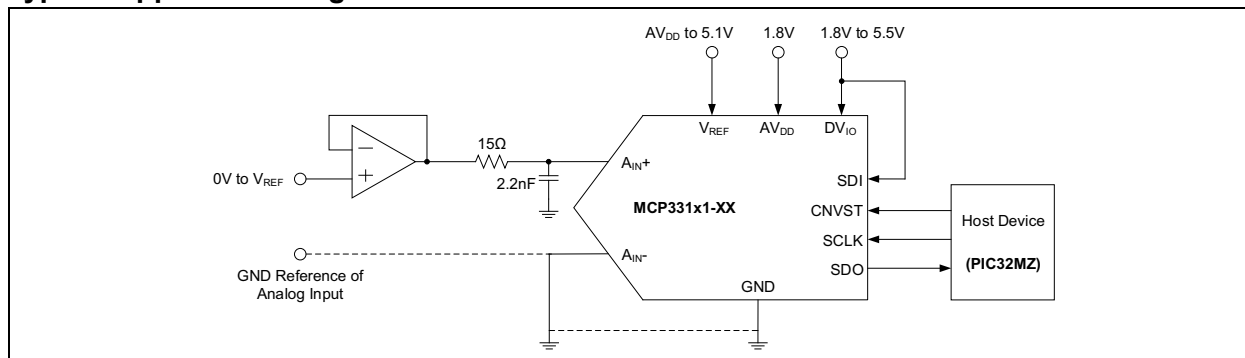

## Description

The MCP33151/41-10 and MCP33151/41-05 are single-ended, 14-bit and 12-bit, single-channel 1 Msps and 500 kSPS ADC family devices, respectively, featuring low-power consumption and high performance, using a successive approximation register (SAR) architecture.

The device operates with an external voltage reference (V<sub>REF</sub>) from AV<sub>DD</sub> to 5.1V, which supports a wide range of input full-scale range from 0V to V<sub>REF</sub>. The reference voltage setting is independent of the analog supply voltage (AV<sub>DD</sub>) and is higher than AV<sub>DD</sub>. The conversion output is available through an easy-to-use simple SPI-compatible 3-wire interface.

The device requires a 1.8V analog supply voltage (AV<sub>DD</sub>) and a 1.7V to 5.5V digital I/O interface supply voltage (DV<sub>IO</sub>). The wide digital I/O interface supply (DV<sub>IO</sub>) range (1.7V-5.5V) allows the device to interface with most host devices (Master) available in the current industry, such as the PIC32 microcontrollers, without using external voltage level shifters.

Once all supply voltages are connected, the device will power-up and perform an automatic calibration to minimize offset, gain and linearity errors. The automatic calibration takes place approximately 40 ms following power-up, and it is necessary to ensure that all power supplies are fully settled and stable after this time. See [Section 4.1.1, Power-Up Sequence and Auto-Calibration](#) for more details. The device performance stays stable across the specified temperature range. However, when extreme changes in the operating environment, such as in the reference voltage, are made with respect to the initial conditions (e.g. the reference voltage did not fully settle during the initial power-up sequence), the user may send a recalibrate command anytime to initiate another self-calibration to restore optimum performance.

When the initial power-up sequence is completed, the device enters a low-current input acquisition mode, where sampling capacitors are connected to the input pins. This mode is called Standby.

During Standby mode, most of the internal analog circuitry is shut down in order to reduce current consumption. Typically, the device consumes approximately 1.5 μA during Standby. A new conversion is started on the rising edge of CNVST. When the conversion is complete and the host lowers CNVST, the output data is presented on SDO, and the device enters Standby mode to begin acquiring the next input sample. The user can clock out the ADC output data using the SPI-compatible serial clock during Standby.

The ADC system clock is generated by an internal on-chip clock, therefore the conversion is performed independent of the SPI serial clock (SCLK).

This device can be used for various high-speed and high-accuracy analog-to-digital data conversion applications, where design simplicity, low power, and no output latency are needed.

The device is AEC-Q100 qualified for automotive applications and operates over the extended temperature range of -40°C to +125°C. The available package options are Pb-free TDFN-10 and MSOP-10.

## 1.0 KEY ELECTRICAL CHARACTERISTICS

### 1.1 Absolute Maximum Ratings†

|                                               |                           |
|-----------------------------------------------|---------------------------|
| External Analog Supply Voltage ( $AV_{DD}$ )  | -0.3V to 2.0V             |
| External Digital Supply Voltage ( $DV_{IO}$ ) | -0.3V to 5.8V             |
| External Reference Voltage ( $V_{REF}$ )      | -0.3V to 5.8V             |
| Analog Inputs w.r.t GND                       | -0.3V to $V_{REF} + 0.3V$ |
| Current at Input Pins                         | ±2 mA                     |
| Current at Output and Supply Pins             | ±250 mA                   |
| Storage Temperature                           | -65°C to +150°C           |
| Maximum Junction Temperature ( $T_J$ )        | +150°C                    |
| ESD Protection on all Pins                    | ≤4 kV HBM, ≤2 kV CDM      |

†**Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

### 1.2 Electrical Specifications

**TABLE 1-1: ELECTRICAL CHARACTERISTICS**

| <b>Electrical Specifications:</b> Unless otherwise specified, all parameters apply for $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ , $AV_{DD} = 1.8\text{V}$ , $DV_{IO} = 3.3\text{V}$ , $V_{REF} = 5\text{V}$ , $\text{GND} = 0\text{V}$ , Analog Input ( $V_{IN}$ ) = -1 dBFS sine wave, $f_{IN} = 10\text{ kHz}$ , $C_{LOAD\_SDO} = 20\text{ pF}$ , $+25^{\circ}\text{C}$ is applied for typical values.<br>MCP331X1-10: Sample Rate ( $f_s$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.<br>MCP331X1-05: Sample Rate ( $f_s$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz. |                  |      |      |      |       |                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------|------|------|-------|----------------------------------------|
| Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Sym.             | Min. | Typ. | Max. | Units | Conditions                             |
| <b>Power Supply Requirements</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |      |      |      |       |                                        |
| Analog Supply Voltage Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $AV_{DD}$        | 1.7  | 1.8  | 1.9  | V     | Note 3                                 |
| Digital Input/Output Interface Voltage Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | $DV_{IO}$        | 1.7  | —    | 5.5  | V     | Note 3                                 |
| Analog Supply Current at $AV_{DD}$ Pin:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                  |      |      |      |       |                                        |
| During Conversion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $I_{DDAN}$       | —    | 660  | 900  | μA    | $f_s = 1\text{ Msps}$ (MCP331X1-10)    |
| During Standby                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $I_{DDAN\_STBY}$ | —    | 330  | 600  | μA    | $f_s = 500\text{ ksp/s}$ (MCP331X1-05) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  | —    | 1.5  | —    | μA    | During input acquisition ( $t_{ACQ}$ ) |
| Average Digital Supply Current At $DV_{IO}$ Pin:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |      |      |      |       |                                        |
| During Data Transfer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | $I_{IO\_DATA}$   | —    | 400  | —    | μA    | $f_s = 1\text{ Msps}$ (MCP33151-10)    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  | —    | 343  | —    | μA    | $f_s = 1\text{ Msps}$ (MCP33141-10)    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  | —    | 200  | —    | μA    | $f_s = 500\text{ ksp/s}$ (MCP33151-05) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  | —    | 171  | —    | μA    | $f_s = 500\text{ ksp/s}$ (MCP33141-05) |
| During Standby                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $I_{IO\_STBY}$   | —    | 120  | —    | nA    | During input acquisition ( $t_{ACQ}$ ) |

**Note 1:** This parameter is ensured by design and not 100% tested.

**2:** This parameter is ensured by characterization and not 100% tested.

**3:** Decoupling capacitor is recommended on the following pins:

(a)  $AV_{DD}$  pin: 1 μF ceramic capacitor, (b)  $DV_{IO}$  pin: 0.1 μF ceramic capacitor, (c)  $V_{REF}$  pin: 10 μF tantalum capacitor.

**4:** PSRR (dB) =  $-20 \log (D_{VOUT}/AV_{DD})$ , where  $D_{VOUT}$  = change in conversion result.

**5:** ENOB =  $(\text{SINAD} - 1.76)/6.02$

# MCP33151/41-XX

**TABLE 1-1: ELECTRICAL CHARACTERISTICS (CONTINUED)**

| <b>Electrical Specifications:</b> Unless otherwise specified, all parameters apply for $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ , $AV_{DD} = 1.8\text{V}$ , $DV_{IO} = 3.3\text{V}$ , $V_{REF} = 5\text{V}$ , $\text{GND} = 0\text{V}$ , Analog Input ( $V_{IN}$ ) = -1 dBFS sine wave, $f_{IN} = 10\text{ kHz}$ , $C_{LOAD\_SDO} = 20\text{ pF}$ , $+25^{\circ}\text{C}$ is applied for typical values.<br>MCP331X1-10: Sample Rate ( $f_s$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.<br>MCP331X1-05: Sample Rate ( $f_s$ ) = 500 ksps, SPI Clock Input (SCLK) = 30 MHz. |                       |           |           |                 |               |                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------|-----------|-----------------|---------------|------------------------------------------------------------------------|
| Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Sym.                  | Min.      | Typ.      | Max.            | Units         | Conditions                                                             |
| <b>External Reference Voltage Input</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                       |           |           |                 |               |                                                                        |
| Reference Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $V_{REF}$             | $AV_{DD}$ | —         | 5.1             | V             | Note 2, Note 3                                                         |
| Reference Load Current at $V_{REF}$ Pin:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |           |           |                 |               |                                                                        |
| During Conversion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $I_{REF}$             | —         | 220       | 290             | $\mu\text{A}$ | $f_s = 1\text{ Msps}$ (MCP331X1-10)                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       |           | 110       | 180             | $\mu\text{A}$ | $f_s = 500\text{ ksps}$ (MCP331X1-05)                                  |
| During Standby                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $I_{REF\_STBY}$       | —         | 40        | —               | nA            | During input acquisition ( $t_{ACQ}$ )                                 |
| <b>Total Power Consumption (Including <math>AV_{DD}</math>, <math>DV_{IO}</math>, <math>V_{REF}</math> Pins)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |           |           |                 |               |                                                                        |
| <b>MCP331X1-10</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |           |           |                 |               |                                                                        |
| at 1 Msps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $P_{DISS\_TOTAL}$     | —         | 3.6       | —               | mW            | Averaged power for $t_{ACQ} + t_{CNV}$                                 |
| at 500 ksps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       | —         | 1.8       | —               | mW            |                                                                        |
| at 100 ksps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       | —         | 0.4       | —               | mW            |                                                                        |
| During Standby                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $P_{DISS\_STBY}$      | —         | 3.3       | —               | $\mu\text{W}$ | During input acquisition ( $t_{ACQ}$ )                                 |
| <b>MCP331X1-05</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |           |           |                 |               |                                                                        |
| at 500 ksps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | $P_{DISS\_TOTAL}$     | —         | 1.8       | —               | mW            | Averaged power for $t_{ACQ} + t_{CNV}$                                 |
| at 100 ksps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       | —         | 0.4       | —               | mW            |                                                                        |
| During Standby                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $P_{DISS\_STBY}$      | —         | 3.3       | —               | $\mu\text{W}$ | During input acquisition ( $t_{ACQ}$ )                                 |
| <b>Analog Inputs</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                       |           |           |                 |               |                                                                        |
| Input Voltage Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | $V_{IN+}$             | -0.1      | —         | $V_{REF} + 0.1$ | V             | Note 2                                                                 |
| Input Full-Scale Voltage Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | FSR                   | 0         | —         | $+V_{REF}$      | $V_{PP}$      | Note 2                                                                 |
| Input Sampling Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $C_S$                 | —         | 10        | —               | pF            | Note 1                                                                 |
| -3 dB Input Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $BW_{-3dB}$           | —         | 45        | —               | MHz           | Note 1                                                                 |
| Aperture Delay                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                       | —         | 2.5       | —               | ns            | Time delay between CNVST rising edge and when input is sampled, Note 1 |
| Leakage Current at Analog Input Pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | $I_{LEAK\_AN\_INPUT}$ | —         | $\pm 2.2$ | $\pm 200$       | nA            | During input acquisition ( $t_{ACQ}$ )                                 |
| <b>System Performance</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                       |           |           |                 |               |                                                                        |
| Sample Rate (Throughput Rate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $f_s$                 | —         | —         | 1               | Msps          | MCP331X1-10                                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       | —         | —         | 500             | ksps          | MCP331X1-05                                                            |
| Resolution (No Missing Codes)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                       | 14        | —         | —               | Bits          | MCP33151-10 and MCP33151-05                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       | 12        | —         | —               | Bits          | MCP33141-10 and MCP33141-05                                            |

**Note 1:** This parameter is ensured by design and not 100% tested.

**2:** This parameter is ensured by characterization and not 100% tested.

**3:** Decoupling capacitor is recommended on the following pins:

(a)  $AV_{DD}$  pin: 1  $\mu\text{F}$  ceramic capacitor, (b)  $DV_{IO}$  pin: 0.1  $\mu\text{F}$  ceramic capacitor, (c)  $V_{REF}$  pin: 10  $\mu\text{F}$  tantalum capacitor.

**4:**  $\text{PSRR (dB)} = -20 \log (D_{VOUT}/AV_{DD})$ , where  $D_{VOUT}$  = change in conversion result.

**5:**  $\text{ENOB} = (\text{SINAD} - 1.76)/6.02$

**TABLE 1-1: ELECTRICAL CHARACTERISTICS (CONTINUED)**

| <b>Electrical Specifications:</b> Unless otherwise specified, all parameters apply for $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ , $AV_{DD} = 1.8\text{V}$ , $DV_{IO} = 3.3\text{V}$ , $V_{REF} = 5\text{V}$ , $GND = 0\text{V}$ , Analog Input ( $V_{IN}$ ) = -1 dBFS sine wave, $f_{IN} = 10\text{ kHz}$ , $C_{LOAD\_SDO} = 20\text{ pF}$ , $+25^{\circ}\text{C}$ is applied for typical values.<br>MCP331X1-10: Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.<br>MCP331X1-05: Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz. |          |                                                |            |       |                                |                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------------------------------|------------|-------|--------------------------------|----------------------------------------------------|
| Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sym.     | Min.                                           | Typ.       | Max.  | Units                          | Conditions                                         |
| Integral Nonlinearity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | INL      | -1.5                                           | $\pm 0.39$ | +1.5  | LSB                            | MCP33151-10 and MCP33151-05                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | $\pm 0.09$ | —     | LSB                            | MCP33141-10 and MCP33141-05                        |
| Differential Nonlinearity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | DNL      | -0.8                                           | $\pm 0.11$ | +0.8  | LSB                            | MCP33151-10 and MCP33151-05                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | -0.3                                           | $\pm 0.05$ | +0.3  | LSB                            | MCP33141-10 and MCP33141-05                        |
| Offset Error                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          | -1.62                                          | $\pm 0.4$  | +1.62 | mV                             | MCP33151-10 and MCP33151-05                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | -1.33                                          | $\pm 0.4$  | +1.33 | mV                             | MCP33141-10 and MCP33141-05                        |
| Offset Error Drift with Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          | —                                              | $\pm 0.1$  | —     | $\mu\text{V}/^{\circ}\text{C}$ |                                                    |
| Gain Error                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $G_{ER}$ | —                                              | $\pm 2$    | —     | LSB                            | MCP33151-10 and MCP33151-05                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | $\pm 0.5$  | —     | LSB                            | MCP33141-10 and MCP33141-05                        |
| Gain Error Drift with Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |          | —                                              | $\pm 8$    | —     | $\mu\text{V}/^{\circ}\text{C}$ |                                                    |
| Input Common-mode Rejection Ratio                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | CMRR     | —                                              | 84         | —     | dB                             |                                                    |
| Power Supply Rejection Ratio                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | PSRR     | —                                              | 75         | —     | dB                             | (Note 4)                                           |
| <b>Dynamic Performance</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |          |                                                |            |       |                                |                                                    |
| Signal-to-Noise Ratio                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | SNR      | <b>MCP33151-10 and MCP33151-05: 14-bit ADC</b> |            |       |                                |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | 80.4       | —     | dBFS                           | $V_{REF} = 5\text{V}$ , $f_{IN} = 1\text{ kHz}$    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | 73.5       | —     |                                | $V_{REF} = 1.8\text{V}$ , $f_{IN} = 1\text{ kHz}$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | 78.7                                           | 80.4       | —     |                                | $V_{REF} = 5\text{V}$ , $f_{IN} = 10\text{ kHz}$   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | 73.5       | —     |                                | $V_{REF} = 1.8\text{V}$ , $f_{IN} = 10\text{ kHz}$ |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | <b>MCP33141-10 and MCP33141-05: 12-bit ADC</b> |            |       |                                |                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | 73.3       | —     | dBFS                           | $V_{REF} = 5\text{V}$ , $f_{IN} = 1\text{ kHz}$    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | 70.9       | —     |                                | $V_{REF} = 1.8\text{V}$ , $f_{IN} = 1\text{ kHz}$  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | 72.8                                           | 73.3       | —     |                                | $V_{REF} = 5\text{V}$ , $f_{IN} = 10\text{ kHz}$   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          | —                                              | 70.8       | —     |                                | $V_{REF} = 1.8\text{V}$ , $f_{IN} = 10\text{ kHz}$ |

**Note 1:** This parameter is ensured by design and not 100% tested.

**2:** This parameter is ensured by characterization and not 100% tested.

**3:** Decoupling capacitor is recommended on the following pins:

(a)  $AV_{DD}$  pin: 1  $\mu\text{F}$  ceramic capacitor, (b)  $DV_{IO}$  pin: 0.1  $\mu\text{F}$  ceramic capacitor, (c)  $V_{REF}$  pin: 10  $\mu\text{F}$  tantalum capacitor.

**4:** PSRR (dB) =  $-20 \log (D_{VOUT}/AV_{DD})$ , where  $D_{VOUT}$  = change in conversion result.

**5:** ENOB =  $(\text{SINAD} - 1.76)/6.02$

# MCP33151/41-XX

**TABLE 1-1: ELECTRICAL CHARACTERISTICS (CONTINUED)**

**Electrical Specifications:** Unless otherwise specified, all parameters apply for  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Analog Input ( $V_{IN}$ ) = -1 dBFS sine wave,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ ,  $+25^{\circ}\text{C}$  is applied for typical values.

MCP331X1-10: Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.

MCP331X1-05: Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

| Parameters                                          | Sym.                   | Min.                                    | Typ.   | Max. | Units  | Conditions                                        |
|-----------------------------------------------------|------------------------|-----------------------------------------|--------|------|--------|---------------------------------------------------|
| Signal-to-Noise and Distortion Ratio<br>(Note 5)    | SINAD                  | MCP33151-10 and MCP33151-05: 14-bit ADC |        |      |        |                                                   |
|                                                     |                        | —                                       | 80.4   | —    | dBFS   | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 1 kHz    |
|                                                     |                        | —                                       | 73.6   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 1 kHz  |
|                                                     |                        | —                                       | 80.3   | —    |        | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 10 kHz   |
|                                                     |                        | —                                       | 73.3   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 10 kHz |
|                                                     |                        | MCP33141-10 and MCP33141-05: 12-bit ADC |        |      |        |                                                   |
|                                                     |                        | —                                       | 73.3   | —    | dBFS   | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 1 kHz    |
|                                                     |                        | —                                       | 70.9   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 1 kHz  |
|                                                     |                        | —                                       | 73.3   | —    |        | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 10 kHz   |
|                                                     |                        | —                                       | 70.8   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 10 kHz |
| Spurious Free Dynamic Range                         | SFDR                   | MCP33151-10 and MCP33151-05: 14-bit ADC |        |      |        |                                                   |
|                                                     |                        | —                                       | 103.5  | —    | dBc    | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 1 kHz    |
|                                                     |                        | —                                       | 101.3  | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 1 kHz  |
|                                                     |                        | —                                       | 103.7  | —    |        | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 10 kHz   |
|                                                     |                        | —                                       | 98.1   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 10 kHz |
|                                                     |                        | MCP33141-10 and MCP33141-05: 12-bit ADC |        |      |        |                                                   |
|                                                     |                        | —                                       | 101.0  | —    | dBc    | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 1 kHz    |
|                                                     |                        | —                                       | 98.8   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 1 kHz  |
|                                                     |                        | —                                       | 101.4  | —    |        | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 10 kHz   |
|                                                     |                        | —                                       | 97.5   | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 10 kHz |
| Total Harmonic Distortion<br>(first five harmonics) | THD                    | MCP33151-10 and MCP33151-05: 14-bit ADC |        |      |        |                                                   |
|                                                     |                        | —                                       | -102.0 | —    | dBc    | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 1 kHz    |
|                                                     |                        | —                                       | -97.0  | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 1 kHz  |
|                                                     |                        | —                                       | -101.5 | —    |        | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 10 kHz   |
|                                                     |                        | —                                       | -95.5  | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 10 kHz |
|                                                     |                        | MCP33141-10 and MCP33141-05: 12-bit ADC |        |      |        |                                                   |
|                                                     |                        | —                                       | -98.9  | —    | dBc    | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 1 kHz    |
|                                                     |                        | —                                       | -95.0  | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 1 kHz  |
|                                                     |                        | —                                       | -98.6  | —    |        | V <sub>REF</sub> = 5V, f <sub>IN</sub> = 10 kHz   |
|                                                     |                        | —                                       | -94.5  | —    |        | V <sub>REF</sub> = 1.8V, f <sub>IN</sub> = 10 kHz |
| System Self-Calibration                             |                        |                                         |        |      |        |                                                   |
| Self-Calibration Time                               | t <sub>CAL</sub>       | —                                       | 500    | 650  | ms     | Note 2                                            |
| Number of SCLK Clocks for Recalibrate Command       | ReCal <sub>NSCLK</sub> | —                                       | 1024   | —    | clocks | Includes clocks for data bits                     |
| Serial Interface Timing Information, see            |                        |                                         |        |      |        |                                                   |

**Serial Interface Timing Information, see**

**Note 1:** This parameter is ensured by design and not 100% tested.

**Note 2:** This parameter is ensured by characterization and not 100% tested.

**Note 3:** Decoupling capacitor is recommended on the following pins:

(a)  $AV_{DD}$  pin: 1  $\mu\text{F}$  ceramic capacitor, (b)  $DV_{IO}$  pin: 0.1  $\mu\text{F}$  ceramic capacitor, (c)  $V_{REF}$  pin: 10  $\mu\text{F}$  tantalum capacitor.

**Note 4:**  $PSRR\text{ (dB)} = -20 \log(D_{VOUT}/AV_{DD})$ , where  $D_{VOUT}$  = change in conversion result.

**Note 5:**  $ENOB = (SINAD - 1.76)/6.02$

**TABLE 1-1: ELECTRICAL CHARACTERISTICS (CONTINUED)**

**Electrical Specifications:** Unless otherwise specified, all parameters apply for  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $\text{GND} = 0\text{V}$ , Analog Input ( $V_{IN}$ ) = -1 dBFS sine wave,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ ,  $+25^{\circ}\text{C}$  is applied for typical values.  
MCP331X1-10: Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
MCP331X1-05: Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

| Parameters                                            | Sym.       | Min.                 | Typ.                 | Max.                 | Units         | Conditions                                    |
|-------------------------------------------------------|------------|----------------------|----------------------|----------------------|---------------|-----------------------------------------------|
| <b>Digital Inputs/Outputs</b>                         |            |                      |                      |                      |               |                                               |
| High-Level Input Voltage                              | $V_{IH}$   | $0.7 \times DV_{IO}$ | —                    | $DV_{IO} + 0.3$      | V             | $DV_{IO} \geq 2.3\text{V}$                    |
|                                                       |            | $0.9 \times DV_{IO}$ | —                    | $DV_{IO} + 0.3$      | V             | $DV_{IO} < 2.3\text{V}$                       |
| Low-Level Input Voltage                               | $V_{IL}$   | -0.3                 | —                    | $0.3 \times DV_{IO}$ | V             | $DV_{IO} \geq 2.3\text{V}$                    |
|                                                       |            | -0.3                 | —                    | $0.2 \times DV_{IO}$ | V             | $DV_{IO} < 2.3\text{V}$                       |
| Hysteresis of Schmitt Trigger Inputs                  | $V_{HYST}$ | —                    | $0.2 \times DV_{IO}$ | —                    | V             | All digital inputs                            |
| Low-Level Output Voltage                              | $V_{OL}$   | —                    | —                    | $0.2 \times DV_{IO}$ | V             | $I_{OL} = 500\text{ }\mu\text{A}$ (source)    |
| High-Level Output Voltage                             | $V_{OH}$   | $0.8 \times DV_{IO}$ | —                    | —                    | V             | $I_{OH} = -500\text{ }\mu\text{A}$ (sink)     |
| Input Leakage Current                                 | $I_{LI}$   | —                    | —                    | $\pm 1$              | $\mu\text{A}$ | CNVST/SDI/SCLK = GND or $DV_{IO}$             |
| Output Leakage Current                                | $I_{LO}$   | —                    | —                    | $\pm 1$              | $\mu\text{A}$ | Output is high-Z, SDO = GND or $DV_{IO}$      |
| Internal Capacitance (all digital inputs and outputs) | $C_{INT}$  | —                    | 7                    | —                    | pF            | $T_A = +25^{\circ}\text{C}$ ( <b>Note 1</b> ) |

**Note 1:** This parameter is ensured by design and not 100% tested.

**2:** This parameter is ensured by characterization and not 100% tested.

**3:** Decoupling capacitor is recommended on the following pins:

(a)  $AV_{DD}$  pin: 1  $\mu\text{F}$  ceramic capacitor, (b)  $DV_{IO}$  pin: 0.1  $\mu\text{F}$  ceramic capacitor, (c)  $V_{REF}$  pin: 10  $\mu\text{F}$  tantalum capacitor.

**4:** PSRR (dB) =  $-20 \log (D_{VOUT}/AV_{DD})$ , where  $D_{VOUT}$  = change in conversion result.

**5:** ENOB =  $(\text{SINAD} - 1.76)/6.02$


# MCP33151/41-XX

**TABLE 1-2: SERIAL INTERFACE TIMING SPECIFICATIONS**

| <b>Electrical Specifications:</b> Unless otherwise specified, all parameters apply for $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ , $AV_{DD} = 1.8\text{V}$ , $DV_{IO} = 3.3\text{V}$ , $GND = 0\text{V}$ , Analog Input ( $A_{IN}$ ) = -1 dBFS sine wave, Resolution = 16-bit (MCP33151-10), $f_{IN} = 10\text{ kHz}$ , $C_{LOAD\_SDO} = 20\text{ pF}$ , $+25^{\circ}\text{C}$ is applied for typical values. All timings are measured at 50%. See <a href="#">Figure 2.0</a> for timing diagram. |                     |      |      |      |               |                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|------|------|---------------|------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>MCP331X1-10: Sample Rate (<math>f_S</math>) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.</li> <li>MCP331X1-05: Sample Rate (<math>f_S</math>) = 500 ksps, SPI Clock Input (SCLK) = 30 MHz.</li> </ul>                                                                                                                                                                                                                                                                    |                     |      |      |      |               |                                                                  |
| Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Symbol              | Min. | Typ. | Max. | Units         | Conditions                                                       |
| Serial Clock Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | $f_{SCLK}$          | —    | —    | 100  | MHz           | See $t_{SCLK}$ specification                                     |
| SCLK Period                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $t_{SCLK}$          | 10   | —    | —    | ns            | $DV_{IO} \geq 3.3\text{V}$ , $f_{SCLK} = 100\text{ MHz}$ (Max.)  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | 12   | —    | —    | ns            | $DV_{IO} \geq 2.3\text{V}$ , $f_{SCLK} = 83.3\text{ MHz}$ (Max.) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | 16   | —    | —    | ns            | $DV_{IO} \geq 1.7\text{V}$ , $f_{SCLK} = 62.5\text{ MHz}$ (Max.) |
| SCLK Low Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $t_{SCLK\_L}$       | 3    | —    | —    | ns            | $DV_{IO} \geq 2.3\text{V}$                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | 4.5  | —    | —    | ns            | $DV_{IO} \geq 1.7\text{V}$                                       |
| SCLK High Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | $t_{SCLK\_H}$       | 3    | —    | —    | ns            | $DV_{IO} \geq 2.3\text{V}$                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | 4.5  | —    | —    | ns            | $DV_{IO} \geq 1.7\text{V}$                                       |
| Output Valid from SCLK Low                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $t_{DO}$            | —    | —    | 10   | ns            | $DV_{IO} \geq 3.3\text{V}$                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | —    | —    | 12   | ns            | $DV_{IO} \geq 2.3\text{V}$                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | —    | —    | 16   | ns            | $DV_{IO} \geq 1.7\text{V}$                                       |
| Quiet Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $t_{QUIET}$         | 10   | —    | —    | ns            | <a href="#">Note 2</a>                                           |
| <b>3-Wire Operation:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |      |      |      |               |                                                                  |
| SDI Valid Setup Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $t_{SU\_SDIH\_CNV}$ | 5    | —    | —    | ns            | SDI High to CNVST Rising Edge                                    |
| CNVST Pulse Width High Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $t_{CNVH}$          | 10   | —    | —    | ns            |                                                                  |
| Output Enable Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $t_{EN}$            | —    | —    | 10   | ns            | $DV_{IO} \geq 2.3\text{V}$                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     | —    | —    | 15   | ns            | $DV_{IO} \geq 1.7\text{V}$                                       |
| Output Disable Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $t_{DIS}$           | —    | —    | 15   | ns            | <a href="#">Note 2</a>                                           |
| <b>MCP331X1-10</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |      |      |      |               |                                                                  |
| Sample Rate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $f_S$               | —    | —    | 1    | Msps          | Throughput rate                                                  |
| Input Acquisition Time ( <a href="#">Note 2</a> )                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $t_{ACQ}$           | 250  | 490  | —    | ns            |                                                                  |
| Data Conversion Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $t_{CNV}$           | —    | 510  | 750  | ns            |                                                                  |
| Time Between Conversions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $t_{CYC}$           | 1    | —    | —    | $\mu\text{s}$ | $t_{CYC} = t_{ACQ} + t_{CNV}$ , $f_S = 1\text{ Msps}$            |
| <b>MCP331X1-05</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                     |      |      |      |               |                                                                  |
| Sample Rate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $f_S$               | —    | —    | 500  | ksps          | Throughput rate                                                  |
| Input Acquisition Time ( <a href="#">Note 2</a> )                                                                                                                                                                                                                                                                                                                                                                                                                                                             | $t_{ACQ}$           | 600  | 800  | —    | ns            |                                                                  |
| Data Conversion Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $t_{CNV}$           | —    | 1200 | 1400 | ns            |                                                                  |
| Time Between Conversions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $t_{CYC}$           | 2    | —    | —    | $\mu\text{s}$ | $t_{CYC} = t_{ACQ} + t_{CNV}$ , $f_S = 500\text{ ksps}$          |

**Note 1:** This parameter is ensured by design and not 100% tested.

**2:** This parameter is ensured by characterization and not 100% tested.

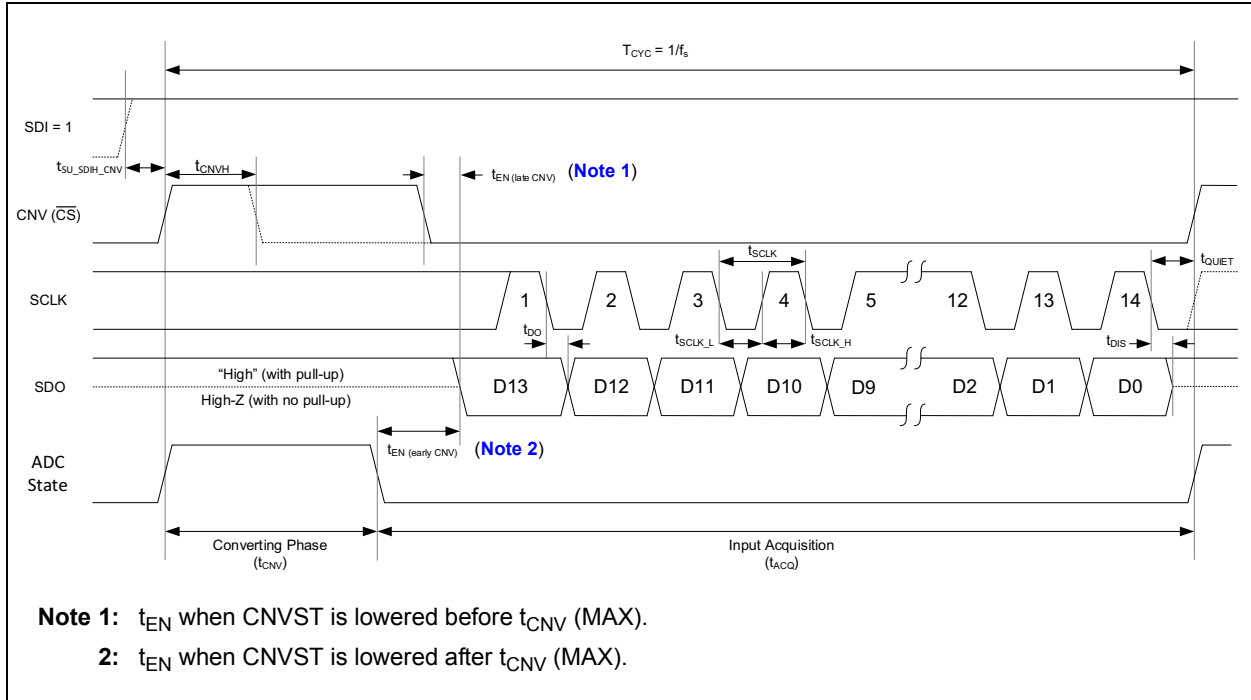

**FIGURE 1-1:** Interface Timing Diagram (14-bit Device). CNVST is Used as Chip Select ( $\overline{CS}$ ). See Section 6.0, Digital Serial Interface.

**TABLE 1-3: TEMPERATURE CHARACTERISTICS**

| Parameters                        | Sym.          | Min. | Typ. | Max. | Units | Conditions |
|-----------------------------------|---------------|------|------|------|-------|------------|
| <b>Temperature Ranges</b>         |               |      |      |      |       |            |
| Operating Temperature Range       | $T_A$         | -40  | —    | +125 | °C    | Note 1     |
| Storage Temperature Range         | $T_A$         | -65  | —    | +150 | °C    | Note 1     |
| <b>Thermal Package Resistance</b> |               |      |      |      |       |            |
| Thermal Resistance, MSOP-10       | $\theta_{JA}$ | —    | 202  | —    | °C/W  |            |
| Thermal Resistance, TDFN-10       | $\theta_{JA}$ | —    | 68   | —    | °C/W  |            |

**Note 1:** The internal junction temperature ( $T_j$ ) must not exceed the absolute maximum specification of +150°C.

# MCP33151/41-XX


---

NOTES:


## 2.0 TYPICAL PERFORMANCE CURVES FOR 14-BIT DEVICES (MCP33151-XX)

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 kps, SPI Clock Input (SCLK) = 30 MHz.

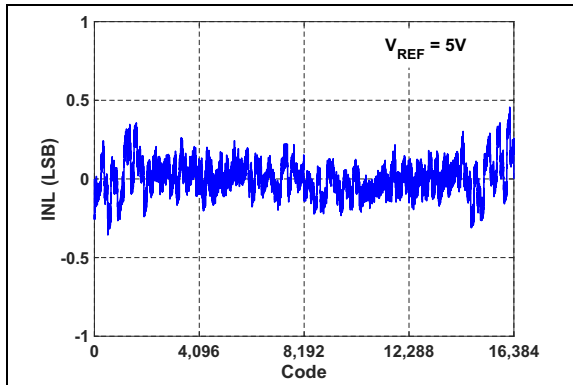


**FIGURE 2-1:** INL vs. Output Code:  
 $V_{REF} = 5\text{V}$ .

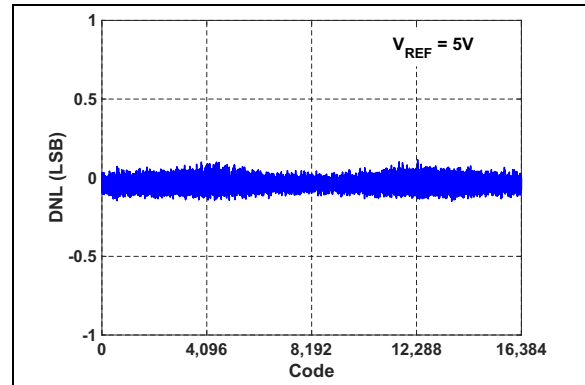


**FIGURE 2-4:** DNL vs. Output Code:  
 $V_{REF} = 5\text{V}$ .

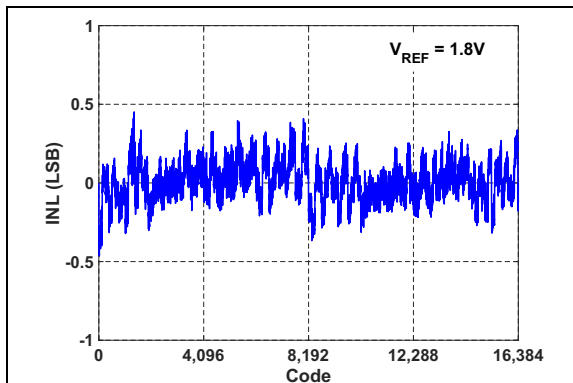


**FIGURE 2-2:** INL vs. Output Code:  
 $V_{REF} = 1.8\text{V}$ .

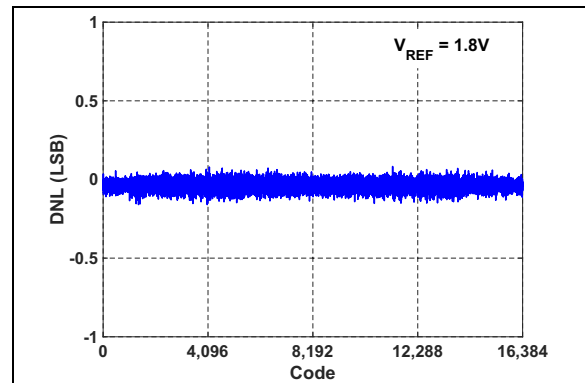

**FIGURE 2-5:** DNL vs. Output Code:  
 $V_{REF} = 1.8\text{V}$ .

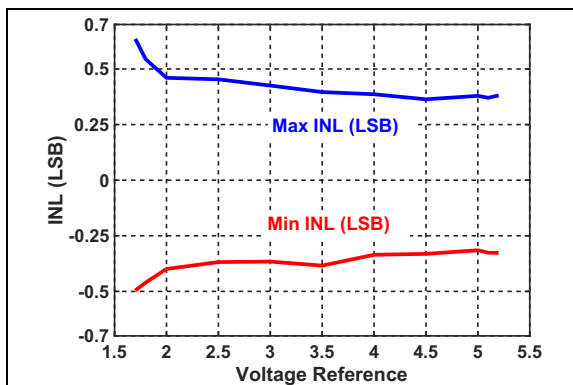


**FIGURE 2-3:** INL vs. Reference Voltage.

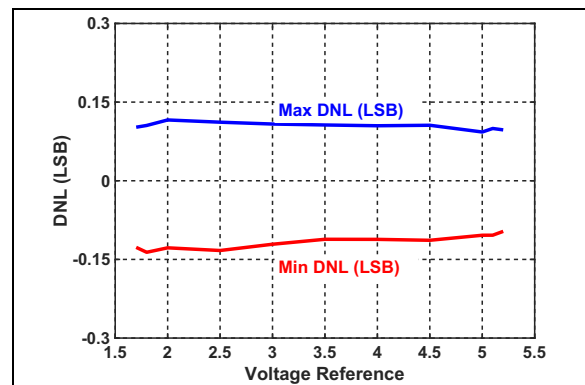


**FIGURE 2-6:** DNL vs. Reference Voltage.

# MCP33151/41-XX


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 kpsps, SPI Clock Input (SCLK) = 30 MHz.

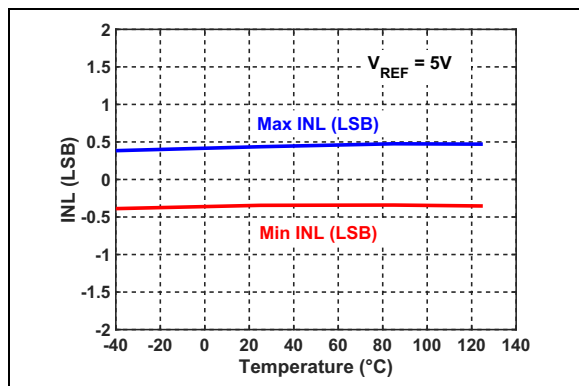


**FIGURE 2-7:** INL vs. Temperature.

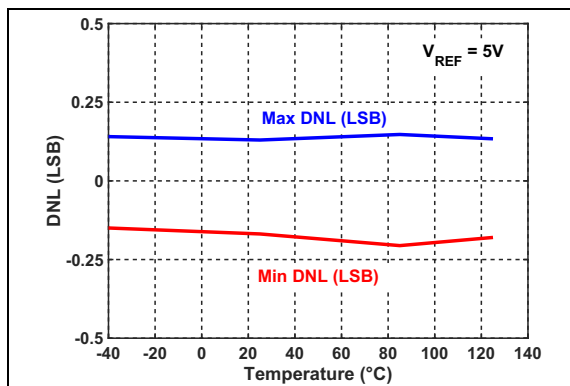


**FIGURE 2-10:** DNL vs. Temperature.

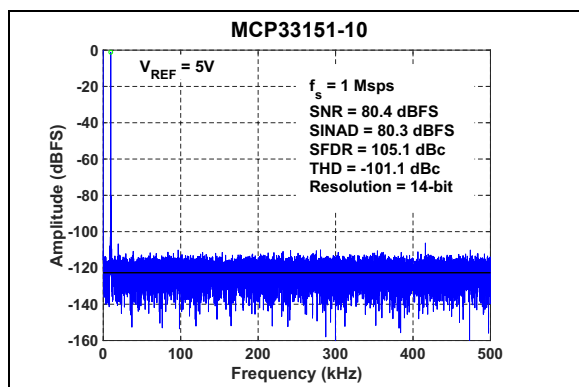


**FIGURE 2-8:** FFT for 10 kHz Input Signal:  $f_S = 1\text{ Msps}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 5\text{V}$ .

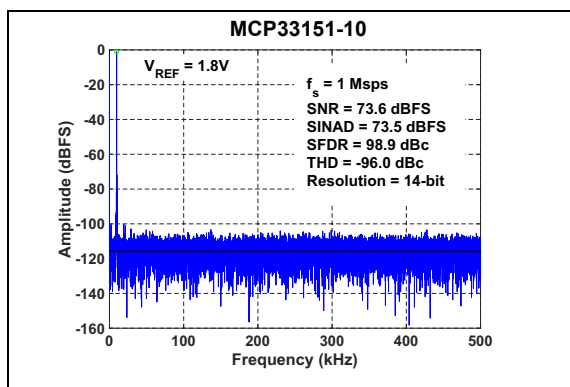

**FIGURE 2-11:** FFT for 10 kHz Input Signal:  $f_S = 1\text{ Msps}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 1.8\text{V}$ .

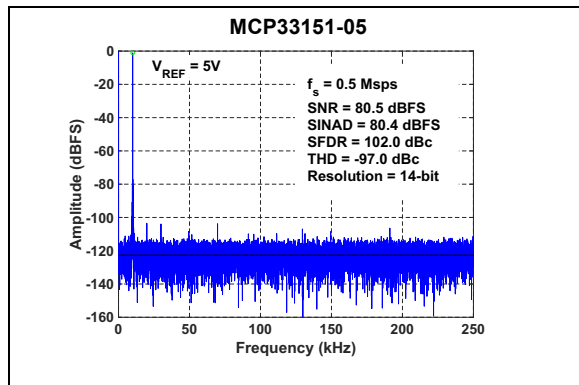


**FIGURE 2-9:** FFT for 10 kHz Input Signal:  $f_S = 500\text{ kpsps}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 5\text{V}$ .

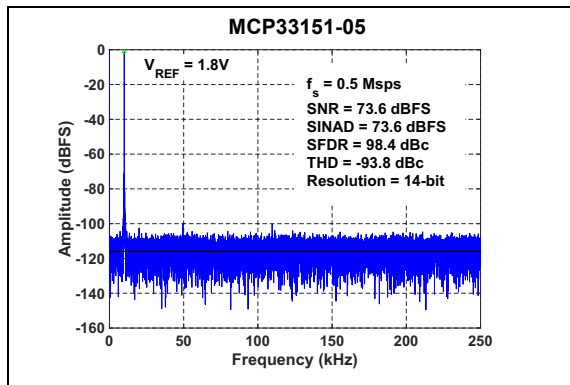


**FIGURE 2-12:** FFT for 10 kHz Input Signal:  $f_S = 500\text{ kpsps}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 1.8\text{V}$ .


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 kpsps, SPI Clock Input (SCLK) = 30 MHz.

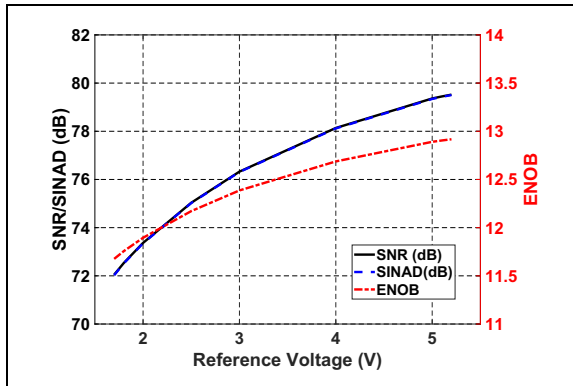


**FIGURE 2-13:** SNR/SINAD/ENOB vs. Reference Voltage.

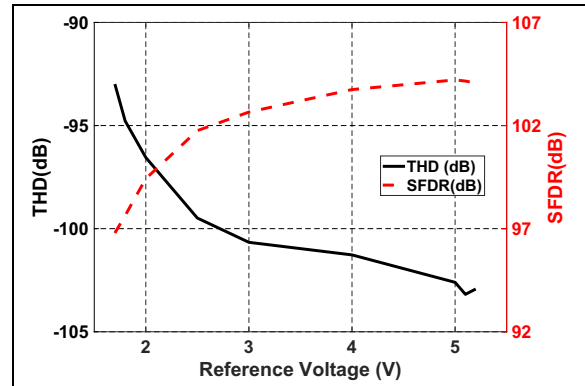


**FIGURE 2-16:** THD/SFDR vs. Reference Voltage.

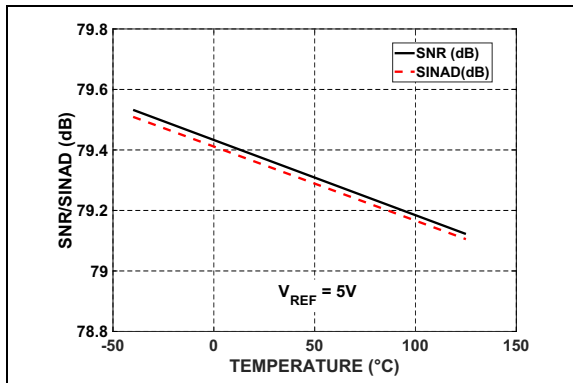


**FIGURE 2-14:** SNR/SINAD vs. Temperature:  $V_{REF} = 5\text{V}$ .

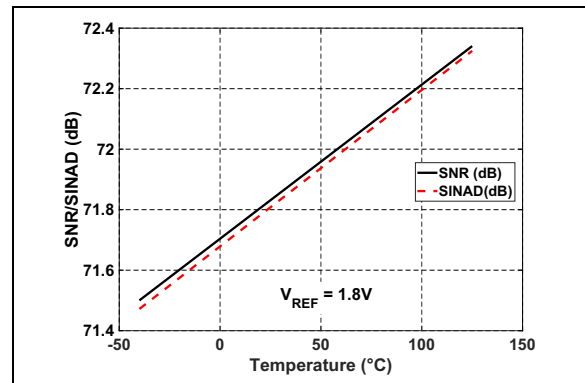

**FIGURE 2-17:** SNR/SINAD vs. Temperature:  $V_{REF} = 1.8\text{V}$ .

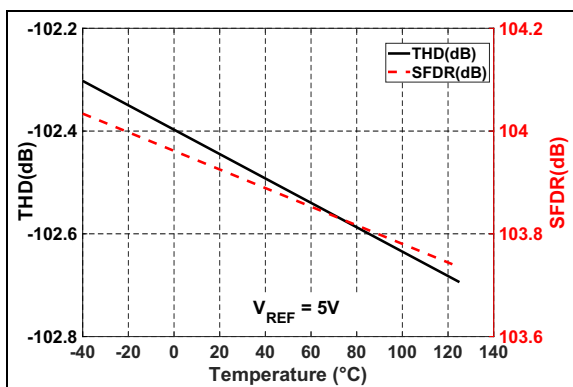


**FIGURE 2-15:** THD/SFDR vs. Temperature:  $V_{REF} = 5\text{V}$ .

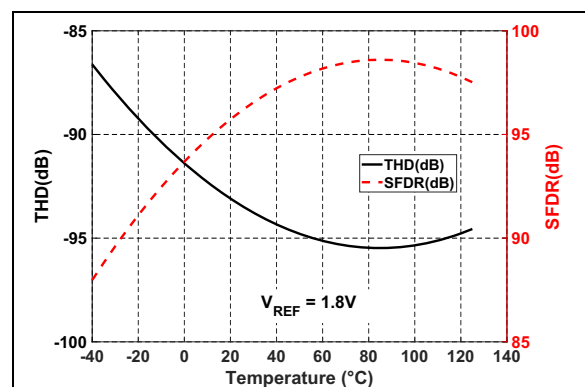


**FIGURE 2-18:** THD/SFDR vs. Temperature:  $V_{REF} = 1.8\text{V}$ .

# MCP33151/41-XX


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

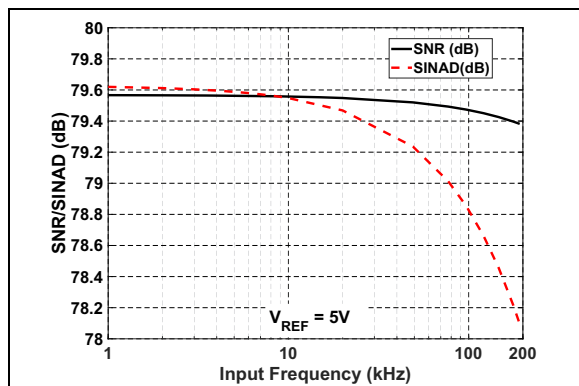


**FIGURE 2-19:** SNR/SINAD vs. Input Frequency:  $V_{REF} = 5\text{V}$ .

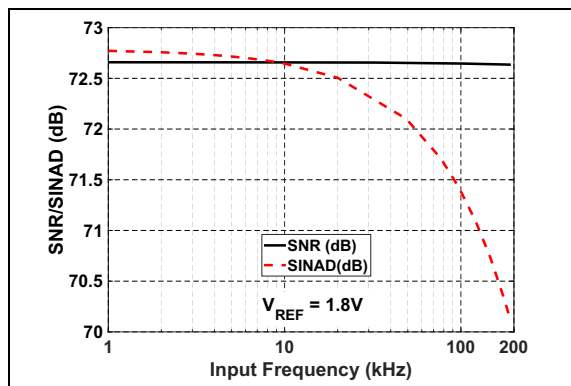


**FIGURE 2-22:** SNR/SINAD vs. Input Frequency:  $V_{REF} = 1.8\text{V}$ .

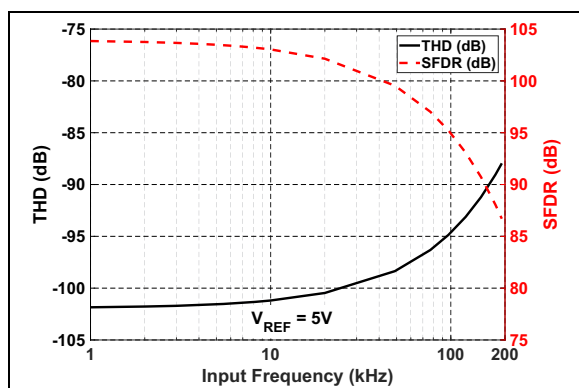


**FIGURE 2-20:** THD/SFDR vs. Input Frequency:  $V_{REF} = 5\text{V}$ .

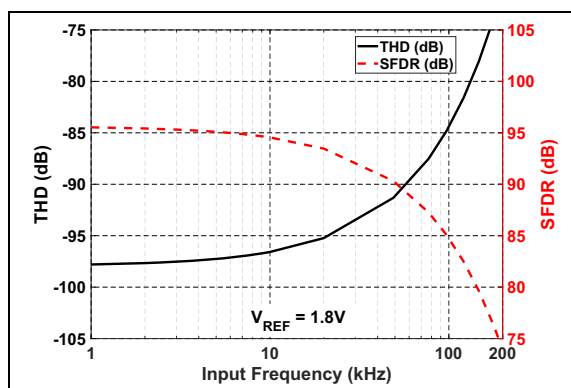

**FIGURE 2-23:** THD/SFDR vs. Input Frequency:  $V_{REF} = 1.8\text{V}$ .

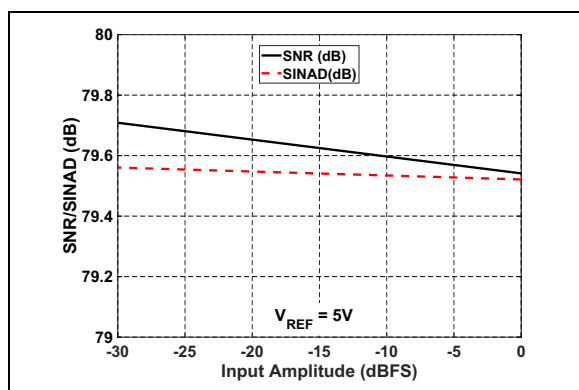


**FIGURE 2-21:** SNR/SINAD vs. Input Amplitude:  $V_{REF} = 5\text{V}$ .

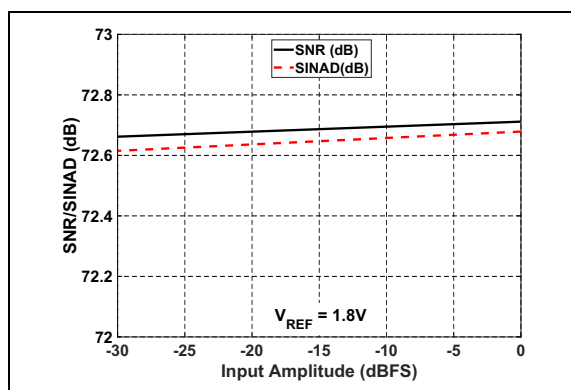


**FIGURE 2-24:** SNR/SINAD vs. Input Amplitude:  $V_{REF} = 1.8\text{V}$ .


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $A_{V_{DD}} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 kpsps, SPI Clock Input (SCLK) = 30 MHz.

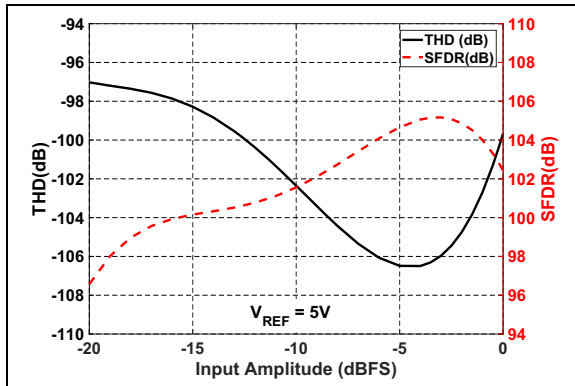


**FIGURE 2-25:** THD/SFDR vs. Input Amplitude:  $V_{REF} = 5\text{V}$ .

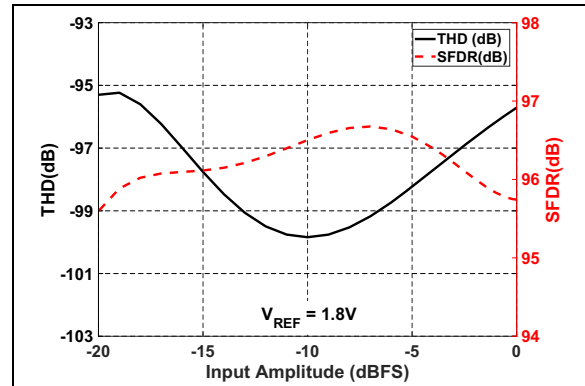


**FIGURE 2-28:** THD/SFDR vs. Input Amplitude:  $V_{REF} = 1.8\text{V}$ .

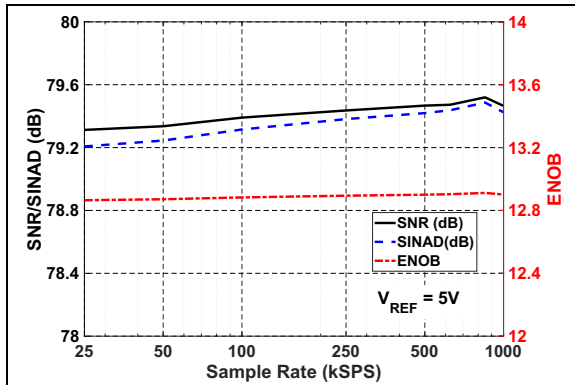


**FIGURE 2-26:** SNR/SINAD/ENOB vs. Sample Rate:  $V_{REF} = 5\text{V}$ .

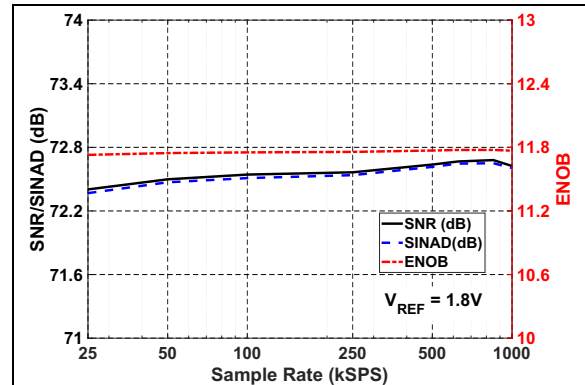

**FIGURE 2-29:** SNR/SINAD/ENOB vs. Sample Rate:  $V_{REF} = 1.8\text{V}$ .

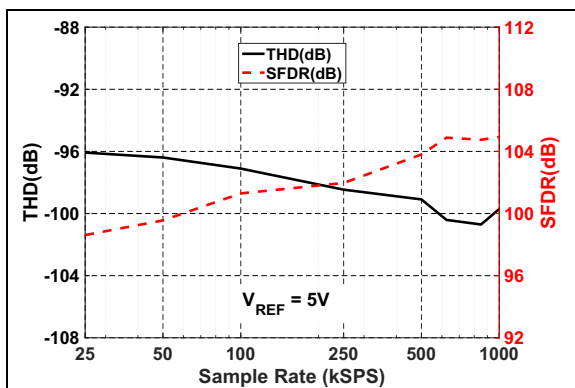


**FIGURE 2-27:** THD/SFDR vs. Sample Rate:  $V_{REF} = 5\text{V}$ .

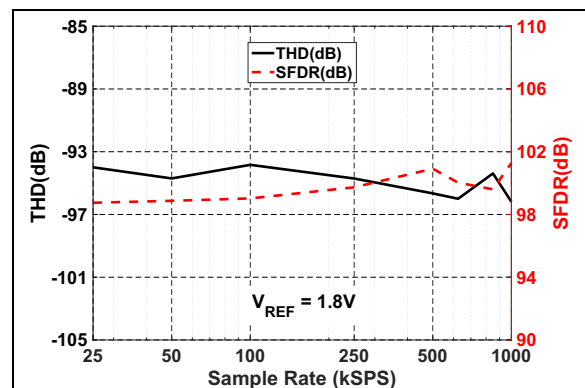


**FIGURE 2-30:** THD/SFDR vs. Sample Rate:  $V_{REF} = 1.8\text{V}$ .

# MCP33151/41-XX


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

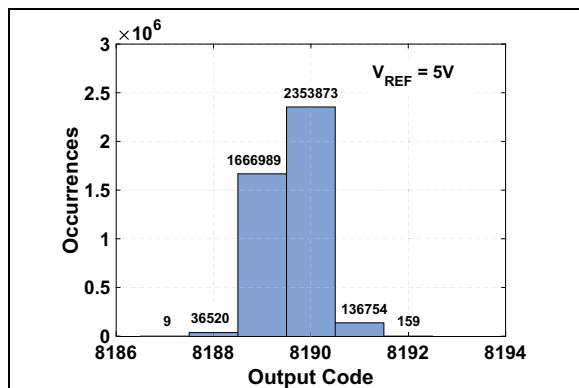


**FIGURE 2-31:** Shorted Input Histogram:  $V_{REF} = 5\text{V}$ .

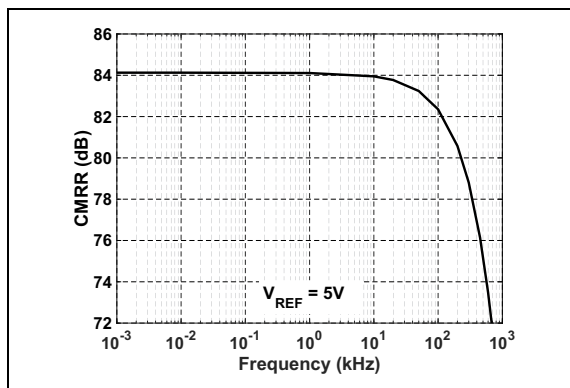


**FIGURE 2-34:** CMRR vs. Input Frequency:  $5V_{REF}$

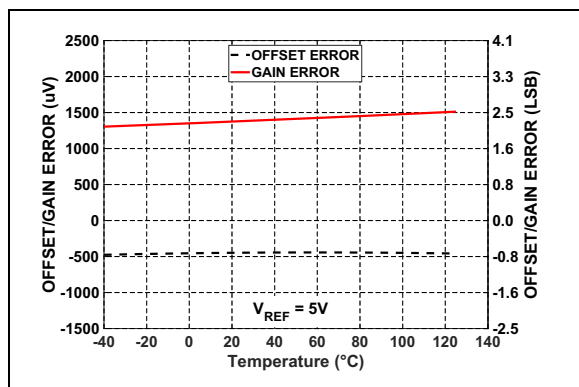


**FIGURE 2-32:** Offset and Gain Error vs. Temperature:  $V_{REF} = 5\text{V}$ .

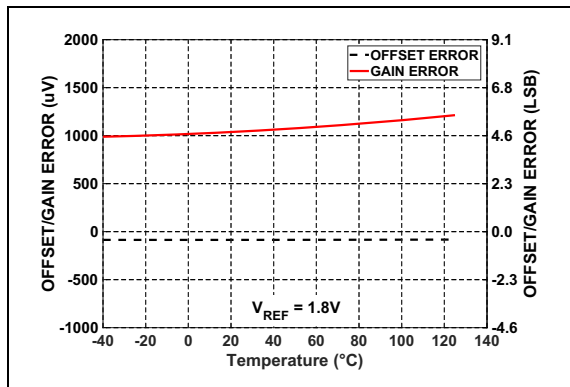

**FIGURE 2-35:** Offset and Gain Error vs. Temperature:  $V_{REF} = 1.8\text{V}$ .

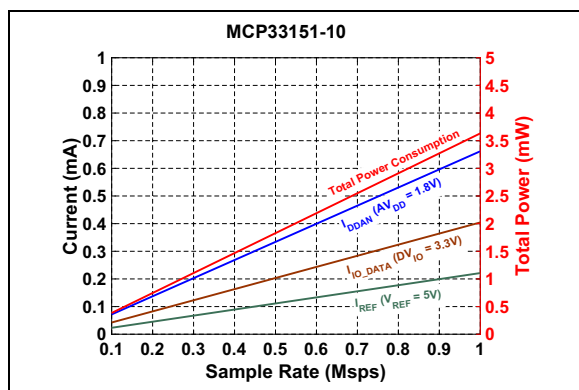


**FIGURE 2-33:** Power Consumption vs. Sample Rate: MCP33151-10,  $C_{LOAD\_SDO} = 20\text{ pF}$ .

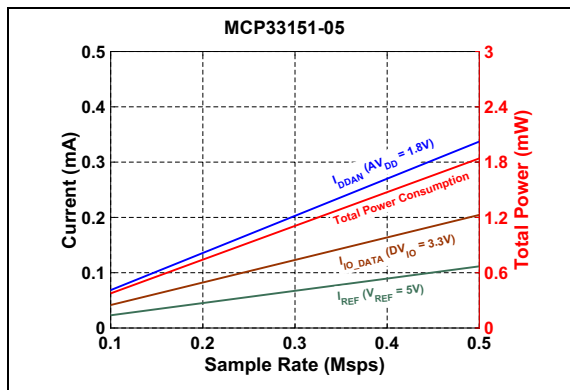


**FIGURE 2-36:** Power Consumption vs. Sample Rate: MCP33151-05,  $C_{LOAD\_SDO} = 20\text{ pF}$ .


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $\text{GND} = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33151-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33151-05:** Sample Rate ( $f_S$ ) = 500 kps, SPI Clock Input (SCLK) = 30 MHz.

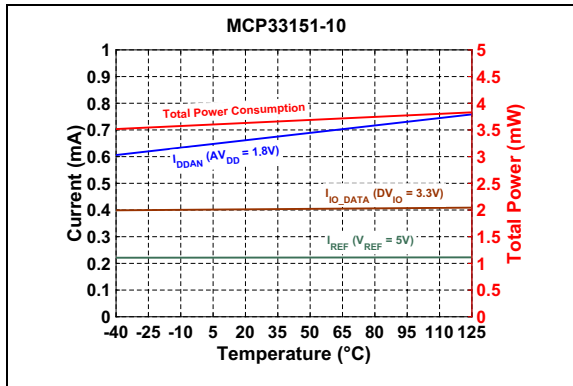

**FIGURE 2-37:** Power Consumption vs. Temperature: MCP33151-10,  $C_{LOAD\_SDO} = 20\text{ pF}$ .

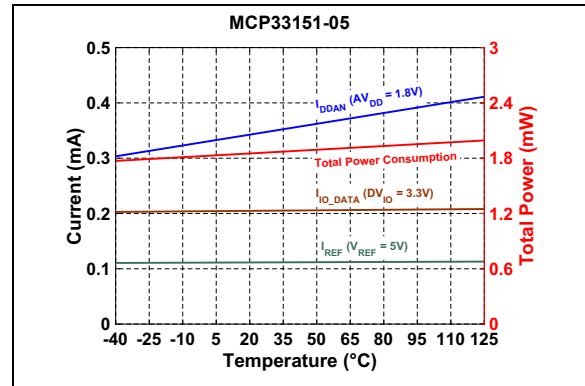

**FIGURE 2-39:** Power Consumption vs. Temperature: MCP33151-05,  $C_{LOAD\_SDO} = 20\text{ pF}$ .

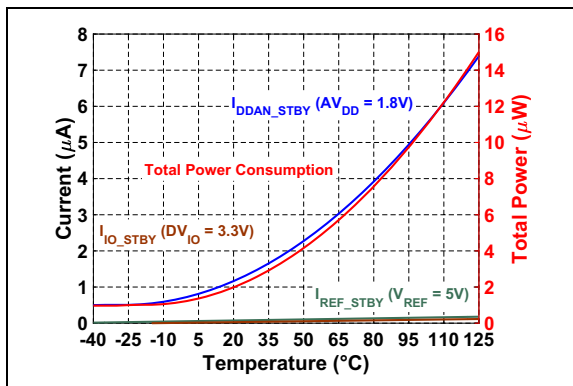


**FIGURE 2-38:** Power Consumption vs. Temperature during Shutdown (Standby).


## 3.0 TYPICAL PERFORMANCE CURVES FOR 12-BIT DEVICES (MCP33141-XX)

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 kpsps, SPI Clock Input (SCLK) = 30 MHz.

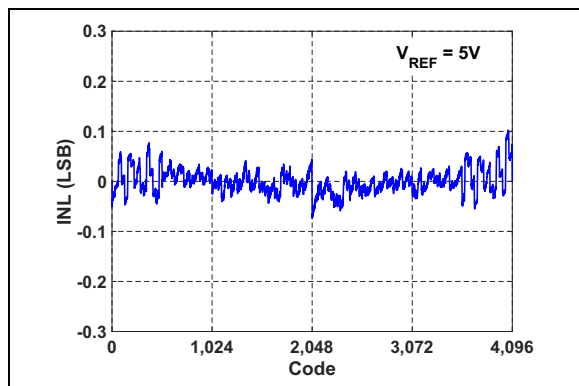


**FIGURE 3-1:** INL vs. Output Code:  
 $V_{REF} = 5\text{V}$ .

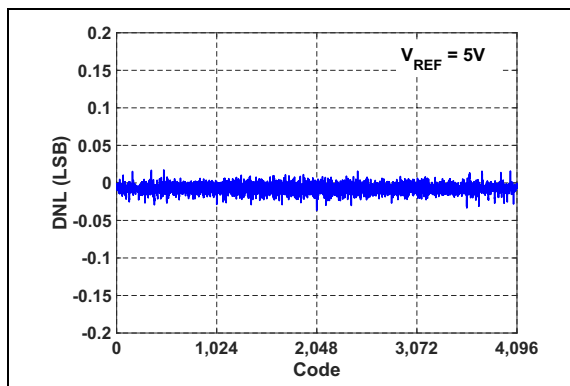


**FIGURE 3-4:** DNL vs. Output Code:  
 $V_{REF} = 5\text{V}$ .

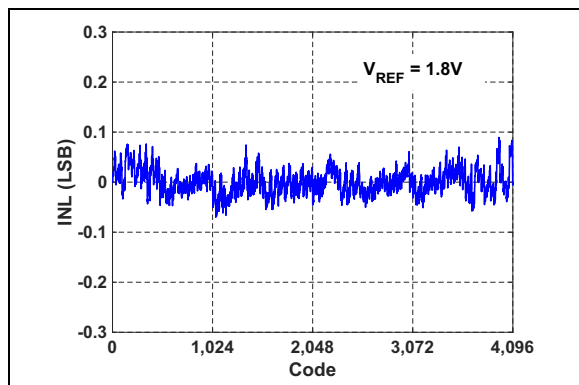


**FIGURE 3-2:** INL vs. Output Code:  
 $V_{REF} = 1.8\text{V}$ .

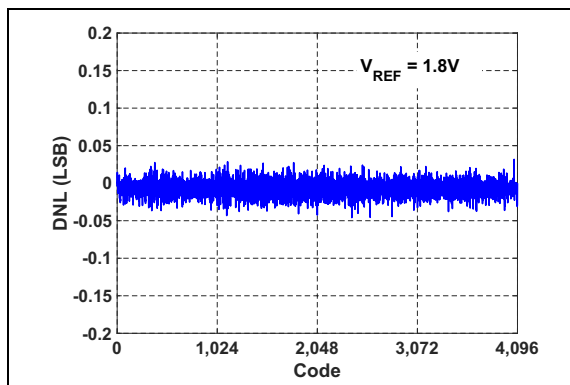

**FIGURE 3-5:** DNL vs. Output Code:  
 $V_{REF} = 1.8\text{V}$ .

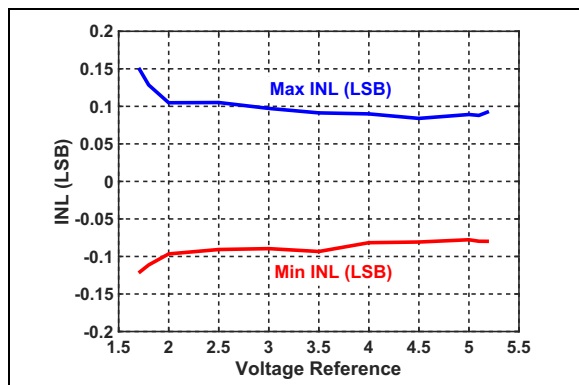


**FIGURE 3-3:** INL vs. Reference Voltage.

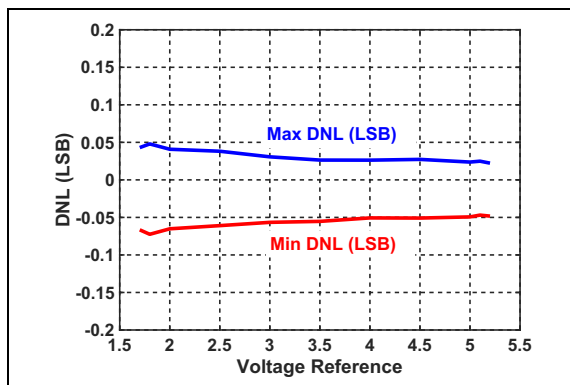


**FIGURE 3-6:** DNL vs. Reference Voltage.


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msp/s, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

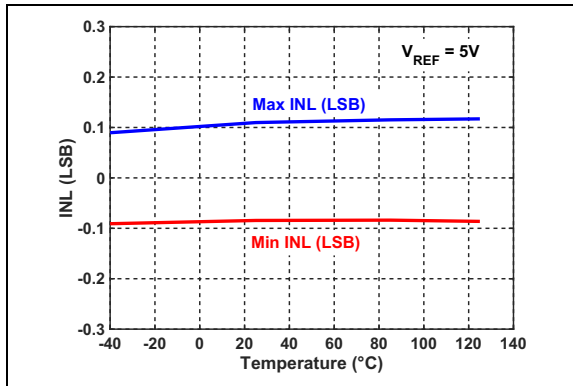


**FIGURE 3-7:** INL vs. Temperature.

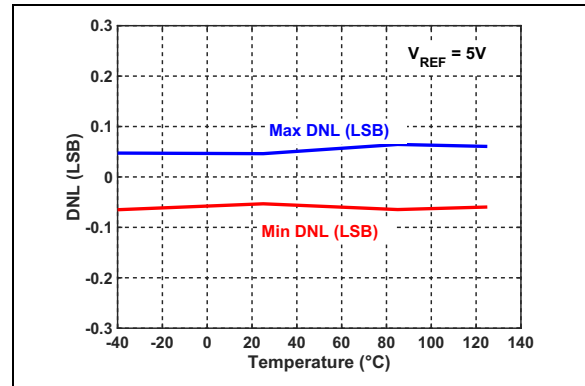


**FIGURE 3-10:** DNL vs. Temperature.

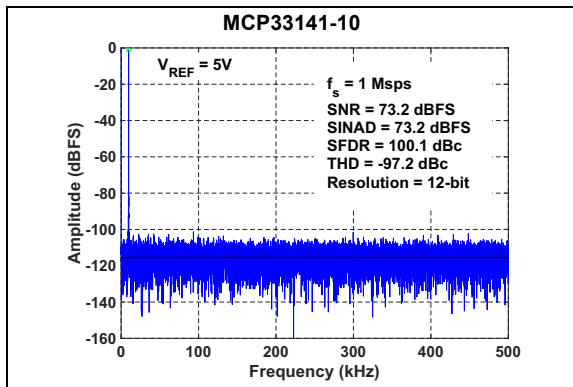


**FIGURE 3-8:** FFT for 10 kHz Input Signal:  
 $f_S = 1\text{ Msp/s}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 5\text{V}$ .

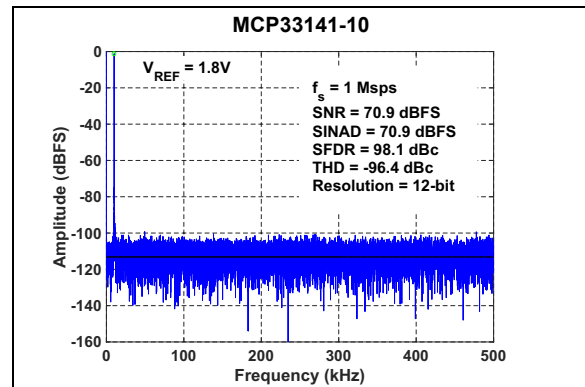

**FIGURE 3-11:** FFT for 10 kHz Input Signal:  
 $f_S = 1\text{ Msp/s}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 1.8\text{V}$ .

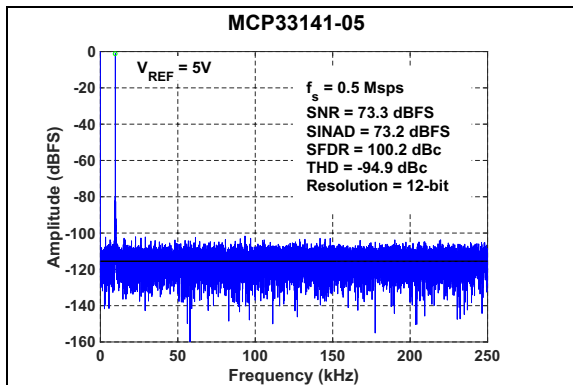


**FIGURE 3-9:** FFT for 10 kHz Input Signal:  
 $f_S = 500\text{ ksp/s}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 5\text{V}$ .

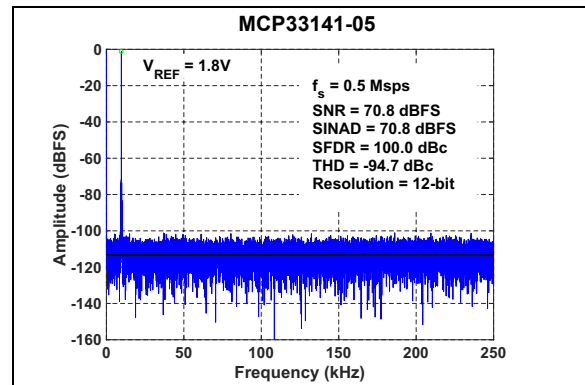


**FIGURE 3-12:** FFT for 10 kHz Input Signal:  
 $f_S = 500\text{ ksp/s}$ ,  $V_{IN} = -1\text{ dBFS}$ ,  $V_{REF} = 1.8\text{V}$ .

# MCP33151/41-XX


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 kpsps, SPI Clock Input (SCLK) = 30 MHz.

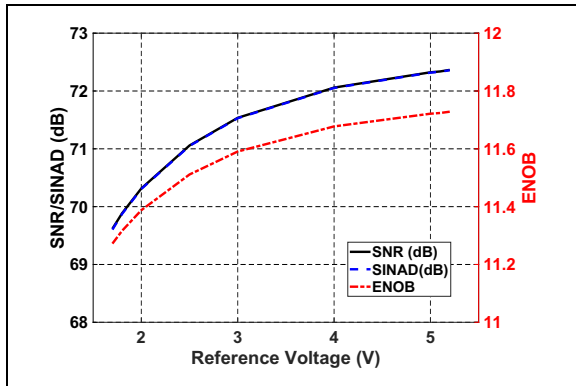


**FIGURE 3-13:** SNR/SINAD/ENOB vs. Reference Voltage.

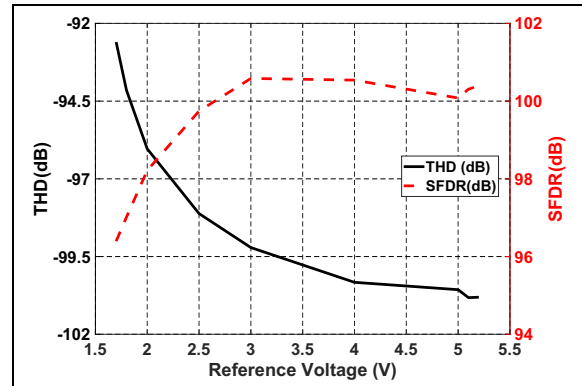


**FIGURE 3-16:** THD/SFDR vs. Reference Voltage.

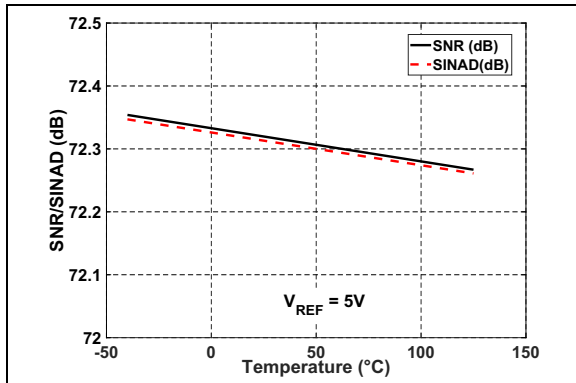


**FIGURE 3-14:** SNR/SINAD vs. Temperature:  $V_{REF} = 5\text{V}$ .

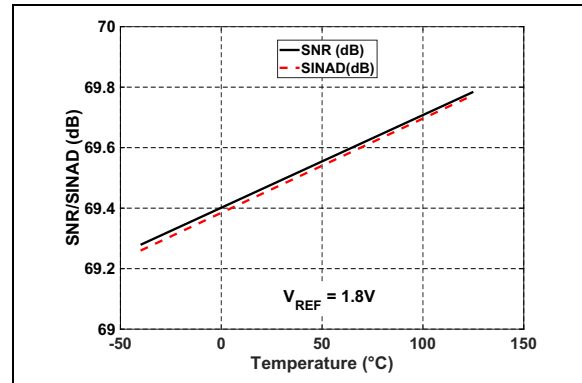

**FIGURE 3-17:** SNR/SINAD vs. Temperature:  $V_{REF} = 1.8\text{V}$ .

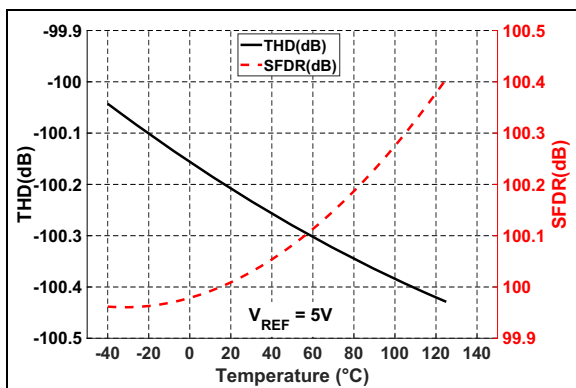


**FIGURE 3-15:** THD/SFDR vs. Temperature:  $V_{REF} = 5\text{V}$ .

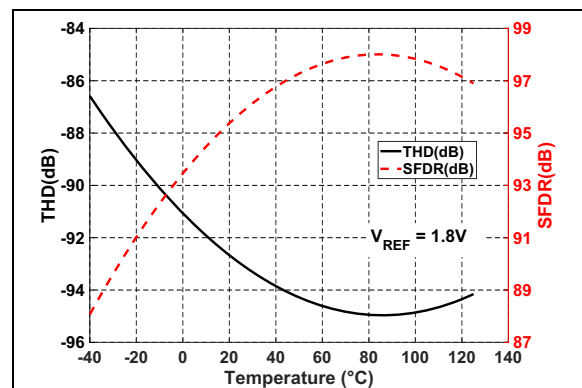


**FIGURE 3-18:** THD/SFDR vs. Temperature:  $V_{REF} = 1.8\text{V}$ .


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 1.8\text{V}$ ,  $V_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $\text{GND} = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 kpsps, SPI Clock Input (SCLK) = 30 MHz.

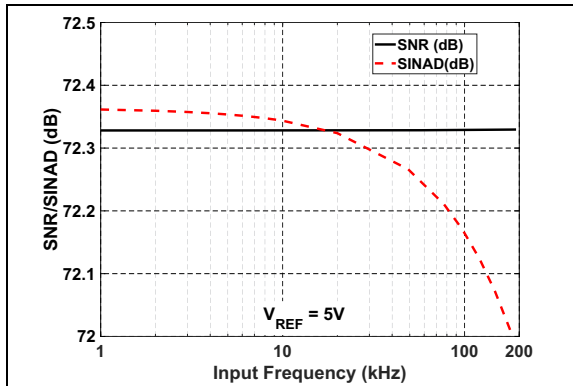


**FIGURE 3-19:** SNR/SINAD vs. Input Frequency:  $V_{REF} = 5\text{V}$ .

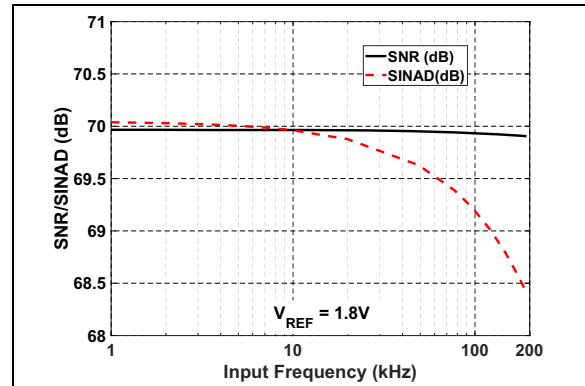


**FIGURE 3-22:** SNR/SINAD vs. Input Frequency:  $V_{REF} = 1.8\text{V}$ .

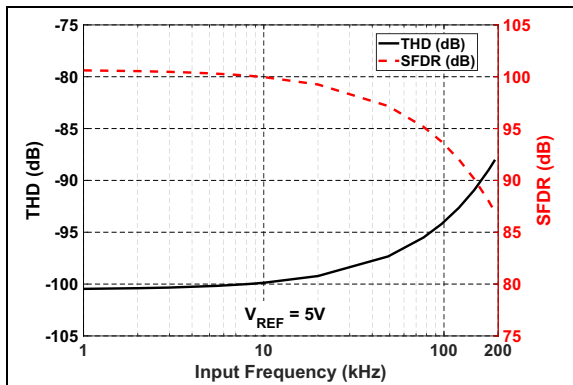


**FIGURE 3-20:** THD/SFDR vs. Input Frequency:  $V_{REF} = 5\text{V}$ .

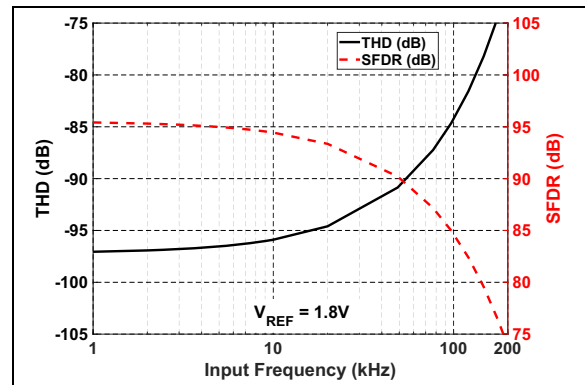

**FIGURE 3-23:** THD/SFDR vs. Input Frequency:  $V_{REF} = 1.8\text{V}$ .

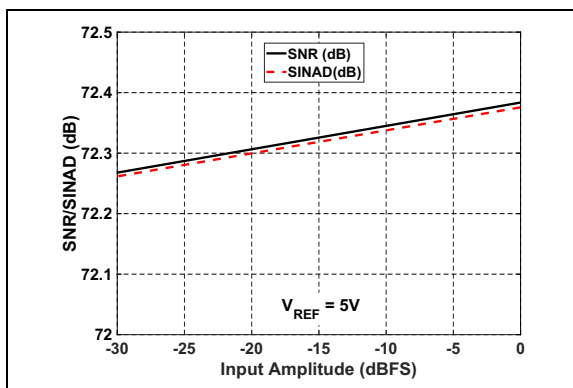


**FIGURE 3-21:** SNR/SINAD vs. Input Amplitude:  $V_{REF} = 5\text{V}$ .

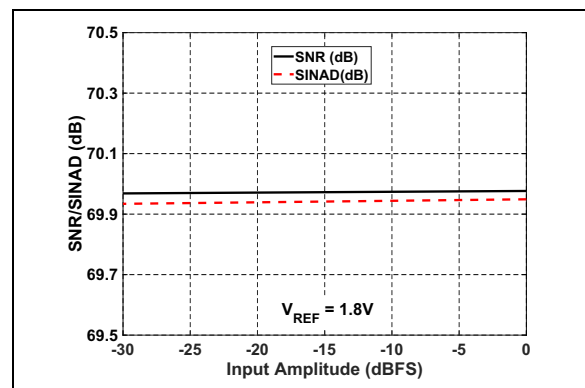


**FIGURE 3-24:** SNR/SINAD vs. Input Amplitude:  $V_{REF} = 1.8\text{V}$ .

# MCP33151/41-XX


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

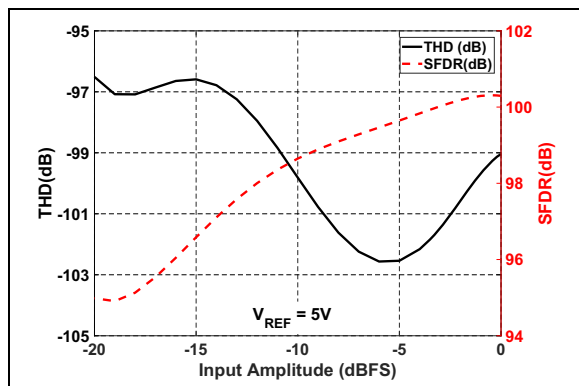


**FIGURE 3-25:** THD/SFDR vs. Input Amplitude:  $V_{REF} = 5\text{V}$ .

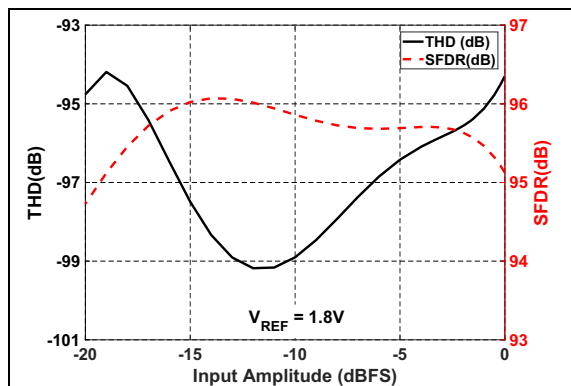


**FIGURE 3-28:** THD/SFDR vs. Input Amplitude:  $V_{REF} = 1.8\text{V}$ .

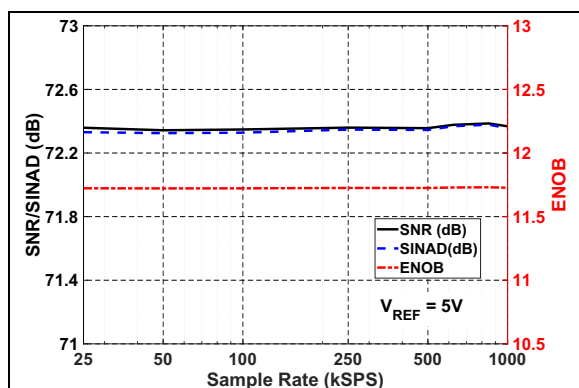


**FIGURE 3-26:** SNR/SINAD/ENOB vs. Sample Rate:  $V_{REF} = 5\text{V}$ .

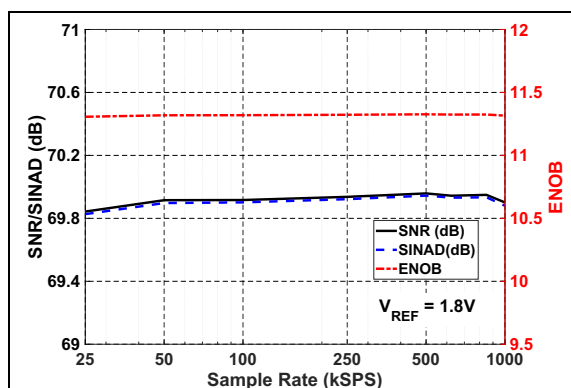

**FIGURE 3-29:** SNR/SINAD/ENOB vs. Sample Rate:  $V_{REF} = 1.8\text{V}$ .

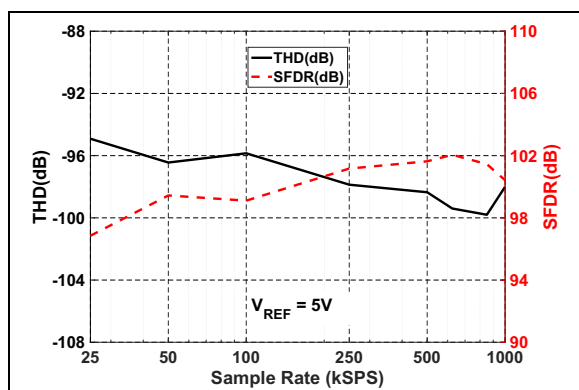


**FIGURE 3-27:** THD/SFDR vs. Sample Rate:  $V_{REF} = 5\text{V}$ .

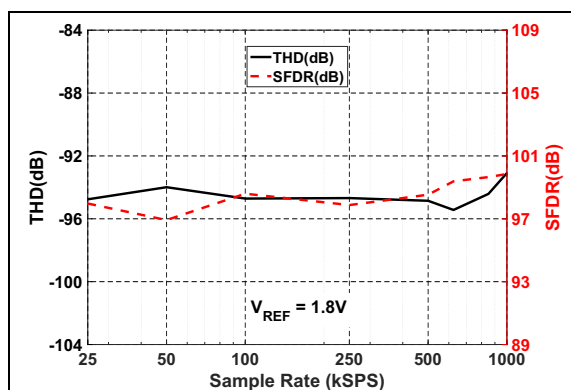


**FIGURE 3-30:** THD/SFDR vs. Sample Rate:  $V_{REF} = 1.8\text{V}$ .


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msp/s, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

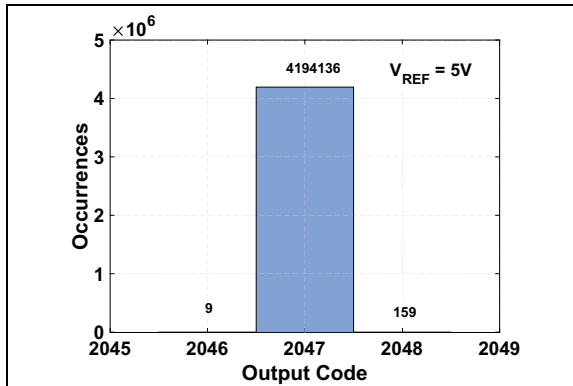


**FIGURE 3-31:** Shorted Input Histogram:  
 $V_{REF} = 5\text{V}$ .

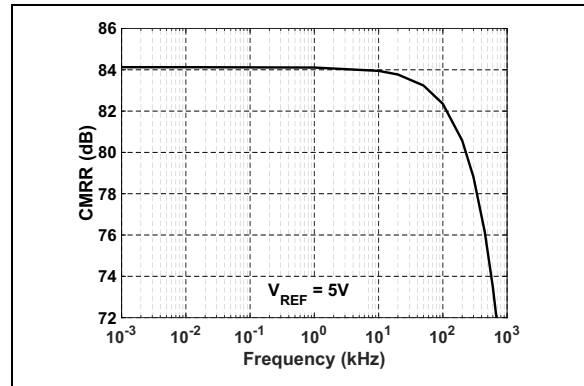


**FIGURE 3-34:** CMRR vs. Input Frequency:  
 $5V_{REF}$

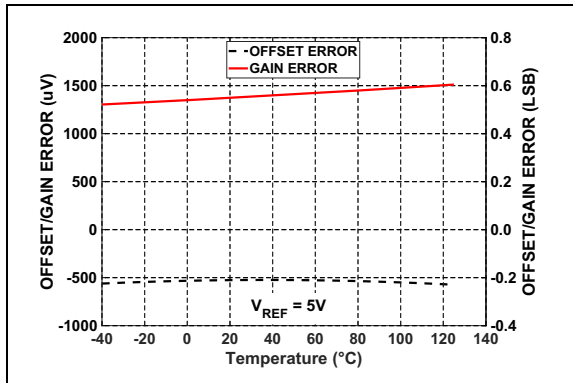


**FIGURE 3-32:** Offset and Gain Error vs.  
Temperature:  $V_{REF} = 5\text{V}$ .

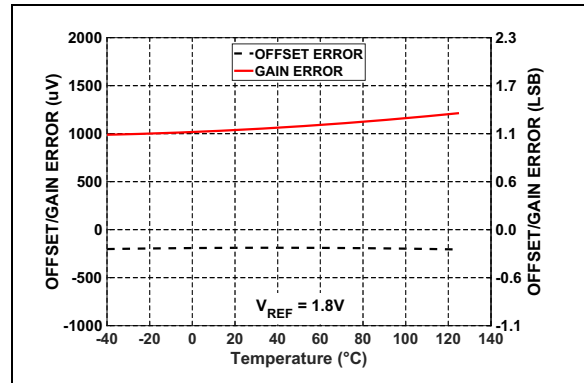

**FIGURE 3-35:** Offset and Gain Error vs.  
Temperature:  $V_{REF} = 1.8\text{V}$ .

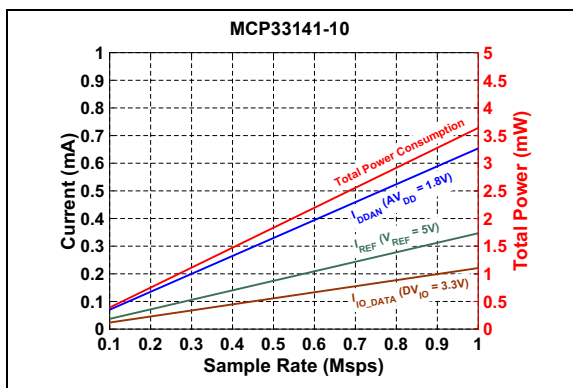


**FIGURE 3-33:** Power Consumption vs.  
Sample Rate: MCP33141-10,  
 $C_{LOAD\_SDO} = 20\text{ pF}$ .

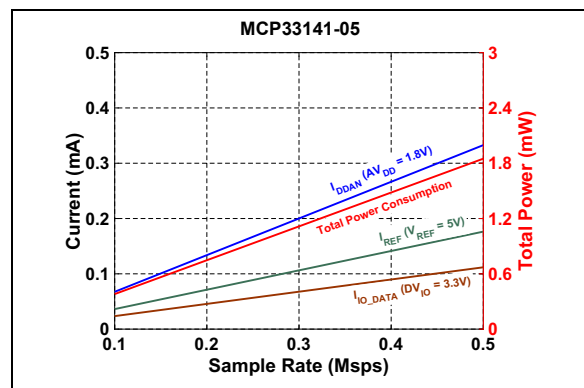


**FIGURE 3-36:** Power Consumption vs.  
Sample Rate: MCP33141-05,  
 $C_{LOAD\_SDO} = 20\text{ pF}$ .

# MCP33151/41-XX


**Note:** Unless otherwise specified, all parameters apply for  $T_A = +25^\circ\text{C}$ ,  $A_{V_{DD}} = 1.8\text{V}$ ,  $DV_{IO} = 3.3\text{V}$ ,  $V_{REF} = 5\text{V}$ ,  $GND = 0\text{V}$ , Differential Analog Input ( $V_{IN}$ ) = -1 dBFS,  $f_{IN} = 10\text{ kHz}$ ,  $C_{LOAD\_SDO} = 20\text{ pF}$ .  
**MCP33141-10:** Sample Rate ( $f_S$ ) = 1 Msps, SPI Clock Input (SCLK) = 60 MHz.  
**MCP33141-05:** Sample Rate ( $f_S$ ) = 500 ksp/s, SPI Clock Input (SCLK) = 30 MHz.

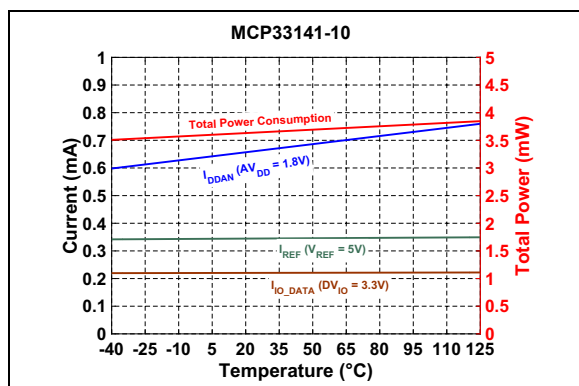

**FIGURE 3-37:** Power Consumption vs. Temperature: MCP33141-10,  $C_{LOAD\_SDO} = 20\text{ pF}$ .

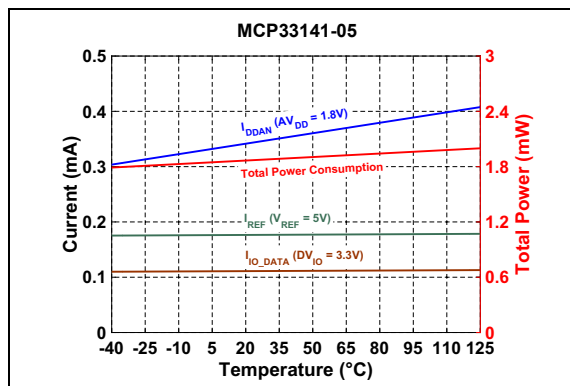


**FIGURE 3-39:** Power Consumption vs. Temperature: MCP33141-05,  $C_{LOAD\_SDO} = 20\text{ pF}$ .

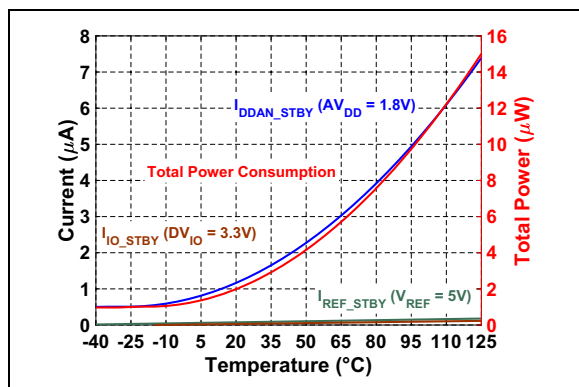

**FIGURE 3-38:** Power Consumption vs. Temperature during Shutdown (Standby).

## 4.0 PIN DESCRIPTIONS

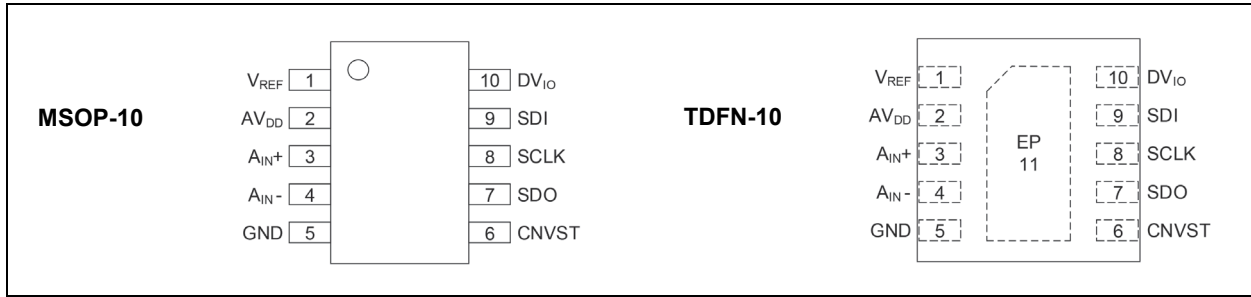

**FIGURE 4-1:** Pin Configurations.

**TABLE 4-1: PIN FUNCTION TABLE**

| MSOP-10 | TDFN-10 | Symbol       | Description                                                                                                                                                                                                                 |
|---------|---------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | 1       | $V_{REF}$    | Reference Voltage Input Pin ( $AV_{DD}$ -5.1V). This pin should be decoupled with a 10 $\mu$ F tantalum capacitor.                                                                                                          |
| 2       | 2       | $AV_{DD}$    | DC Supply Voltage Input for Analog Section Pin (1.8V). This pin should be decoupled with a 1 $\mu$ F ceramic capacitor.                                                                                                     |
| 3       | 3       | $A_{IN}^{+}$ | Analog Input Pin                                                                                                                                                                                                            |
| 4       | 4       | $A_{IN}^{-}$ | Ground Reference Pin for Analog Input. Connect this pin to the ground reference of the analog input.                                                                                                                        |
| 5       | 5       | GND          | Power Supply Ground Reference Pin. This pin is a common ground for both the analog power supply ( $AV_{DD}$ ) and digital I/O supply ( $DV_{IO}$ ).                                                                         |
| 6       | 6       | CNVST        | Conversion Start Control and Active-Low SPI $\overline{CS}$ Digital Input Pin. A new conversion is started on the rising edge of CNVST. When the conversion is complete, output data is available at SDO by lowering CNVST. |
| 7       | 7       | SDO          | SPI-Compatible Serial Digital Data Output Pin. ADC conversion data is shifted out by SCLK clock, with MSB first.                                                                                                            |
| 8       | 8       | SCLK         | SPI-Compatible Serial Data Clock Digital Input Pin. The ADC output is synchronously shifted out by this clock.                                                                                                              |
| 9       | 9       | SDI          | SPI-Compatible Serial Data Digital Input Pin. Tie to $DV_{IO}$ for normal operation.                                                                                                                                        |
| 10      | 10      | $DV_{IO}$    | DC Supply Voltage for Digital Input/Output Interface Pin (1.7V-5.5V). This pin should be decoupled with a 0.1 $\mu$ F ceramic capacitor.                                                                                    |
| —       | 11      | EP           | Exposed Thermal Pad. Not internally bonded (NC).                                                                                                                                                                            |

## 4.1 Supply Voltages (AV<sub>DD</sub>, DV<sub>IO</sub>)

The device has two power supply pins:

- Analog power supply (AV<sub>DD</sub>): 1.8V
- Digital input/output interface power supply (DV<sub>IO</sub>): 1.7V to 5.5V.

The large supply voltage range of DV<sub>IO</sub> allows the device to interface with various host devices that operate with different supply voltages. See [TABLE 1-2: Serial Interface Timing Specifications](#) for timing specifications for I/O interface signal parameters depending on DV<sub>IO</sub> voltage.

**Note:** Proper decoupling capacitors (1  $\mu$ F to AV<sub>DD</sub>, 0.1  $\mu$ F to DV<sub>IO</sub>) should be mounted as close as possible to the respective pins. See [Figure 5-1](#) for an example circuit.

## 4.2 Reference Voltage (V<sub>REF</sub>)

The device requires a single-ended external reference voltage (V<sub>REF</sub>). The external input reference range is from AV<sub>DD</sub> to 5.1V. This reference voltage sets the input full-scale range from 0V to V<sub>REF</sub>. See [Figure 5-2](#) and [Figure 5-3](#) for an example application circuit and reference voltage settings.

**Note:** The reference pin needs a tantalum decoupling capacitor (10  $\mu$ F, 10V rating). Additional multiple ceramic capacitors can be added in parallel to decouple high-frequency noise.

### 4.2.1 VOLTAGE REFERENCE SELECTION


The performance of the voltage reference has a large impact on the accuracy of high-precision data acquisition systems. The voltage reference should

have high-accuracy, low-noise, and low-temperature drift. A  $\pm 0.1\%$  output accuracy of the reference directly corresponds to  $\pm 0.1\%$  absolute accuracy of the ADC output. The RMS output noise voltage of the reference must be less than 1/2 LSB of the ADC.

## 4.3 Power-Up Sequence and Auto-Calibration

The device will perform an automatic calibration on power-up approximately 40 ms after all three power rails (AV<sub>DD</sub>, DV<sub>IO</sub>, and V<sub>REF</sub>) are powered by their respective voltage supplies. The calibration process will take approximately 400 ms to complete before the device will be ready for acquisition. To avoid potential auto-calibration issues, all supplies must be fully stabilized < 40 ms from the moment power is initially supplied. All digital activity must be avoided prior to and during device calibration. At higher operating temperatures (>85°C) it may be necessary to provide additional time for the device to complete calibration (up to 55 ms at 125°C). Therefore it is advisable to wait at least 450-500 ms following power-on before initiating any other activity. Otherwise, it may be necessary to send a manual recalibration command to ensure proper operation. See [Figure 4-2](#) for example power-on operation timing, and refer to [Section 6.2, Recalibrate Command](#) for more details regarding initiating manual recalibration. Once the device finishes calibration it will automatically enter Acquisition (ACQ) mode.

**Note:** Unlike manual recalibration, there will be no activity on SDO to indicate completion of auto-calibration. See [Section 6.2, Recalibrate Command](#) for more details.

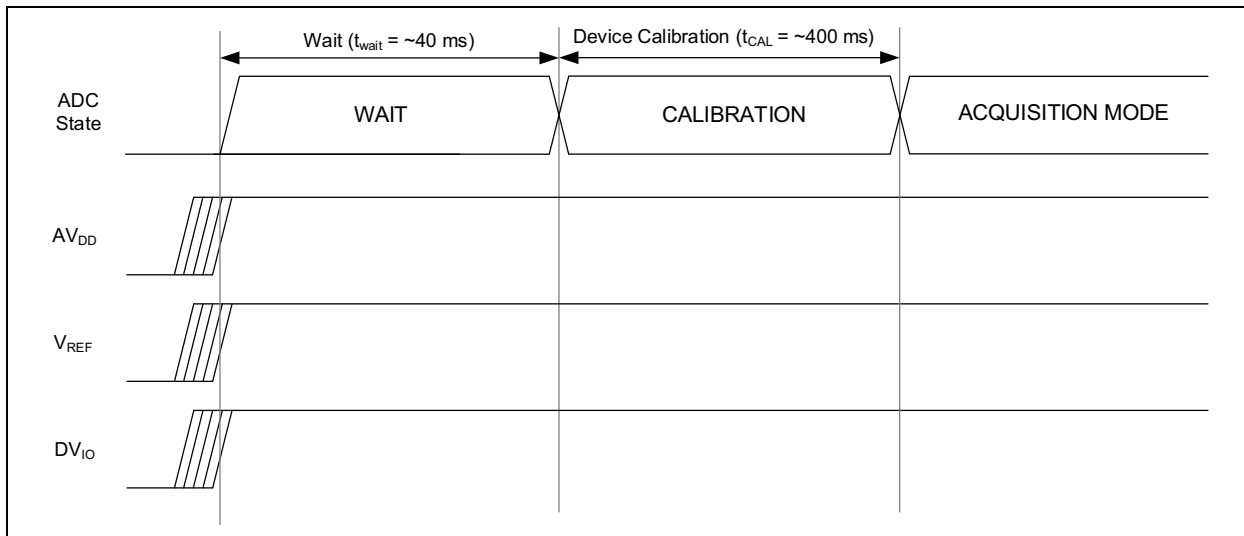

**FIGURE 4-2:** Power-Up Sequence and Auto-Calibration Timing Diagram.

## 5.0 DEVICE OVERVIEW

The device converts unipolar single-ended analog input into unipolar straight binary codes.

When the MCP33151/41-XX is first powered-up, it performs a self-calibration and enters a low current input acquisition mode (Standby) by itself.

The external reference voltage ( $V_{REF}$ ) ranging from  $AV_{DD}$  to 5.1V sets the input full-scale range (FSR) from 0V to  $+V_{REF}$ .

During input acquisition (Standby), the internal input sampling capacitors are connected to the input signal, while most of the internal analog circuits are shut down to save power. During this input acquisition time ( $t_{ACQ}$ ), the device consumes a typical current of 1.5  $\mu$ A.

The user can operate the device with an easy-to-use SPI-compatible 3-wire interface.

The device initiates data conversion on the rising edge of the conversion start control (CNVST). The data conversion time ( $t_{CNV}$ ) is set by the internal clock. Once the conversion is complete, the device starts the next input acquisition. During this input acquisition time ( $t_{ACQ}$ ), the user can clock out the output data by providing the external SPI serial clock (SCLK).

The device provides conversion data with no missing codes. This ADC device family has a large input full-scale range, high precision, high throughput with no output latency, and is an ideal choice for various ADC applications.


### 5.1 Analog Input

Figure 5-1 shows a simplified equivalent circuit of the input architecture with a switched capacitor input stage. The input sampling capacitor ( $C_{S+}$ ) is about 10 pF. The back-to-back diodes ( $D_1 - D_2$ ) at each input pin are ESD protection diodes. Note that these ESD diodes are tied to  $V_{REF}$ , so that each input signal can swing from 0V to  $V_{REF}$ .

The input sampling and hold circuit in  $A_{IN+}$  path is also repeated in  $A_{IN-}$  path. This allows the device to perform a pseudodifferential conversion of the input signal. Therefore, the Common-mode signal presented at both input pins is rejected. In applications,  $A_{IN+}$  pin is for the input signal and  $A_{IN-}$  pin is for the ground reference of the input signal. The user must connect the  $A_{IN-}$  pin to a clean ground plane of the input signal externally.

During input acquisition phase (Standby), the sampling switches are closed and each input sees the sampling capacitor ( $\approx 10$  pF) in series with the on-resistance of the sampling switch,  $R_{SON}$  ( $\approx 350\Omega$ ).

For high-precision data conversion applications, the input voltage needs to be fully settled within 1/2 LSB during  $t_{ACQ}$ . The settling time is directly related to the source impedance: a lower impedance source results in a faster input settling time. Although the device can be driven directly with a low impedance source, using a low noise input driver is highly recommended.

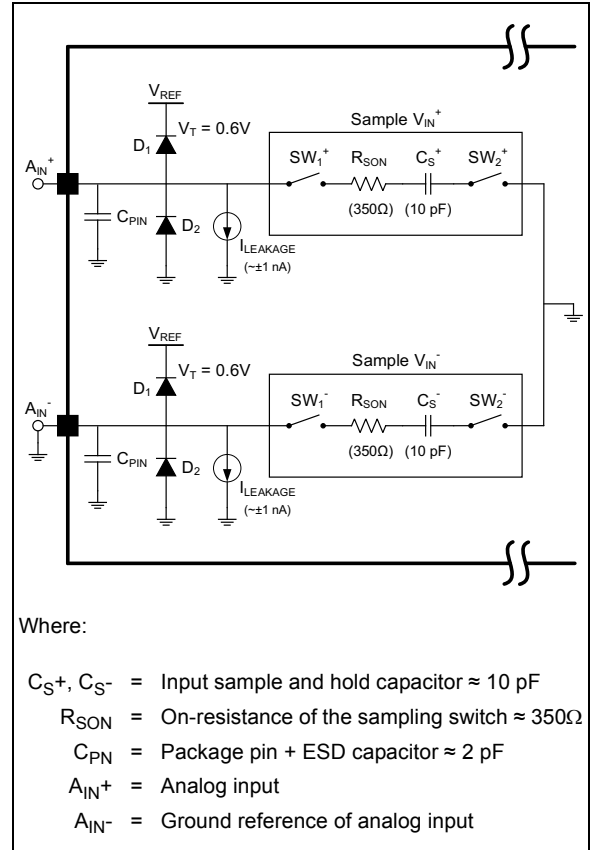

**FIGURE 5-1:** Simplified Equivalent Analog Input Circuit.

**Note:** The ESD diodes at the analog input pins are biased from  $V_{REF}$ . Any input voltage outside the absolute maximum range can turn on the input ESD protection diodes and results in input leakage current which may cause conversion errors and permanent damage to the device. Care must be taken in setting the input voltage ranges so that the input voltage does not exceed the absolute maximum input voltage range.

# MCP33151/41-XX

## 5.1.1 INPUT VOLTAGE RANGE

The device has two analog input pins:  $A_{IN}^+$  and  $A_{IN}^-$  pins. The analog input signal is applied to the  $A_{IN}^+$  pin, and the ground reference of the input signal is tied to the  $A_{IN}^-$  pin.

The voltage difference between  $A_{IN}^+$  and  $A_{IN}^-$  is the ADC input ( $V_{IN}$ ) and needs to be between 0V and  $+V_{REF}$  to produce unsaturated output codes. Equation 5-1 shows the input full-scale range (FSR) and input range.

### EQUATION 5-1: FSR AND INPUT RANGE

$$\text{Input Full-Scale Range (FSR)} = V_{REF}$$

$$\text{Input Range: } 0V \leq V_{IN} \leq (V_{REF} - 1 \text{ LSB})$$

Where:

$$V_{IN} = A_{IN}^+ - A_{IN}^-$$

The device will output unipolar straight binary codes for the analog input. If the input ( $V_{IN}$ ) is greater than the reference voltage ( $V_{REF}$ ), the output code will be saturated (all 1's). If the input ( $V_{IN}$ ) is less than or equal to 0V, the output will be all 0's.

## 5.2 Analog Input Conditioning Circuit

The MCP33151/41-XX can be driven directly when the source impedance of the input driver is low.

A large source impedance of the input signal may affect the ADC's performance. In general, the source impedance is less sensitive to the ADC's DC performances such as INL and DNL. However, it affects significantly the dynamic performances, such as THD, SFDR and SNR.

Therefore, it is a good design practice to isolate the ADC input from the high-impedance source using a low-noise input driver amplifier. Figure 5-2 shows an input configuration example using a low-noise OP amplifier such as MCP6286 and Figure 5-3 shows the transfer function of the MCP33151/41-XX.

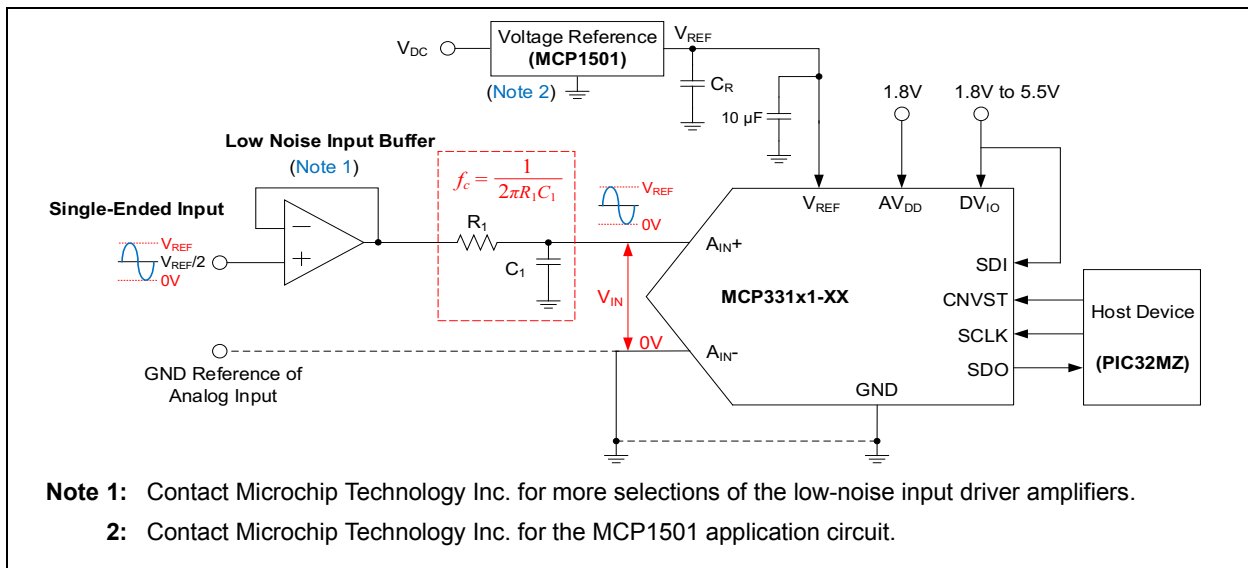


FIGURE 5-2: Unipolar Input Application Example.


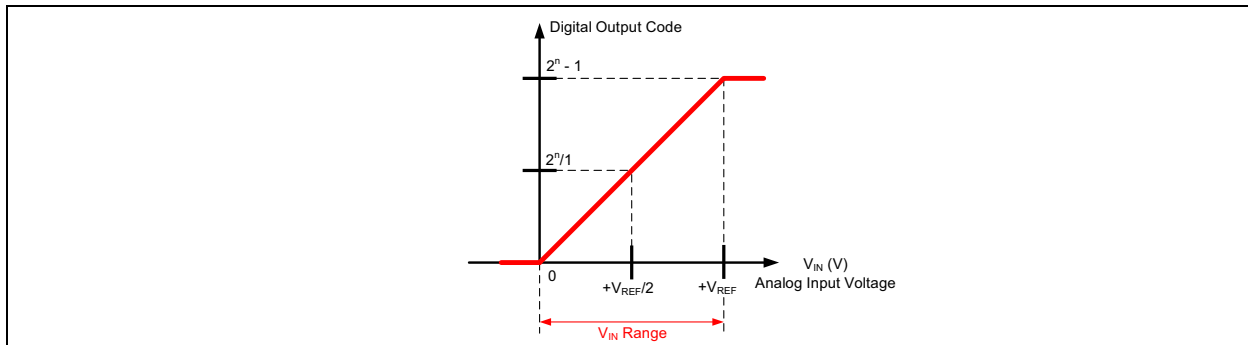


FIGURE 5-3: Transfer Function for Figure 5-2.

## 5.3 ADC Input Driver Selection

The noise and distortion of the ADC input driver can degrade the dynamic performance (SNR, SFDR, and THD) of the overall ADC application system. Therefore, the ADC input driver needs better performance specifications than the ADC itself. The data sheet of the driver typically shows the output noise voltage and harmonic distortion parameters.

Figure 5-4 shows a simplified system noise presentation block diagram for the front-end driver and ADC.

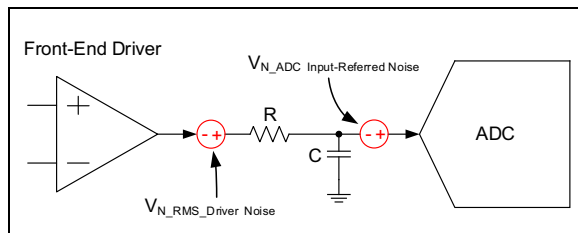

**FIGURE 5-4:** Simplified System Noise Representation.

### • Unity Gain Bandwidth:

An input driver with higher bandwidth usually results in better overall linearity performance. Typically, the driver should have the unity gain bandwidth greater than 5 times the -3 dB cutoff frequency of the anti-aliasing filter:

### EQUATION 5-2: BANDWIDTH REQUIREMENT FOR ADC INPUT DRIVER

$$BW_{Input\ Driver} \geq 5 \times f_B \quad (\text{Hz})$$

$$\geq \frac{5}{2\pi RC} \quad \text{for a single-pole RC filter}$$

Where:

$f_B$  = -3 dB bandwidth of RC anti-aliasing filter as shown in Figure 5-4.

### • Distortion:

The nonlinearity characteristics of the input driver cause distortions in the ADC output. Therefore, the input driver should have less distortion than the ADC itself. The recommended THD of the driver is at least 10 dB less than that of the ADC:

### EQUATION 5-3: RECOMMENDED THD FOR ADC INPUT DRIVER

$$THD_{Input\ Buffer} \leq THD_{ADC} - 10 \quad (\text{dB})$$

### • ADC Input Referred Noise:

When the ADC operates with a full-scale input range, the ADC input-referred RMS noise for a single-ended input configuration is approximated as shown in Equation 5-4.

### EQUATION 5-4: ADC INPUT-REFERRED NOISE

$$V_{N\_ADC\ Input-Referred\ Noise} = \frac{V_{REF}}{2\sqrt{2}} 10^{\frac{SNR}{-20}} \quad (\text{V})$$

### • Noise Contribution from the Front-End Driver:

The noise from the input driver can degrade the ADC's SNR performance. Therefore, the selected input driver must have the lowest possible broadband noise density and 1/f noise. When an anti-aliasing filter is used after the input driver, the output noise density of the input driver is integrated over the -3 dB bandwidth of the filter.

Equation 5-5 shows the RMS output noise voltage calculation using the RC filter's bandwidth and noise density ( $e_N$ ) of the input driver.  $G_N$  in Equation 5-5 is the noise gain of the driver amplifier and becomes 1 for a unity gain buffer driver.

### EQUATION 5-5: NOISE FROM FRONT-END DRIVER AMPLIFIER

$$V_{N\_RMS\_Driver\ Noise} \approx G_N \frac{e_N}{\sqrt{2}} \sqrt{\pi f_B} \quad (\text{V})$$

Where  $e_N$  is the broadband noise density (V/ $\sqrt{\text{Hz}}$ ) of the front-end driver amplifier and is typically given in its data sheet.

In Equation 5-5, 1/f noise ( $e_{N\_Flicker}$ ) is ignored assuming it is very small compared to the broadband noise ( $e_N$ ).

For high-precision ADC applications, the noise contribution from the front-end input driver amplifier is typically constrained to be less than about 20% (or 1/5 times) of the ADC input-referred noise as shown in Equation 5-6:

### EQUATION 5-6: RECOMMENDED ADC INPUT DRIVER NOISE

$$V_{N\_RMS\_Driver\ Noise} \leq \frac{1}{5} V_{N\_ADC\ Input-Referred\ Noise}$$

Using Equation 5-4 and Equation 5-6, the recommended noise voltage density ( $e_N$ ) limit of the ADC input driver is expressed in Equation 5-7:

# MCP33151/41-XX

**EQUATION 5-7: NOISE DENSITY FOR ADC INPUT DRIVER**

$$G_N \frac{e_N}{\sqrt{2}} \sqrt{\pi f_B} \leq \frac{1}{5} V_{N\_ADC \text{ Input-Referred Noise}}$$

$$e_N \leq \frac{1}{10} \frac{1}{G_N \sqrt{\pi f_B}} V_{REF} 10^{\frac{SNR}{20}} \left( \frac{V}{\sqrt{Hz}} \right)$$

Using Equation 5-7, the recommended maximum noise voltage density limit for unity gain input driver for single-ended input ADC can be estimated. Table 5-1 and Table 5-2 show a few example results with  $G_N = 1$ . The user has these tables as a reference when selecting the ADC input driver amplifier.

**TABLE 5-1: NOISE VOLTAGE DENSITY ( $e_N$ ) OF INPUT DRIVER FOR MCP33151-XX**

| ADC (Note 1) |            |                          | RC Filter      | ADC Input Driver Amplifier ( $G_N = 1$ ) |
|--------------|------------|--------------------------|----------------|------------------------------------------|
| $V_{REF}$    | SNR (dBFS) | ADC Input-Referred Noise | $f_B$ (Note 2) | Noise Voltage Density ( $e_N$ )          |
| 1.8V         | 71.9       | 161.7 $\mu$ V            | 3 MHz          | 14.9 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 4 MHz          | 12.9 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 5 MHz          | 11.5 nV/ $\sqrt{Hz}$                     |
| 3V           | 76.0       | 168.1 $\mu$ V            | 3 MHz          | 15.5 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 4 MHz          | 13.4 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 5 MHz          | 12.0 nV/ $\sqrt{Hz}$                     |
| 5V           | 79.3       | 190.7 $\mu$ V            | 3 MHz          | 17.6 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 4 MHz          | 15.2 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 5 MHz          | 13.6 nV/ $\sqrt{Hz}$                     |

**Note 1:** See Equation 5-4 for the ADC input-referred noise calculation for single-ended input.

**2:**  $f_B$  is -3 dB bandwidth of the RC anti-aliasing filter.

**TABLE 5-2: NOISE VOLTAGE DENSITY ( $e_N$ ) OF INPUT DRIVER FOR MCP33141-XX**

| ADC (Note 1) |            |                          | RC Filter      | ADC Input Driver Amplifier ( $G_N = 1$ ) |
|--------------|------------|--------------------------|----------------|------------------------------------------|
| $V_{REF}$    | SNR (dBFS) | ADC Input-Referred Noise | $f_B$ (Note 2) | Noise Voltage Density ( $e_N$ )          |
| 1.8V         | 69.5       | 213.2 $\mu$ V            | 3 MHz          | 19.6 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 4 MHz          | 17.0 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 5 MHz          | 15.2 nV/ $\sqrt{Hz}$                     |
| 3V           | 71.4       | 285.5 $\mu$ V            | 3 MHz          | 26.3 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 4 MHz          | 22.8 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 5 MHz          | 20.4 nV/ $\sqrt{Hz}$                     |
| 5V           | 72.3       | 429.0 $\mu$ V            | 3 MHz          | 39.5 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 4 MHz          | 34.2 nV/ $\sqrt{Hz}$                     |
|              |            |                          | 5 MHz          | 30.6 nV/ $\sqrt{Hz}$                     |

**Note 1:** See Equation 5-4 for the ADC input-referred noise calculation for single-ended input.

**2:**  $f_B$  is -3dB bandwidth of the RC anti-aliasing filter.

## 5.4 Device Operation

When the MCP33151/41-XX is first powered-up, it self-calibrates internal systems and automatically enters Input Acquisition mode. The device operates in two phases: input acquisition (Standby) and data conversion. Figure 5-5 shows the ADC operating sequence.

### 5.4.1 INPUT ACQUISITION PHASE (STANDBY)

During the input acquisition phase ( $t_{ACQ}$ ), also called Standby, the two input sampling capacitors,  $C_{S+}$  and  $C_{S-}$ , are connected to the  $A_{IN+}$  and  $A_{IN-}$  pins, respectively. The input voltage is sampled until a rising edge on  $CNVST$  is detected. The input voltage should be fully settled within 1/2 LSB during  $t_{ACQ}$ .

The acquisition time ( $t_{ACQ}$ ) is user-controllable. This acquisition time ( $t_{ACQ}$ ) can be increased as long as needed for additional power savings.

### 5.4.2 DATA CONVERSION PHASE

The start of the conversion is controlled by  $CNVST$ . On the rising edge of  $CNVST$ , the sampled charge is locked (sample switches are opened) and the ADC

performs the conversion. Once a conversion is started, it will not stop until the current conversion is complete. The data conversion time ( $t_{CNV}$ ) is not user-controllable. After the conversion is complete and the host lowers  $CNVST$ , the output data is presented on  $SDO$ .

Any noise injection during the conversion phase may affect the accuracy of the conversion. To reduce environment noise, minimize I/O events and running clocks during the conversion time.

The output data is clocked out MSB first. While the output data is being transferred, the device enters the next input acquisition phase.

**Note:** Transferring output data during the acquisition phase can disturb the next input sample. It is highly recommended to allow at least  $t_{QUIET}$  (10 ns, typical) between the last edge on the SPI interface and the rising edge on  $CNVST$ . See Figure 2.0 for  $t_{QUIET}$ .

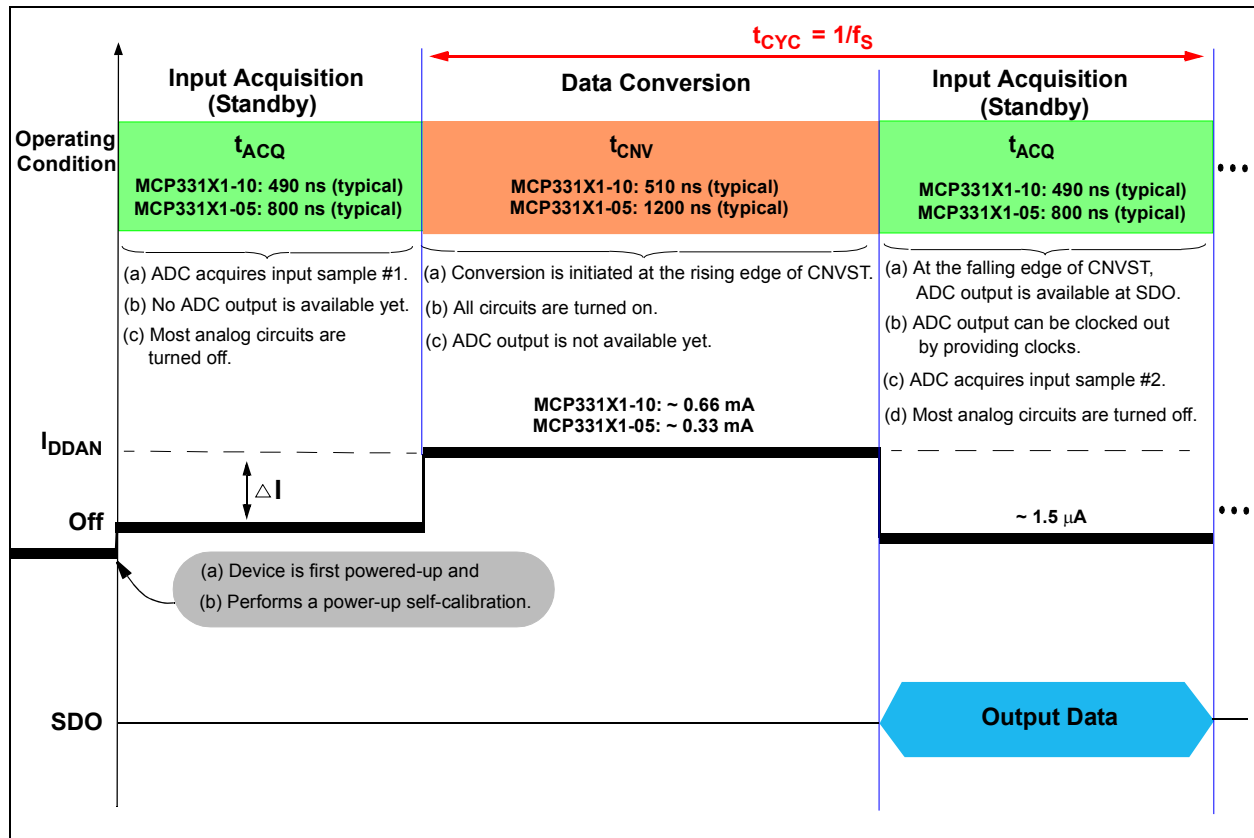


FIGURE 5-5: Device Operating Sequence.

## 5.4.3 SAMPLE (THROUGHPUT) RATE

The device completes data conversion within the maximum specification of the data conversion time ( $t_{CNV}$ ). The continuous input sample rate is the inverse of the sum of input acquisition time ( $t_{ACQ}$ ) and data conversion time ( $t_{CNV}$ ). Equation 5-8 shows the continuous sample rate calculation using the minimum and maximum specifications of the input acquisition time ( $t_{ACQ}$ ) and data conversion time ( $t_{CNV}$ ).

### EQUATION 5-8: SAMPLE RATE

$$\text{Sample Rate} = \frac{1}{(t_{ACQ} + t_{CNV})}$$

(a) MCP331X1-10:

$$\text{Sample Rate} = \frac{1}{(250 \text{ ns} + 750 \text{ ns})} = 1 \text{ Msp/s}$$

(b) MCP331X1-05:

$$\text{Sample Rate} = \frac{1}{(600 \text{ ns} + 1400 \text{ ns})} = 500 \text{ kSPS}$$

## 5.4.4 SERIAL SPI CLOCK FREQUENCY REQUIREMENT

The ADC output is collected during the input acquisition time. For continuous input sampling and data conversion sequence, the SPI clock frequency should be fast enough to clock out all output data bits during  $t_{ACQ}$ . For the continuous sampling rate ( $f_s$ ), the minimum SPI clock frequency requirement is determined by Equation 5-9.

### EQUATION 5-9: SPI CLOCK FREQUENCY REQUIREMENT

$$t_{ACQ} = N \times T_{SCLK} + t_{QUIET} + t_{EN}$$

$$f_{SCLK} = \frac{1}{T_{SCLK}} = \frac{N}{t_{ACQ} - (t_{QUIET} + t_{EN})}$$

Where:

$f_{SCLK}$  = Minimum SPI serial clock frequency required to transfer all N-bits of output data during  $t_{ACQ}$

=  $f_{SCLK}$  = minimum SPI serial clock frequency required to transfer all N-bits of output data during  $t_{ACQ}$

N = Number of output data bits

$T_{SCLK}$  = Period of SPI clock

$N \times T_{SCLK}$  = Output data window

$t_{QUIET}$  = Quiet time between the last output bit and beginning of the next conversion start

= 10 ns (min.)

**Note:** Refer to [TABLE 1-2: Serial Interface Timing Specifications](#) for relevant timing information and see [Figure 2-1](#) for the digital interface timing diagram.

## 5.5 Transfer Function

The pseudodifferential analog input is:

$V_{IN} = (V_{IN+}) - (V_{IN-})$ , where  $V_{IN+}$  is the analog input voltage at  $A_{IN+}$  pin with respect to the ground reference (GND), and  $V_{IN-}$  is the voltage at  $A_{IN-}$  pin, which is 0V when tied to the analog input ground reference (GND).

The LSB size is given by Equation 5-10, and an example of LSB size vs. reference voltage is summarized in Table 5-3.

### EQUATION 5-10: LSB SIZE - EXAMPLE


$$LSB = \frac{V_{REF}}{2^N}$$

Where N is the resolution of the ADC in bits.

**TABLE 5-3: LSB SIZE VS REFERENCE**

| Reference Voltage ( $V_{REF}$ ) | LSB Size             |                      |
|---------------------------------|----------------------|----------------------|
|                                 | MCP33151-XX (14-bit) | MCP33141-XX (12-bit) |
| 1.8V                            | 109.9 $\mu$ V        | 439.5 $\mu$ V        |
| 2V                              | 122.1 $\mu$ V        | 488.3 $\mu$ V        |
| 2.5V                            | 152.6 $\mu$ V        | 0.6104 mV            |
| 3V                              | 183.1 $\mu$ V        | 0.7324 mV            |
| 3.3V                            | 201.4 $\mu$ V        | 0.8057 mV            |
| 3.5V                            | 213.6 $\mu$ V        | 0.8545 mV            |
| 4V                              | 244.1 $\mu$ V        | 0.9766 mV            |
| 4.5V                            | 274.7 $\mu$ V        | 1.0986 mV            |
| 5V                              | 305.2 $\mu$ V        | 1.2207 mV            |
| 5.1                             | 311.3 $\mu$ V        | 1.2451 mV            |

Figure 5-6 shows the ideal transfer function and Table 5-4 shows the digital output codes for the MCP33151/41-XX.

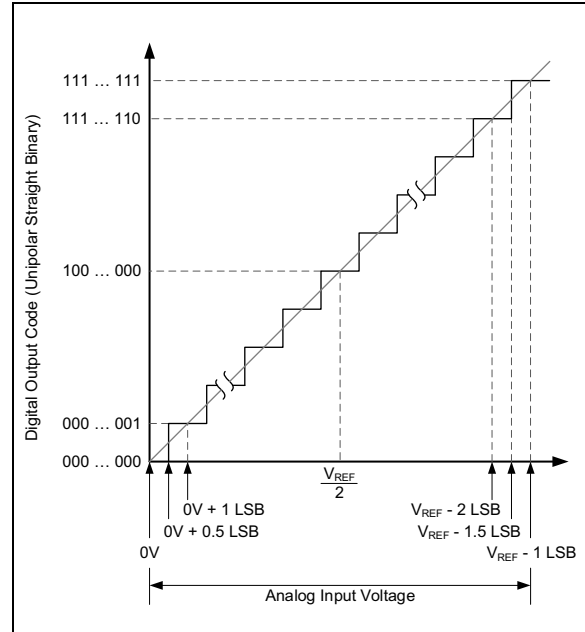

**FIGURE 5-6: Ideal Transfer Function.**

## 5.6 Digital Output Code

The digital output code is proportional to the input voltage. The output data is in unipolar straight binary format. The following is an example of the output code:

- for a zero or negative input:  
**Analog Input:**  $V_{IN} \leq 0$  (V)  
**Output Code:** 0000...0000
- for a mid-scale input:  
**Analog Input:**  $V_{IN} = +V_{REF}/2$  (V)  
**Output Code:** 1000...0000
- for a positive full-scale input:  
**Analog Input:**  $V_{IN} = +V_{REF}$  (V)  
**Output Code:** 1111...1111

The code will be locked at 1111...11 for all voltages greater than  $(V_{REF} - 1 \text{ LSB})$  and 0000...00 for voltages less than 0V. Table 5-4 shows an example of output codes of various input levels.


# MCP33151/41-XX

**TABLE 5-4: DIGITAL OUTPUT CODE**


| Input Voltage (V)         | Digital Output Codes    |                         |
|---------------------------|-------------------------|-------------------------|
|                           | MCP33151-XX<br>(14-bit) | MCP33141-XX<br>(12-bit) |
| $V_{REF}$                 | 11-1111-1111-1111       | 1111-1111-1111          |
| $V_{REF} - 1 \text{ LSB}$ | 11-1111-1111-1111       | 1111-1111-1111          |
| .                         | .                       | .                       |
| $V_{REF}/2$               | 10-0000-0000-0000       | 1000-0000-0000          |
| .                         | .                       | .                       |
| 2 LSB                     | 00-0000-0000-0010       | 0000-0000-0010          |
| 1 LSB                     | 00-0000-0000-0001       | 0000-0000-0001          |
| $\leq 0V$                 | 00-0000-0000-0000       | 0000-0000-0000          |

## 5.7 Data Accumulator

The MCP33151/41-XX devices feature an internal integrator capable of accumulating consecutive sample data and transmitting the accumulated data directly from the ADC, without requiring any special SPI settings to operate. This enables the user to achieve a higher ENOB through consecutive sample integration utilizing the ADC hardware, without requiring any external computational resources and reducing the amount of data transmitted on the serial bus. See [Figure 5-7](#) for an example FFT performance plot after 1024 integrated samples while sampling a 75Hz input signal with a 5V reference voltage. Refer to [Figure 5-8](#) for an example of FFT performance across possible integration lengths.

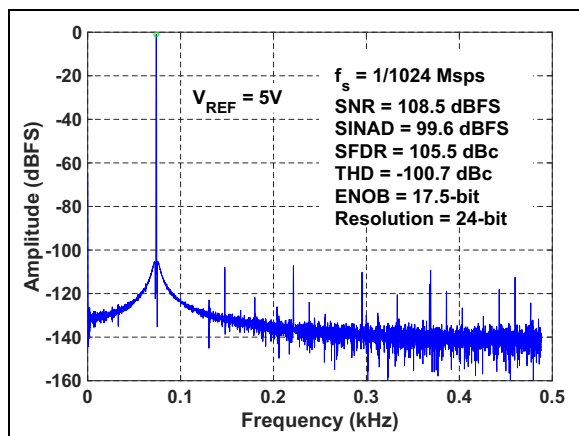

**FIGURE 5-7:** FFT with 1024 Integrated Samples: Input Freq = 75Hz.

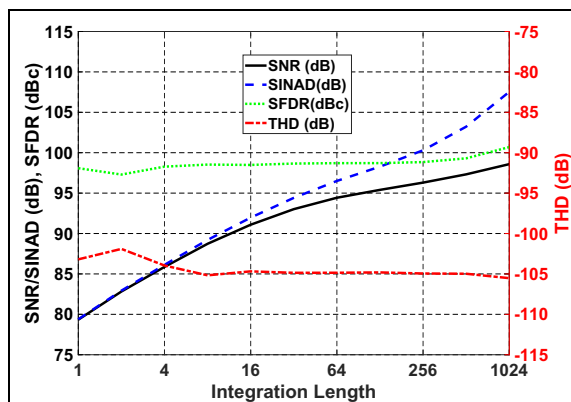

**FIGURE 5-8:** FFT Performance vs Integration Length: Input Freq = 75Hz.

### 5.7.1 DATA ACCUMULATOR USAGE

Data accumulation is performed automatically within the device between each sequential Conversion/Acquisition cycle (TCYC) whenever the current conversion results are not read out, up to a total of 1024 consecutive conversions for an ENOB increase of up to 5 bits above typical. To begin data accumulation, the user simply avoids transmitting any SCLK pulses during each sequential conversion cycle.

**Note:** If a sample has been converted but not read out, the sample can be discarded by providing at least 1 SCLK pulse before initiating the next conversion. Providing at least 1 SCLK will reset the system for single acquisition. Otherwise all consecutive conversions without an SCLK pulse will automatically be integrated with the previous conversion results.

After completing the desired number of conversions to achieve the target ENOB, the user can begin transferring the total accumulated data by transmitting the necessary number of SCLK pulses to transfer all

stored bits. Refer to [Table 5-5](#) for number of conversions, bit size and ENOB relationship. See [Figure 6-5](#) and [Figure 6-8](#) for example Conversion/Acquisition control and SPI timing operation.

Consecutive sample integration increases the bit size of the output data, up to the maximum output size of the ADC (24-bits/18.5 ENOB at 1024 samples for a 14-bit ADC).

Because the addition of two binary values can produce a sum with an increased bit size, the ADC will need to output data proportional to the amount of samples being integrated. See [Table 5-5](#) for an estimate of the data size and ENOB capability depending on the number of conversions the user chooses to integrate.

When using the accumulator, it is important to consider the frequency content of the input signal being sampled. Because the accumulator is averaging all consecutive conversions over the accumulated time period, the input frequency must be low enough to ensure that no signal information is being filtered out. This means that there is a performance trade-off between sample integration length (and resulting ENOB improvement) and the maximum input frequency that can be sampled. Refer to [Table 5-6](#) to understand the roll-off frequencies for various integration lengths, and refer to [Figure 5-9](#) for an example of the dB attenuation across integration lengths.

**TABLE 5-5: ACCUMULATED DATA SIZE AND ENOB FOR 14-BIT ADC**

| Number of Conversions | ADC transmission size (bits) | Effective Number of bits (ENOB) (1) |
|-----------------------|------------------------------|-------------------------------------|
| 1                     | 14                           | 13                                  |
| 2                     | 15                           | 13.5                                |
| 3 - 4                 | 16                           | 13.5 - 14                           |
| 5 - 8                 | 17                           | 14 - 14.5                           |
| 9 - 16                | 18                           | 14.5 - 15                           |
| 17 - 32               | 19                           | 15 - 15.5                           |
| 33 - 64               | 20                           | 15.5 - 16                           |
| 65 - 128              | 21                           | 16 - 16.5                           |
| 129 - 256             | 22                           | 16.5 - 17                           |
| 257 - 512             | 23                           | 17 - 17.5                           |
| 513 - 1024            | 24                           | 17.5 - 18                           |


**Note 1:** ENOB values based on typical 14-bit device characteristics under nominal conditions and setting N to the maximum value in the corresponding row.

**Note:** The discrepancy between the output data size and the actual ENOB is a result of sample integration doubling both the signal amplitude and the noise power for each

factor of two that the samples are integrated. By integrating 2 samples, the signal amplitude increases SNR by 6 dB, and the noise power decreases SNR by 3 dB, resulting in an overall SNR increase of 3 dB (+0.5 ENOB).

**TABLE 5-6: INPUT SIGNAL ROLL-OFF FREQUENCY VS INTEGRATION LENGTH**

| Integration Length | Roll-Off (Hz @ 1MSPS) |         |          |
|--------------------|-----------------------|---------|----------|
|                    | 0.1 dB                | 0.01 dB | 0.001 dB |
| 2                  | 41781.9               | 13226.3 | 4183.0   |
| 4                  | 20890.9               | 6613.2  | 2091.5   |
| 8                  | 10445.5               | 3306.6  | 1045.7   |
| 16                 | 5222.7                | 1653.3  | 522.9    |
| 32                 | 2611.4                | 826.6   | 261.4    |
| 64                 | 1305.7                | 413.3   | 130.7    |
| 128                | 652.8                 | 206.7   | 65.4     |
| 256                | 326.4                 | 103.3   | 32.7     |
| 512                | 163.2                 | 51.7    | 16.3     |
| 1024               | 81.6                  | 25.8    | 8.2      |

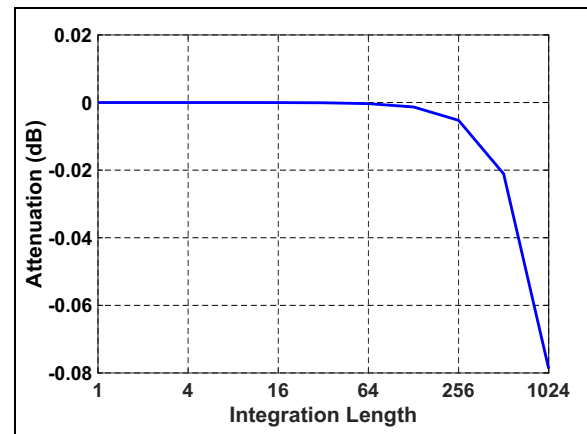

**FIGURE 5-9:** Measured Attenuation of Fundamental Frequency (dB) vs Integration Length: Input Freq = 75 Hz.

# MCP33151/41-XX

## 6.0 DIGITAL SERIAL INTERFACE

The device has an SPI compatible serial digital interface using four digital interface pins: CNV, SDI, SDO and SCLK.

The following sections describe the operation of the MCP33151/41-XX using the digital serial interface.

Table 6-1 summarizes the descriptions of both digital interface pins and interface options. The communication is always started by the host device (Master).

**Note:** This device supports a standard SPI Mode 0,0 only. **SPI MODE 0,0:** in this mode, the SCLK idle state is Low. Data is clocked out on the SDO pin on the falling edge of the SCLK pin. For the MCP33151/41-XX, this means that there will be a rising edge before there is a falling edge.

TABLE 6-1: INTERFACE MODE SELECTION SUMMARY

| Interface Mode                                                | SDI Pin               |                          | CNV Pin at $t_{\text{CNV}}$<br>(recommended)                      | SCLK at<br>CNV<br>Rising<br>Edge | BUSY bit<br>at SDO |
|---------------------------------------------------------------|-----------------------|--------------------------|-------------------------------------------------------------------|----------------------------------|--------------------|
|                                                               | at CNV Rising<br>Edge | after CNV Rising<br>Edge |                                                                   |                                  |                    |
| 3-wire $\overline{\text{CS}}$ mode without<br>BUSY output bit | "High"                |                          | Transition from "High" to<br>"Low" after $t_{\text{CNV}}$ (Max.)  | —                                | No                 |
| 3-wire $\overline{\text{CS}}$ mode with<br>BUSY output bit    | "Low"                 |                          | Transition from "High" to<br>"Low" before $t_{\text{CNV}}$ (Max.) | —                                | Yes                |

### 6.1.1 $\overline{\text{CS}}$ MODES

**Note:** The timing diagram examples in the following subsections are given with 14-bit mode only. The examples are applicable for the 12-bit mode in the same way with reduced bits.

#### 6.1.1.1 3-Wire $\overline{\text{CS}}$ Mode Without BUSY Output Bit

This interface option is most useful when a single MCP33151/41-XX is connected to an SPI-compatible digital host. Figure 6-1 shows the connection diagram with the host device. In this mode, CNV functions as both conversion control and  $\overline{\text{CS}}$ .

To enable this interface option, SDI can either be tied to  $V_{\text{IO}}$ , or permanently held in a Logic = 1 state. By doing so, the device will never output a BUSY status bit.

As shown in Figure 6-2, at the rising edge of CNV, the conversion is initiated. The SDO pin becomes High-Z state (if no external pull-up is used). Once the conversion is initiated, it continues and completes the conversion regardless of the CNV pin condition. This means the CNV pin can be used for other SPI devices after the conversion is initiated.

## 6.1 Serial Interface Options and Serial Communications

The device offers a  $\overline{\text{CS}}$  mode with a 3-wire interface, and can operate either with or without a BUSY indicator status output. This BUSY status output bit is followed by the conversion output bits, and can be used as an interrupt request ( $\overline{\text{IRQ}}$ ) input for the digital host device.

The 3-wire  $\overline{\text{CS}}$  mode (using CNV, SCLK, SDO) interface is simple and useful when the host device handles a single MCP33151/41-XX device.


The following sections detail the serial communication of the 3-wire  $\overline{\text{CS}}$  modes with or without a BUSY output bit.

When the conversion is complete, the device enters the acquisition phase (Power-Down state), and SDO comes out of the High-Z state when CNV is lowered. The device exits the acquisition phase when CNV goes high. SDO returns to a High-Z state after the 14th SCLK falling edge or when CNV goes high, whichever occurs first.


The device will output the MSB on the SDO pin following the falling edge of CNV, or once the converting phase ( $t_{\text{CNV}}$ ) completes, whichever happens later. The remaining data bits are then clocked out on the subsequent SCLK falling edges. Data are valid on both edges of SCLK and can be captured on either edge. However, a digital host capturing data on the SCLK falling edge can achieve a faster read out rate.

**Note:** It is recommended to use this mode only when the ADC converting phase ( $t_{\text{CNV}}$ ) will complete before the falling edge of CNV.


Figure 6-2 and Figure 6-3 show the timing diagrams for both early and late CNV lowering scenarios.

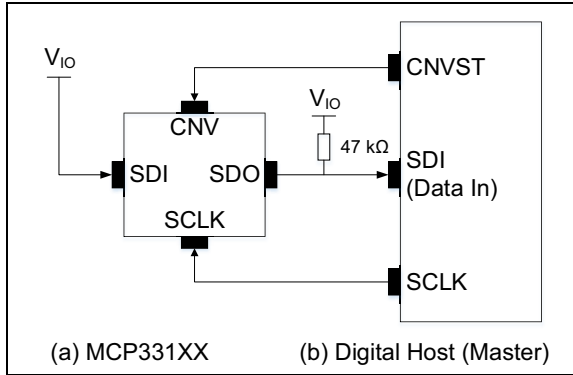


**FIGURE 6-1:** Connection Diagram for 3-Wire  $\overline{CS}$  Mode without BUSY Status Indicator Output Bit.

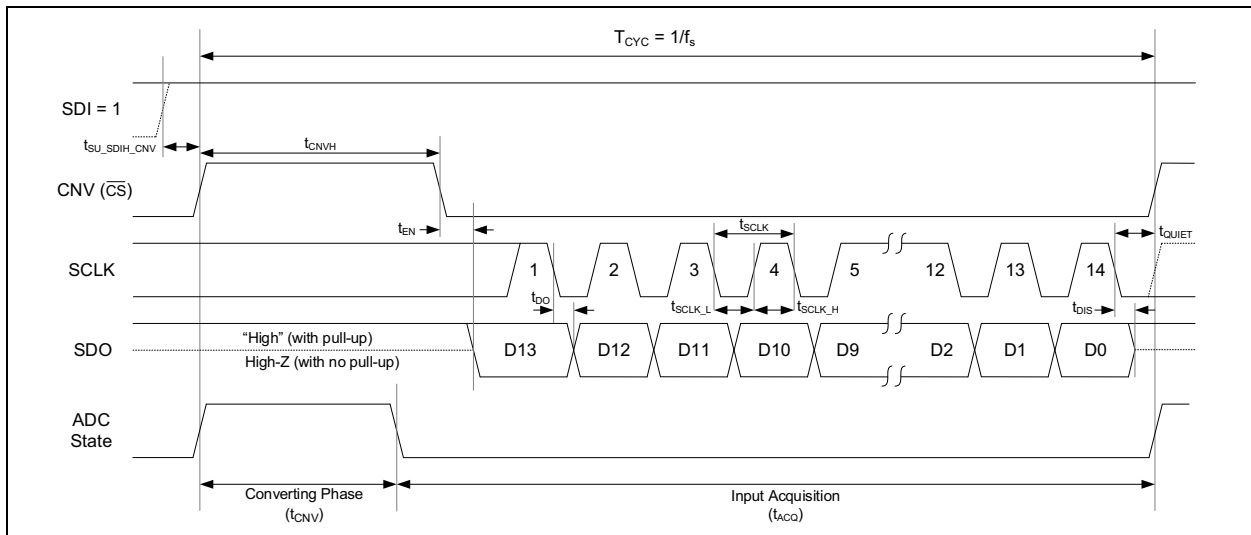

**FIGURE 6-2:** Interface Timing Diagram for 3-Wire  $\overline{CS}$  Mode without BUSY Status Indicator Output Bit, Late CNV (Recommended).

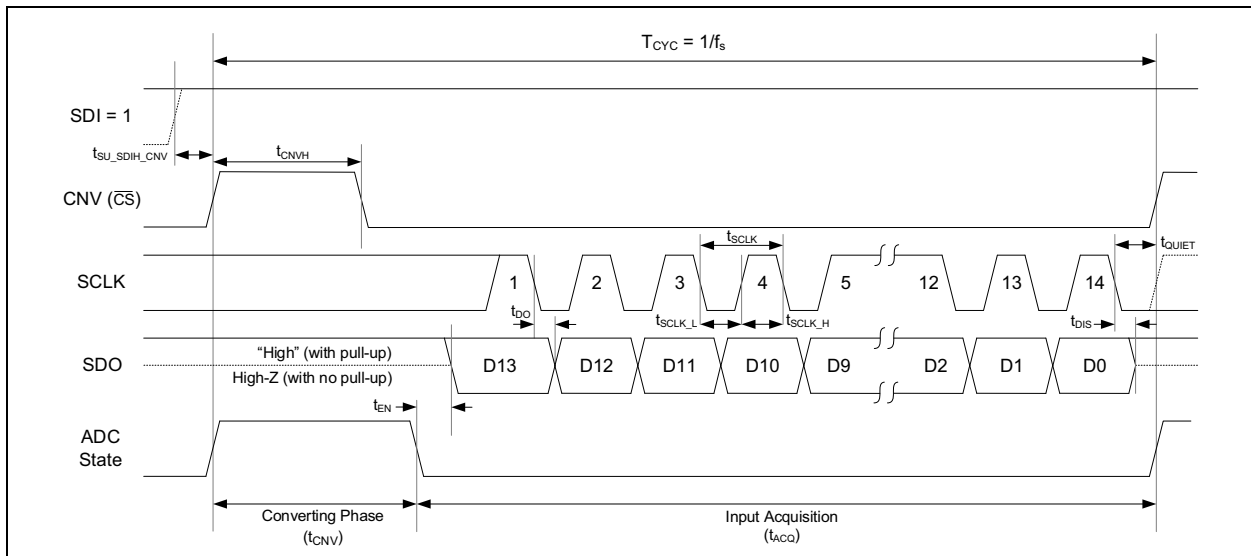

**FIGURE 6-3:** Interface Timing Diagram for 3-Wire  $\overline{CS}$  Mode without BUSY Status Indicator Output Bit, Early CNV.

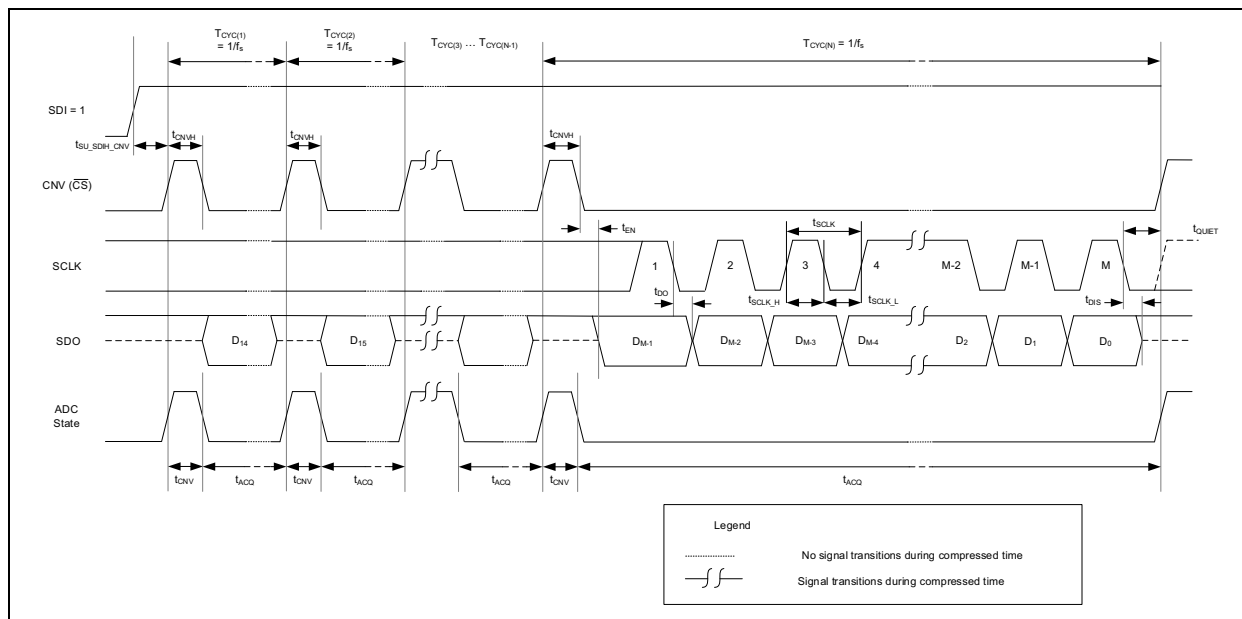

**FIGURE 6-4:** Interface Timing Diagram for Accumulator Operation in 3-Wire CS Mode, Without BUSY Status Indicator Output Bit.

**Note:** See [Section 5.7, Data Accumulator](#) for more details about using the data accumulator feature.

## 6.1.1.2 3-Wire $\overline{\text{CS}}$ Mode with BUSY Output Bit

This interface option is typically used when a single MCP33151/41-XX is connected to an SPI-compatible digital host that has an interrupt (IRQ) input.

[Figure 6-5](#) shows the connection diagram with the host device. In this mode, CNV functions as both conversion control and  $\overline{\text{CS}}$ .

To enable this interface option, SDI can either be tied to GND, or permanently held in a Logic = 0 state. By doing so, the device will always output a BUSY status bit.


As shown in [Figure 6-6](#), at the rising edge of CNV, conversion is initiated. The SDO pin becomes High-Z state (if no external pull-up is used). Once the conversion is initiated, it continues and completes the conversion regardless of the CNV pin condition. This means the CNV pin can be used for other SPI devices after the conversion is initiated.

When conversion is complete, the device enters an acquisition phase and Power-Down state, SDO comes out of the High-Z state, and outputs a BUSY status indicator bit (Low level). The device exits the acquisition phase when CNV once again returns to a High state. SDO then returns to a High-Z state after the 15th SCLK falling edge or when CNV goes High, whichever occurs first.

**Note:** It is recommended that CNV be driven Low before the minimum conversion time ( $t_{\text{CNV}}$ ) expires, and remain Low until the maximum possible conversion time ( $t_{\text{CONV}}$ ) expires. A Low level on the CNV input at the end of a conversion ensures the device generates a BUSY status indicator bit when the ADC has finished converting.


This configuration provides a high-to-low transition on the IRQ pin of the digital host by the BUSY bit. The data bits are clocked out, MSB first, on the subsequent SCLK falling edges. Data are valid on both edges of SCLK and can be captured on either edge. However, a digital host capturing data on the SCLK falling edge can achieve a faster reading rate.

[Figure 6-6](#) and [Figure 6-7](#) show the timing diagrams for both early and late CNV lowering scenarios.

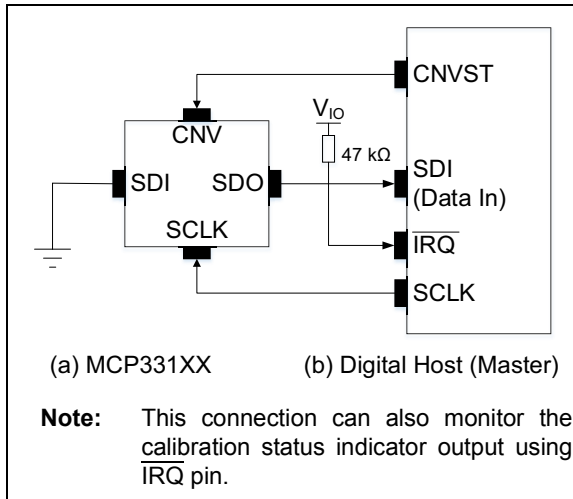


**Note:** The pull-up resistor on the SDO pin is highly recommended in this mode as it ensures that the  $\overline{\text{IRQ}}$  pin of the digital host is held high when SDO goes to High-Z state.

**FIGURE 6-5:** Connection Diagram for 3-Wire  $\overline{\text{CS}}$  Mode with BUSY Status Indicator Output Bit.  $\overline{\text{IRQ}}$  Pin in the Host Device Is Used for Interrupt Event.

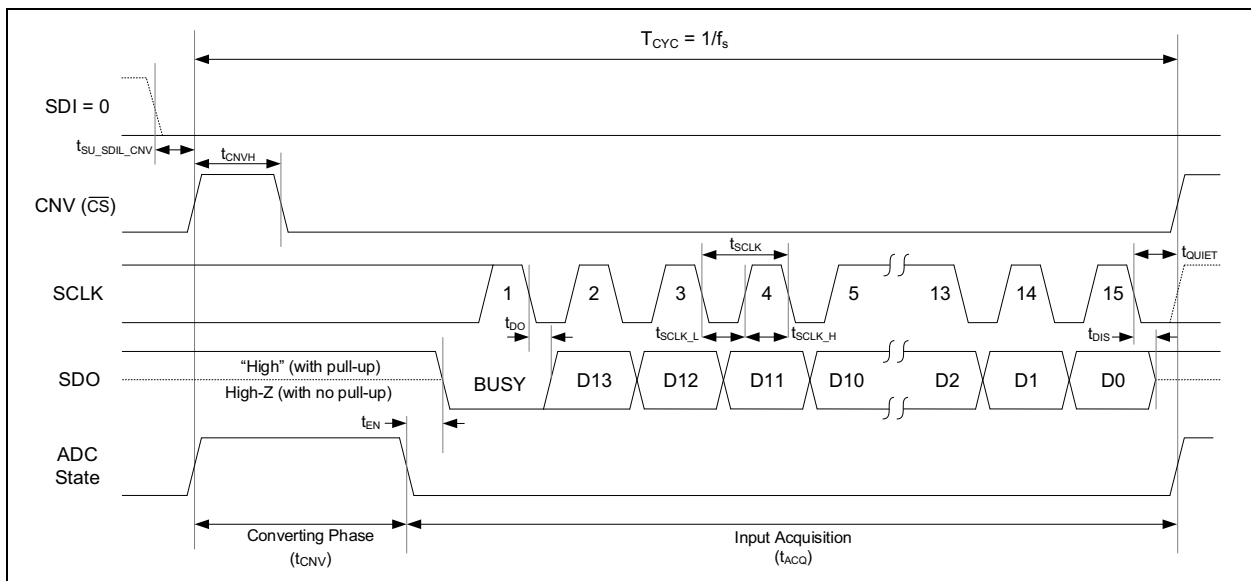


**FIGURE 6-6:** Timing Diagram for 3-Wire  $\overline{\text{CS}}$  Mode with BUSY Status Indicator Output Bit, Early CNV (Recommended).

# MCP33151/41-XX

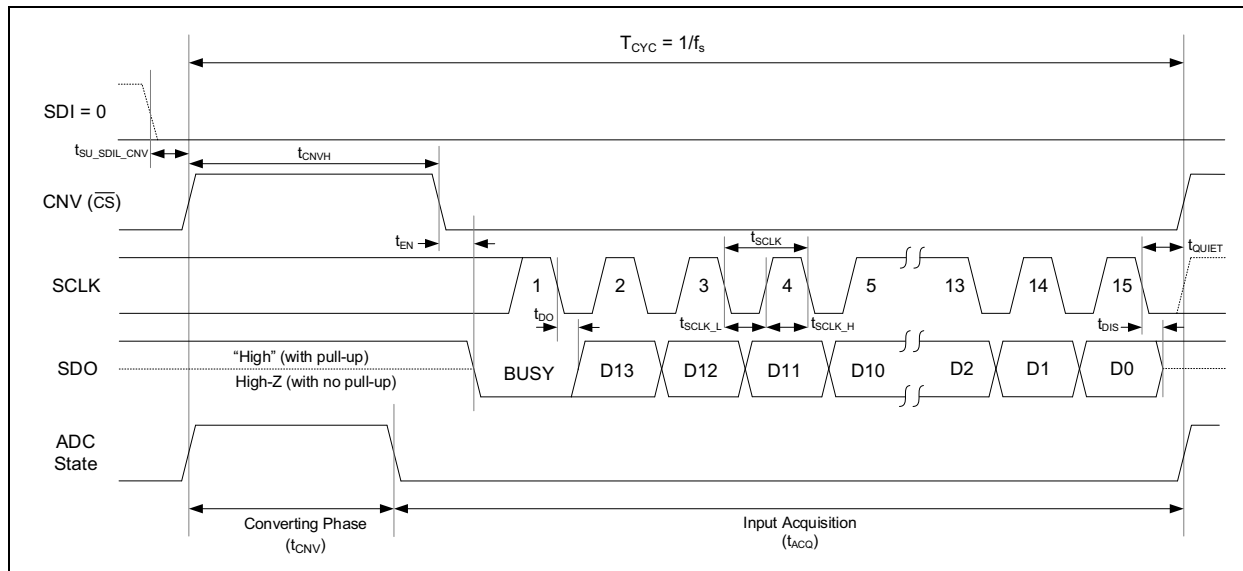

**FIGURE 6-7:** Timing Diagram for 3-Wire  $\overline{\text{CS}}$  Mode with *BUSY* Status Indicator Output Bit, Late CNV.

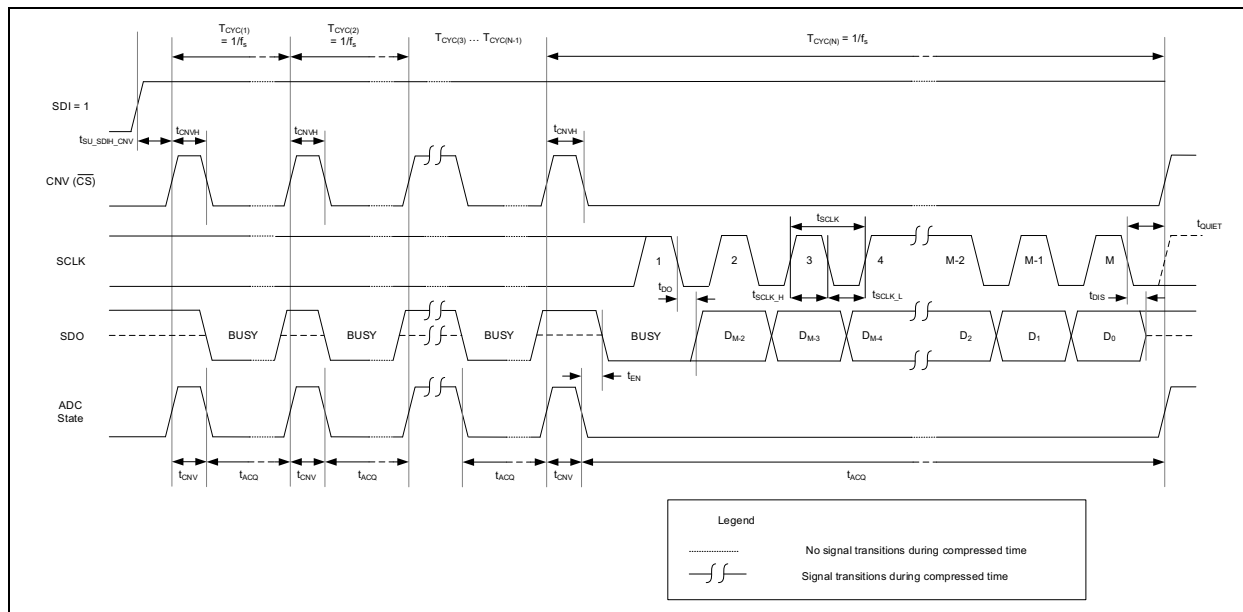

**FIGURE 6-8:** Interface Timing Diagram for Accumulator Operation in 3-Wire CS Mode, with *BUSY* Status Indicator Output Bit.

**Note:** See [Section 5.7, Data Accumulator](#) for more details about using the data accumulator feature.

## 6.2 Recalibrate Command


The recalibrate command applies to the following cases:

- When the reference voltage was not fully settled during the initial power-on sequence.
- During operation, to ensure optimum performance across varying environment conditions, such as reference voltage and temperature.

A self-calibration is initiated by sending the recalibrate command. The host device sends a recalibrate command by transmitting 1024 SCLK pulses (including the clocks for data bits) while the device is in the acquisition phase (Standby).

The device drives SDO Low during the recalibration procedure, and returns to High-Z once completed. The status of the recalibration procedure can be monitored by placing a pull-up on SDO, so that SDO goes High when the recalibration is complete.

Figure 6-9 shows the recalibrate command timing diagram. The calibration takes approximately 500 ms ( $t_{CAL}$ ).

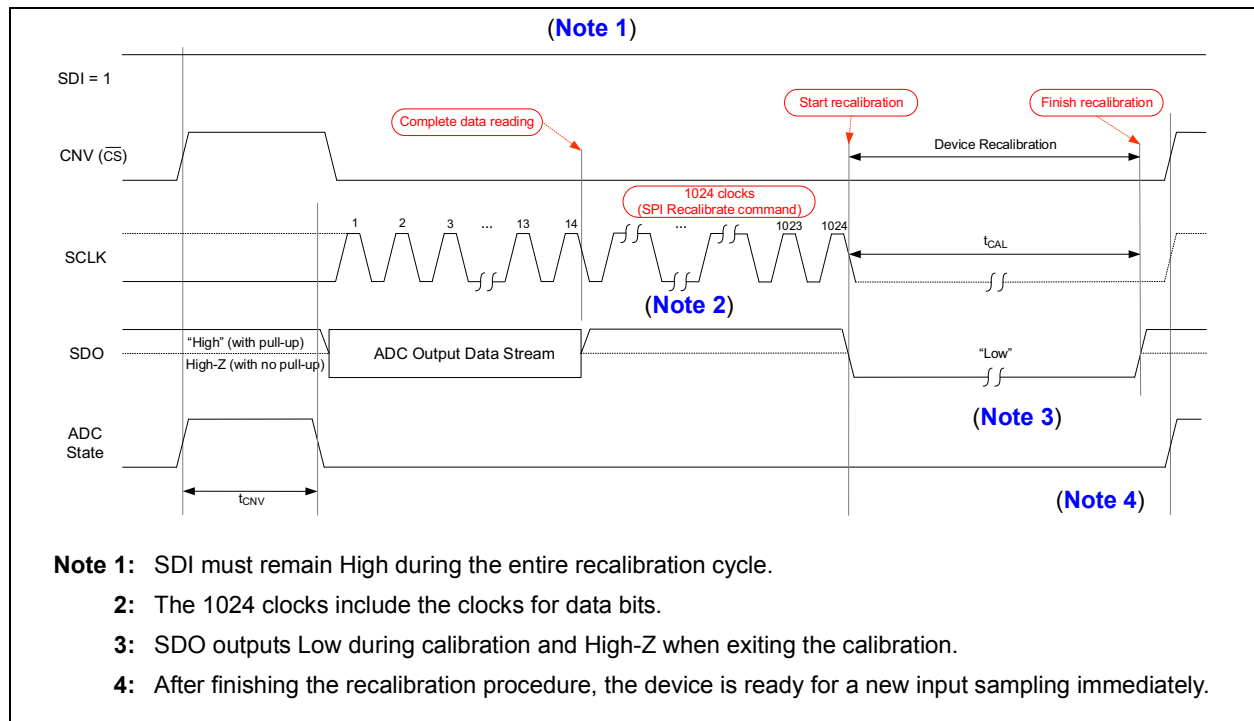

**FIGURE 6-9:** Recalibrate Command Timing Diagram.

**Note:** When the device performs a calibration, it is important to note that the analog supply voltage ( $AV_{DD}$ ), the reference voltage ( $V_{REF}$ ) and the digital I/O interface supply voltage ( $DV_{IO}$ ) must be stabilized for a correct calibration. This is particularly relevant during the initial power-on sequence. See [Section 4.1.1, Power-Up Sequence and Auto-Calibration](#) for more details.

## 7.0 TERMINOLOGY

### Analog Input Bandwidth (Full-Power Bandwidth)

The analog input frequency at which the spectral power of the fundamental frequency (as determined by FFT analysis) is reduced by 3 dB.

### Aperture Delay or Sampling Delay

This is the time delay between the rising edge of the CNVST input and when the input signal is held for a conversion.

### Differential Nonlinearity (DNL, No Missing Codes)

An ideal ADC exhibits code transitions that are exactly 1 LSB apart. DNL is the deviation from this ideal value. No missing codes to 16-bit resolution indicates that all 65,536 codes (16,384 codes for 14-bit, 4096 codes for 12-bit) must be present over all the operating conditions.

### Integral Nonlinearity (INL)

INL is the maximum deviation of each individual code from an ideal straight line drawn from negative full scale through positive full scale.

### Signal-to-Noise Ratio (SNR)

SNR is the ratio of the power of the fundamental ( $P_S$ ) to the noise floor power ( $P_N$ ), below the Nyquist frequency and excluding the power at DC and the first nine harmonics.

#### EQUATION 7-1:

$$SNR = 10\log\left(\frac{P_S}{P_N}\right)$$

SNR is either given in units of dBc (dB to carrier), when the absolute power of the fundamental is used as the reference, or dBFS (dB to full-scale), when the power of the fundamental is extrapolated to the converter full-scale range.

### Signal-to-Noise and Distortion (SINAD)

SINAD is the ratio of the power of the fundamental ( $P_S$ ) to the power of all the other spectral components including noise ( $P_N$ ) and distortion ( $P_D$ ) below the Nyquist frequency, but excluding DC:

#### EQUATION 7-2:

$$\begin{aligned} SINAD &= 10\log\left(\frac{P_S}{P_D + P_N}\right) \\ &= -10\log\left[10^{\frac{SNR}{10}} - 10^{\frac{THD}{10}}\right] \end{aligned}$$

SINAD is either given in units of dBc (dB to carrier), when the absolute power of the fundamental is used as the reference, or dBFS (dB to full-scale), when the power of the fundamental is extrapolated to the converter full-scale range.

### Effective Number of Bits (ENOB)

The effective number of bits for a sine wave input at a given input frequency can be calculated directly from its measured SINAD using the following formula:

#### EQUATION 7-3:

$$ENOB = \frac{SINAD - 1.76}{6.02}$$

### Gain Error

Gain error is the deviation of the ADC's actual input full-scale range from its ideal value. The gain error is given as a percentage of the ideal input full-scale range. Gain error is usually expressed in LSB or as a percentage of full-scale range (%FSR).

### Offset Error

Offset error is the difference between the ideal voltage ( $0V + 0.5 \text{ LSB}$ ) that produces the first code transition ("000... 000" to "000... 001") and the actual voltage producing that code.

### Temperature Drift

The temperature drift for offset error and gain error specifies the maximum change from the initial (+25°C) value to the value at across the  $T_{MIN}$  to  $T_{MAX}$  range. The value is normalized by the reference voltage and expressed in  $\mu V/^\circ C$  or  $ppm/^\circ C$ .

### Maximum Conversion Rate

The maximum clock rate at which parametric testing is performed.

## Spurious-Free Dynamic Range (SFDR)

SFDR is the ratio of the power of the fundamental to the highest other spectral component (either spur or harmonic). SFDR is typically given in units of dBc (dB to carrier) or dBFS.

## Total Harmonic Distortion (THD)

THD is the ratio of the power of the fundamental ( $P_S$ ) to the summed power of the first 13 harmonics ( $P_D$ ).

### EQUATION 7-4:

$$THD = 10 \log \left( \frac{P_S}{P_D} \right)$$

THD is typically given in units of dBc (dB to carrier). THD is also shown by:

### EQUATION 7-5:

$$THD = -20 \log \frac{\sqrt{V_2^2 + V_3^2 + V_4^2 + \dots + V_n^2}}{V_1^2}$$

Where:

$V_1$  = RMS amplitude of the fundamental frequency

$V_1$  through  $V_n$  = Amplitudes of the second through  $n^{\text{th}}$  harmonics

## Common-Mode Rejection Ratio (CMRR)

Common-mode rejection is the ability of a device to reject a signal that is common to both sides of a differential or pseudodifferential input pair. The Common-mode signal can be an AC or DC signal or a combination of the two. CMRR is measured using the ratio of the differential signal gain to the Common-mode signal gain and expressed in dB with the following equation:

### EQUATION 7-6:

$$CMRR = 20 \log \left( \frac{A_{DIFF}}{A_{CM}} \right)$$

Where:

$A_{DIFF}$  =  $\Delta$ Output Code/ $\Delta$ Differential Voltage


$A_{DIFF}$  =  $\Delta$ Output Code/ $\Delta$ Common-Mode Voltage

# MCP33151/41-XX

## 8.0 PACKAGING INFORMATION


### 8.1 Package Marking Information

10-Lead MSOP (3 mm x 3 mm)




| Part Number | Code  |
|-------------|-------|
| MCP33151-10 | 51-10 |
| MCP33151-05 | 51-05 |
| MCP33141-10 | 41-10 |
| MCP33141-05 | 41-05 |

Example




10-Lead TDFN (3 mm x 3 mm x 0.8 mm)



| Part Number | Code |
|-------------|------|
| MCP33151-10 | 511  |
| MCP33151-05 | 510  |
| MCP33141-10 | 411  |
| MCP33141-05 | 410  |

Example




**Legend:** XX...X Customer-specific information  
Y Year code (last digit of calendar year)  
YY Year code (last 2 digits of calendar year)  
WW Week code (week of January 1 is week '01')  
NNN Alphanumeric traceability code  
(e3) Pb-free JEDEC® designator for Matte Tin (Sn)  
\* This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package.


**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

## 10-Lead Plastic Micro Small Outline Package (MS) [MSOP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

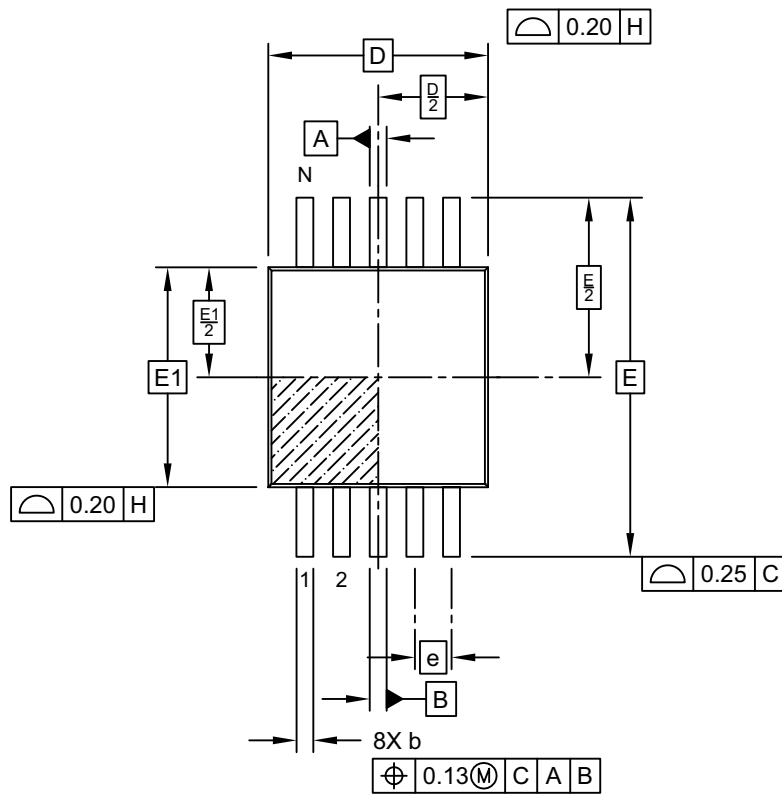

TOP VIEW

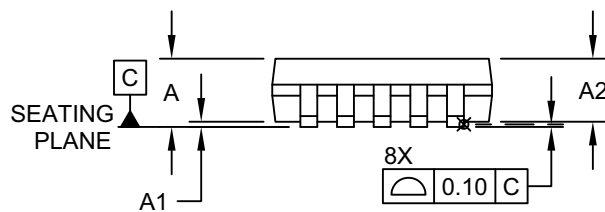

SIDE VIEW

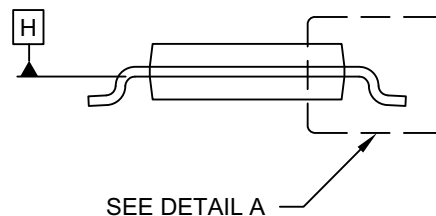


END VIEW

Microchip Technology Drawing C04-021D Sheet 1 of 2

# MCP33151/41-XX

## 10-Lead Plastic Micro Small Outline Package (MS) [MSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

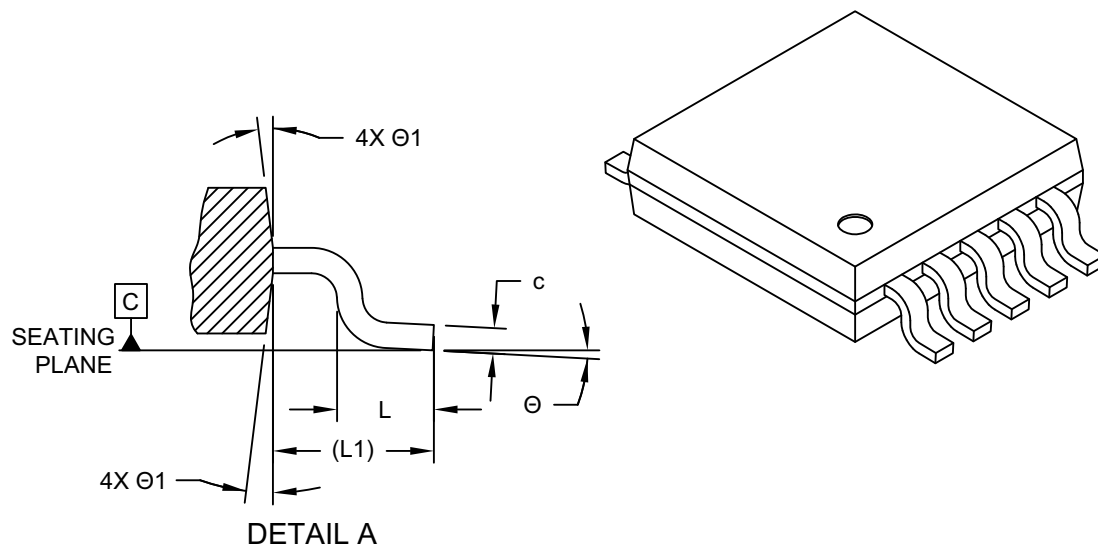

|                          |    | Units | MILLIMETERS |      |      |
|--------------------------|----|-------|-------------|------|------|
| Dimension Limits         |    |       | MIN         | NOM  | MAX  |
| Number of Pins           | N  |       | 10          |      |      |
| Pitch                    | e  |       | 0.50 BSC    |      |      |
| Overall Height           | A  | -     | -           | -    | 1.10 |
| Molded Package Thickness | A2 | 0.75  | 0.85        | 0.95 |      |
| Standoff                 | A1 | 0.00  | -           | 0.15 |      |
| Overall Width            | E  |       | 4.90 BSC    |      |      |
| Molded Package Width     | E1 |       | 3.00 BSC    |      |      |
| Overall Length           | D  |       | 3.00 BSC    |      |      |
| Foot Length              | L  | 0.40  | 0.60        | 0.80 |      |
| Footprint                | L1 |       | 0.95 REF    |      |      |
| Mold Draft Angle         | Ø  | 0°    | -           | -    | 8°   |
| Foot Angle               | Ø1 | 5°    | -           | -    | 15°  |
| Lead Thickness           | c  | 0.08  | -           | 0.23 |      |
| Lead Width               | b  | 0.15  | -           | 0.33 |      |


**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-021D Sheet 2 of 2

## 10-Lead Plastic Micro Small Outline Package (MS) [MSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

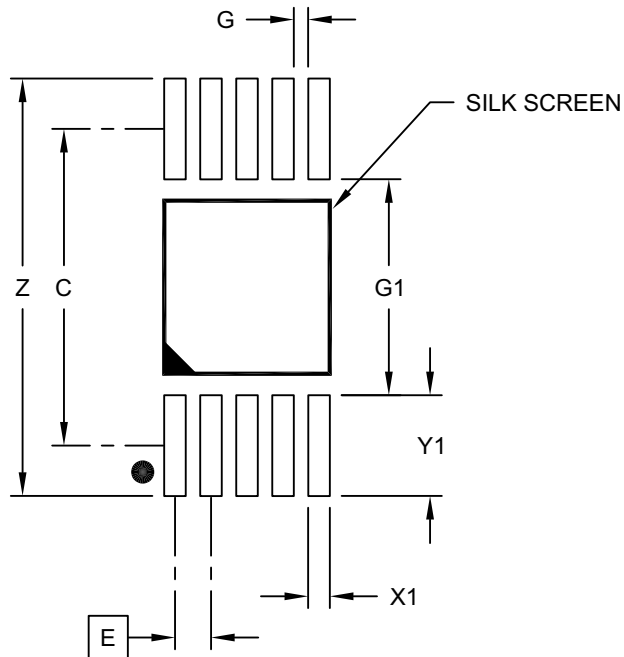

### RECOMMENDED LAND PATTERN

| Dimension Limits           | Units | MILLIMETERS |      |      |
|----------------------------|-------|-------------|------|------|
|                            |       | MIN         | NOM  | MAX  |
| Contact Pitch              | E     | 0.50 BSC    |      |      |
| Contact Pad Spacing        | C     |             | 4.40 |      |
| Overall Width              | Z     |             |      | 5.80 |
| Contact Pad Width (X10)    | X1    |             |      | 0.30 |
| Contact Pad Length (X10)   | Y1    |             |      | 1.40 |
| Distance Between Pads (X5) | G1    | 3.00        |      |      |
| Distance Between Pads (X8) | G     | 0.20        |      |      |

**Notes:**


1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2021B

# MCP33151/41-XX

## 10-Lead Thin Plastic Dual Flat, No Lead Package (MN) - 3x3x0.8mm Body [TDFN]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

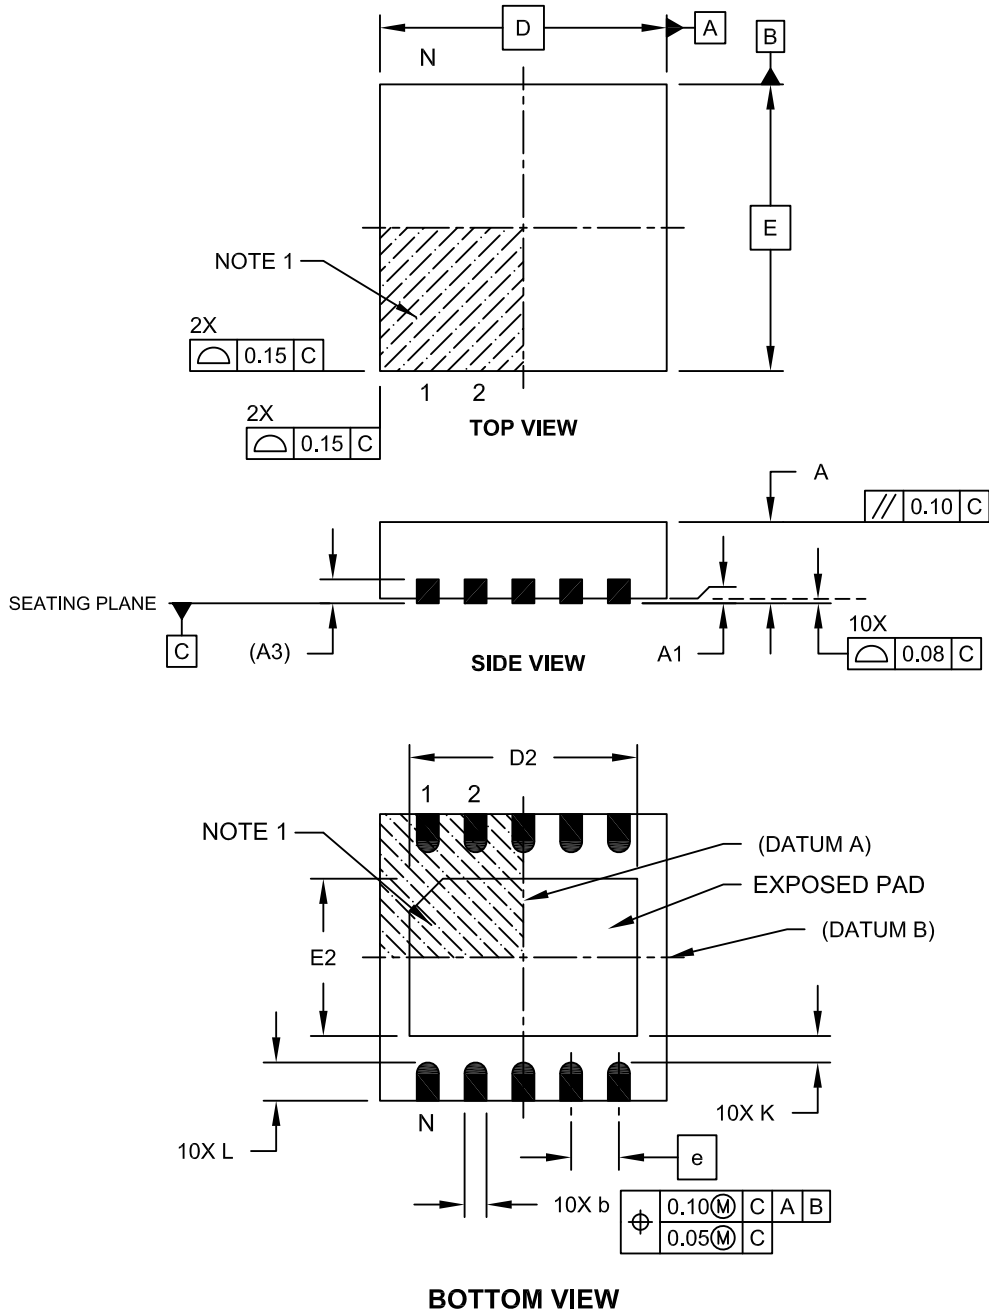

Microchip Technology Drawing C04-185A Sheet 1 of 2

## 10-Lead Thin Plastic Dual Flat, No Lead Package (MN) - 3x3x0.8mm Body [TDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

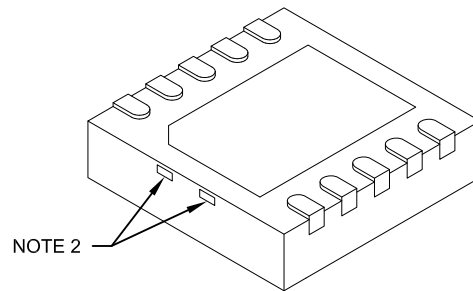

| Units                  |    | MILLIMETERS |      |      |
|------------------------|----|-------------|------|------|
| Dimension Limits       |    | MIN         | NOM  | MAX  |
| Number of Pins         | N  | 10          |      |      |
| Pitch                  | e  | 0.50 BSC    |      |      |
| Overall Height         | A  | 0.70        | 0.75 | 0.80 |
| Standoff               | A1 | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | A3 | 0.20 REF    |      |      |
| Overall Length         | D  | 3.00 BSC    |      |      |
| Exposed Pad Length     | D2 | 2.20        | 2.30 | 2.35 |
| Overall Width          | E  | 3.00 BSC    |      |      |
| Exposed Pad Width      | E2 | 1.55        | 1.65 | 1.70 |
| Contact Width          | b  | 0.18        | 0.25 | 0.30 |
| Contact Length         | L  | 0.30        | 0.40 | 0.50 |
| Contact-to-Exposed Pad | K  | 0.20        | -    | -    |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package may have one or more exposed tie bars at ends.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
  - REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing No. C04-0185A Sheet 2 of 2

## APPENDIX A: REVISION HISTORY

### Revision A (June 2019)

- Original release of this document.

# MCP33151/41-XX

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <u>X</u>   | <u>-XX</u>  | <u>X</u>      | <u>-X</u>         | <u>/XX</u> | Examples:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|---------------|-------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Input Type | Sample Rate | Tape and Reel | Temperature Range | Package    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <div><div><div>Device:</div><div>MCP33151-10: 1 Msps, 14-Bit Single-Ended Input SAR ADC</div><div>MCP33141-10: 1 Msps, 12-Bit Single-Ended Input SAR ADC</div><div>MCP33151-05: 500 ksps, 14-Bit Single-Ended Input SAR ADC</div><div>MCP33141-05: 500 ksps, 12-Bit Single-Ended Input SAR ADC</div></div><div><div>Input Type</div><div>Blank =Single-Ended Input</div></div><div><div>Sample Rate:</div><div>10 = 1 Msps</div><div>05 = 500 kSPS</div></div><div><div>Tape and Reel Option:</div><div>Blank = Standard packaging (tube or tray)</div><div>T = Tape and Reel</div></div><div><div>Temperature Range:</div><div>E = -40°C to +125°C (Extended)</div></div><div><div>Package:</div><div>MS = Plastic Micro Small Outline Package (MSOP), 10-Lead</div><div>MN = Thin Plastic Dual Flat No, Lead Package (TDFN), 10-Lead</div></div></div> |            |             |               |                   |            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            |             |               |                   |            | <div>a) MCP33151-10-E/MS: 1 Msps, 14-bit device, 10-LD MSOP</div> <div>b) MCP33151-10T-E/MS: 1 Msps, 14-bit device, 10-LD MSOP, Tape and Reel</div> <div>c) MCP33151-10-E/MN: 1 Msps, 14-bit device, 10-LD TDFN</div> <div>d) MCP33151-10T-E/MN: 1 Msps, 14-bit device, 10-LD TDFN, Tape and Reel</div> <div>e) MCP33141-10-E/MS: 1 Msps, 12-bit device, 10-LD MSOP</div> <div>f) MCP33141-10T-E/MS: 1 Msps, 12-bit device, 10-LD MSOP, Tape and Reel</div> <div>g) MCP33141-10-E/MN: 1 Msps, 12-bit device, 10-LD TDFN</div> <div>h) MCP33141-10T-E/MN: 1 Msps, 12-bit device, 10-LD TDFN, Tape and Reel</div> <div>i) MCP33151-05-E/MS: 500 ksps, 14-bit device, 10-LD MSOP</div> <div>j) MCP33151-05T-E/MS: 500 ksps, 14-bit device, 10-LD MSOP, Tape and Reel</div> <div>k) MCP33151-05-E/MN: 500 ksps, 14-bit device, 10-LD TDFN</div> <div>l) MCP33151-05T-E/MN: 500 ksps, 14-bit device, 10-LD TDFN, Tape and Reel</div> <div>m) MCP33141-05-E/MS: 500 ksps, 12-bit device, 10-LD MSOP</div> <div>n) MCP33141-05T-E/MS: 500 ksps, 12-bit device, 10-LD MSOP, Tape and Reel</div> <div>o) MCP33141-05-E/MN: 500 ksps, 12-bit device, 10-LD TDFN</div> <div>p) MCP33141-05T-E/MN: 500 ksps, 12-bit device, 10-LD TDFN, Tape and Reel</div> <div><div>Note 1:</div><div>Tape and Reel identifier appears only in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.</div></div> |

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-4702-3

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820