

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: SK33B/TR13
Manufacturer: Microsemi Corporation
Package: DO-214AA, SMB
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/microsemi-corporation/sk33b-tr13.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request


Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

3 Amp Schottky Rectifiers SK32B — SK310B

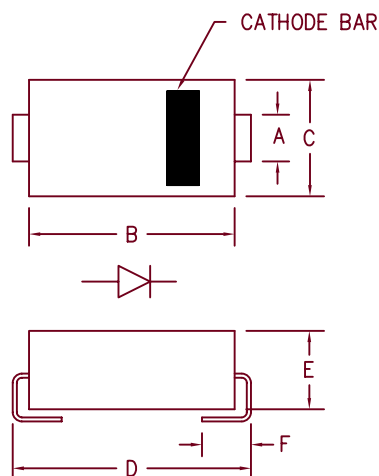

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.068	.087	1.73	2.21	
B	.157	.177	3.99	4.50	
C	.130	.155	3.30	3.94	
D	.194	.228	4.93	5.79	
E	.078	.115	1.98	2.92	
F	.030	.060	.760	1.52	

SMB
DO-214AA

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SK32B	20V	20V
SK33B	30V	30V
SK34B	40V	40V
SK36B	60V	60V
SK38B	80V	80V
SK310B	100V	100V

- Schottky Barrier Rectifier
- Low Forward Voltage Drop
- 20-100 Volts
- Low switching losses
- Round lead design

Electrical Characteristics

Average forward current	$I_F(AV)$	3.0A	$T_J = 120^\circ C$
Maximum surge current	I_{FSM}	100A	8.3ms half-sine
Max repetitive reverse current	$I_{R(OV)}$	2A	$f = 1KHZ, 25^\circ C, 1\mu s$ square wave
Max peak forward voltage (SK32B-SK34B)	V_{FM}	.50V	$I_{FM} = 3.0A; T_J = 25^\circ C^*$
Max peak forward voltage (SK36B)	V_{FM}	.75V	$I_{FM} = 3.0A; T_J = 25^\circ C^*$
Max peak forward voltage (SK38B-SK310B)	V_{FM}	.85V	$I_{FM} = 3.0A; T_J = 25^\circ C^*$
Max peak reverse current	I_{RM}	.5mA	$V_{RRM}, T_J = 25^\circ C$
Max peak reverse current	I_{RM}	20mA	$V_{RRM}, T_J = 100^\circ C^*$
Typical junction capacitance	C_J	250pF	$V_R = 5.0V, T_J = 25^\circ C$

*Pulse test: Pulse width 300 μs ec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T_{STG}	$-55^\circ C$ to $150^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $125^\circ C$
Maximum thermal resistance	$R_{\theta JC}$	$10^\circ C/W$



8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-30-07 Rev. 2

SK32B — SK310B

Figure 1
Typical Forward Characteristics

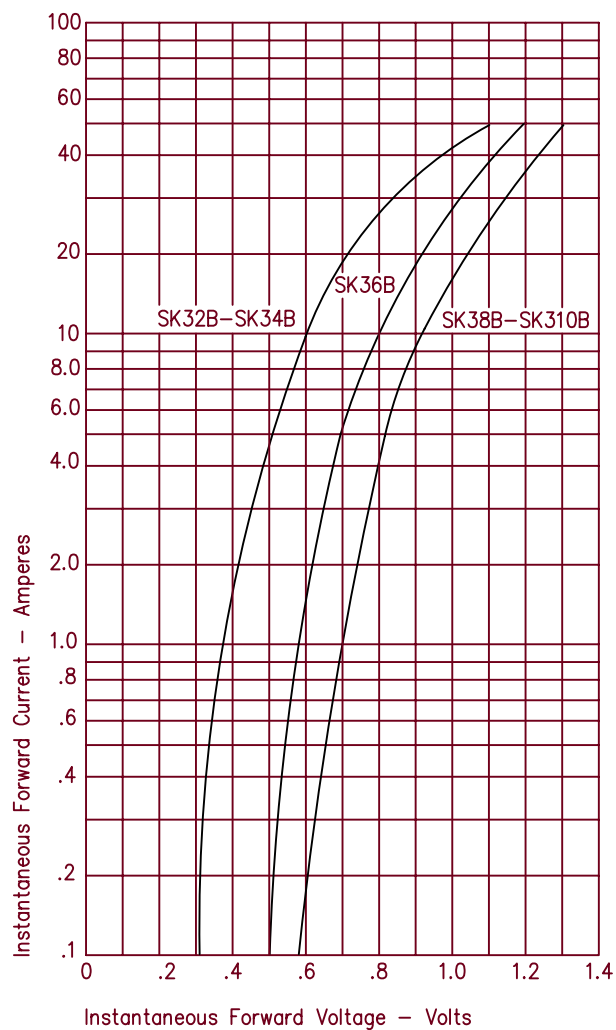


Figure 2
Typical Reverse Characteristics @ 100°C

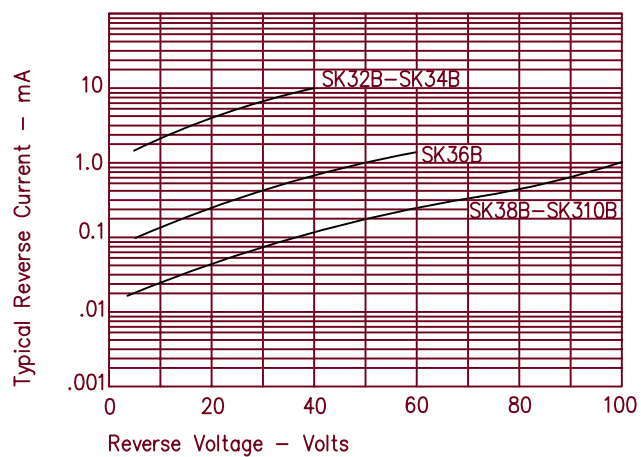


Figure 3
Typical Junction Capacitance

