

# ANTREX Electronics

## Electronic Components Sourcing Information

---

### Product Reference Information

|                      |                                |
|----------------------|--------------------------------|
| <b>Part Number:</b>  | NUC029LDE                      |
| <b>Manufacturer:</b> | Nuvoton Technology Corporation |
| <b>Package:</b>      | Please confirm with sales      |
| <b>Availability:</b> | Please confirm with sales      |

**Product Page:**

<https://antrexco.com/product/details/nuvoton-technology-corporation/nuc029lde.html>

**Request a Quote:**

[Submit RFQ for this part](#)



Scan for product page

### Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

### Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

# Arm<sup>®</sup> Cortex<sup>®</sup>-M 32-bit Microcontroller

## NuMicro<sup>®</sup> NUC029 Series NUC029xDE Datasheet

*The information described in this document is the exclusive intellectual property of Nuvoton Technology Corporation and shall not be reproduced without permission from Nuvoton.*

*Nuvoton is providing this document only for reference purposes of NuMicro<sup>®</sup> microcontroller based system design. Nuvoton assumes no responsibility for errors or omissions.*

*All data and specifications are subject to change without notice.*

*For additional information or questions, please contact: Nuvoton Technology Corporation.*

[www.nuvoton.com](http://www.nuvoton.com)

## TABLE OF CONTENTS

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>1 GENERAL DESCRIPTION</b>                          | <b>7</b>  |
| <b>2 FEATURES</b>                                     | <b>8</b>  |
| <b>3 ABBREVIATIONS</b>                                | <b>11</b> |
| <b>4 PARTS INFORMATION LIST AND PIN CONFIGURATION</b> | <b>12</b> |
| 4.1 NuMicro® NUC029 Series Selection Code             | 12        |
| 4.2 NuMicro® NUC029 Series Selection Guide            | 13        |
| 4.3 Pin Configuration                                 | 14        |
| 4.3.1 NuMicro® NUC029xDE Pin Diagram                  | 14        |
| 4.4 Pin Description                                   | 16        |
| 4.4.1 NuMicro® NUC029xDE Pin Description              | 16        |
| <b>5 BLOCK DIAGRAM</b>                                | <b>21</b> |
| 5.1 NuMicro® NUC029xDE Block Diagram                  | 21        |
| <b>6 FUNCTIONAL DESCRIPTION</b>                       | <b>22</b> |
| 6.1 ARM® Cortex®-M0 Core                              | 22        |
| 6.2 System Manager                                    | 24        |
| 6.2.1 Overview                                        | 24        |
| 6.2.2 System Reset                                    | 24        |
| 6.2.3 System Power Distribution                       | 25        |
| 6.2.4 System Memory Map                               | 26        |
| 6.2.5 System Timer (SysTick)                          | 27        |
| 6.2.6 Nested Vectored Interrupt Controller (NVIC)     | 28        |
| 6.2.7 System Control                                  | 32        |
| 6.3 Clock Controller                                  | 33        |
| 6.3.1 Overview                                        | 33        |
| 6.3.2 System Clock and SysTick Clock                  | 35        |
| 6.3.3 Power-down Mode Clock                           | 36        |
| 6.3.4 Frequency Divider Output                        | 37        |
| 6.4 Flash Memory Controller (FMC)                     | 38        |
| 6.4.1 Overview                                        | 38        |
| 6.4.2 Features                                        | 38        |
| 6.5 General Purpose I/O (GPIO)                        | 39        |
| 6.5.1 Overview                                        | 39        |
| 6.5.2 Features                                        | 39        |
| 6.6 Timer Controller (TIMER)                          | 40        |

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| 6.6.1 Overview .....                                                       | 40        |
| 6.6.2 Features .....                                                       | 40        |
| 6.7 PWM Generator and Capture Timer (PWM) .....                            | 41        |
| 6.7.1 Overview .....                                                       | 41        |
| 6.7.2 Features .....                                                       | 41        |
| 6.8 Watchdog Timer (WDT) .....                                             | 43        |
| 6.8.1 Overview .....                                                       | 43        |
| 6.8.2 Features .....                                                       | 43        |
| 6.9 Window Watchdog Timer (WWDT) .....                                     | 44        |
| 6.9.1 Overview .....                                                       | 44        |
| 6.9.2 Features .....                                                       | 44        |
| 6.10 UART Interface Controller (UART) .....                                | 45        |
| 6.10.1 Overview .....                                                      | 45        |
| 6.10.2 Features .....                                                      | 45        |
| 6.11 I <sup>2</sup> C Serial Interface Controller (I <sup>2</sup> C) ..... | 46        |
| 6.11.1 Overview .....                                                      | 46        |
| 6.11.2 Features .....                                                      | 46        |
| 6.12 Serial Peripheral Interface (SPI) .....                               | 47        |
| 6.12.1 Overview .....                                                      | 47        |
| 6.12.2 Features .....                                                      | 47        |
| 6.13 Analog-to-Digital Converter (ADC) .....                               | 48        |
| 6.13.1 Overview .....                                                      | 48        |
| 6.13.2 Features .....                                                      | 48        |
| <b>7 ELECTRICAL CHARACTERISTICS .....</b>                                  | <b>49</b> |
| 7.1 Absolute Maximum Ratings .....                                         | 49        |
| 7.2 DC Electrical Characteristics .....                                    | 50        |
| 7.3 AC Electrical Characteristics .....                                    | 54        |
| 7.3.1 External 4~24 MHz High Speed Oscillator .....                        | 54        |
| 7.3.2 External 4~24 MHz High Speed Crystal .....                           | 54        |
| 7.3.3 Internal 22.1184 MHz High Speed Oscillator .....                     | 55        |
| 7.3.4 Internal 10 kHz Low Speed Oscillator .....                           | 56        |
| 7.4 Analog Characteristics .....                                           | 57        |
| 7.4.1 12-bit SARADC Specification .....                                    | 57        |
| 7.4.2 LDO and Power Management Specification .....                         | 58        |
| 7.4.3 Low Voltage Reset Specification .....                                | 59        |

7.4.4 Brown-out Detector Specification ..... 59

7.4.5 Power-on Reset Specification ..... 59

7.5 Flash DC Electrical Characteristics.....61

7.6 I<sup>2</sup>C Dynamic Characteristics .....62

7.7 SPI Dynamic Characteristics .....63

7.8 I2S Dynamic Characteristics .....65

**8 APPLICATION CIRCUIT .....67**

**9 PACKAGE DIMENSIONS .....68**

9.1 64-pin LQFP (7x7x1.4 mm footprint 2.0 mm) .....68

9.2 48-pin LQFP (7x7x1.4 mm footprint 2.0 mm) .....69

**10 REVISION HISTORY .....70**

List of Figures

|                                                                |    |
|----------------------------------------------------------------|----|
| Figure 4-1 NuMicro® NUC029 Series Selection Code .....         | 12 |
| Figure 4-2 NuMicro® NUC029SDE LQFP 64-pin Diagram .....        | 14 |
| Figure 4-3 NuMicro® NUC029LDE LQFP 48-pin Diagram.....         | 15 |
| Figure 5-1 NuMicro® NUC029xDE Block Diagram .....              | 21 |
| Figure 6-1 Functional Controller Diagram .....                 | 22 |
| Figure 6-2 NuMicro® NUC029xDE Power Distribution Diagram ..... | 25 |
| Figure 6-3 Clock Generator Block Diagram .....                 | 33 |
| Figure 6-4 Clock Generator Global View Diagram.....            | 34 |
| Figure 6-5 System Clock Block Diagram .....                    | 35 |
| Figure 6-6 SysTick Clock Control Block Diagram .....           | 35 |
| Figure 6-7 Clock Source of Frequency Divider .....             | 37 |
| Figure 6-8 Frequency Divider Block Diagram .....               | 37 |
| Figure 7-1 Typical Crystal Application Circuit .....           | 55 |
| Figure 7-2 HIRC Accuracy vs. Temperature .....                 | 56 |
| Figure 7-3 Power-up Ramp Condition.....                        | 60 |
| Figure 7-4 I <sup>2</sup> C Timing Diagram .....               | 62 |
| Figure 7-5 SPI Master Mode Timing Diagram .....                | 63 |
| Figure 7-6 SPI Slave Mode Timing Diagram .....                 | 64 |
| Figure 7-7 I2S Master Mode Timing Diagram.....                 | 65 |
| Figure 7-8 I2S Slave Mode Timing Diagram.....                  | 66 |

List of Tables

Table 3-1 List of Abbreviations..... 11

Table 6-1 Address Space Assignments for On-Chip Controllers..... 26

Table 6-2 Exception Model ..... 29

Table 6-3 System Interrupt Map..... 30

Table 6-4 Vector Table Format ..... 31

## 1 GENERAL DESCRIPTION

The NuMicro® NUC029xDE of NUC029 series is embedded with the Cortex®-M0 core and offers 68K bytes flash, 4 Kbytes flash for the ISP, and 8 Kbytes SRAM for industrial control and applications which need rich communication interfaces or require high performance, high integration.

Additionally, the NUC029xDE can run up to 50MHz and operate at standard industrial voltage 2.5V ~ 5.5V with -40°C ~ 105°C. It is also equipped with plenty of peripheral devices, such as Timers, Watchdog Timer (WDT), Window Watchdog Timer (WWDT), UART, SPI, I<sup>2</sup>C, PWM, GPIO, LIN, 1000 kSPS high speed 12-bit ADC, Low Voltage Reset Controller and Brown-out Detector.

## 2 FEATURES

- ARM® Cortex®-M0 core
  - Runs up to 50 MHz
  - One 24-bit system timer
  - Supports low power sleep mode
  - Single-cycle 32-bit hardware multiplier
  - NVIC for the 32 interrupt inputs, each with 4-levels of priority
  - Serial Wire Debug supports with 2 watchpoints/4 breakpoints
- Built-in LDO for wide operating voltage ranged from 2.5 V to 5.5 V
- Flash Memory
  - 68 Kbytes Flash for program code
  - Configurable Flash memory for data memory (Data Flash), 4 KB flash for ISP loader
  - Supports In-System-Program (ISP) and In-Application-Program (IAP) application code update
  - 512 byte page erase for flash
  - Supports 2-wired ICP update through SWD/ICE interface
  - Supports fast parallel programming mode by external programmer
- SRAM Memory
  - 8KB SRAM
- Clock Control
  - Flexible selection for different applications
  - Built-in 22.1184 MHz high speed oscillator for system operation
    - Trimmed to  $\pm 1\%$  at  $+25\text{ }^{\circ}\text{C}$  and  $V_{DD} = 5\text{ V}$
    - Trimmed to  $\pm 2\%$  at  $-40\text{ }^{\circ}\text{C} \sim +105\text{ }^{\circ}\text{C}$  and  $V_{DD} = 2.5\text{ V} \sim 5.5\text{ V}$
  - Built-in 10 kHz low speed oscillator for Watchdog Timer and Wake-up operation
  - Supports one PLL output frequency up to 200 MHz, PWM clock frequency up to 100 MHz, and System operation frequency up to 50 MHz
  - External 4~24 MHz high speed crystal input for precise timing operation
- GPIO
  - Four I/O modes:
    - Quasi-bidirectional
    - Push-pull output
    - Open-drain output
    - Input only with high impedance
  - TTL/Schmitt trigger input selectable
  - I/O pin configured as interrupt source with edge/level setting
- Timer
  - Supports 4 sets of 32-bit timers with 24-bit up-timer and one 8-bit prescale counter
  - Independent clock source for each timer
  - Provides one-shot, periodic, toggle and continuous counting operation modes
  - Supports event counting function
  - Supports input capture function
- Watchdog Timer
  - Multiple clock sources
    - System clock (HCLK)
    - Internal 10 kHz oscillator (LIRC)
  - 8 selectable time-out period from 1.6 ms ~ 26.0 sec (depending on clock source)
  - Wake-up from Power-down or Idle mode
  - Interrupt or reset selectable on watchdog time-out
- Window Watchdog Timer
  - 6-bit down counter with 11-bit prescale for wide range window selected
- PWM/Capture
  - Supports maximum clock frequency up to 100MHz
  - Supports up to two PWM modules, each module provides three 16-bit timers and 6 output channels

- Supports independent mode for PWM output/Capture input channel
- Supports complementary mode for 3 complementary paired PWM output channel
  - Dead-time insertion with 12-bit resolution
  - Two compared values during one period
- Supports 12-bit pre-scalar from 1 to 4096
- Supports 16-bit resolution PWM counter
  - Up, down and up/down counter operation type
- Supports mask function and tri-state enable for each PWM pin
- Supports brake function
  - Brake source from pin and system safety events (clock failed, Brown-out detection and CPU lockup)
  - Noise filter for brake source from pin
  - Edge detect brake source to control brake state until brake interrupt cleared
  - Level detect brake source to auto recover function after brake condition removed
- Supports interrupt on the following events:
  - PWM counter match zero, period value or compared value
  - Brake condition happened
- Supports trigger ADC on the following events:
  - PWM counter match zero, period value or compared value
- Supports up to 12 capture input channels with 16-bit resolution
- Supports rising edges, falling edges or both edges capture condition
- Supports input rising edges, falling edges or both edges capture interrupt
- Supports rising edges, falling edges or both edges capture with counter reload option
- **UART**
  - Up to four UART controllers
  - UART0 and UART1 ports with flow control (TXD, RXD, nCTS and nRTS)
  - UART0, UART1 and UART2 with 16-byte FIFO for standard device
  - Supports IrDA (SIR) and LIN function
  - Supports RS-485 9-bit mode and direction control
  - Supports auto baud-rate generator
- **SPI**
  - One set of SPI controller
  - Supports SPI Master/Slave mode
  - Full duplex synchronous serial data transfer
  - Variable length of transfer data from 8 to 32 bits
  - MSB or LSB first data transfer
  - Rx and Tx on both rising or falling edge of serial clock independently
  - Supports Byte Suspend mode in 32-bit transmission
  - Supports three wire, no slave select signal, bi-direction interface
- **I<sup>2</sup>C**
  - Up to two sets of I<sup>2</sup>C devices
  - Master/Slave mode
  - Bidirectional data transfer between masters and slaves
  - Multi-master bus (no central master)
  - Arbitration between simultaneously transmitting masters without corruption of serial data on the bus
  - Serial clock synchronization allowing devices with different bit rates to communicate via one serial bus
  - Serial clock synchronization used as a handshake mechanism to suspend and resume serial transfer
  - Programmable clocks allowing for versatile rate control
  - Supports multiple address recognition (four slave address with mask option)
  - Supports wake-up function
- **ADC**
  - 12-bit SAR ADC with 1000 kSPS
  - Up to 8-ch single-end input or 4-ch differential input

- Single scan/single cycle scan/continuous scan
- Each channel with individual result register
- Scan on enabled channels
- Threshold voltage detection
- Conversion started by software programming or external input
- 96-bit unique ID (UID)
- 128-bit unique customer ID(UCID)
- Brown-out Detector
  - With 4 levels: 4.4 V/3.7 V/2.7 V/2.2 V
  - Supports Brown-out Interrupt and Reset option
- Low Voltage Reset
  - Threshold voltage level: 2.0 V
- Operating Temperature: -40°C ~ +105°C
- Packages:
  - All Green package (RoHS)
  - LQFP 64-pin / 48-pin (7mm x 7mm)

### 3 ABBREVIATIONS

| Acronym | Description                                     |
|---------|-------------------------------------------------|
| ADC     | Analog-to-Digital Converter                     |
| APB     | Advanced Peripheral Bus                         |
| AHB     | Advanced High-Performance Bus                   |
| BOD     | Brown-out Detection                             |
| DAP     | Debug Access Port                               |
| FIFO    | First In, First Out                             |
| FMC     | Flash Memory Controller                         |
| GPIO    | General-Purpose Input/Output                    |
| HCLK    | The Clock of Advanced High-Performance Bus      |
| HIRC    | 22.1184 MHz Internal High Speed RC Oscillator   |
| HXT     | 4~24 MHz External High Speed Crystal Oscillator |
| IAP     | In Application Programming                      |
| ICP     | In Circuit Programming                          |
| ISP     | In System Programming                           |
| LDO     | Low Dropout Regulator                           |
| LIN     | Local Interconnect Network                      |
| LIRC    | 10 kHz internal low speed RC oscillator (LIRC)  |
| MPU     | Memory Protection Unit                          |
| NVIC    | Nested Vectored Interrupt Controller            |
| PCLK    | The Clock of Advanced Peripheral Bus            |
| PLL     | Phase-Locked Loop                               |
| PWM     | Pulse Width Modulation                          |
| SPI     | Serial Peripheral Interface                     |
| SPS     | Samples per Second                              |
| TMR     | Timer Controller                                |
| UART    | Universal Asynchronous Receiver/Transmitter     |
| UCID    | Unique Customer ID                              |
| WDT     | Watchdog Timer                                  |
| WWDT    | Window Watchdog Timer                           |

Table 3-1 List of Abbreviations

4 PARTS INFORMATION LIST AND PIN CONFIGURATION

4.1 NuMicro® NUC029 Series Selection Code

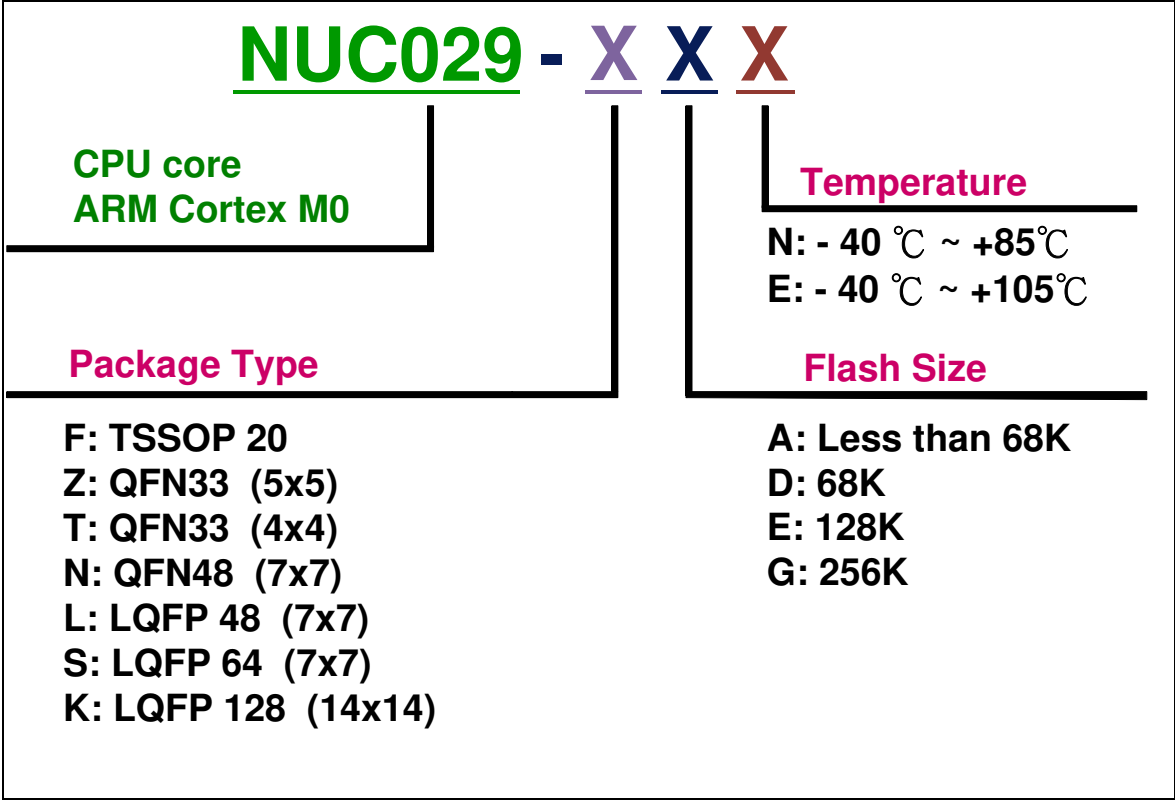


Figure 4-1 NuMicro® NUC029 Series Selection Code

## 4.2 NuMicro® NUC029 Series Selection Guide

| Part Number | APROM (KB) | RAM (KB) | Data Flash (KB) | SPROM(KB) | ISP ROM (KB) | I/O | Timer (32-Bit) | Connectivity |     |                  |                    |     |     | I <sup>2</sup> S | PWM (16-Bit) | ADC              | ACMP             | PDMA | Smart Card | RTC | EBI | PLL | ISP/ICP/IAP | Package    | Operating Temperature Range (°C) |
|-------------|------------|----------|-----------------|-----------|--------------|-----|----------------|--------------|-----|------------------|--------------------|-----|-----|------------------|--------------|------------------|------------------|------|------------|-----|-----|-----|-------------|------------|----------------------------------|
|             |            |          |                 |           |              |     |                | UART         | SPI | I <sup>2</sup> C | USC <sup>[4]</sup> | USB | LIN |                  |              |                  |                  |      |            |     |     |     |             |            |                                  |
| NUC029FAE   | 16         | 2        | Conf            | -         | 2            | 17  | 2              | 1            | 1   | 1                | -                  | -   | -   | -                | 3            | 4 <sup>[1]</sup> | 2 <sup>[3]</sup> | -    | -          | -   | -   | -   | √           | TSSOP20    | -40 to +105                      |
| NUC029TAN   | 32         | 4        | 4               | -         | 4            | 24  | 4              | 2            | 1   | 2                | -                  | -   | -   | -                | 5            | 5                | 3 <sup>[2]</sup> | -    | -          | -   | -   | √   | √           | QFN33(4*4) | -40 to +85                       |
| NUC029ZAN   | 64         | 4        | 4               | -         | 4            | 24  | 4              | 2            | 1   | 2                | -                  | -   | -   | -                | 5            | 5                | 3 <sup>[2]</sup> | -    | -          | -   | -   | √   | √           | QFN33(5*5) | -40 to +85                       |
| NUC029LAN   | 64         | 4        | 4               | -         | 4            | 40  | 4              | 2            | 2   | 2                | -                  | -   | -   | -                | 8            | 8                | 4                | -    | -          | -   | √   | √   | √           | LQFP48     | -40 to +85                       |
| NUC029LDE   | 68         | 8        | Conf            | -         | 4            | 42  | 4              | 4            | 1   | 2                | -                  | -   | 3   | -                | 12           | 8                | -                | -    | -          | -   | √   | √   | √           | LQFP48     | -40 to +105                      |
| NUC029SDE   | 68         | 8        | Conf            | -         | 4            | 56  | 4              | 4            | 1   | 2                | -                  | -   | 3   | -                | 12           | 8                | -                | -    | -          | -   | √   | √   | √           | LQFP64     | -40 to +105                      |
| NUC029LEE   | 128        | 16       | Conf            | -         | 8            | 31  | 4              | 2            | 1   | 2                | -                  | 1   | 2   | -                | 6            | 10               | -                | 9    | -          | √   | -   | √   | √           | LQFP48     | -40 to +105                      |
| NUC029SEE   | 128        | 16       | Conf            | -         | 8            | 45  | 4              | 3            | 2   | 2                | -                  | 1   | 3   | -                | 6            | 12               | -                | 9    | -          | √   | √   | √   | √           | LQFP64     | -40 to +105                      |
| NUC029LGE   | 256        | 20       | Conf            | 2         | 4            | 35  | 4              | 3            | 2   | 2                | 3                  | 1   | -   | 2                | 10           | 9                | 2                | 5    | -          | √   | √   | √   | √           | LQFP48     | -40 to +105                      |
| NUC029SGE   | 256        | 20       | Conf            | 2         | 4            | 49  | 4              | 3            | 2   | 2                | 3                  | 1   | -   | 2                | 12           | 15               | 2                | 5    | -          | √   | √   | √   | √           | LQFP64     | -40 to +105                      |
| NUC029KGE   | 256        | 20       | Conf            | 2         | 4            | 86  | 4              | 3            | 2   | 2                | 3                  | 1   | -   | 2                | 12           | 20               | 2                | 5    | 2          | √   | √   | √   | √           | LQFP128    | -40 to +105                      |

[1] NUC029FAE is 10-bit ADC. All the others are 12-bit ADC.

[2] For NUC029TAN/NUC029ZAN, ACMP3 only has positive and negative input.

[3] For NUC029FAE, ACMP0 only has positive and negative input. And ACMP1 only has positive input.

[4] USCI can be configured to UART, SPI or I<sup>2</sup>C

## 4.3 Pin Configuration

### 4.3.1 NuMicro® NUC029xDE Pin Diagram

#### 4.3.1.1 NuMicro® NUC029SDE LQFP 64 pin (7 mm \* 7mm)

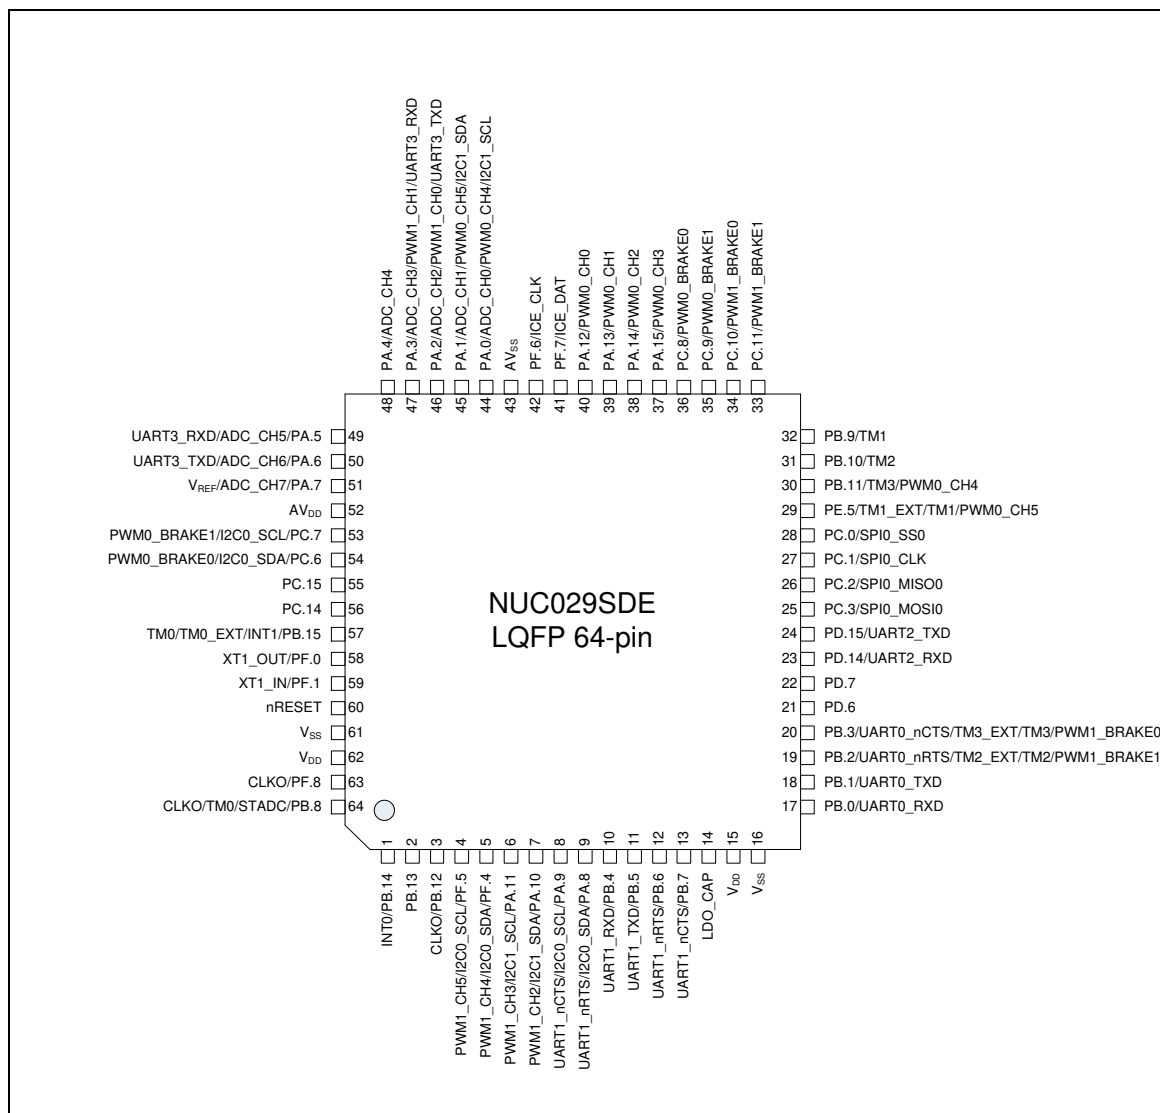


Figure 4-2 NuMicro® NUC029SDE LQFP 64-pin Diagram

4.3.1.2 NuMicro® NUC029LDE LQFP 48 pin (7 mm \* 7mm)

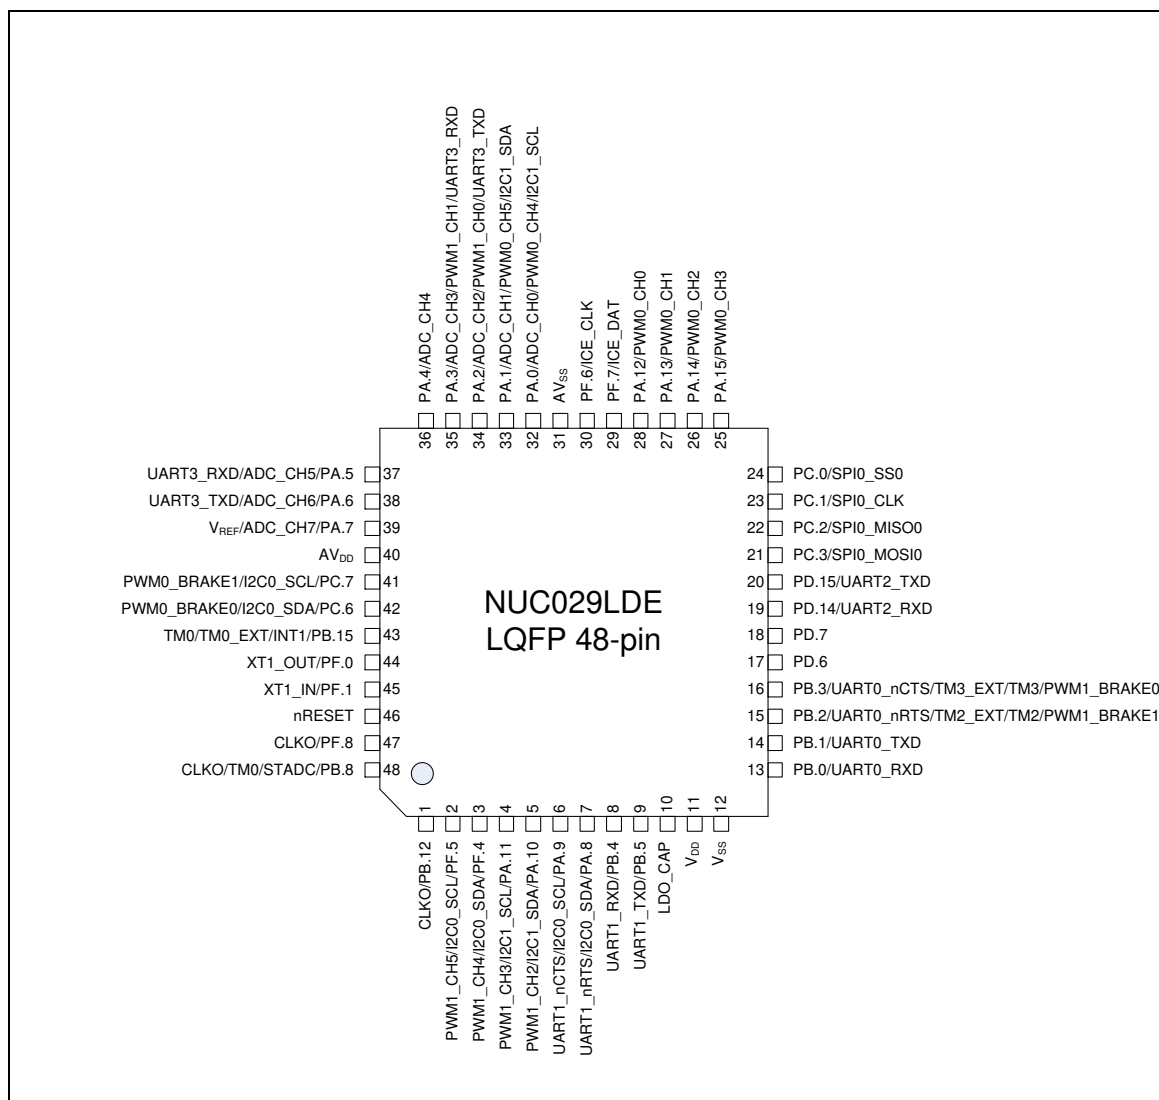


Figure 4-3 NuMicro® NUC029LDE LQFP 48-pin Diagram

## 4.4 Pin Description

### 4.4.1 NuMicro® NUC029xDE Pin Description

| Pin No.     |             | Pin Name   | Pin Type | Description                              |
|-------------|-------------|------------|----------|------------------------------------------|
| LQFP 64-pin | LQFP 48-pin |            |          |                                          |
| 1           |             | PB.14      | I/O      | General purpose digital I/O pin.         |
|             |             | INT0       | I        | External interrupt0 input pin.           |
| 2           |             | PB.13      | I/O      | General purpose digital I/O pin.         |
| 3           | 1           | PB.12      | I/O      | General purpose digital I/O pin.         |
|             |             | CLKO       | O        | Frequency divider clock output pin.      |
| 4           | 2           | PF.5       | I/O      | General purpose digital I/O pin.         |
|             |             | I2C0_SCL   | I/O      | I <sup>2</sup> C0 clock pin.             |
|             |             | PWM1_CH5   | I/O      | PWM1 CH5 output/Capture input.           |
| 5           | 3           | PF.4       | I/O      | General purpose digital I/O pin.         |
|             |             | I2C0_SDA   | I/O      | I <sup>2</sup> C0 data input/output pin. |
|             |             | PWM1_CH4   | I/O      | PWM1 CH4 output/Capture input.           |
| 6           | 4           | PA.11      | I/O      | General purpose digital I/O pin.         |
|             |             | I2C1_SCL   | I/O      | I <sup>2</sup> C1 clock pin.             |
|             |             | PWM1_CH3   | I/O      | PWM1 CH3 output/Capture input.           |
| 7           | 5           | PA.10      | I/O      | General purpose digital I/O pin.         |
|             |             | I2C1_SDA   | I/O      | I <sup>2</sup> C1 data input/output pin. |
|             |             | PWM1_CH2   | I/O      | PWM1 CH2 output/Capture input.           |
| 8           | 6           | PA.9       | I/O      | General purpose digital I/O pin.         |
|             |             | I2C0_SCL   | I/O      | I <sup>2</sup> C0 clock pin.             |
|             |             | UART1_nCTS | I        | Clear to Send input pin for UART1.       |
| 9           | 7           | PA.8       | I/O      | General purpose digital I/O pin.         |
|             |             | I2C0_SDA   | I/O      | I <sup>2</sup> C0 data input/output pin. |
|             |             | UART1_nRTS | O        | Request to Send output pin for UART1.    |
| 10          | 8           | PB.4       | I/O      | General purpose digital I/O pin.         |
|             |             | UART1_RXD  | I        | Data receiver input pin for UART1.       |
| 11          | 9           | PB.5       | I/O      | General purpose digital I/O pin.         |
|             |             | UART1_TXD  | O        | Data transmitter output pin for UART1.   |
| 12          |             | PB.6       | I/O      | General purpose digital I/O pin.         |
|             |             | UART1_nRTS | O        | Request to Send output pin for UART1.    |
| 13          |             | PB.7       | I/O      | General purpose digital I/O pin.         |

| Pin No.     |             | Pin Name        | Pin Type | Description                                                                     |
|-------------|-------------|-----------------|----------|---------------------------------------------------------------------------------|
| LQFP 64-pin | LQFP 48-pin |                 |          |                                                                                 |
|             |             | UART1_nCTS      | I        | Clear to Send input pin for UART1.                                              |
| 14          | 10          | LDO_CAP         | P        | LDO output pin.                                                                 |
| 15          | 11          | V <sub>DD</sub> | P        | Power supply for I/O ports and LDO source for internal PLL and digital circuit. |
| 16          | 12          | V <sub>SS</sub> | P        | Ground pin for digital circuit.                                                 |
| 17          | 13          | PB.0            | I/O      | General purpose digital I/O pin.                                                |
|             |             | UART0_RXD       | I        | Data receiver input pin for UART0.                                              |
| 18          | 14          | PB.1            | I/O      | General purpose digital I/O pin.                                                |
|             |             | UART0_TXD       | O        | Data transmitter output pin for UART0.                                          |
| 19          | 15          | PB.2            | I/O      | General purpose digital I/O pin.                                                |
|             |             | UART0_nRTS      | O        | Request to Send output pin for UART0.                                           |
|             |             | TM2_EXT         | I        | Timer2 external capture input pin.                                              |
|             |             | TM2             | O        | Timer2 toggle output pin.                                                       |
|             |             | PWM1_BRAKE1     | I        | PWM1 brake input pin.                                                           |
| 20          | 16          | PB.3            | I/O      | General purpose digital I/O pin.                                                |
|             |             | UART0_nCTS      | I        | Clear to Send input pin for UART0.                                              |
|             |             | TM3_EXT         | I        | Timer3 external capture input pin.                                              |
|             |             | TM3             | O        | Timer3 toggle output pin.                                                       |
|             |             | PWM1_BRAKE0     | I        | PWM1 brake input pin.                                                           |
| 21          | 17          | PD.6            | I/O      | General purpose digital I/O pin.                                                |
| 22          | 18          | PD.7            | I/O      | General purpose digital I/O pin.                                                |
| 23          | 19          | PD.14           | I/O      | General purpose digital I/O pin.                                                |
|             |             | UART2_RXD       | I        | Data receiver input pin for UART2.                                              |
| 24          | 20          | PD.15           | I/O      | General purpose digital I/O pin.                                                |
|             |             | UART2_TXD       | O        | Data transmitter output pin for UART2.                                          |
| 25          | 21          | PC.3            | I/O      | General purpose digital I/O pin.                                                |
|             |             | SPI0_MOSI0      | I/O      | SPI0 MOSI (Master Out, Slave In) pin.                                           |
| 26          | 22          | PC.2            | I/O      | General purpose digital I/O pin.                                                |
|             |             | SPI0_MISO0      | I/O      | SPI0 MISO (Master In, Slave Out) pin.                                           |
| 27          | 23          | PC.1            | I/O      | General purpose digital I/O pin.                                                |
|             |             | SPI0_CLK        | I/O      | SPI0 serial clock pin.                                                          |
| 28          | 24          | PC.0            | I/O      | General purpose digital I/O pin.                                                |
|             |             | SPI0_SS0        | I/O      | SPI0 slave select pin.                                                          |

| Pin No.     |             | Pin Name         | Pin Type | Description                                 |
|-------------|-------------|------------------|----------|---------------------------------------------|
| LQFP 64-pin | LQFP 48-pin |                  |          |                                             |
| 29          |             | PE.5             | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_CH5         | I/O      | PWM0 CH5 output/Capture input.              |
|             |             | TM1_EXT          | I        | Timer1 external capture input pin.          |
|             |             | TM1              | O        | Timer1 toggle output pin.                   |
| 30          |             | PB.11            | I/O      | General purpose digital I/O pin.            |
|             |             | TM3              | I/O      | Timer3 event counter input / toggle output. |
|             |             | PWM0_CH4         | I/O      | PWM0 CH4 output/Capture input.              |
| 31          |             | PB.10            | I/O      | General purpose digital I/O pin.            |
|             |             | TM2              | I/O      | Timer2 event counter input / toggle output. |
| 32          |             | PB.9             | I/O      | General purpose digital I/O pin.            |
|             |             | TM1              | I/O      | Timer1 event counter input / toggle output. |
| 33          |             | PC.11            | I/O      | General purpose digital I/O pin.            |
|             |             | PWM1_BRAKE1      | I        | PWM1 brake input pin.                       |
| 34          |             | PC.10            | I/O      | General purpose digital I/O pin.            |
|             |             | PWM1_BRAKE0      | I        | PWM1 brake input pin.                       |
| 35          |             | PC.9             | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_BRAKE1      | I        | PWM0 brake input pin.                       |
| 36          |             | PC.8             | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_BRAKE0      | I        | PWM0 brake input pin.                       |
| 37          | 25          | PA.15            | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_CH3         | I/O      | PWM0 CH3 output/Capture input.              |
| 38          | 26          | PA.14            | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_CH2         | I/O      | PWM0 CH2 output/Capture input.              |
| 39          | 27          | PA.13            | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_CH1         | I/O      | PWM0 CH1 output/Capture input.              |
| 40          | 28          | PA.12            | I/O      | General purpose digital I/O pin.            |
|             |             | PWM0_CH0         | I/O      | PWM0 CH0 output/Capture input.              |
| 41          | 29          | PF.7             | I/O      | General purpose digital I/O pin.            |
|             |             | ICE_DAT          | I/O      | Serial wire debugger data pin.              |
| 42          | 30          | PF.6             | I/O      | General purpose digital I/O pin.            |
|             |             | ICE_CLK          | I        | Serial wire debugger clock pin.             |
| 43          | 31          | AV <sub>SS</sub> | AP       | Ground pin for analog circuit.              |
| 44          | 32          | PA.0             | I/O      | General purpose digital I/O pin.            |

| Pin No.     |             | Pin Name         | Pin Type | Description                               |
|-------------|-------------|------------------|----------|-------------------------------------------|
| LQFP 64-pin | LQFP 48-pin |                  |          |                                           |
|             |             | ADC_CH0          | AI       | ADC_CH0 analog input.                     |
|             |             | PWM0_CH4         | I/O      | PWM0 CH4 output/Capture input.            |
|             |             | I2C1_SCL         | I/O      | I <sup>2</sup> C1 clock pin.              |
| 45          | 33          | PA.1             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH1          | AI       | ADC_CH1 analog input.                     |
|             |             | PWM0_CH5         | I/O      | PWM0 CH5 output/Capture input.            |
|             |             | I2C1_SDA         | I/O      | I <sup>2</sup> C1 data input/output pin.  |
| 46          | 34          | PA.2             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH2          | AI       | ADC_CH2 analog input.                     |
|             |             | PWM1_CH0         | I/O      | PWM1 CH0 output/Capture input.            |
|             |             | UART3_TXD        | O        | Data transmitter output pin for UART3.    |
| 47          | 35          | PA.3             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH3          | AI       | ADC_CH3 analog input.                     |
|             |             | PWM1_CH1         | I/O      | PWM1 CH1 output/Capture input.            |
|             |             | UART3_RXD        | I        | Data receiver input pin for UART3.        |
| 48          | 36          | PA.4             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH4          | AI       | ADC_CH4 analog input.                     |
| 49          | 37          | PA.5             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH5          | AI       | ADC_CH5 analog input.                     |
|             |             | UART3_RXD        | I        | Data receiver input pin for UART3.        |
| 50          | 38          | PA.6             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH6          | AI       | ADC_CH6 analog input.                     |
|             |             | UART3_TXD        | O        | Data transmitter output pin for UART3.    |
| 51          | 39          | PA.7             | I/O      | General purpose digital I/O pin.          |
|             |             | ADC_CH7          | AI       | ADC_CH7 analog input.                     |
|             |             | V <sub>REF</sub> | AP       | Voltage reference input for ADC.          |
| 52          | 40          | AV <sub>DD</sub> | AP       | Power supply for internal analog circuit. |
| 53          | 41          | PC.7             | I/O      | General purpose digital I/O pin.          |
|             |             | I2C0_SCL         | I/O      | I <sup>2</sup> C0 clock pin.              |
|             |             | PWM0_BRAKE1      | I        | PWM0 brake input pin.                     |
| 54          | 42          | PC.6             | I/O      | General purpose digital I/O pin.          |
|             |             | I2C0_SDA         | I/O      | I <sup>2</sup> C0 data input/output pin.  |
|             |             | PWM0_BRAKE0      | I        | PWM0 brake input pin.                     |

| Pin No.     |             | Pin Name        | Pin Type | Description                                                                                               |
|-------------|-------------|-----------------|----------|-----------------------------------------------------------------------------------------------------------|
| LQFP 64-pin | LQFP 48-pin |                 |          |                                                                                                           |
| 55          |             | PC.15           | I/O      | General purpose digital I/O pin.                                                                          |
| 56          |             | PC.14           | I/O      | General purpose digital I/O pin.                                                                          |
| 57          | 43          | PB.15           | I/O      | General purpose digital I/O pin.                                                                          |
|             |             | INT1            | I        | External interrupt1 input pin.                                                                            |
|             |             | TM0_EXT         | I        | Timer0 external capture input pin.                                                                        |
|             |             | TM0             | O        | Timer0 toggle output pin.                                                                                 |
| 58          | 44          | PF.0            | I/O      | General purpose digital I/O pin.                                                                          |
|             |             | XT1_OUT         | O        | External 4~24 MHz (high speed) crystal output pin.                                                        |
| 59          | 45          | PF.1            | I/O      | General purpose digital I/O pin.                                                                          |
|             |             | XT1_IN          | I        | External 4~24 MHz (high speed) crystal input pin.                                                         |
| 60          | 46          | nRESET          | I        | External reset input: active LOW, with an internal pull-up. Set this pin low reset chip to initial state. |
| 61          |             | V <sub>SS</sub> | P        | Ground pin for digital circuit.                                                                           |
| 62          |             | V <sub>DD</sub> | P        | Power supply for I/O ports and LDO source for internal PLL and digital circuit.                           |
| 63          | 47          | PF.8            | I/O      | General purpose digital I/O pin.                                                                          |
|             |             | CLKO            | O        | Frequency divider clock output pin.                                                                       |
| 64          | 48          | PB.8            | I/O      | General purpose digital I/O pin.                                                                          |
|             |             | STADC           | I        | ADC external trigger input.                                                                               |
|             |             | TM0             | I/O      | Timer0 event counter input / toggle output.                                                               |
|             |             | CLKO            | O        | Frequency divider clock output pin.                                                                       |

**Note:** Pin Type I = Digital Input, O = Digital Output; AI = Analog Input; P = Power Pin; AP = Analog Power

## 5 BLOCK DIAGRAM

### 5.1 NuMicro® NUC029xDE Block Diagram

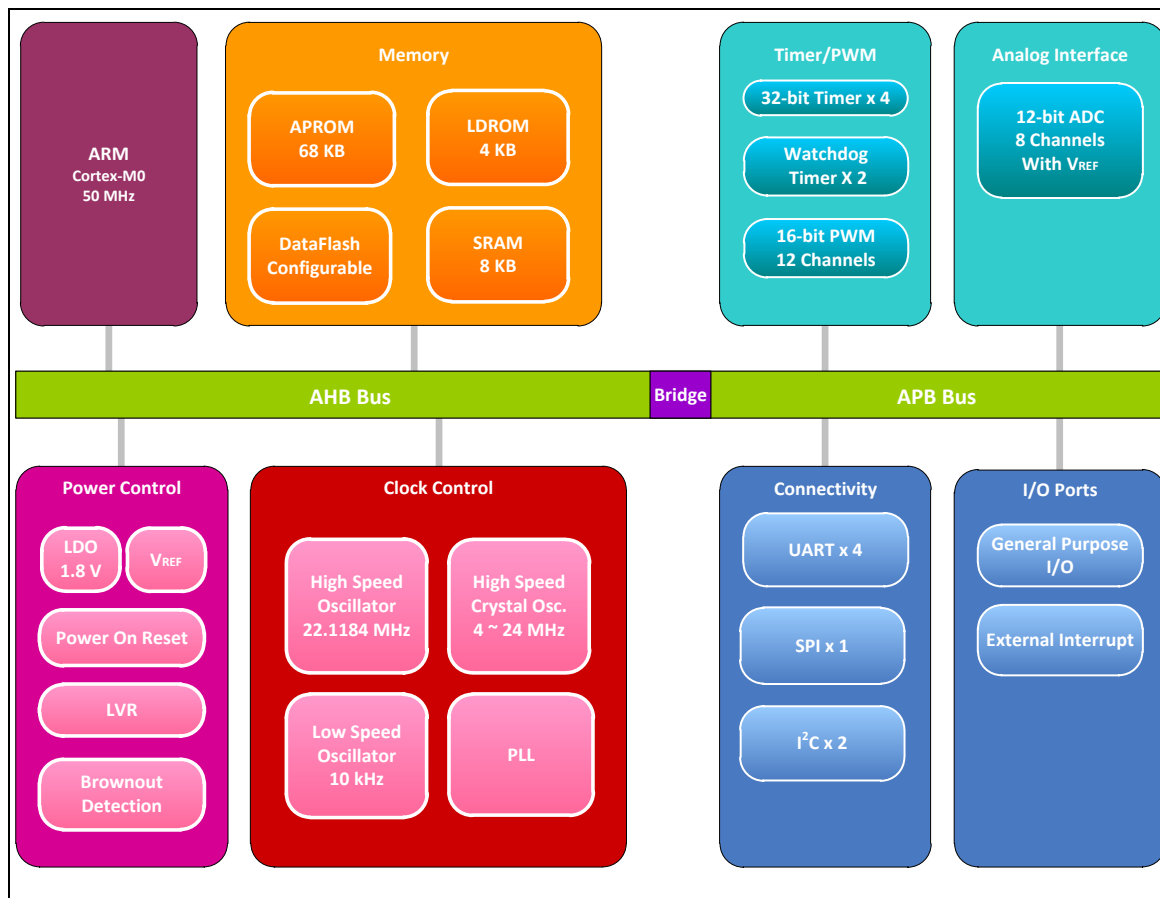


Figure 5-1 NuMicro® NUC029xDE Block Diagram

## 6 FUNCTIONAL DESCRIPTION

### 6.1 ARM® Cortex®-M0 Core

The Cortex®-M0 processor is a configurable, multistage, 32-bit RISC processor, which has an AMBA AHB-Lite interface and includes an NVIC component. It also has optional hardware debug functionality. The processor can execute Thumb code and is compatible with other Cortex®-M profile processor. The profile supports two modes -Thread mode and Handler mode. Handler mode is entered as a result of an exception. An exception return can only be issued in Handler mode. Thread mode is entered on Reset, and can be entered as a result of an exception return.

Figure 6-1 shows the functional controller of processor.

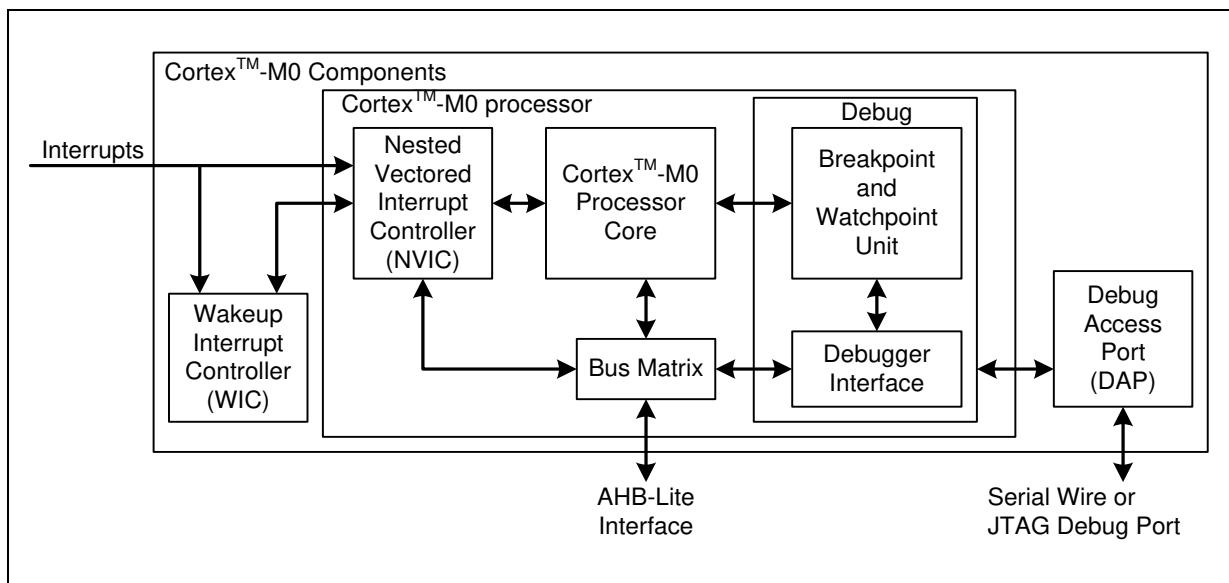


Figure 6-1 Functional Controller Diagram

The implemented device provides the following components and features:

- A low gate count processor:
  - ARMv6-M Thumb® instruction set
  - Thumb-2 technology
  - ARMv6-M compliant 24-bit SysTick timer
  - A 32-bit hardware multiplier
  - System interface supported with little-endian data accesses
  - Ability to have deterministic, fixed-latency, interrupt handling
  - Load/store-multiples and multicycle-multiplies that can be abandoned and restarted to facilitate rapid interrupt handling
  - C Application Binary Interface compliant exception model. This is the ARMv6-M, C Application Binary Interface (C-ABI) compliant exception model that enables the use of pure C functions as interrupt handlers
  - Low Power Sleep mode entry using Wait For Interrupt (WFI), Wait For Event (WFE) instructions, or the return from interrupt sleep-on-exit feature

- **NVIC:**
  - 32 external interrupt inputs, each with four levels of priority
  - Dedicated Non-maskable Interrupt (NMI) input
  - Supports for both level-sensitive and pulse-sensitive interrupt lines
  - Supports Wake-up Interrupt Controller (WIC) and, providing Ultra-low Power Sleep mode
- **Debug support**
  - Four hardware breakpoints
  - Two watchpoints
  - Program Counter Sampling Register (PCSR) for non-intrusive code profiling
  - Single step and vector catch capabilities
- **Bus interfaces:**
  - Single 32-bit AMBA-3 AHB-Lite system interface that provides simple integration to all system peripherals and memory
  - Single 32-bit slave port that supports the DAP (Debug Access Port)

## 6.2 System Manager

### 6.2.1 Overview

System management includes the following sections:

- System Resets
- System Memory Map
- System management registers for Part Number ID, chip reset and on-chip controllers reset , multi-functional pin control
- System Timer (SysTick)
- Nested Vectored Interrupt Controller (NVIC)
- System Control registers

### 6.2.2 System Reset

The system reset can be issued by one of the following listed events. For these reset event flags can be read by RSTSRC register.

- Power-on Reset
- Low level on the nRESET pin
- Watchdog Time-out Reset
- Low Voltage Reset
- Brown-out Detector Reset
- CPU Reset
- System Reset

System Reset and Power-on Reset all reset the whole chip including all peripherals. The difference between System Reset and Power-on Reset is external crystal circuit and BS (ISPCON[1]) bit. System Reset does not reset external crystal circuit and BS (ISPCON[1]) bit, but Power-on Reset does.

### 6.2.3 System Power Distribution

In this chip, the power distribution is divided into three segments.

- Analog power from  $AV_{DD}$  and  $AV_{SS}$  provides the power for analog components operation.
- Digital power from  $V_{DD}$  and  $V_{SS}$  supplies the power to the internal regulator which provides a fixed 1.8 V power for digital operation and I/O pins.

The outputs of internal voltage regulators, LDO, require an external capacitor which should be located close to the corresponding pin. Analog power ( $AV_{DD}$ ) should be the same voltage level with the digital power ( $V_{DD}$ ). Figure 6-2 shows the NuMicro® NUC029xDE power distribution.

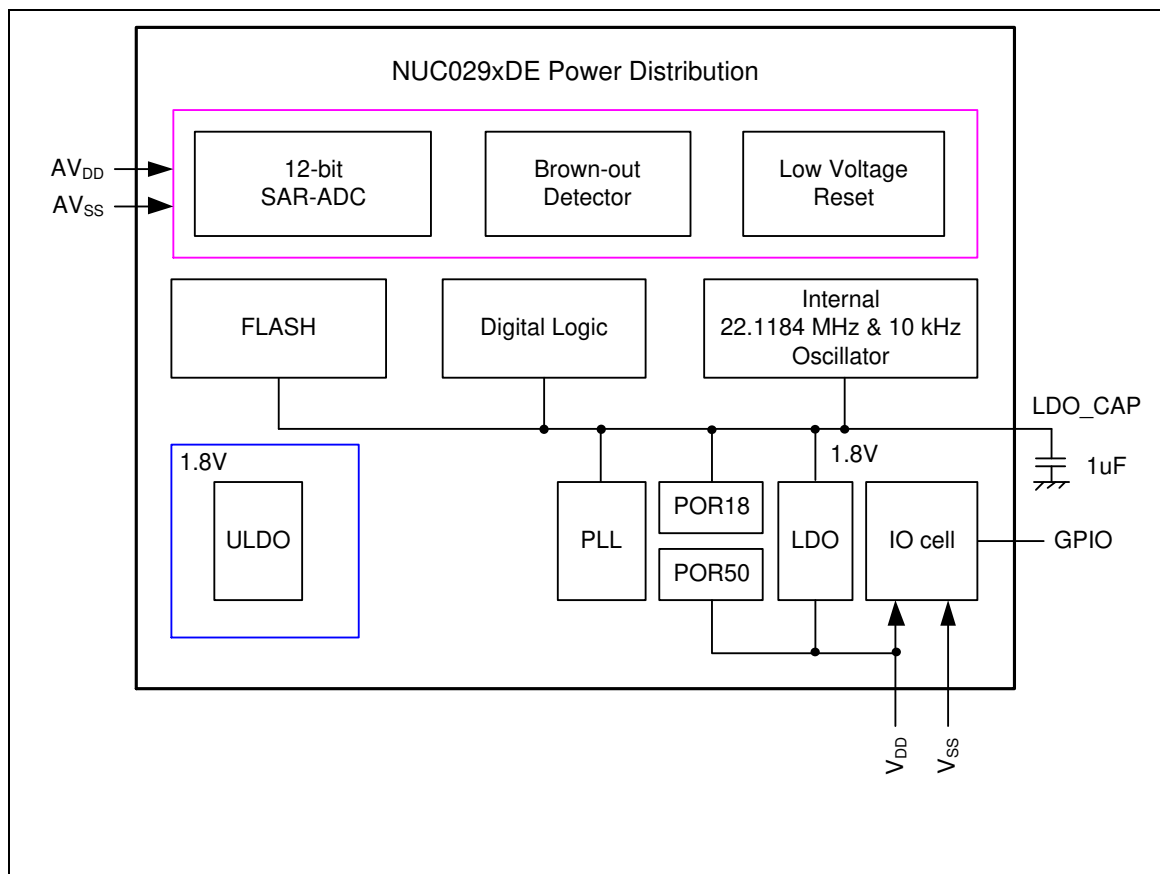


Figure 6-2 NuMicro® NUC029xDE Power Distribution Diagram

### 6.2.4 System Memory Map

The NuMicro<sup>®</sup> NUC029xDE provides 4G-byte addressing space. The memory locations assigned to each on-chip controllers are shown in the following table. The detailed register definition, memory space, and programming detailed will be described in the following sections for each on-chip peripheral. The NuMicro<sup>®</sup> NUC029xDE only supports little-endian data format.

| Address Space                                               | Token    | Controllers                                       |
|-------------------------------------------------------------|----------|---------------------------------------------------|
| <b>Flash and SRAM Memory Space</b>                          |          |                                                   |
| 0x0000_0000 – 0x0001_0FFF                                   | FLASH_BA | FLASH Memory Space (68 KB)                        |
| 0x2000_0000 – 0x2000_3FFF                                   | SRAM_BA  | SRAM Memory Space (8 KB)                          |
| <b>AHB Controllers Space (0x5000_0000 – 0x501F_FFFF)</b>    |          |                                                   |
| 0x5000_0000 – 0x5000_01FF                                   | GCR_BA   | System Global Control Registers                   |
| 0x5000_0200 – 0x5000_02FF                                   | CLK_BA   | Clock Control Registers                           |
| 0x5000_0300 – 0x5000_03FF                                   | INT_BA   | Interrupt Multiplexer Control Registers           |
| 0x5000_4000 – 0x5000_7FFF                                   | GPIO_BA  | GPIO Control Registers                            |
| 0x5000_C000 – 0x5000_FFFF                                   | FMC_BA   | Flash Memory Control Registers                    |
| <b>APB1 Controllers Space (0x4000_0000 ~ 0x400F_FFFF)</b>   |          |                                                   |
| 0x4000_4000 – 0x4000_7FFF                                   | WDT_BA   | Watchdog Timer Control Registers                  |
| 0x4001_0000 – 0x4001_3FFF                                   | TMR01_BA | Timer0/Timer1 Control Registers                   |
| 0x4002_0000 – 0x4002_3FFF                                   | I2C0_BA  | I <sup>2</sup> C0 Interface Control Registers     |
| 0x4003_0000 – 0x4003_3FFF                                   | SPI0_BA  | SPI0 with master/slave function Control Registers |
| 0x4004_0000 – 0x4004_3FFF                                   | PWM0_BA  | PWM0 Control Registers                            |
| 0x4005_0000 – 0x4005_3FFF                                   | UART0_BA | UART0 Control Registers                           |
| 0x4005_4000 – 0x4005_7FFF                                   | UART3_BA | UART3 Control Registers                           |
| 0x400E_0000 – 0x400E_FFFF                                   | ADC_BA   | Analog-Digital-Converter (ADC) Control Registers  |
| <b>APB2 Controllers Space (0x4010_0000 ~ 0x401F_FFFF)</b>   |          |                                                   |
| 0x4011_0000 – 0x4011_3FFF                                   | TMR23_BA | Timer2/Timer3 Control Registers                   |
| 0x4012_0000 – 0x4012_3FFF                                   | I2C1_BA  | I <sup>2</sup> C1 Interface Control Registers     |
| 0x4014_0000 – 0x4014_3FFF                                   | PWM1_BA  | PWM1 Control Registers                            |
| 0x4015_0000 – 0x4015_3FFF                                   | UART1_BA | UART1 Control Registers                           |
| 0x4015_4000 – 0x4015_7FFF                                   | UART2_BA | UART2 Control Registers                           |
| <b>System Controllers Space (0xE000_E000 ~ 0xE000_EFFF)</b> |          |                                                   |
| 0xE000_E010 – 0xE000_E0FF                                   | SCS_BA   | System Timer Control Registers                    |
| 0xE000_E100 – 0xE000_ECFF                                   | SCS_BA   | External Interrupt Controller Control Registers   |
| 0xE000_ED00 – 0xE000_ED8F                                   | SCS_BA   | System Control Registers                          |

Table 6-1 Address Space Assignments for On-Chip Controllers

### 6.2.5 System Timer (SysTick)

The Cortex®-M0 includes an integrated system timer, SysTick, which provides a simple, 24-bit clear-on-write, decrementing, wrap-on-zero counter with a flexible control mechanism. The counter can be used as a Real Time Operating System (RTOS) tick timer or as a simple counter.

When system timer is enabled, it will count down from the value in the SysTick Current Value Register (SYST\_CVR) to 0, and reload (wrap) to the value in the SysTick Reload Value Register (SYST\_RVR) on the next clock cycle, then decrement on subsequent clocks. When the counter transitions to 0, the COUNTFLAG status bit is set. The COUNTFLAG bit clears on reads.

The SYST\_CVR value is unknown on reset. Software should write to the register to clear it to 0 before enabling the feature. This ensures the timer will count from the SYST\_RVR value rather than an arbitrary value when it is enabled.

If the SYST\_RVR is 0, the timer will be maintained with a current value of 0 after it is reloaded with this value. This mechanism can be used to disable the feature independently from the timer enable bit.

For more detailed information, please refer to the “ARM® Cortex®-M0 Technical Reference Manual” and “ARM® v6-M Architecture Reference Manual”.

### 6.2.6 Nested Vectored Interrupt Controller (NVIC)

The Cortex<sup>®</sup>-M0 provides an interrupt controller as an integral part of the exception mode, named as “Nested Vectored Interrupt Controller (NVIC)”, which is closely coupled to the processor core and provides following features:

- Nested and Vectored interrupt support
- Automatic processor state saving and restoration
- Reduced and deterministic interrupt latency

The NVIC prioritizes and handles all supported exceptions. All exceptions are handled in “Handler Mode”. This NVIC architecture supports 32 (IRQ[31:0]) discrete interrupts with 4 levels of priority. All of the interrupts and most of the system exceptions can be configured to different priority levels. When an interrupt occurs, the NVIC will compare the priority of the new interrupt to the current running one’s priority. If the priority of the new interrupt is higher than the current one, the new interrupt handler will override the current handler.

When an interrupt is accepted, the starting address of the interrupt service routine (ISR) is fetched from a vector table in memory. There is no need to determine which interrupt is accepted and branch to the starting address of the correlated ISR by software. While the starting address is fetched, NVIC will also automatically save processor state including the registers “PC, PSR, LR, R0~R3, R12” to the stack. At the end of the ISR, the NVIC will restore the mentioned registers from stack and resume the normal execution. Thus it will take less and deterministic time to process the interrupt request.

The NVIC supports “Tail Chaining” which handles back-to-back interrupts efficiently without the overhead of states saving and restoration and therefore reduces delay time in switching to pending ISR at the end of current ISR. The NVIC also supports “Late Arrival” which improves the efficiency of concurrent ISRs. When a higher priority interrupt request occurs before the current ISR starts to execute (at the stage of state saving and starting address fetching), the NVIC will give priority to the higher one without delay penalty. Thus it advances the real-time capability.

For more detailed information, please refer to the “ARM<sup>®</sup> Cortex<sup>®</sup>-M0 Technical Reference Manual” and “ARM<sup>®</sup> v6-M Architecture Reference Manual”.

### 6.2.6.1 Exception Model and System Interrupt Map

The following table lists the exception model supported by NuMicro® NUC029xDE. Software can set four levels of priority on some of these exceptions as well as on all interrupts. The highest user-configurable priority is denoted as “0” and the lowest priority is denoted as “3”. The default priority of all the user-configurable interrupts is “0”. Note that priority “0” is treated as the fourth priority on the system, after three system exceptions “Reset”, “NMI” and “Hard Fault”.

| Exception Name           | Vector Number | Priority     |
|--------------------------|---------------|--------------|
| Reset                    | 1             | -3           |
| NMI                      | 2             | -2           |
| Hard Fault               | 3             | -1           |
| Reserved                 | 4 ~ 10        | Reserved     |
| SVCALL                   | 11            | Configurable |
| Reserved                 | 12 ~ 13       | Reserved     |
| PendSV                   | 14            | Configurable |
| SysTick                  | 15            | Configurable |
| Interrupt (IRQ0 ~ IRQ31) | 16 ~ 47       | Configurable |

Table 6-2 Exception Model

| Vector Number | Interrupt Number (Bit In Interrupt Registers) | Interrupt Name    | Source Module | Interrupt Description                                      |
|---------------|-----------------------------------------------|-------------------|---------------|------------------------------------------------------------|
| 1 ~ 15        | -                                             | -                 | -             | System exceptions                                          |
| 16            | 0                                             | <b>BOD_INT</b>    | Brown-out     | Brown-out low voltage detected interrupt                   |
| 17            | 1                                             | <b>WDT_INT</b>    | WDT           | Watchdog Timer interrupt                                   |
| 18            | 2                                             | <b>EINT0</b>      | GPIO          | External signal interrupt from PB.14 pin                   |
| 19            | 3                                             | <b>EINT1</b>      | GPIO          | External signal interrupt from PB.15 pin                   |
| 20            | 4                                             | <b>GPAB_INT</b>   | GPIO          | External signal interrupt from PA[15:0]/PB[13:0]           |
| 21            | 5                                             | <b>GPCDEF_INT</b> | GPIO          | External interrupt from PC[15:0]/PD[15:0]/PE[15:0]/PF[8:0] |
| 22            | 6                                             | -                 | -             | Reserved                                                   |
| 23            | 7                                             | -                 | -             | Reserved                                                   |
| 24            | 8                                             | <b>TMR0_INT</b>   | TMR0          | Timer 0 interrupt                                          |
| 25            | 9                                             | <b>TMR1_INT</b>   | TMR1          | Timer 1 interrupt                                          |
| 26            | 10                                            | <b>TMR2_INT</b>   | TMR2          | Timer 2 interrupt                                          |
| 27            | 11                                            | <b>TMR3_INT</b>   | TMR3          | Timer 3 interrupt                                          |
| 28            | 12                                            | <b>UART02_INT</b> | UART0/2       | UART0 and UART2 interrupt                                  |
| 29            | 13                                            | <b>UART1_INT</b>  | UART1         | UART1 interrupt                                            |
| 30            | 14                                            | <b>SPI0_INT</b>   | SPI0          | SPI0 interrupt                                             |

|    |    |                   |                   |                                                                   |
|----|----|-------------------|-------------------|-------------------------------------------------------------------|
| 31 | 15 | <b>UART3_INT</b>  | UART3             | UART3 interrupt                                                   |
| 32 | 16 | -                 | -                 | Reserved                                                          |
| 33 | 17 | -                 | -                 | Reserved                                                          |
| 34 | 18 | <b>I2C0_INT</b>   | I <sup>2</sup> C0 | I <sup>2</sup> C0 interrupt                                       |
| 35 | 19 | <b>I2C1_INT</b>   | I <sup>2</sup> C1 | I <sup>2</sup> C1 interrupt                                       |
| 36 | 20 | -                 | -                 | Reserved                                                          |
| 37 | 21 | -                 | -                 | Reserved                                                          |
| 38 | 22 | <b>PWM0_INT</b>   | PWM0              | PWM0 interrupt                                                    |
| 39 | 23 | <b>PWM1_INT</b>   | PWM1              | PWM1 interrupt                                                    |
| 40 | 24 | -                 | -                 | Reserved                                                          |
| 41 | 25 | -                 | -                 | Reserved                                                          |
| 42 | 26 | <b>BRAKE0_INT</b> | PWM0              | PWM0 brake interrupt                                              |
| 43 | 27 | <b>BRAKE1_INT</b> | PWM1              | PWM1 brake interrupt                                              |
| 44 | 28 | <b>PWRWU_INT</b>  | CLKC              | Clock controller interrupt for chip wake-up from Power-down state |
| 45 | 29 | <b>ADC_INT</b>    | ADC               | ADC interrupt                                                     |
| 46 | 30 | <b>CKD_INT</b>    | CLKC              | Clock detection interrupt                                         |
| 47 | 31 | -                 | -                 | Reserved                                                          |

Table 6-3 System Interrupt Map

### 6.2.6.2 Vector Table

When an interrupt is accepted, the processor will automatically fetch the starting address of the interrupt service routine (ISR) from a vector table in memory. For ARMv6-M, the vector table base address is fixed at 0x00000000. The vector table contains the initialization value for the stack pointer on reset, and the entry point addresses for all exception handlers. The vector number on previous page defines the order of entries in the vector table associated with exception handler entry as illustrated in previous section.

| Vector Table Word Offset | Description                                      |
|--------------------------|--------------------------------------------------|
| 0                        | SP_main – The Main stack pointer                 |
| Vector Number            | Exception Entry Pointer using that Vector Number |

Table 6-4 Vector Table Format

### 6.2.6.3 Operation Description

NVIC interrupts can be enabled and disabled by writing to their corresponding Interrupt Set-Enable or Interrupt Clear-Enable register bit-field. The registers use a write-1-to-enable and write-1-to-clear policy, both registers reading back the current enabled state of the corresponding interrupts. When an interrupt is disabled, interrupt assertion will cause the interrupt to become Pending, however, the interrupt will not activate. If an interrupt is Active when it is disabled, it remains in its Active state until cleared by reset or an exception return. Clearing the enable bit prevents new activations of the associated interrupt.

NVIC interrupts can be pended/un-pended using a complementary pair of registers to those used to enable/disable the interrupts, named the Set-Pending Register and Clear-Pending Register respectively. The registers use a write-1-to-enable and write-1-to-clear policy, both registers reading back the current pended state of the corresponding interrupts. The Clear-Pending Register has no effect on the execution status of an Active interrupt.

NVIC interrupts are prioritized by updating an 8-bit field within a 32-bit register (each register supporting four interrupts).

The general registers associated with the NVIC are all accessible from a block of memory in the System Control Space and will be described in next section.

### 6.2.7 System Control

The Cortex®-M0 status and operating mode control are managed by System Control Registers. Including CPUID, Cortex®-M0 interrupt priority and Cortex®-M0 power management can be controlled through these system control registers.

For more detailed information, please refer to the “ARM® Cortex®-M0 Technical Reference Manual” and “ARM® v6-M Architecture Reference Manual”.

## 6.3 Clock Controller

### 6.3.1 Overview

The clock controller generates the clocks for the whole chip, including system clocks and all peripheral clocks. The clock controller also implements the power control function with the individually clock ON/OFF control, clock source selection and clock divider. The chip enters Power-down mode when Cortex<sup>®</sup>-M0 core executes the WFI instruction only if the PWR\_DOWN\_EN (PWRCON[7]) bit and PD\_WAIT\_CPU (PWRCON[8]) bit are both set to 1. After that, chip enters Power-down mode and wait for wake-up interrupt source triggered to leave Power-down mode. In the Power-down mode, the clock controller turns off the 4~24 MHz external high speed crystal oscillator and 22.1184 MHz internal high speed RC oscillator to reduce the overall system power consumption. The following figures show the clock generator and the overview of the clock source control.

The clock generator consists of 5 clock sources as listed below:

- 4~24 MHz external high speed crystal oscillator (HXT)
- Programmable PLL output clock frequency(PLL FOUT),PLL source can be from external 4~24 MHz external high speed crystal oscillator (HXT) or 22.1184 MHz internal high speed RC oscillator (HIRC))
- 22.1184 MHz internal high speed RC oscillator (HIRC)
- 10 kHz internal low speed RC oscillator (LIRC)

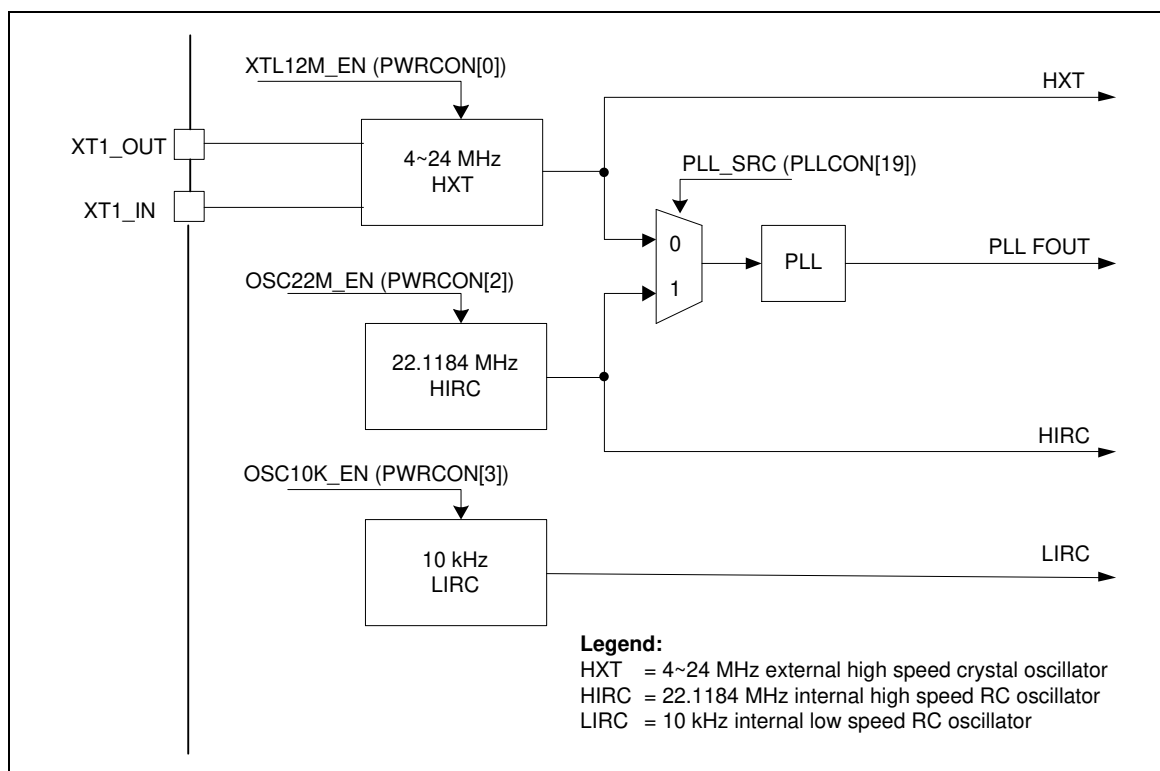


Figure 6-3 Clock Generator Block Diagram

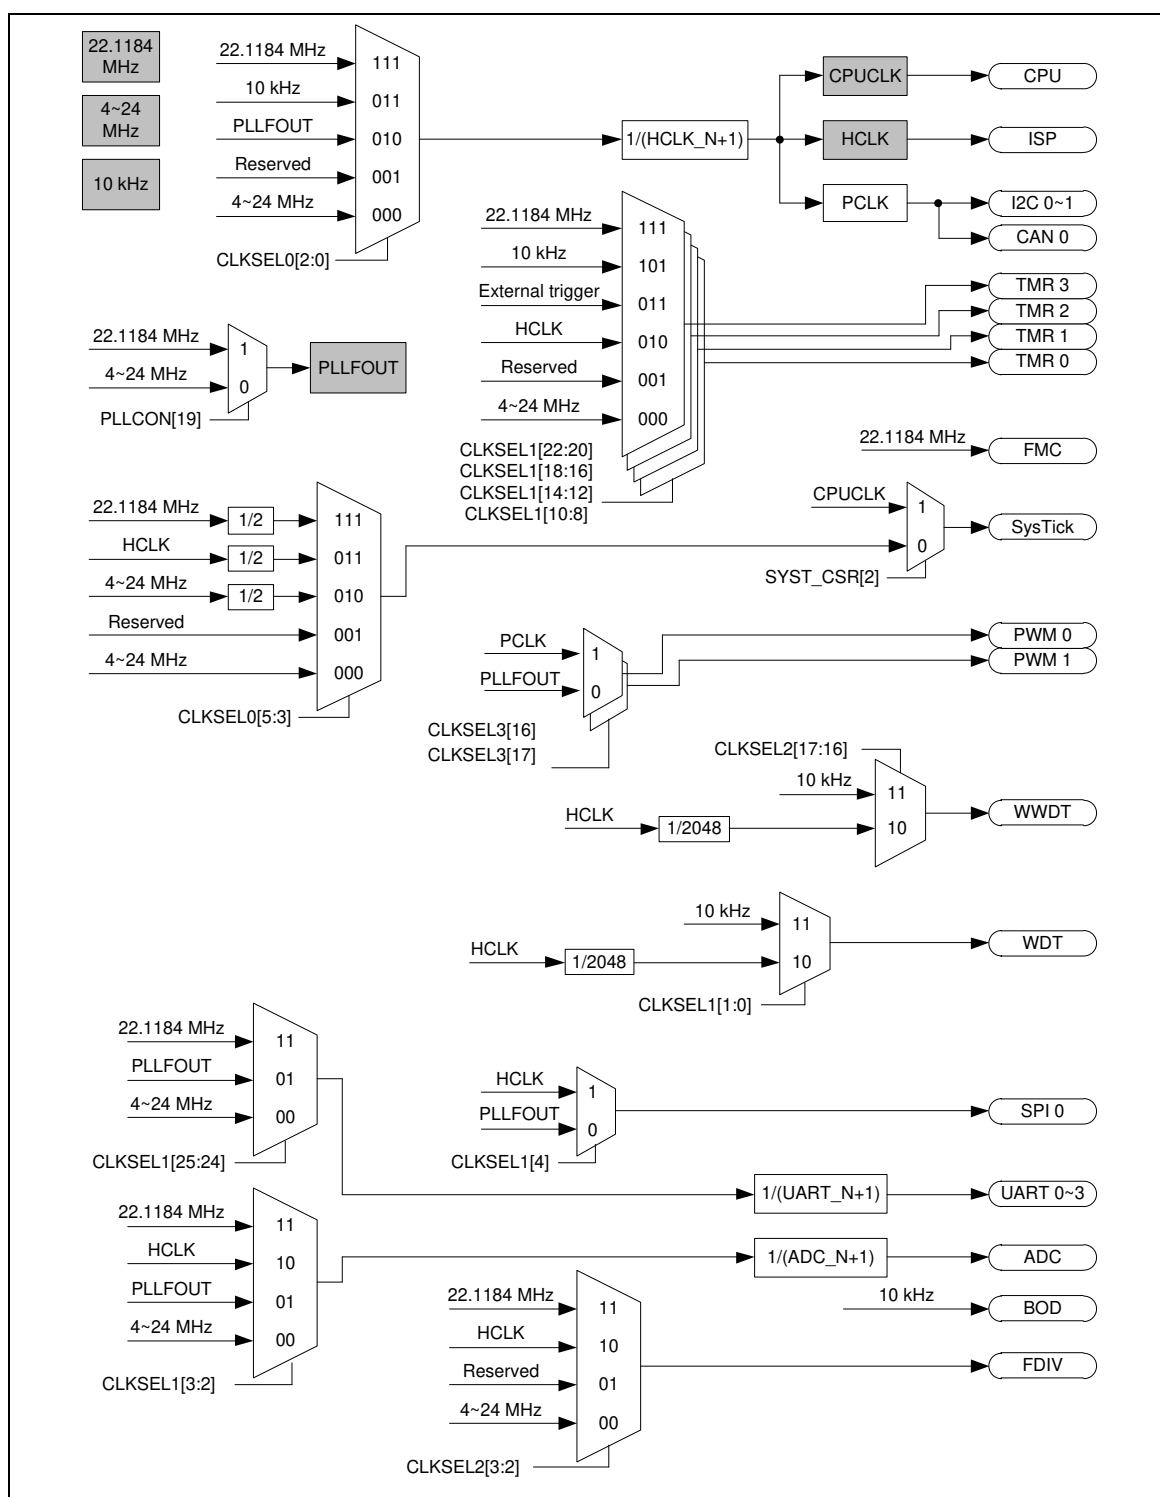


Figure 6-4 Clock Generator Global View Diagram

### 6.3.2 System Clock and SysTick Clock

The system clock has 4 clock sources which were generated from clock generator block. The clock source switch depends on the register HCLK\_S (CLKSEL0[2:0]). The block diagram is shown in Figure 6-5.

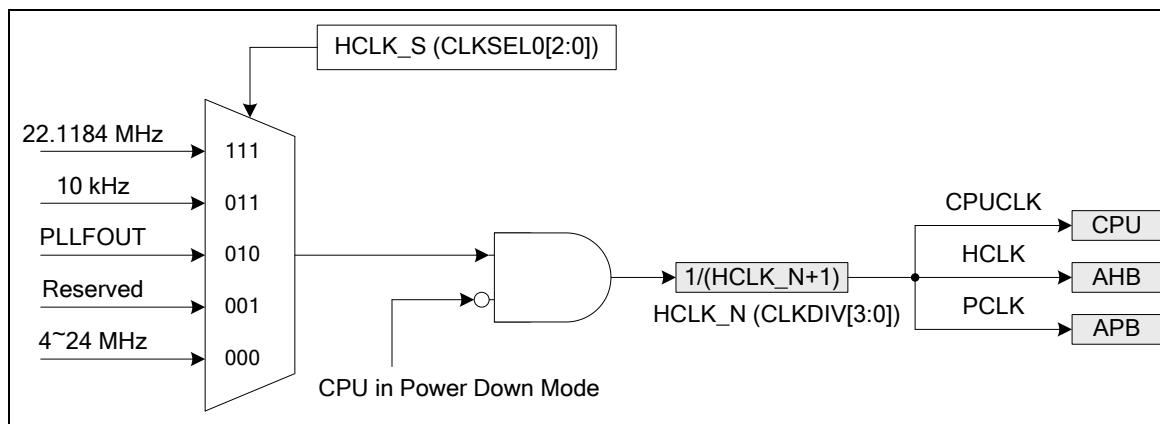


Figure 6-5 System Clock Block Diagram

The clock source of SysTick in Cortex®-M0 core can use CPU clock or external clock (SYST\_CSR[2]). If using external clock, the SysTick clock (STCLK) has 4 clock sources. The clock source switch depends on the setting of the register STCLK\_S (CLKSEL0[5:3]). The block diagram is shown in Figure 6-6.

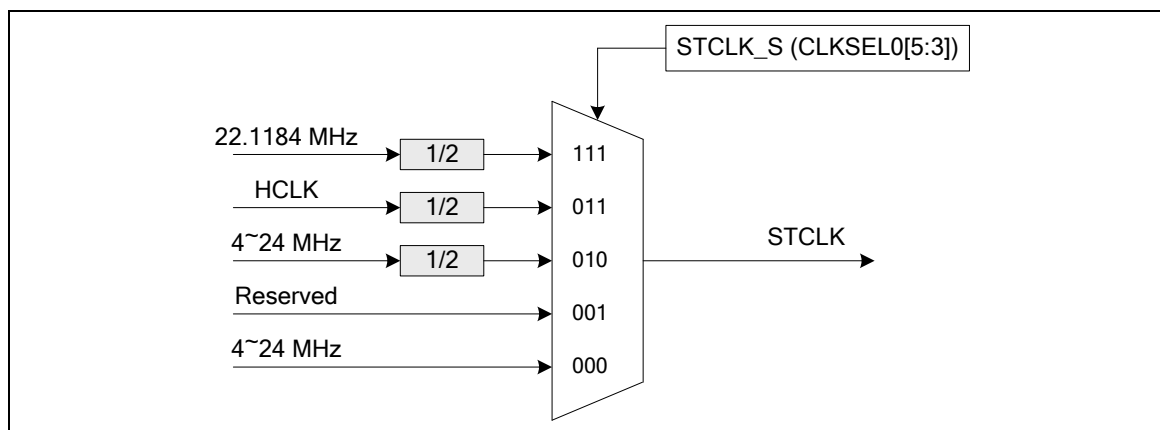


Figure 6-6 SysTick Clock Control Block Diagram

### 6.3.3 Power-down Mode Clock

When chip enters Power-down mode, system clocks, some clock sources, and some peripheral clocks will be disabled. Some clock sources and peripherals clocks are still active in Power-down mode.

The clocks still kept active are listed below:

- Clock Generator
  - 10 kHz internal low speed RC oscillator (LIRC) clock
- WDT/Timer Peripherals Clock (when 10 kHz internal low speed RC oscillator (LIRC) is adopted as clock source)

### 6.3.4 Frequency Divider Output

This device is equipped with a power-of-2 frequency divider which is composed by 16 chained divide-by-2 shift registers. One of the 16 shift register outputs selected by a sixteen to one multiplexer is reflected to CLKO function pin. Therefore there are 16 options of power-of-2 divided clocks with the frequency from  $F_{in}/2^1$  to  $F_{in}/2^{16}$  where  $F_{in}$  is input clock frequency to the clock divider.

The output formula is  $F_{out} = F_{in}/2^{(N+1)}$ , where  $F_{in}$  is the input clock frequency,  $F_{out}$  is the clock divider output frequency and N is the 4-bit value in FSEL (FRQDIV[3:0]).

When writing 1 to DIVIDER\_EN (FRQDIV[4]), the chained counter starts to count. When writing 0 to DIVIDER\_EN (FRQDIV[4]), the chained counter continuously runs till divided clock reaches low state and stay in low state.

If DIVIDER1 (FRQDIV[5]) is set to 1, the frequency divider clock (FRQDIV\_CLK) will bypass power-of-2 frequency divider. The frequency divider clock will be output to CLKO pin directly.

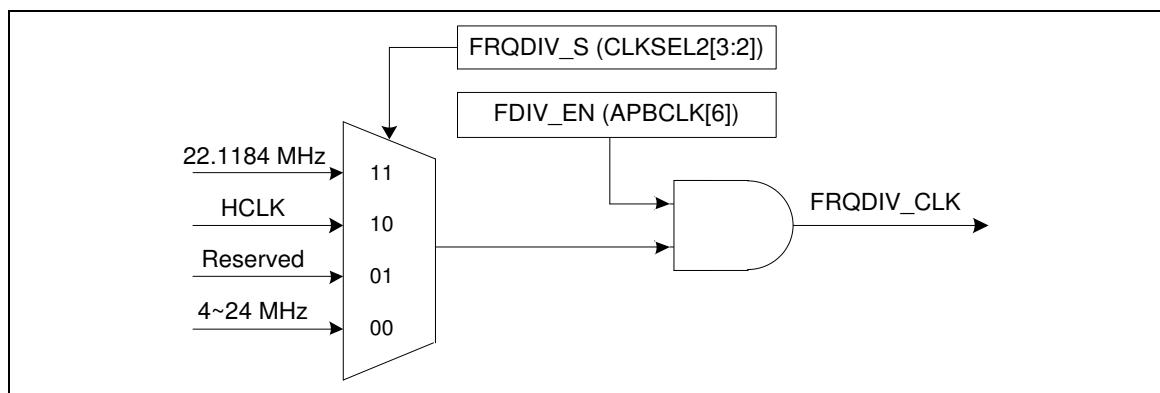


Figure 6-7 Clock Source of Frequency Divider

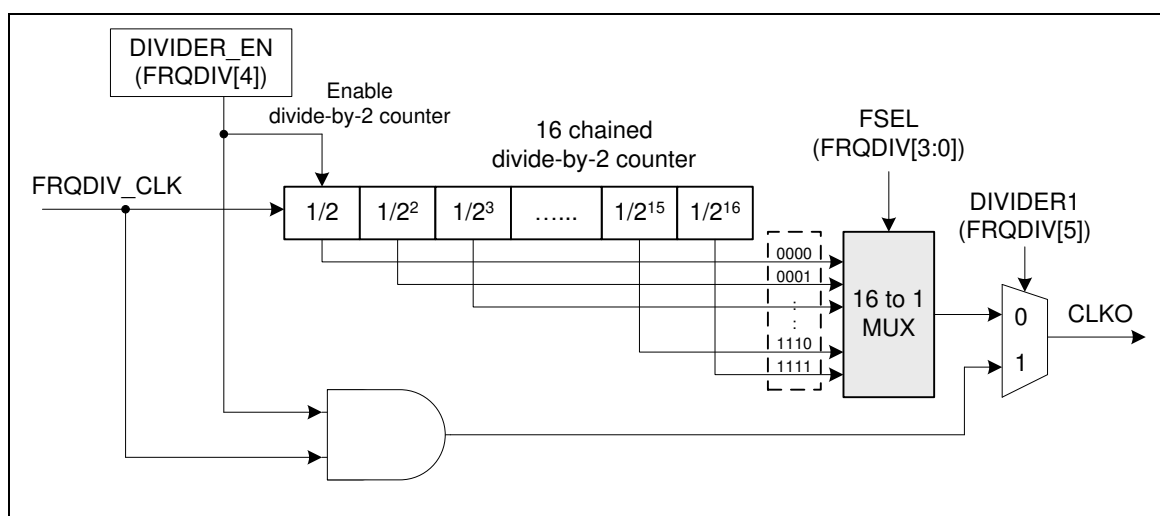


Figure 6-8 Frequency Divider Block Diagram

## 6.4 Flash Memory Controller (FMC)

### 6.4.1 Overview

The NuMicro® NUC029xDE has 68K bytes on-chip embedded Flash for application program memory (APROM) that can be updated through ISP procedure. The In-System-Programming (ISP) function enables user to update program memory when chip is soldered on PCB. After chip is powered on, Cortex®-M0 CPU fetches code from APROM or LDROM decided by boot select (CBS) in CONFIG0. By the way, the NuMicro® NUC029xDE also provides additional Data Flash for user to store some application dependent data.

The NuMicro® NUC029xDE supports another flexible feature: configurable Data Flash size. The Data Flash size is decided by Data Flash variable size enable (DFVSEN), Data Flash enable (DFEN) in Config0 and Data Flash base address (DFBADR) in Config1. When DFVSEN is set to 1, the Data Flash size is fixed at 4K and the address is started from 0x0001\_f000, and the APROM size is become 64K. When DFVSEN is set to 0 and DFEN is set to 1, the Data Flash size is zero and the APROM size is 68K bytes. When DFVSEN is set to 0 and DFEN is set to 0, the APROM and Data Flash share 68K bytes continuous address and the start address of Data Flash is defined by (DFBADR) in Config1.

### 6.4.2 Features

- Runs up to 50 MHz with zero wait cycle for continuous address read access
- All embedded flash memory supports 512 bytes page erase
- 68 KB application program memory (APROM)
- 4KB In-System-Programming (ISP) loader program memory (LDROM)
- Configurable Data Flash size
- 512 bytes page erase unit
- Supports In-Application-Programming (IAP) to switch code between APROM and LDROM without reset
- In-System-Programming (ISP) to update on-chip Flash

## 6.5 General Purpose I/O (GPIO)

### 6.5.1 Overview

The NuMicro® NUC029xDE series has up to 56 General Purpose I/O pins to be shared with other function pins depending on the chip configuration. These 56 pins are arranged in 6 ports named as GPIOA, GPIOB, GPIOC, GPIOD, GPIOE and GPIOF. The GPIOA/B port has the maximum of 16 pins. The GPIOC port has the maximum of 12 pins. The GPIOD port has the maximum of 4 pins. The GPIOE port has the maximum of 1 pin. The GPIOF port has the maximum of 7 pins. Each of the 56 pins is independent and has the corresponding register bits to control the pin mode function and data.

The I/O type of each of I/O pins can be configured by software individually as input, output, open-drain or Quasi-bidirectional mode. After reset, the I/O mode of all pins are depending on Config0[10] setting. In Quasi-bidirectional mode, I/O pin has a very weak individual pull-up resistor which is about 110~300 K $\Omega$  for V<sub>DD</sub> from 5.0 V to 2.5 V.

### 6.5.2 Features

- Four I/O modes:
  - Quasi-bidirectional
  - Push-Pull output
  - Open-Drain output
  - Input only with high impedance
- TTL/Schmitt trigger input selectable by GPx\_TYPE[15:0] in GPx\_MFP[31:16]
- I/O pin configured as interrupt source with edge/level setting
- Configurable default I/O mode of all pins after reset by Config0[10] setting
  - If Config[10] is 0, all GPIO pins in input tri-state mode after chip reset
  - If Config[10] is 1, all GPIO pins in Quasi-bidirectional mode after chip reset
- I/O pin internal pull-up resistor enabled only in Quasi-bidirectional I/O mode
- Enabling the pin interrupt function will also enable the pin wake-up function

## 6.6 Timer Controller (TIMER)

### 6.6.1 Overview

The timer controller includes four 32-bit timers, TIMER0 ~ TIMER3, allowing user to easily implement a timer control for applications. The timer can perform functions, such as frequency measurement, delay timing, clock generation, and event counting by external input pins, and interval measurement by external capture pins.

### 6.6.2 Features

- Four sets of 32-bit timers with 24-bit up counter and one 8-bit prescale counter
- Independent clock source for each timer
- Provides four timer counting modes: one-shot, periodic, toggle and continuous counting
- Time-out period = (Period of timer clock input) \* (8-bit prescale counter + 1) \* (24-bit TCMP)
- Maximum counting cycle time =  $(1 / T \text{ MHz}) * (2^8) * (2^{24})$ , T is the period of timer clock
- 24-bit up counter value is readable through TDR (Timer Data Register)
- Supports event counting function to count the event from external counter pin (TM0~TM3)
- Supports external pin capture (TM0\_EXT~TM3\_EXT) for interval measurement
- Supports external pin capture (TM0\_EXT~TM3\_EXT) for reset 24-bit up counter
- Supports chip wake-up from Idle/Power-down mode if a timer interrupt signal is generated

## 6.7 PWM Generator and Capture Timer (PWM)

### 6.7.1 Overview

The NUC029xDE provides two PWM generators — PWM0 and PWM1. Each PWM supports 6 channels of PWM output or input capture. There is a 12-bit prescaler to support flexible clock to the 16-bit PWM counter with 16-bit comparator. The PWM counter supports up, down and up-down counter types. PWM uses the comparator compared with counter to generate events. These events are used to generate PWM pulse, interrupt and trigger signal for ADC to start conversion.

The PWM generator supports two standard PWM output modes: Independent mode and Complementary mode, which have difference architecture. In Complementary mode, there are two comparators to generate various PWM pulse with 12-bit dead-time generator. For PWM output control unit, it supports polarity output, independent pin mask, tri-state output enable and brake functions.

The PWM generator also supports input capture function to latch PWM counter value to the corresponding register when input channel has a rising transition, falling transition or both transition is happened.

### 6.7.2 Features

#### 6.7.2.1 PWM function features

- Supports maximum clock frequency up to 100 MHz
- Supports up to two PWM modules, each module provides 6 output channels
- Supports independent mode for PWM output/Capture input channel
- Supports complementary mode for 3 complementary paired PWM output channel
  - Dead-time insertion with 12-bit resolution
  - Two compared values during one period
- Supports 12-bit pre-scalar from 1 to 4096
- Supports 16-bit resolution PWM counter, each module provides 3 PWM counters
  - Up, down and up/down counter operation type
- Supports mask function and tri-state enable for each PWM pin
- Supports brake function
  - Brake source from pin and system safety events (clock failed, Brown-out detection and CPU lockup)
  - Noise filter for brake source from pin
  - Edge detect brake source to control brake state until brake interrupt cleared
  - Level detect brake source to auto recover function after brake condition removed
- Supports interrupt on the following events:
  - PWM counter match zero, period value or compared value
  - Brake condition happened
- Supports trigger ADC on the following events:

- PWM counter match zero, period value or compared value

#### 6.7.2.2 *Capture Function Features*

- Supports up to 12 capture input channels with 16-bit resolution
- Supports rising or falling capture condition
- Supports input rising/falling capture interrupt
- Supports rising/falling capture with counter reload option

## 6.8 Watchdog Timer (WDT)

### 6.8.1 Overview

The purpose of Watchdog Timer is to perform a system reset when system runs into an unknown state. This prevents system from hanging for an infinite period of time. Besides, this Watchdog Timer supports the function to wake-up system from Idle/Power-down mode.

### 6.8.2 Features

- 18-bit free running up counter for Watchdog Timer time-out interval.
- Selectable time-out interval ( $2^4 \sim 2^{18}$ ) WDT\_CLK cycle and the time-out interval period is 104 ms ~ 26.3168 s if WDT\_CLK = 10 kHz.
- System kept in reset state for a period of  $(1 / \text{WDT\_CLK}) * 63$
- Supports Watchdog Timer reset delay period
  - Selectable it includes (1026、130、18 or 3) \* WDT\_CLK reset delay period.
- Supports to force Watchdog Timer enabled after chip powered on or reset while CWDTEN (CONFIG0[31] Watchdog Enable) bit is set to 0.
- Supports Watchdog Timer time-out wake-up function only if WDT clock source is selected as 10 kHz

## 6.9 Window Watchdog Timer (WWDT)

### 6.9.1 Overview

The Window Watchdog Timer is used to perform a system reset within a specified window period to prevent software run to uncontrollable status by any unpredictable condition.

### 6.9.2 Features

- 6-bit down counter value (WWDTV[5:0]) and 6-bit compare window value (WWDTW[21:16]) to make the WWDT time-out window period flexible
- Supports 4-bit value to programmable maximum 11-bit prescale counter period of WWDT counter

## 6.10 UART Interface Controller (UART)

### 6.10.1 Overview

The NuMicro® NUC029xDE provides up to four channels of Universal Asynchronous Receiver/Transmitters (UART). UART0/UART1/UART2 supports 16 bytes entry FIFO and UART3 support 1 byte buffer for data payload. Besides, only UART0 and UART1 support the flow control function. The UART Controller performs a serial-to-parallel conversion on data received from the peripheral, and a parallel-to-serial conversion on data transmitted from the CPU. The UART controller also supports IrDA SIR Function. UART0/UART1 provides RS-485 function mode. UART0/UART1/UART2 provides LIN master/slave function.

### 6.10.2 Features

- Full duplex, asynchronous communications
- Separates receive / transmit 16/16 bytes (UART0/UART1/UART2 support) entry FIFO and 1/1 bytes buffer for data payloads (UART3 support)
- Supports hardware auto-flow control function (CTS, RTS) and programmable RTS flow control trigger level (UART0/UART1 support).
- Programmable receiver buffer trigger level
- Supports programmable baud-rate generator for each channel individually
- Supports CTS wake-up function (UART0/UART1 support)
- Supports 7-bit receiver buffer time-out detection function
- Programmable transmitting data delay time between the last stop and the next start bit by setting DLY (UA\_TOR [15:8]) register
- Supports break error, frame error, parity error and receive / transmit buffer overflow detect function
- Fully programmable serial-interface characteristics
  - Programmable data bit length, 5-, 6-, 7-, 8-bit character
  - Programmable parity bit, even, odd, no parity or stick parity bit generation and detection
  - Programmable stop bit length, 1, 1.5, or 2 stop bit generation
- IrDA SIR function mode
  - Supports 3/16-bit duration for normal mode
- LIN function mode (UART0/UART1/UART2 support)
  - Supports LIN master/slave mode
  - Supports programmable break generation function for transmitter
  - Supports break detect function for receiver
- RS-485 function mode. (UART0/UART1 support)
  - Supports RS-485 9-bit mode
  - Supports hardware or software direct enable control provided by RTS pin.

## 6.11 I<sup>2</sup>C Serial Interface Controller (I<sup>2</sup>C)

### 6.11.1 Overview

I<sup>2</sup>C is a two-wire, bi-directional serial bus that provides a simple and efficient method of data exchange between devices. The I<sup>2</sup>C standard is a true multi-master bus including collision detection and arbitration that prevents data corruption if two or more masters attempt to control the bus simultaneously.

### 6.11.2 Features

The I<sup>2</sup>C bus uses two wires (I2Cn\_SDA and I2Cn\_SCL) to transfer information between devices connected to the bus. The main features of the I<sup>2</sup>C bus include:

- Supports up to two I<sup>2</sup>C serial interface controller
- Master/Slave mode
- Bidirectional data transfer between masters and slaves
- Multi-master bus (no central master)
- Arbitration between simultaneously transmitting masters without corruption of serial data on the bus
- Serial clock synchronization allow devices with different bit rates to communicate via one serial bus
- Built-in a 14-bit time-out counter requesting the I<sup>2</sup>C interrupt if the I<sup>2</sup>C bus hangs up and timer-out counter overflows.
- Programmable clocks allow for versatile rate control
- Supports 7-bit addressing mode
- Supports multiple address recognition ( four slave address with mask option)
- Supports Power-down wake-up function

## 6.12 Serial Peripheral Interface (SPI)

### 6.12.1 Overview

The Serial Peripheral Interface (SPI) is a synchronous serial data communication protocol that operates in full duplex mode. Devices communicate in Master/Slave mode with the 4-wire bi-direction interface. The NuMicro® NUC029xDE contains one set of SPI controllers performing a serial-to-parallel conversion on data received from a peripheral device, and a parallel-to-serial conversion on data transmitted to a peripheral device. This SPI controller can be configured as a master or a slave device.

The SPI controller supports the variable bus clock function for special applications.

### 6.12.2 Features

- One set of SPI controller
- Supports Master or Slave mode operation
- Supports Dual I/O Transfer mode
- Configurable bit length of a transaction word from 8 to 32 bits
- Provides separate 8-layer depth transmit and receive FIFO buffers
- Supports MSB first or LSB first transfer sequence
- Supports the Byte Reorder function
- Supports Byte or Word Suspend mode
- Variable output bus clock frequency in Master mode
- Supports 3-wire, no slave select signal, bi-direction interface

## 6.13 Analog-to-Digital Converter (ADC)

### 6.13.1 Overview

The NuMicro® NUC029xDE contains one 12-bit successive approximation analog-to-digital converters (SAR A/D converter) with 8 input channels. The A/D converter supports three operation modes: single, single-cycle scan and continuous scan mode. The A/D converter can be started by software, PWM trigger and external STADC pin.

### 6.13.2 Features

- Analog input voltage range:  $0 \sim V_{REF}$
- 12-bit resolution and 10-bit accuracy is guaranteed
- Up to 8 single-end analog input channels or 4 differential analog input channels
- Up to 1000 kSPS conversion rate (chip working at 5V)
- Three operating modes
  - Single mode: A/D conversion is performed one time on a specified channel
  - Single-cycle scan mode: A/D conversion is performed one cycle on all specified channels with the sequence from the smallest numbered channel to the largest numbered channel
  - Continuous scan mode: A/D converter continuously performs Single-cycle scan mode until software stops A/D conversion
- An A/D conversion can be started by:
  - Writing 1 to ADST bit (ADCR[11]) through software
  - PWM trigger
  - External pin STADC
- Conversion results are held in data registers for each channel with valid and overrun indicators
- Supports two set digital comparators. The conversion result can be compared with specify value and user can select whether to generate an interrupt when conversion result matches the compare register setting
- Channel 7 supports 2 input sources: external analog voltage, and internal Band-gap voltage

## 7 ELECTRICAL CHARACTERISTICS

### 7.1 Absolute Maximum Ratings

| SYMBOL                                    | PARAMETER       | MIN.         | MAX          | UNIT |
|-------------------------------------------|-----------------|--------------|--------------|------|
| DC Power Supply                           | $V_{DD}-V_{SS}$ | -0.3         | +7.0         | V    |
| Input Voltage                             | $V_{IN}$        | $V_{SS}-0.3$ | $V_{DD}+0.3$ | V    |
| Oscillator Frequency                      | $1/t_{CLCL}$    | 4            | 24           | MHz  |
| Operating Temperature                     | $T_A$           | -40          | +105         | °C   |
| Storage Temperature                       | $T_{ST}$        | -55          | +150         | °C   |
| Maximum Current into $V_{DD}$             |                 | -            | 120          | mA   |
| Maximum Current out of $V_{SS}$           |                 |              | 120          | mA   |
| Maximum Current sunk by a I/O pin         |                 |              | 35           | mA   |
| Maximum Current sourced by a I/O pin      |                 |              | 35           | mA   |
| Maximum Current sunk by total I/O pins    |                 |              | 100          | mA   |
| Maximum Current sourced by total I/O pins |                 |              | 100          | mA   |

**Note:** Exposure to conditions beyond those listed under absolute maximum ratings may adversely affects the life and reliability of the device.

## 7.2 DC Electrical Characteristics

( $V_{DD}-V_{SS}=5.5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $F_{OSC} = 50\text{ MHz}$  unless otherwise specified.)

| PARAMETER                                                                                                               | SYM.                  | SPECIFICATION |          |      |               | TEST CONDITIONS                                                                                              |         |            |     |                    |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------|----------|------|---------------|--------------------------------------------------------------------------------------------------------------|---------|------------|-----|--------------------|
|                                                                                                                         |                       | MIN.          | TYP.     | MAX. | UNIT          |                                                                                                              |         |            |     |                    |
| Operation Voltage                                                                                                       | $V_{DD}$              | 2.5           |          | 5.5  | V             | $V_{DD} = 2.5\text{ V} \sim 5.5\text{ V}$ up to 50 MHz                                                       |         |            |     |                    |
| Power Ground                                                                                                            | $V_{SS}$<br>$AV_{SS}$ | -0.3          | 0        | 0.3  | V             |                                                                                                              |         |            |     |                    |
| LDO Output Voltage                                                                                                      | $V_{LDO}$             | 1.62          | 1.8      | 1.98 | V             | $V_{DD} \geq 2.5\text{ V}$                                                                                   |         |            |     |                    |
| Band-gap Voltage                                                                                                        | $V_{BG}$              |               | 1.20     |      | V             | $V_{DD} = 2.5\text{ V} \sim 5.5\text{ V}$ , $T_A = 25^\circ\text{C}$                                         |         |            |     |                    |
|                                                                                                                         |                       | 1.19          | 1.20     | 1.22 | V             | $V_{DD} = 2.5\text{ V} \sim 5.5\text{ V}$ , $T_A = -40^\circ\text{C} \sim 105^\circ\text{C}$                 |         |            |     |                    |
| Analog Operating Voltage                                                                                                | $AV_{DD}$             |               | $V_{DD}$ |      | V             | When system used analog function, please refer to TRM chapter 6.5 for corresponding analog operating voltage |         |            |     |                    |
| Operating Current<br>Normal Run Mode<br>at 50 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$      | $I_{DD1}$             |               | 26       |      | mA            | $V_{DD}$                                                                                                     | HXT     | HIRC       | PLL | All digital module |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | 12 MHz  | X          | V   | V                  |
|                                                                                                                         |                       |               | 12       |      | mA            | 5.5V                                                                                                         | 12 MHz  | X          | V   | X                  |
|                                                                                                                         |                       |               | 24       |      |               | 3.3V                                                                                                         | 12 MHz  | X          | V   | V                  |
| Operating Current<br>Normal Run Mode<br>at 22.1184 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$ | $I_{DD4}$             |               | 11       |      | mA            | 3.3V                                                                                                         | 12 MHz  | X          | V   | X                  |
|                                                                                                                         |                       |               |          |      |               | 3.3V                                                                                                         | 12 MHz  | X          | V   | X                  |
|                                                                                                                         |                       | -             | 10       | -    | mA            | 5.5V                                                                                                         | X       | V          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | X       | V          | X   | X                  |
| Operating Current<br>Normal Run Mode<br>at 12 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$      | $I_{DD5}$             |               | 10       | -    | mA            | 3.3V                                                                                                         | X       | V          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 3.3V                                                                                                         | X       | V          | X   | V                  |
|                                                                                                                         |                       | -             | 4.1      | -    | mA            | 5.5V                                                                                                         | X       | V          | X   | X                  |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | X       | V          | X   | X                  |
| Operating Current<br>Normal Run Mode<br>at 4 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$       | $I_{DD6}$             |               | 8.3      |      | mA            | 3.3V                                                                                                         | 12 MHz  | X          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 3.3V                                                                                                         | 12 MHz  | X          | X   | V                  |
|                                                                                                                         |                       |               | 4.3      |      | mA            | 5.5V                                                                                                         | 12 MHz  | X          | X   | X                  |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | 12 MHz  | X          | X   | X                  |
| Operating Current<br>Normal Run Mode<br>at 4 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$       | $I_{DD7}$             |               | 6.8      |      | mA            | 3.3V                                                                                                         | 12 MHz  | X          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 3.3V                                                                                                         | 12 MHz  | X          | X   | V                  |
|                                                                                                                         |                       |               | 2.8      |      | mA            | 5.5V                                                                                                         | 4 MHz   | X          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | 4 MHz   | X          | X   | X                  |
| Operating Current<br>Normal Run Mode<br>at 4 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$       | $I_{DD8}$             |               | 3.9      |      | mA            | 3.3V                                                                                                         | 4 MHz   | X          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 3.3V                                                                                                         | 4 MHz   | X          | X   | V                  |
|                                                                                                                         |                       |               | 2.6      |      | mA            | 5.5V                                                                                                         | 4 MHz   | X          | X   | X                  |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | 4 MHz   | X          | X   | X                  |
| Operating Current<br>Normal Run Mode<br>at 4 MHz<br>while(1){} executed<br>from flash<br>$V_{LDO} = 1.8\text{ V}$       | $I_{DD9}$             |               | 2.6      |      | mA            | 3.3V                                                                                                         | 4 MHz   | X          | X   | V                  |
|                                                                                                                         |                       |               |          |      |               | 3.3V                                                                                                         | 4 MHz   | X          | X   | V                  |
|                                                                                                                         |                       |               | 1.3      |      | mA            | 5.5V                                                                                                         | 4 MHz   | X          | X   | X                  |
|                                                                                                                         |                       |               |          |      |               | 5.5V                                                                                                         | 4 MHz   | X          | X   | X                  |
| Operating Current                                                                                                       | $I_{DD21}$            |               | 111      |      | $\mu\text{A}$ | $V_{DD}$                                                                                                     | HXT/LXT | LIRC (kHz) | PLL | All digital module |

| PARAMETER                                                                          | SYM.                | SPECIFICATION |      |      |      | TEST CONDITIONS |                 |            |     |                    |
|------------------------------------------------------------------------------------|---------------------|---------------|------|------|------|-----------------|-----------------|------------|-----|--------------------|
|                                                                                    |                     | MIN.          | TYP. | MAX. | UNIT |                 |                 |            |     |                    |
| Normal Run Mode<br>at 10 kHz<br>while(1){} executed<br>from flash<br>VLDO =1.8 V   |                     |               |      |      |      | 5.5V            | X               | 10         | X   | V                  |
|                                                                                    | I <sub>DD22</sub>   |               | 108  |      | μA   | 5.5V            | X               | 10         | X   | X                  |
|                                                                                    | I <sub>DD23</sub>   |               | 98   |      | μA   | 3.3V            | X               | 10         | X   | V                  |
|                                                                                    | I <sub>DD24</sub>   |               | 96   |      | μA   | 3.3V            | X               | 10         | X   | X                  |
| Operating Current<br>Idle Mode<br>at 50 MHz<br>VLDO =1.8 V                         | I <sub>IDLE1</sub>  |               | 21   |      | mA   | V <sub>DD</sub> | HXT             | HIRC       | PLL | All digital module |
|                                                                                    |                     |               |      |      |      | 5.5V            | 12 MHz          | X          | V   | V                  |
|                                                                                    | I <sub>IDLE2</sub>  |               | 8    |      | mA   | 5.5V            | 12 MHz          | X          | V   | X                  |
|                                                                                    | I <sub>IDLE3</sub>  |               | 20   |      | mA   | 3.3V            | 12 MHz          | X          | V   | V                  |
| Operating Current<br>Idle Mode<br>at 22.1184 MHz<br>VLDO =1.8 V                    | I <sub>IDLE4</sub>  |               | 6.7  |      | mA   | 3.3V            | 12 MHz          | X          | V   | X                  |
|                                                                                    | I <sub>IDLE5</sub>  | -             | 7.7  | -    | mA   | 5.5V            | X               | V          | X   | X                  |
|                                                                                    | I <sub>IDLE6</sub>  | -             | 2.1  | -    | mA   | 5.5V            | X               | V          | X   | X                  |
|                                                                                    | I <sub>IDLE7</sub>  | -             | 7.7  | -    | mA   | 3.3V            | X               | V          | X   | V                  |
| Operating Current<br>Idle Mode<br>at 12 MHz<br>V <sub>LDO</sub> =1.8 V             | I <sub>IDLE8</sub>  | -             | 2.1  | -    | mA   | 3.3V            | X               | V          | X   | X                  |
|                                                                                    | I <sub>IDLE9</sub>  |               | 7.3  |      | mA   | 5.5V            | 12 MHz          | X          | X   | V                  |
|                                                                                    | I <sub>IDLE10</sub> |               | 3.2  |      | mA   | 5.5V            | 12 MHz          | X          | X   | X                  |
|                                                                                    | I <sub>IDLE11</sub> |               | 5.8  |      | mA   | 3.3V            | 12 MHz          | X          | X   | V                  |
| Operating Current<br>Idle Mode<br>at 4 MHz<br>V <sub>LDO</sub> =1.8 V              | I <sub>IDLE12</sub> |               | 1.7  |      | mA   | 3.3V            | 12 MHz          | X          | X   | X                  |
|                                                                                    | I <sub>IDLE13</sub> |               | 3.6  |      | mA   | 5.5V            | 4 MHz           | X          | X   | V                  |
|                                                                                    | I <sub>IDLE14</sub> |               | 2.2  |      | mA   | 5.5V            | 4 MHz           | X          | X   | X                  |
|                                                                                    | I <sub>IDLE15</sub> |               | 2.3  |      | mA   | 3.3V            | 4 MHz           | X          | X   | V                  |
| Operating Current<br>Idle Mode<br>at 10 kHz                                        | I <sub>IDLE16</sub> |               | 0.96 |      | mA   | 3.3V            | 4 MHz           | X          | X   | X                  |
|                                                                                    | I <sub>IDLE21</sub> |               | 110  |      | μA   | V <sub>DD</sub> | HXT/LXT         | LIRC (kHz) | PLL | All digital module |
|                                                                                    |                     |               |      |      |      | 5.5V            | X               | 10         | X   | V                  |
|                                                                                    | I <sub>IDLE22</sub> |               | 107  |      | μA   | 5.5V            | X               | 10         | X   | X                  |
| Standby Current<br>Power-down Mode<br>(Deep Sleep Mode)<br>V <sub>LDO</sub> =1.6 V | I <sub>IDLE23</sub> |               | 97   |      | μA   | 3.3V            | X               | 10         | X   | V                  |
|                                                                                    | I <sub>IDLE24</sub> |               | 95   |      | μA   | 3.3V            | X               | 10         | X   | X                  |
|                                                                                    | I <sub>PWD1</sub>   |               | 15   |      | μA   | V <sub>DD</sub> | HXT/HIRC<br>PLL | LXT (kHz)  | RTC | RAM<br>retention   |
|                                                                                    |                     |               |      |      |      | 5.5V            | X               | X          | X   | V                  |
|                                                                                    | I <sub>PWD2</sub>   |               | 15   |      | μA   | 5.5V            | X               | X          | X   | V                  |
|                                                                                    | I <sub>PWD3</sub>   |               | 17   |      | μA   | 3.3V            | X               | 32.768     | V   | V                  |

| PARAMETER                                                        | SYM.                           | SPECIFICATION       |      |                      |      | TEST CONDITIONS                                                                              |   |        |   |   |
|------------------------------------------------------------------|--------------------------------|---------------------|------|----------------------|------|----------------------------------------------------------------------------------------------|---|--------|---|---|
|                                                                  |                                | MIN.                | TYP. | MAX.                 | UNIT |                                                                                              |   |        |   |   |
|                                                                  | I <sub>PWD4</sub>              |                     | 17   |                      | μA   | 3.3V                                                                                         | X | 32.768 | V | V |
|                                                                  | I <sub>PWD5</sub>              |                     | 10   |                      | μA   | 5.5V                                                                                         | X | X      | X | X |
|                                                                  | I <sub>PWD6</sub>              |                     | 9    |                      | μA   | 3.3V                                                                                         | X | X      | X | X |
| Input Current PA, PB, PC, PD, PE, PF (Quasi-bidirectional mode)  | I <sub>IN1</sub>               |                     | -67  | -75                  | μA   | V <sub>DD</sub> = 5.5V, V <sub>IN</sub> = 0V or V <sub>IN</sub> =V <sub>DD</sub>             |   |        |   |   |
| Input Leakage Current PA, PB, PC, PD, PE, PF                     | I <sub>LK</sub>                | -1                  | -    | +1                   | μA   | V <sub>DD</sub> = 5.5V, 0<V <sub>IN</sub> <V <sub>DD</sub><br>Open-drain or input only mode. |   |        |   |   |
| Logic 1 to 0 Transition Current PA~PF (Quasi-bidirectional mode) | I <sub>TL</sub> <sup>[3]</sup> |                     | -610 | -650                 | μA   | V <sub>DD</sub> = 5.5V, V <sub>IN</sub> =2.0V                                                |   |        |   |   |
| Input Low Voltage PA, PB, PC, PD, PE, PF (TTL input)             | V <sub>IL1</sub>               | -0.3                | -    | 0.8                  | V    | V <sub>DD</sub> = 4.5V                                                                       |   |        |   |   |
|                                                                  |                                | -0.3                | -    | 0.6                  |      | V <sub>DD</sub> = 2.5V                                                                       |   |        |   |   |
| Input High Voltage PA, PB, PC, PD, PE, PF (TTL input)            | V <sub>IH1</sub>               | 2.0                 | -    | V <sub>DD</sub> +0.2 | V    | V <sub>DD</sub> = 5.5V                                                                       |   |        |   |   |
|                                                                  |                                | 1.5                 | -    | V <sub>DD</sub> +0.2 |      | V <sub>DD</sub> = 3.0V                                                                       |   |        |   |   |
| Input Low Voltage XT1_IN <sup>[2]</sup>                          | V <sub>IL3</sub>               | 0                   | -    | 0.8                  | V    | V <sub>DD</sub> = 4.5V                                                                       |   |        |   |   |
|                                                                  |                                | 0                   | -    | 0.4                  |      | V <sub>DD</sub> = 3.0V                                                                       |   |        |   |   |
| Input High Voltage XT1_IN <sup>[2]</sup>                         | V <sub>IH3</sub>               | 3.5                 | -    | V <sub>DD</sub> +0.3 | V    | V <sub>DD</sub> = 5.5V                                                                       |   |        |   |   |
|                                                                  |                                | 2.4                 | -    | V <sub>DD</sub> +0.3 |      | V <sub>DD</sub> = 3.0V                                                                       |   |        |   |   |
| Negative going threshold (Schmitt input), nRESET                 | V <sub>ILS</sub>               | -0.3                | -    | 0.2V <sub>DD</sub>   | V    |                                                                                              |   |        |   |   |
| Positive going threshold (Schmitt input), nRESET                 | V <sub>IHS</sub>               | 0.7 V <sub>DD</sub> | -    | V <sub>DD</sub> +0.3 | V    |                                                                                              |   |        |   |   |
| Internal nRESET pin pull up resistor                             | R <sub>RST</sub>               | 40                  |      | 150                  | kΩ   |                                                                                              |   |        |   |   |
| Negative going threshold (Schmitt input),                        | V <sub>ILS</sub>               | -0.3                | -    | 0.3 V <sub>DD</sub>  | V    |                                                                                              |   |        |   |   |
| Positive going threshold (Schmitt input),                        | V <sub>IHS</sub>               | 0.7 V <sub>DD</sub> | -    | V <sub>DD</sub> +0.3 | V    |                                                                                              |   |        |   |   |
| Source Current PA, PB, PC, PD, PE, PF (Quasi-bidirectional)      | I <sub>SR11</sub>              | -300                | -400 |                      | μA   | V <sub>DD</sub> = 4.5V, V <sub>S</sub> = 2.4V                                                |   |        |   |   |
|                                                                  | I <sub>SR12</sub>              | -50                 | -80  |                      | μA   | V <sub>DD</sub> = 2.7V, V <sub>S</sub> = 2.2V                                                |   |        |   |   |


| PARAMETER                                                                    | SYM.       | SPECIFICATION |      |      |         | TEST CONDITIONS              |
|------------------------------------------------------------------------------|------------|---------------|------|------|---------|------------------------------|
|                                                                              |            | MIN.          | TYP. | MAX. | UNIT    |                              |
| Mode)                                                                        | $I_{SR12}$ | -40           | -73  |      | $\mu A$ | $V_{DD} = 2.5V, V_S = 2.0V$  |
| Source Current PA, PB, PC, PD, PE, PF (Push-pull Mode)                       | $I_{SR21}$ | -20           | -26  |      | mA      | $V_{DD} = 4.5V, V_S = 2.4V$  |
|                                                                              | $I_{SR22}$ | -3            | -5.2 |      | mA      | $V_{DD} = 2.7V, V_S = 2.2V$  |
|                                                                              | $I_{SR22}$ | -2.5          | -5   |      | mA      | $V_{DD} = 2.5V, V_S = 2.0V$  |
|                                                                              | $I_{SK1}$  | 10            | 17   |      | mA      | $V_{DD} = 4.5V, V_S = 0.45V$ |
| Sink Current PA, PB, PC, PD, PE, PF (Quasi-bidirectional and Push-pull Mode) | $I_{SK1}$  | 6             | 11   |      | mA      | $V_{DD} = 2.7V, V_S = 0.45V$ |
|                                                                              | $I_{SK1}$  | 5             | 10   |      | mA      | $V_{DD} = 2.5V, V_S = 0.45V$ |

**Note:**

1. nRESET pin is a Schmitt trigger input.
2. Crystal Input is a CMOS input.
3. Pins of PA, PB, PC, PD, PE and PF can source a transition current when they are being externally driven from 1 to 0. In the condition of  $V_{DD} = 5.5V$ , the transition current reaches its maximum value when  $V_{IN}$  approximates to 2 V.

## 7.3 AC Electrical Characteristics

### 7.3.1 External 4~24 MHz High Speed Oscillator

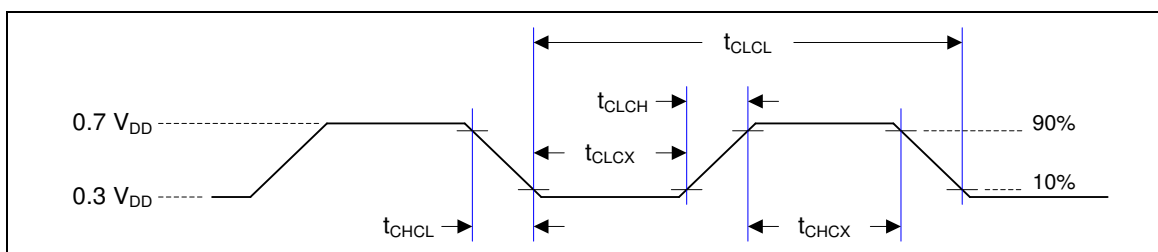

**Note:** Duty cycle is 50%.

| SYMBOL     | PARAMETER       | CONDITION | MIN. | TYP. | MAX. | UNIT |
|------------|-----------------|-----------|------|------|------|------|
| $t_{CHCX}$ | Clock High Time |           | 10   | -    | -    | nS   |
| $t_{CLCX}$ | Clock Low Time  |           | 10   | -    | -    | nS   |
| $t_{CLCH}$ | Clock Rise Time |           | 2    | -    | 15   | nS   |
| $t_{CHCL}$ | Clock Fall Time |           | 2    | -    | 15   | nS   |

### 7.3.2 External 4~24 MHz High Speed Crystal

| SYMBOL    | PARAMETER                  | CONDITION               | MIN. | TYP.. | MAX. | UNIT |
|-----------|----------------------------|-------------------------|------|-------|------|------|
| $V_{HXT}$ | Operation Voltage $V_{DD}$ | -                       | 2.5  | -     | 5.5  | V    |
| $T_A$     | Temperature                | -                       | -40  | -     | 105  | °C   |
| $I_{HXT}$ | Operating Current          | 12 MHz at $V_{DD} = 5V$ | -    | 2     | -    | mA   |
|           |                            | 12 MHz at $V_{DD} = 3V$ |      | 0.8   |      | mA   |
| $f_{HXT}$ | Clock Frequency            | External crystal        | 4    |       | 24   | MHz  |

#### 7.3.2.1 Typical Crystal Application Circuits

| CRYSTAL        | C1      | C2      | R       |
|----------------|---------|---------|---------|
| 4 MHz ~ 24 MHz | 10~20pF | 10~20pF | without |

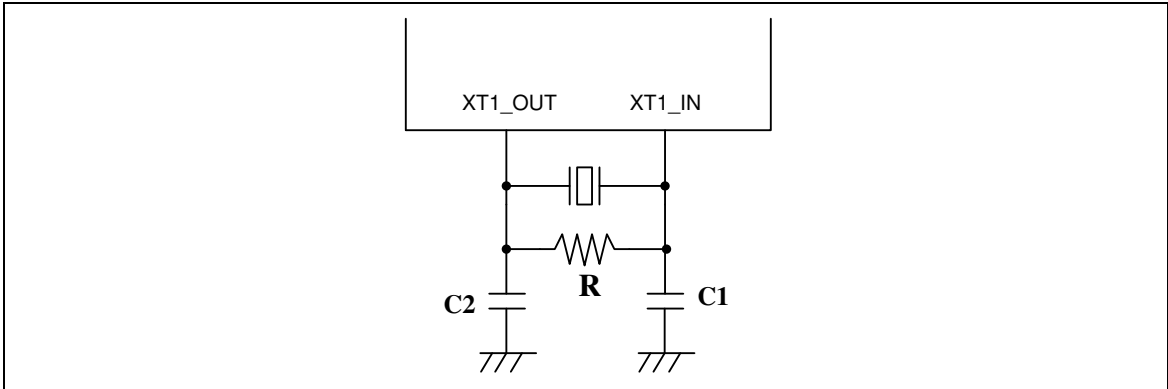


Figure 7-1 Typical Crystal Application Circuit

7.3.3 Internal 22.1184 MHz High Speed Oscillator

| SYMBOL    | PARAMETER                                | CONDITION                                | MIN. | TYP.    | MAX. | UNIT |
|-----------|------------------------------------------|------------------------------------------|------|---------|------|------|
| $V_{HRC}$ | Operation Voltage $V_{DD}$               | -                                        | 2.5  | -       | 5.5  | V    |
| $f_{HRC}$ | Center Frequency                         | -                                        | -    | 22.1184 | -    | MHz  |
|           | Calibrated Internal Oscillator Frequency | +25°C; $V_{DD}$ =5 V                     | -1   | -       | +1   | %    |
|           |                                          | -40°C ~ +105°C;<br>$V_{DD}$ =2.5 V~5.5 V | -2   | -       | +2   | %    |
| $I_{HRC}$ | Operation Current                        | $V_{DD}$ =5 V                            | -    | 744     | -    | uA   |

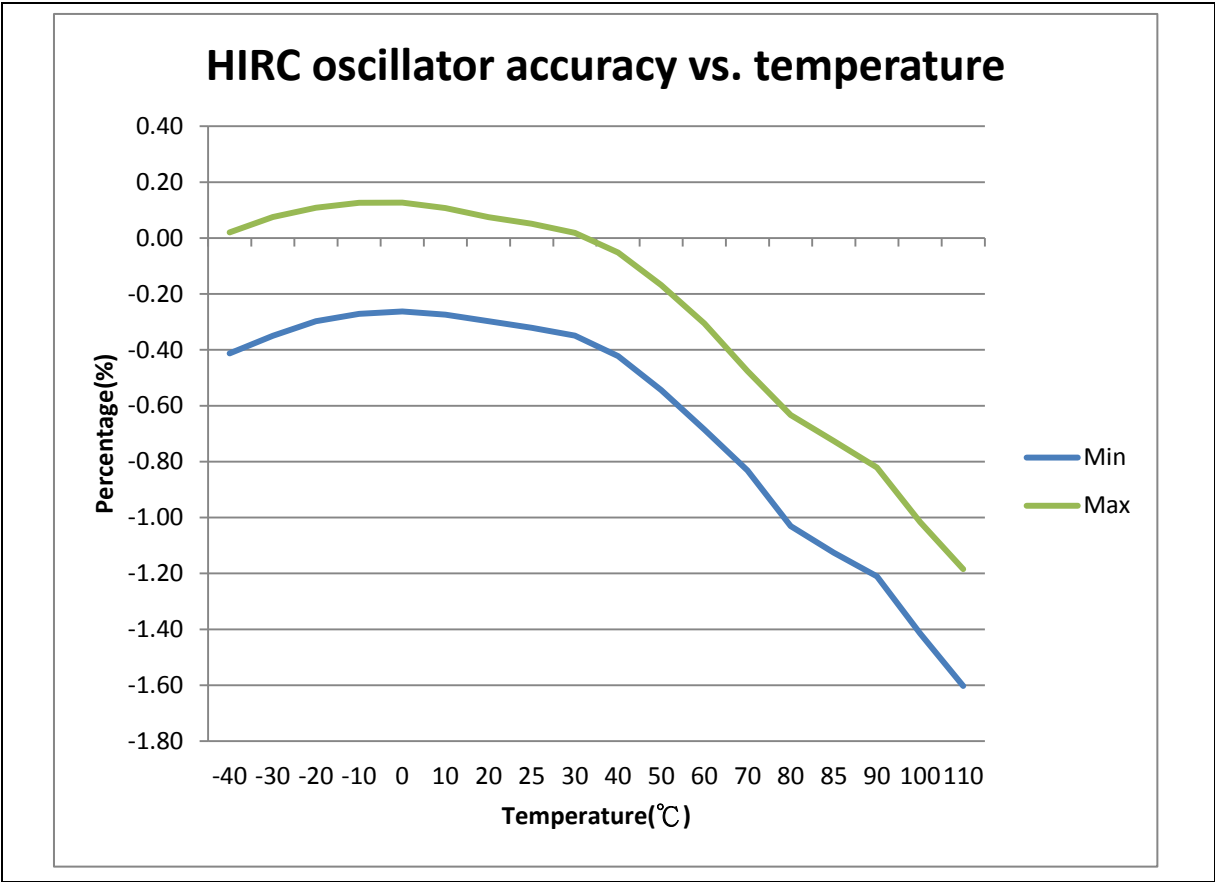


Figure 7-2 HIRC Accuracy vs. Temperature


7.3.4 Internal 10 kHz Low Speed Oscillator

| SYMBOL    | PARAMETER                                | CONDITION                              | MIN. | TYP. | MAX. | UNIT |
|-----------|------------------------------------------|----------------------------------------|------|------|------|------|
| $V_{LRC}$ | Operation Voltage $V_{DD}$               | -                                      | 2.5  | -    | 5.5  | V    |
| $f_{LRC}$ | Center Frequency                         | -                                      | -    | 10   | -    | kHz  |
| -         | Calibrated Internal Oscillator Frequency | +25°C; $V_{DD}$ =5 V                   | -10  | -    | +10  | %    |
|           |                                          | -40°C~+105°C;<br>$V_{DD}$ =2.5 V~5.5 V | -50  | -    | +50  | %    |

## 7.4 Analog Characteristics

### 7.4.1 12-bit SARADC Specification

| SYMBOL            | PARAMETER                                          | MIN.       | TYP. | MAX.             | UNIT               |
|-------------------|----------------------------------------------------|------------|------|------------------|--------------------|
| -                 | Resolution                                         | -          | -    | 12               | Bit                |
| DNL               | Differential nonlinearity error                    | -          | -1~2 | -1~4             | LSB                |
| INL               | Integral nonlinearity error                        | -          | ±2   | ±4               | LSB                |
| E <sub>O</sub>    | Offset error                                       | -          | 3    | -                | LSB                |
| E <sub>G</sub>    | Gain error (Transfer gain)                         | -          | -3   | -                | -                  |
| E <sub>A</sub>    | Absolute Error                                     | -          | 4    | -                | LSB                |
| -                 | Monotonic                                          | Guaranteed |      |                  |                    |
| F <sub>ADC</sub>  | ADC clock frequency (AV <sub>DD</sub> = 4.5V~5.5V) | -          | -    | 21               | MHz                |
| F <sub>S</sub>    | Sample rate (F <sub>ADC</sub> /T <sub>CONV</sub> ) | -          | -    | 1000             | kSPS               |
| T <sub>ACQ</sub>  | Acquisition Time (Sample Stage)                    | 2~9        |      |                  | 1/F <sub>ADC</sub> |
| T <sub>CONV</sub> | Total Conversion Time                              | 16~23      |      |                  | 1/F <sub>ADC</sub> |
| V <sub>DDA</sub>  | Supply Current                                     | 3          | -    | 5.5              | V                  |
| I <sub>DDA</sub>  | Supply current (Avg.)                              |            | 2.9  |                  | mA                 |
| V <sub>IN</sub>   | Input voltage                                      | 0          | -    | AV <sub>DD</sub> | V                  |
| C <sub>IN</sub>   | Input Capacitance                                  |            | 6    |                  | pF                 |
| R <sub>IN</sub>   | Input Load                                         |            | 6.5  |                  | kΩ                 |

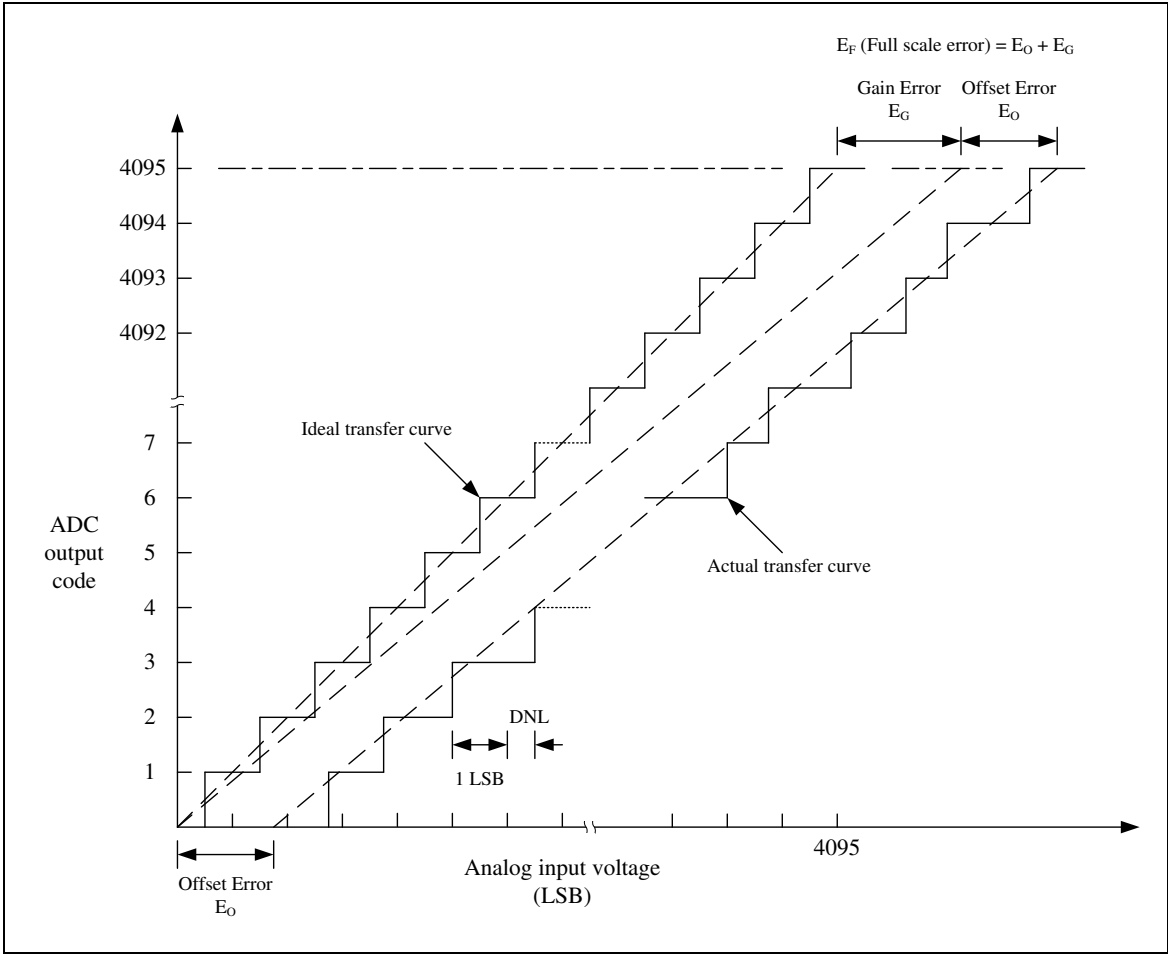

7.4.2 LDO and Power Management Specification

| SYMBOL           | PARAMETER                     | MIN. | TYP. | MAX. | UNIT | NOTE                          |
|------------------|-------------------------------|------|------|------|------|-------------------------------|
| V <sub>DD</sub>  | Input Voltage V <sub>DD</sub> | 2.5  |      | 5.5  | V    | V <sub>DD</sub> input voltage |
| V <sub>LDO</sub> | Output Voltage                | 1.62 | 1.8  | 1.98 | V    | V <sub>DD</sub> > 2.5 V       |
| T <sub>A</sub>   | Operating Temperature         | -40  | 25   | 105  | °C   |                               |

Note:

- 1. It is recommended a 0.1μF bypass capacitor is connected between V<sub>DD</sub> and the closest V<sub>SS</sub> pin of the device.
- 2. For ensuring power stability, a 1μF Capacitor must be connected between LDO\_CAP pin and the closest V<sub>SS</sub> pin of the device..

### 7.4.3 Low Voltage Reset Specification

| SYMBOL    | PARAMETER             | CONDITION                           | MIN. | TYP. | MAX. | UNIT               |
|-----------|-----------------------|-------------------------------------|------|------|------|--------------------|
| $AV_{DD}$ | Operation Voltage     | -                                   | 0    | -    | 5.5  | V                  |
| $I_{LVR}$ | Quiescent Current     | $AV_{DD}=5.5\text{ V}$              | -    | 1    | 5    | $\mu\text{A}$      |
| $T_A$     | Operation Temperature | -                                   | -40  | 25   | 105  | $^{\circ}\text{C}$ |
| $V_{LVR}$ | Threshold Voltage     | $T_A = 25\text{ }^{\circ}\text{C}$  | 2.00 | 2.0  | 2.4  | V                  |
|           |                       | $T_A = -40\text{ }^{\circ}\text{C}$ | 1.95 | 1.98 | 2.02 | V                  |
|           |                       | $T_A = 105\text{ }^{\circ}\text{C}$ | 2.04 | 2.13 | 2.25 | V                  |

### 7.4.4 Brown-out Detector Specification

| SYMBOL    | PARAMETER                           | CONDITION              | MIN. | TYP. | MAX. | UNIT               |
|-----------|-------------------------------------|------------------------|------|------|------|--------------------|
| $AV_{DD}$ | Operation Voltage                   | -                      | 0    | -    | 5.5  | V                  |
| $T_A$     | Temperature                         | -                      | -40  | 25   | 105  | $^{\circ}\text{C}$ |
| $I_{BOD}$ | Quiescent Current                   | $AV_{DD}=5.5\text{ V}$ | -    | -    | 140  | $\mu\text{A}$      |
| $V_{BOD}$ | Brown-out Voltage<br>(Falling edge) | $BOD\_VL[1:0]=11$      | 4.45 | 4.53 | 4.56 | V                  |
|           |                                     | $BOD\_VL[1:0]=10$      | 3.74 | 3.8  | 3.84 | V                  |
|           |                                     | $BOD\_VL[1:0]=01$      | 2.73 | 2.77 | 2.8  | V                  |
|           |                                     | $BOD\_VL[1:0]=00$      | 2.22 | 2.25 | 2.28 | V                  |
| $V_{BOD}$ | Brown-out Voltage<br>(Rising edge)  | $BOD\_VL[1:0]=11$      | 4.34 | 4.39 | 4.41 | V                  |
|           |                                     | $BOD\_VL[1:0]=10$      | 3.65 | 3.69 | 3.71 | V                  |
|           |                                     | $BOD\_VL[1:0]=01$      | 2.66 | 2.69 | 2.7  | V                  |
|           |                                     | $BOD\_VL[1:0]=00$      | 2.16 | 2.19 | 2.2  | V                  |

### 7.4.5 Power-on Reset Specification

| SYMBOL     | PARAMETER                                                              | CONDITION | MIN.  | TYP. | MAX. | UNIT               |
|------------|------------------------------------------------------------------------|-----------|-------|------|------|--------------------|
| $T_A$      | Operation Temperature                                                  | -         | -40   | 25   | 105  | $^{\circ}\text{C}$ |
| $V_{POR}$  | Reset Voltage                                                          | V+        | 1.6   | 2    | 2.4  | V                  |
| $V_{POR}$  | $V_{DD}$ Start Voltage to<br>Ensure Power-on Reset                     | -         | -     | -    | 100  | mV                 |
| $RR_{VDD}$ | $V_{DD}$ Raising Rate to<br>Ensure Power-on Reset                      | -         | 0.025 | -    | -    | V/ms               |
| $t_{POR}$  | Minimum Time for $V_{DD}$<br>Stays at VPOR to<br>Ensure Power-on Reset | -         | 0.5   | -    | -    | ms                 |

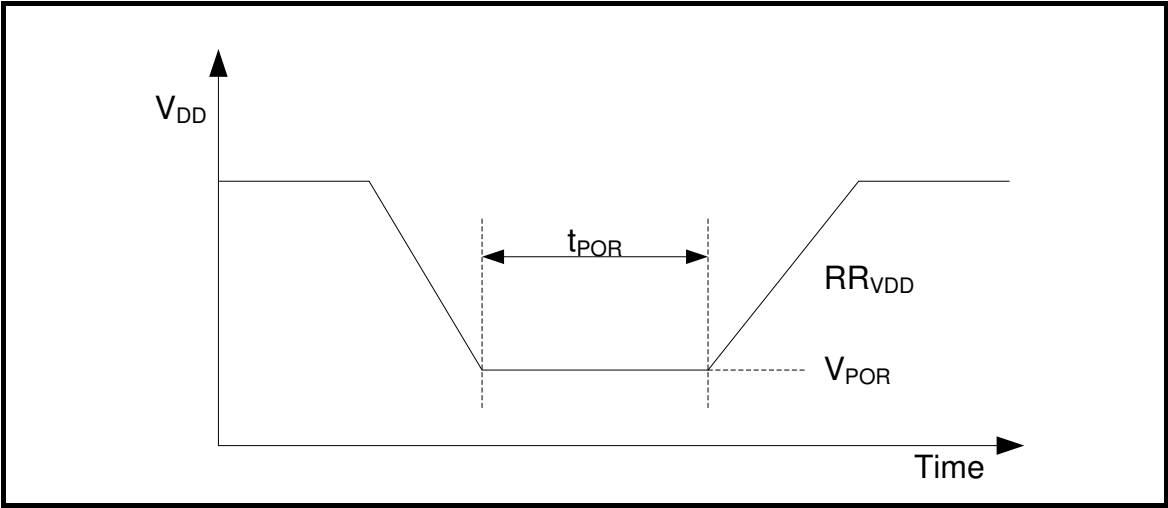


Figure 7-3 Power-up Ramp Condition

## 7.5 Flash DC Electrical Characteristics

| SYMBOL          | PARAMETER       | CONDITIONS | MIN.  | TYP. | MAX. | UNIT                  |
|-----------------|-----------------|------------|-------|------|------|-----------------------|
| $V_{FLA}^{[2]}$ | Supply Voltage  |            | 1.62  | 1.8  | 1.98 | V <sup>[2]</sup>      |
| $N_{ENDUR}$     | Endurance       |            | 20000 | -    | -    | cycles <sup>[1]</sup> |
| $T_{RET}$       | Data Retention  | At 25°C    | 100   | -    | -    | year                  |
| $T_{ERASE}$     | Page Erase Time |            | 20    | -    | -    | ms                    |
| $T_{MER}$       | Mass Erase Time |            | 40    | -    | -    | ms                    |
| $T_{PROG}$      | Program Time    |            | 40    | -    | -    | μs                    |

**Note:**

1. Number of program/erase cycles.
2.  $V_{FLA}$  is source from chip LDO output voltage.

## 7.6 I<sup>2</sup>C Dynamic Characteristics

| SYMBOL              | PARAMETER                           | STANDARD MODE <sup>[1][2]</sup> |                     | FAST MODE <sup>[1][2]</sup> |                    | UNIT |
|---------------------|-------------------------------------|---------------------------------|---------------------|-----------------------------|--------------------|------|
|                     |                                     | MIN.                            | MAX.                | MIN.                        | MAX.               |      |
| t <sub>LOW</sub>    | SCL low period                      |                                 |                     |                             |                    | μS   |
| t <sub>HIGH</sub>   | SCL high period                     |                                 |                     |                             |                    | μS   |
| t <sub>SU;STA</sub> | Repeated START condition setup time |                                 |                     |                             |                    | μS   |
| t <sub>HD;STA</sub> | START condition hold time           | 4                               | -                   | 0.6                         | -                  | μS   |
| t <sub>SU;STO</sub> | STOP condition setup time           | 4                               | -                   | 0.6                         | -                  | μS   |
| t <sub>BUF</sub>    | Bus free time                       | 4.7 <sup>[3]</sup>              | -                   | 1.2 <sup>[3]</sup>          | -                  | μS   |
| t <sub>SU;DAT</sub> | Data setup time                     | 250                             | -                   | 100                         | -                  | nS   |
| t <sub>HD;DAT</sub> | Data hold time                      | 0 <sup>[4]</sup>                | 3.45 <sup>[5]</sup> | 0 <sup>[4]</sup>            | 0.8 <sup>[5]</sup> | μS   |
| t <sub>r</sub>      | SCL/SDA rise time                   | -                               | 1000                | 20+0.1Cb                    | 300                | nS   |
| t <sub>f</sub>      | SCL/SDA fall time                   | -                               | 300                 | -                           | 300                | nS   |
| C <sub>b</sub>      | Capacitive load for each bus line   | -                               | 400                 | -                           | 400                | pF   |

### Note:

1. Guaranteed by design, not tested in production.
2. HCLK must be higher than 2 MHz to achieve the maximum standard mode I<sup>2</sup>C frequency. It must be higher than 8 MHz to achieve the maximum fast mode I<sup>2</sup>C frequency.
3. I<sup>2</sup>C controller must be retrigged immediately at slave mode after receiving STOP condition.
4. The device must internally provide a hold time of at least 300 ns for the SDA signal in order to bridge the undefined region of the falling edge of SCL.
5. The maximum hold time of the Start condition has only to be met if the interface does not stretch the low period of SCL signal.

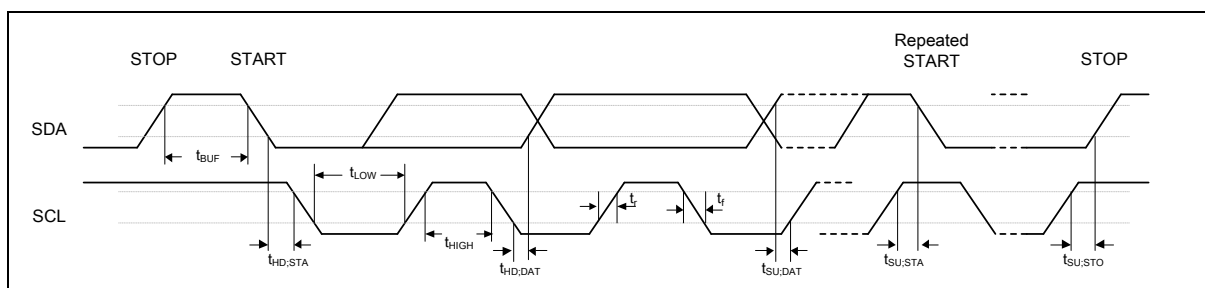


Figure 7-4 I<sup>2</sup>C Timing Diagram

## 7.7 SPI Dynamic Characteristics

| Symbol                                                                                | Parameter              | Min. | Typ. | Max. | Unit |
|---------------------------------------------------------------------------------------|------------------------|------|------|------|------|
| SPI Master Mode ( $V_{DD} = 4.5\text{ V} \sim 5.5\text{ V}$ , 0 pF loading Capacitor) |                        |      |      |      |      |
| $t_{DS}$                                                                              | Data setup time        | 0    | -    | -    | ns   |
| $t_{DH}$                                                                              | Data hold time         | 4    | -    | -    | ns   |
| $t_V$                                                                                 | Data output valid time | -    | 1    | 2    | ns   |
| SPI Master Mode ( $V_{DD} = 3.0\text{ V} \sim 3.6\text{ V}$ , 0 pF loading Capacitor) |                        |      |      |      |      |
| $t_{DS}$                                                                              | Data setup time        | 0    | -    | -    | ns   |
| $t_{DH}$                                                                              | Data hold time         | 4.5  | -    | -    | ns   |
| $t_V$                                                                                 | Data output valid time | -    | 2    | 4    | ns   |
| SPI Slave Mode ( $V_{DD} = 4.5\text{ V} \sim 5.5\text{ V}$ , 0 pF loading Capacitor)  |                        |      |      |      |      |
| $t_{DS}$                                                                              | Data setup time        | 0    | -    | -    | ns   |
| $t_{DH}$                                                                              | Data hold time         | 3.5  | -    | -    | ns   |
| $t_V$                                                                                 | Data output valid time | -    | 16   | 22   | ns   |
| SPI Slave Mode ( $V_{DD} = 3.0\text{ V} \sim 3.6\text{ V}$ , 0 pF loading Capacitor)  |                        |      |      |      |      |
| $t_{DS}$                                                                              | Data setup time        | 0    | -    | -    | ns   |
| $t_{DH}$                                                                              | Data hold time         | 4.5  | -    | -    | ns   |
| $t_V$                                                                                 | Data output valid time | -    | 18   | 24   | ns   |

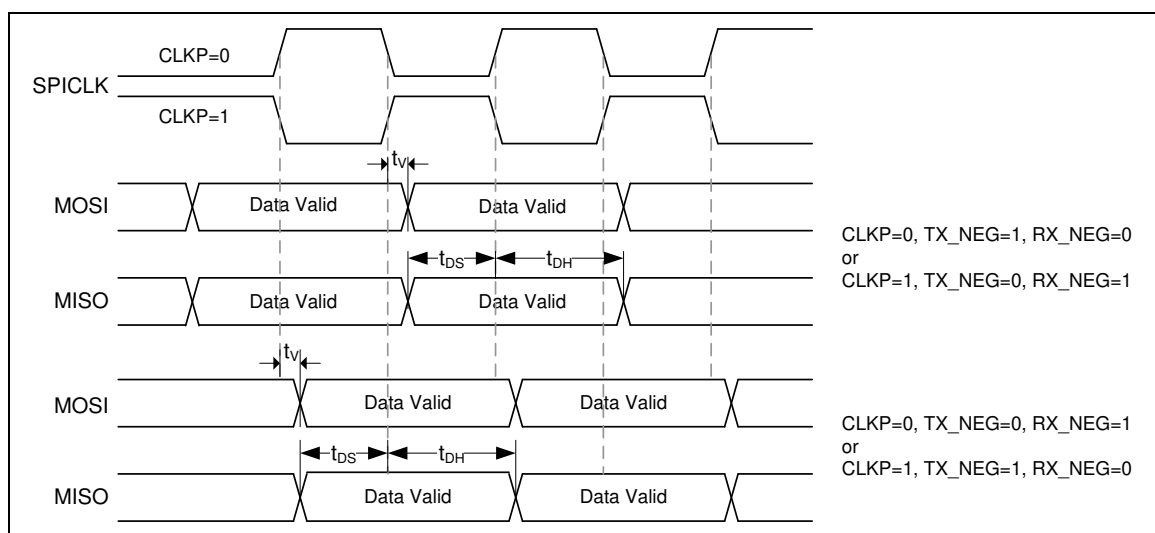


Figure 7-5 SPI Master Mode Timing Diagram

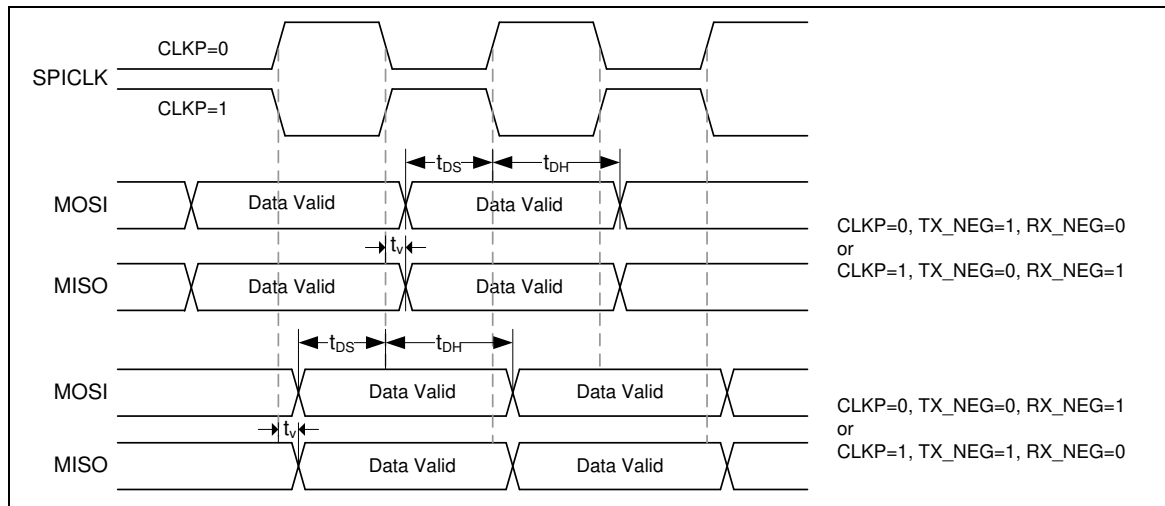


Figure 7-6 SPI Slave Mode Timing Diagram

## 7.8 I2S Dynamic Characteristics

| Symbol           | Parameter                                     | Min | Max | Unit | Test Conditions                                                   |
|------------------|-----------------------------------------------|-----|-----|------|-------------------------------------------------------------------|
| $t_{w(CKH)}$     | I <sup>2</sup> S clock high time              | 42  | -   | ns   | Master $f_{PCLK}$ = MHz, data: 24 bits, audio frequency = 256 kHz |
| $t_{w(CKL)}$     | I <sup>2</sup> S clock low time               | 37  | -   |      |                                                                   |
| $t_{v(WS)}$      | WS valid time                                 | 7   | -   |      |                                                                   |
| $t_{h(WS)}$      | WS hold time                                  | 1   | -   |      |                                                                   |
| $t_{su(WS)}$     | WS setup time                                 | 34  | -   |      |                                                                   |
| $t_{h(WS)}$      | WS hold time                                  | 0   | -   |      |                                                                   |
| $DuCy_{(SCK)}$   | I <sup>2</sup> S slave input clock duty cycle | 25  | 75  | %    | Slave mode                                                        |
| $t_{su(SD\_MR)}$ | Data input setup time                         | 0   | -   | ns   | Master receiver                                                   |
| $t_{su(SD\_SR)}$ |                                               | 0   | -   |      | Slave receiver                                                    |
| $t_{h(SD\_MR)}$  | Data input hold time                          | 0   | -   |      | Master receiver                                                   |
| $t_{h(SD\_SR)}$  |                                               | 0   | -   |      | Slave receiver                                                    |
| $t_{v(SD\_ST)}$  | Data output valid time                        | -   | 32  |      | Slave transmitter (after enable edge)                             |
| $t_{h(SD\_ST)}$  | Data output hold time                         | 16  | -   |      | Slave transmitter (after enable edge)                             |
| $t_{v(SD\_MT)}$  | Data output valid time                        | -   | 5   |      | Master transmitter (after enable edge)                            |
| $t_{h(SD\_MT)}$  | Data output hold time                         | 0   | -   |      | Master transmitter (after enable edge)                            |

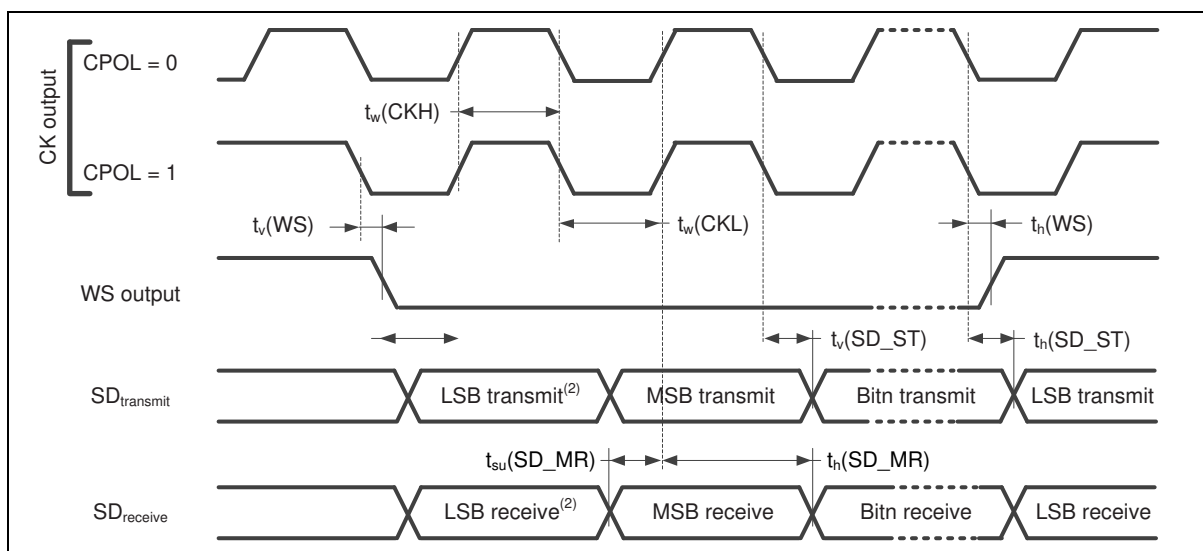


Figure 7-7 I2S Master Mode Timing Diagram


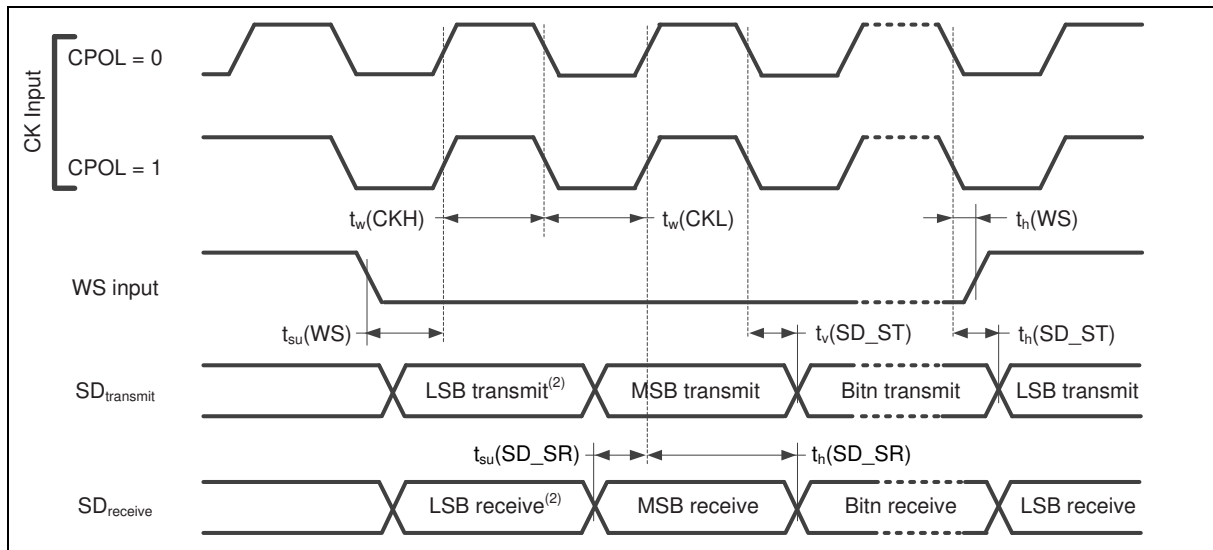



Figure 7-8 I2S Slave Mode Timing Diagram

## 8 APPLICATION CIRCUIT

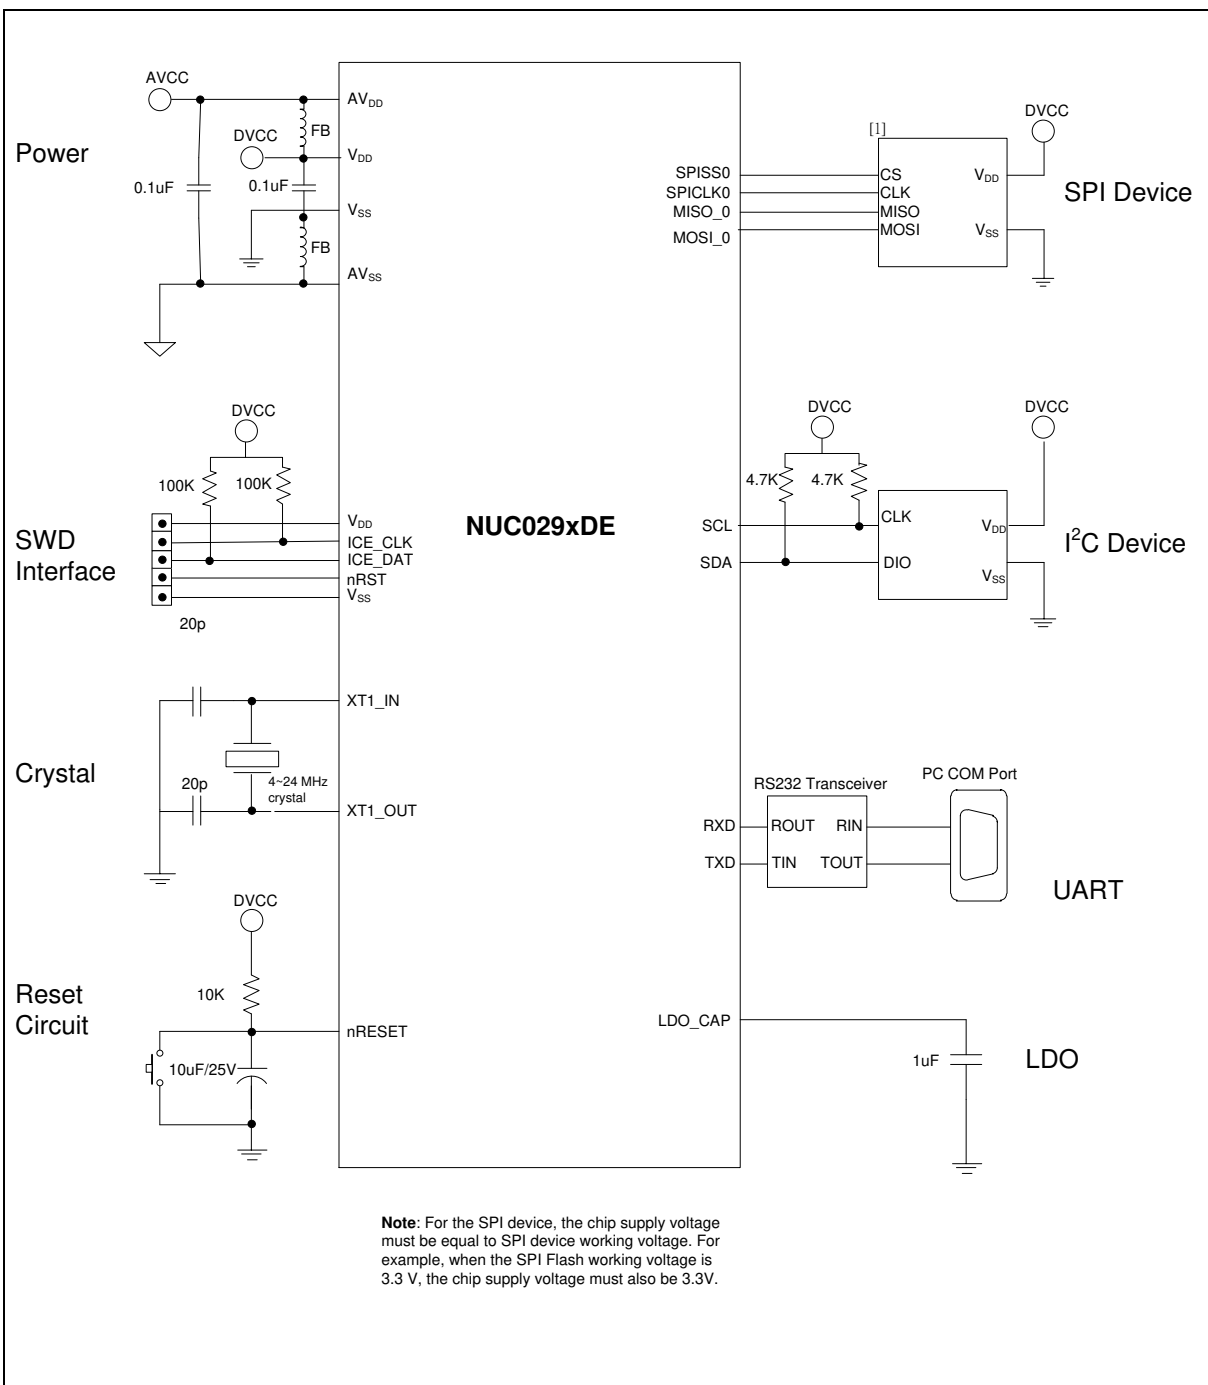

### 9.1 64-pin LQFP (7x7x1.4 mm footprint 2.0 mm)

9.2 48-pin LQFP (7x7x1.4 mm footprint 2.0 mm)

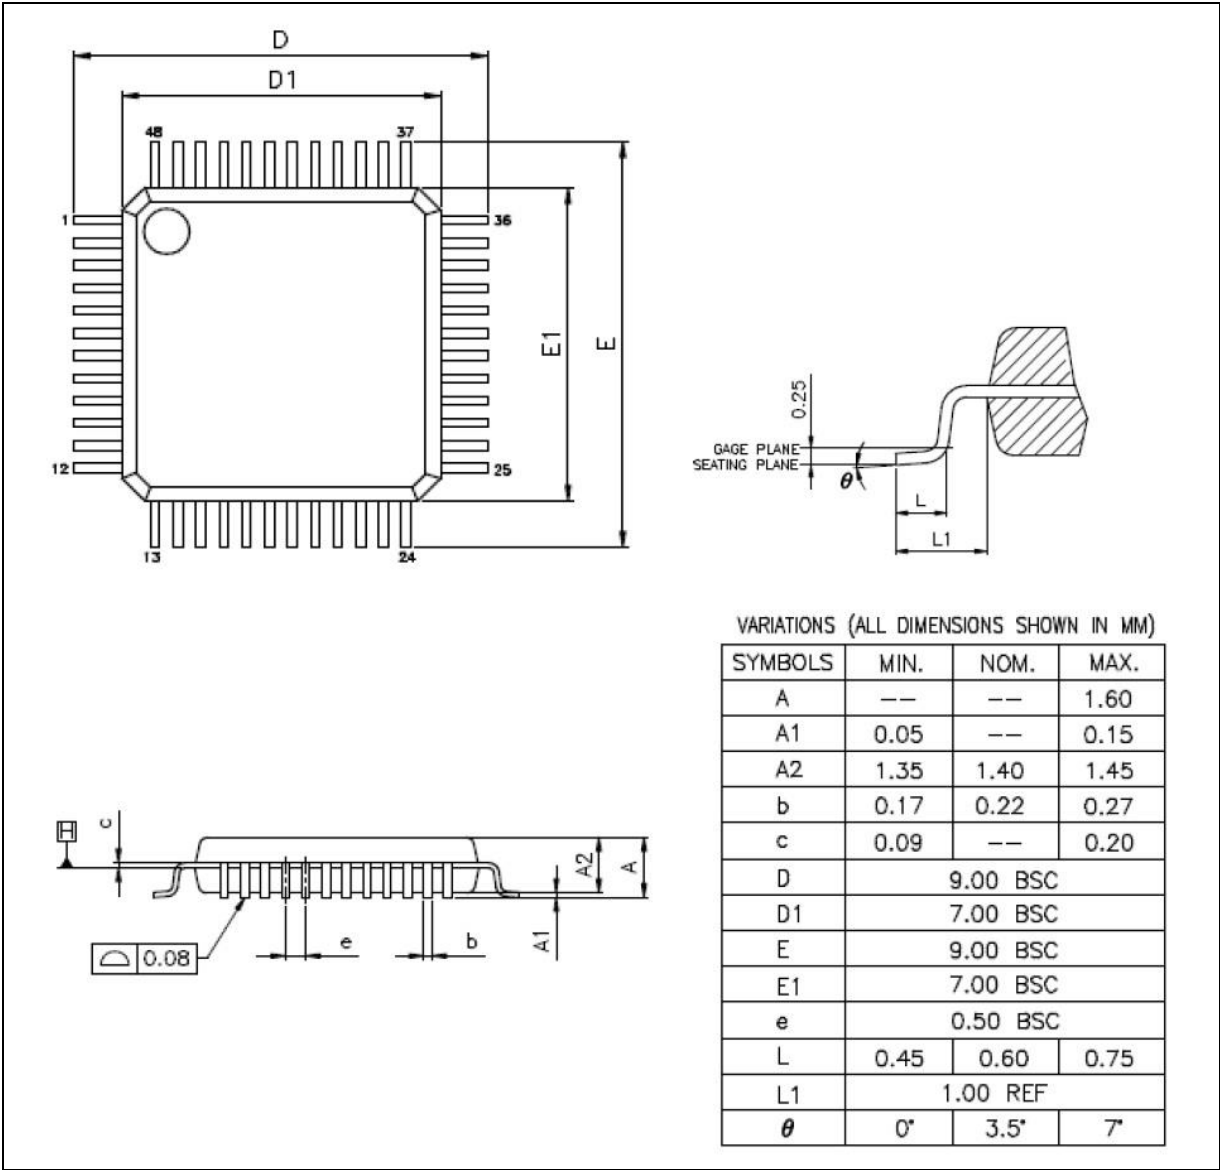

## 10 REVISION HISTORY

| Date       | Revision | Description                                                                                                                                                                                                                         |
|------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2018.06.19 | 1.00     | 1. Initial version.                                                                                                                                                                                                                 |
| 2018.12.18 | 1.01     | 1. Added the part number NUC029KGE in section 4.1 and section 4.2<br>2. Modified chapter 8 - added the pull resistor on SWD interface                                                                                               |
| 2019.07.01 | 1.02     | 1. Modified the wrong symbol in section 7.4.3<br>2. Modified the format on title page<br>3. Replaced "NUC029SDE/ NUC029LDE" with "NUC029xDE"<br>4. Fixed the typo in Figure 4-1. Z should be QFN33(5x5) and T should be QFN33(4x4). |

### Important Notice

**Nuvoton Products are neither intended nor warranted for usage in systems or equipment, any malfunction or failure of which may cause loss of human life, bodily injury or severe property damage. Such applications are deemed, "Insecure Usage".**

**Insecure usage includes, but is not limited to: equipment for surgical implementation, atomic energy control instruments, airplane or spaceship instruments, the control or operation of dynamic, brake or safety systems designed for vehicular use, traffic signal instruments, all types of safety devices, and other applications intended to support or sustain life.**

**All Insecure Usage shall be made at customer's risk, and in the event that third parties lay claims to Nuvoton as a result of customer's Insecure Usage, customer shall indemnify the damages and liabilities thus incurred by Nuvoton.**

---

*Please note that all data and specifications are subject to change without notice.  
All the trademarks of products and companies mentioned in this datasheet belong to their respective owners.*