

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: BYM359X-1500,127
Manufacturer: NXP USA Inc.
Package: Tube
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/nxp-usa-inc/bym359x-1500-127.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.


Dual diode fast, high-voltage

BYM359X

FEATURES

- Low forward volt drop
- Fast switching
- Soft recovery characteristic
- High thermal cycling performance
- Isolated mounting tab

SYMBOL

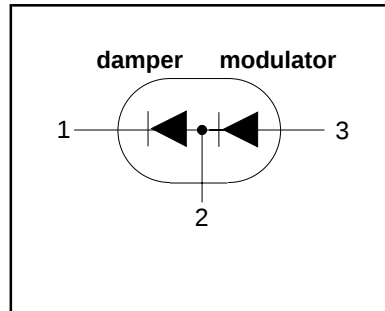

QUICK REFERENCE DATA

DAMPER	MODULATOR
$V_R = 1500 \text{ V}$	$V_R = 800 \text{ V}$
$V_F \leq 1.3 \text{ V}$	$V_F \leq 1.45 \text{ V}$
$I_{F(RMS)} = 15.7 \text{ A}$	$I_{F(RMS)} = 11 \text{ A}$
$I_{FSM} \leq 60 \text{ A}$	$I_{FSM} \leq 60 \text{ A}$
$t_{rr} \leq 300 \text{ ns}$	$t_{rr} \leq 145 \text{ ns}$

GENERAL DESCRIPTION


Combined damper and modulator diodes in an isolated plastic envelope for horizontal deflection in colour TV and PC monitors. The BYM359X contains diodes with performance characteristics designed specifically for applications from 16kHz to 56kHz.

The BYM359X series is supplied in the conventional leaded SOT186A package.

PINNING

PIN	DESCRIPTION
1	damper cathode
2	common anode/cathode
3	modulator anode.

SOT186A

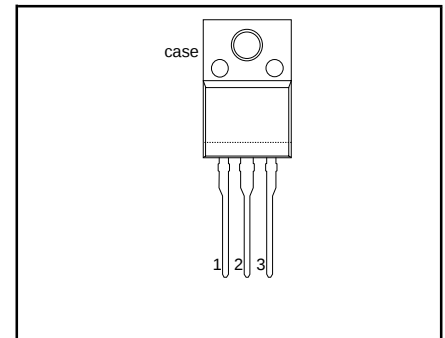

LIMITING VALUES

$T_j = 25 \text{ }^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	DAMPER		MODULATOR		UNIT
			MIN	MAX	MIN	MAX	
V_{RSM}	Peak non-repetitive reverse voltage.		-	1500	-	800	V
V_{RRM}	Peak repetitive reverse voltage		-	1500	-	600	V
V_{RWM}	Crest working reverse voltage		-	1300	-	600	V
$I_{F(AV)}$	Average forward current	sinusoidal; $a=1.57$	-	10	-	8	A
$I_{F(RMS)}$	RMS forward current		-	15.7	-	11.0	A
I_{FRM}	Peak repetitive forward current	$t=25 \mu\text{s}$ $\delta=0.5$ $T_{hs} \leq 83 \text{ }^\circ\text{C}$	-	20	-	16.0	A
I_{FSM}	Peak non-repetitive forward current	$t=10\text{ms}$ $t=8.3\text{ms}$ sinusoidal; with reapplied $V_{RWM(MAX)}$	-	60	-	60	A
			-	66	-	66	A
T_{stg}	Storage temperature		-40	150	-40	150	$^\circ\text{C}$
T_j	Operating junction temperature		-	150	-	150	$^\circ\text{C}$

Dual diode fast, high-voltage

BYM359X

ISOLATION LIMITING VALUE & CHARACTERISTIC

 $T_{hs} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{isol}	R.M.S. isolation voltage from all three terminals to external heatsink	$f = 50\text{-}60\text{ Hz}$; sinusoidal waveform; $R.H. \leq 65\%$; clean and dustfree	-	-	2500	V
C_{isol}	Capacitance from T2 to external heatsink	$f = 1\text{ MHz}$	-	10	-	pF

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	DAMPER		MODULATOR		UNIT
			TYP.	MAX.	TYP.	MAX.	
$R_{th\ j-hs}$	Thermal resistance junction to heatsink	with heatsink compound	-	4.8	-	4.8	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient	in free air.	55	-	-	55	K/W

STATIC CHARACTERISTICS

 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	DAMPER		MODULATOR		UNIT
			TYP.	MAX.	TYP.	MAX.	
V_F	Forward voltage	$I_F = 6.5\text{ A}$	1.1	1.45	1.15	1.55	V
I_R	Reverse current	$I_F = 6.5\text{ A}; T_j = 125\text{ }^{\circ}\text{C}$	1.05	1.3	1.1	1.45	V
		$V_R = V_{RWM}$	10	250	10	100	μA
		$V_R = V_{RWM}$	50	500	100	600	μA
		$T_j = 100\text{ }^{\circ}\text{C}$					







DYNAMIC CHARACTERISTICS

 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	DAMPER		MODULATOR		UNIT
			TYP.	MAX.	TYP.	MAX.	
t_{rr}	Reverse recovery time	$I_F = 1\text{ A}; V_R \geq 30\text{ V};$ $-di_F/dt = 50\text{ A}/\mu\text{s}$	200	300	125	145	ns
Q_s	Reverse recovery charge	$2\text{ A}, 30\text{ V}, 20\text{ A}/\mu\text{s}$	1.2	2.0	0.5	0.7	μC
V_{fr}	Peak forward recovery voltage	$I_F = 6.5\text{ A};$ $di_F/dt = 50\text{ A}/\mu\text{s}$	27	-	18.0	-	V

Dual diode
fast, high-voltage

BYM359X

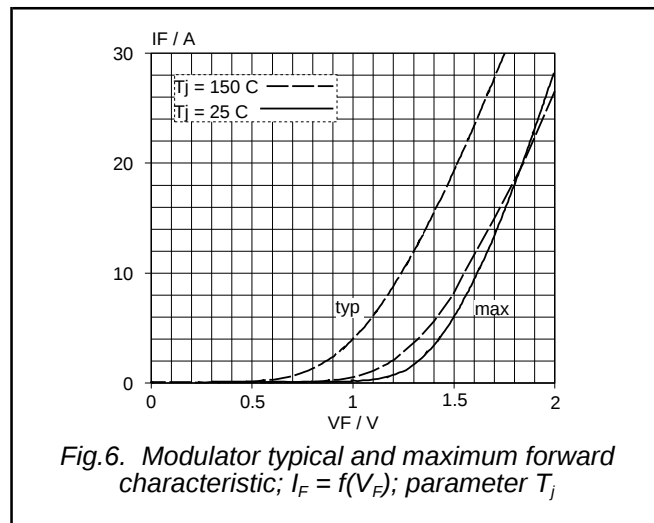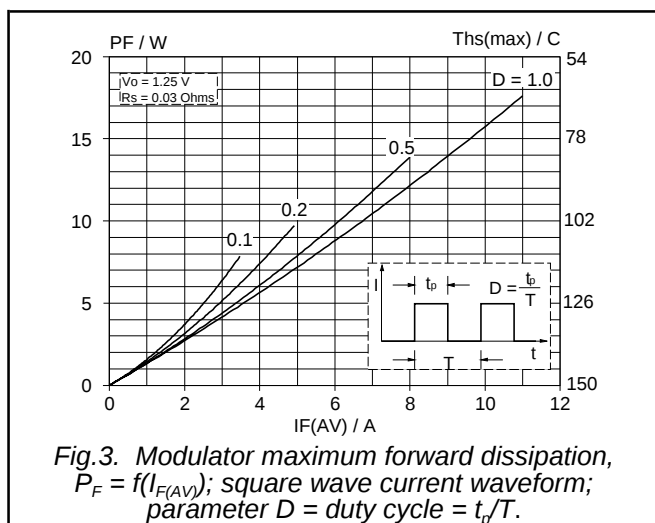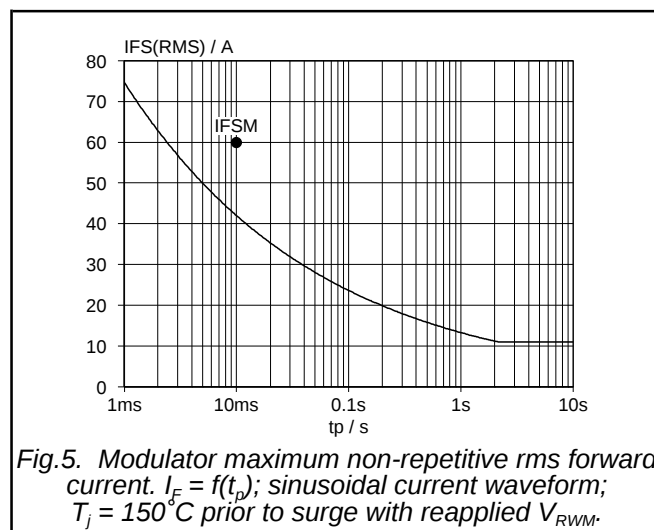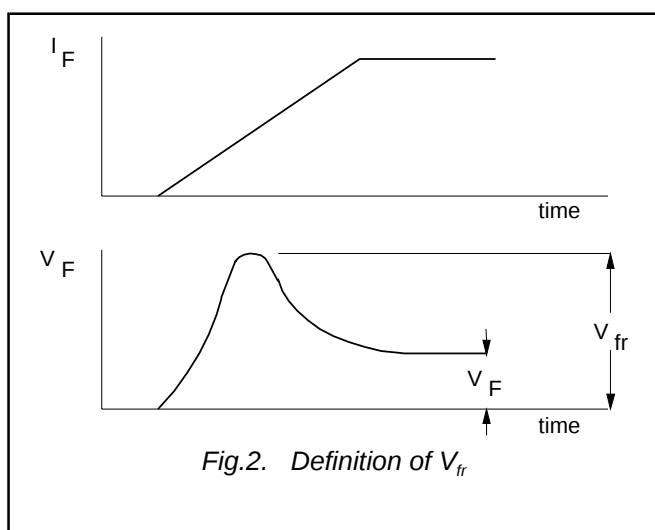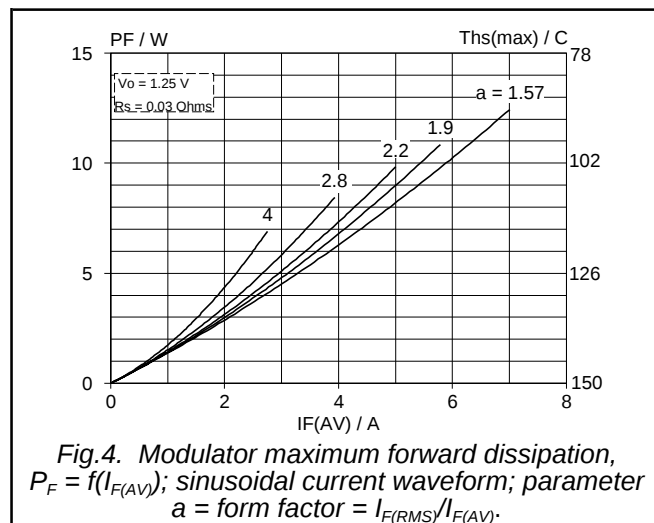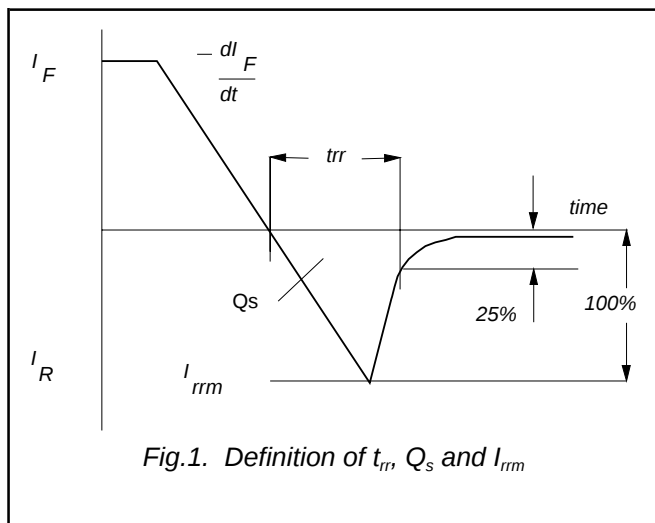

Dual diode fast, high-voltage

BYM359X

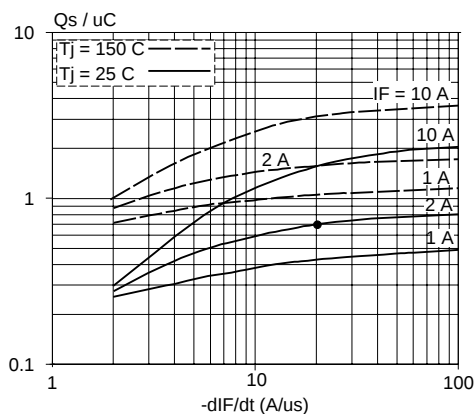


Fig.7. Modulator maximum Q_s at $T_j = 25^\circ\text{C}$ and 150°C

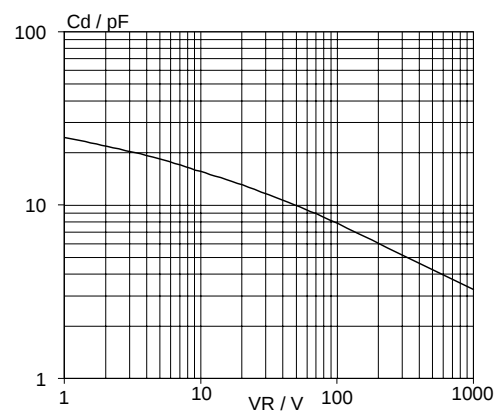


Fig.9. Modulator typical junction capacitance C_d at $f = 1\text{ MHz}$, $T_j = 25^\circ\text{C}$

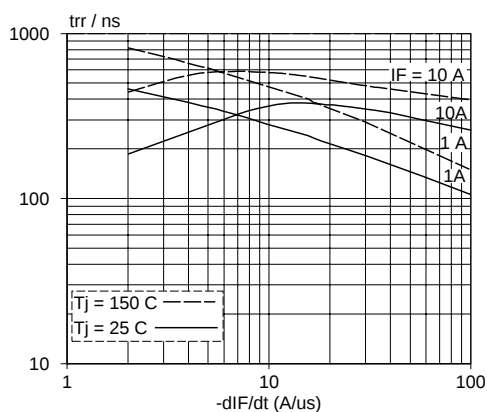


Fig.8. Modulator maximum t_{rr} measured to 25% of I_{rm} ; $T_j = 25^\circ\text{C}$ and 150°C

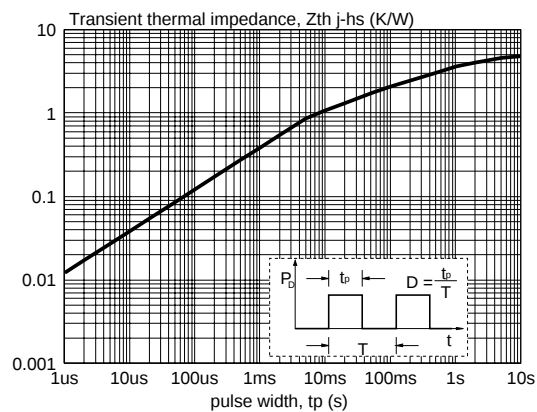


Fig.10. Modulator transient thermal impedance $Z_{th} = f(t_p)$

Dual diode
fast, high-voltage

BYM359X

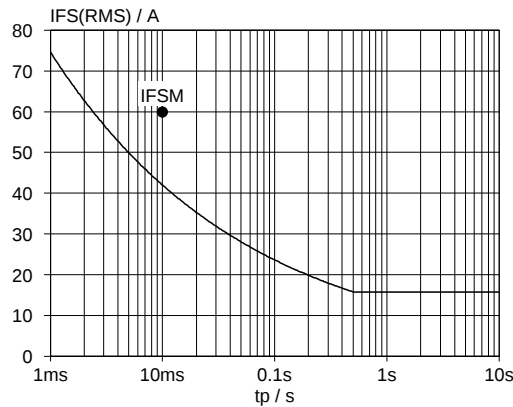


Fig.11. Damper maximum non-repetitive rms forward current. $I_F = f(t_p)$; sinusoidal current waveform; $T_j = 150^\circ\text{C}$ prior to surge with reapplied V_{RWM} .

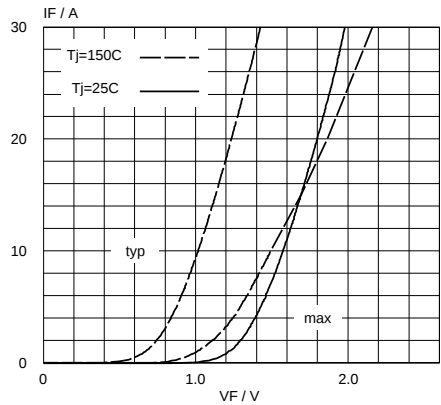


Fig.13. Damper forward characteristic $I_F = f(V_F)$; parameter T_j

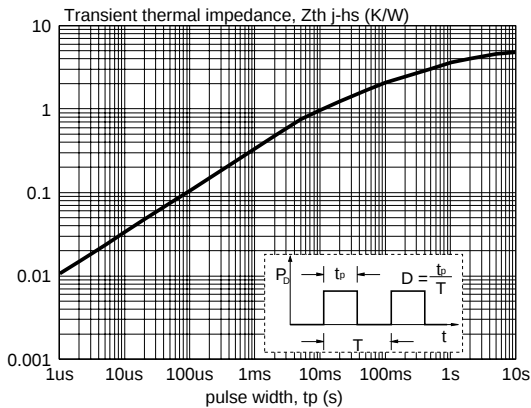


Fig.12. Damper transient thermal impedance $Z_{th} = f(t_p)$

Dual diode fast, high-voltage

BYM359X

MECHANICAL DATA

Dimensions in mm

Net Mass: 2 g

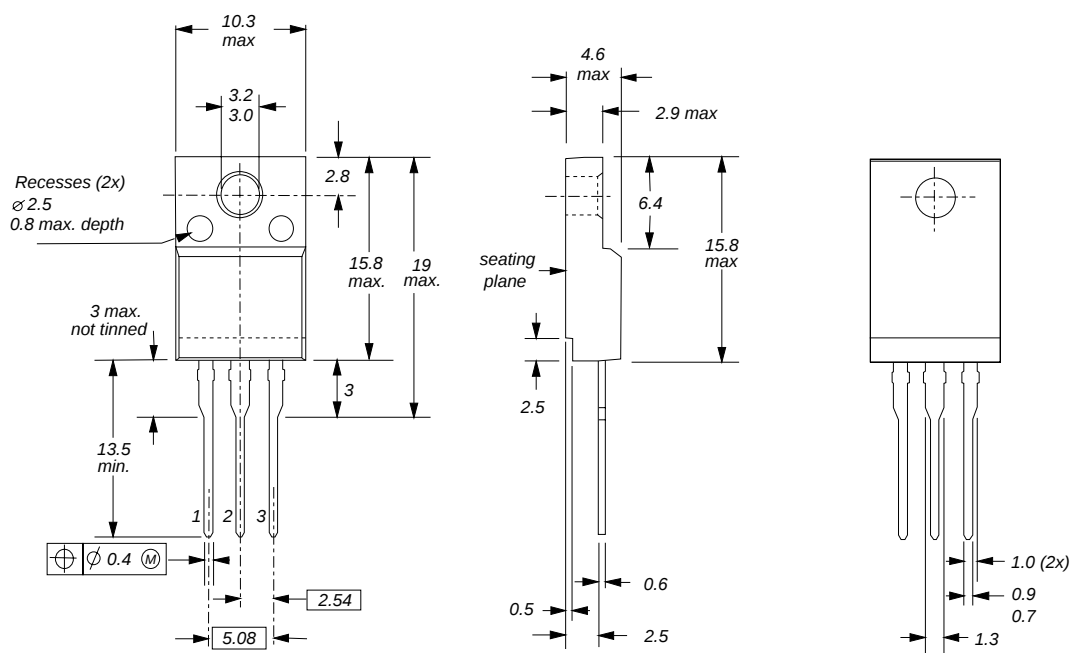


Fig.14. SOT186A; The seating plane is electrically isolated from all terminals.

Notes

1. Refer to mounting instructions for F-pack envelopes.
2. Epoxy meets UL94 V0 at 1/8".

Dual diode
fast, high-voltage

BYM359X

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1999	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.