

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** FS32K144HAT0MLHR  
**Manufacturer:** NXP USA Inc.  
**Package:** 64-LQFP  
**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/nxp-usa-inc/fs32k144hat0mlhr.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---

# S32K1XX

## S32K1xx Data Sheet

Rev. 15 — 5 March 2026

Product data sheet

- This Data Sheet supports S32K116, S32K118, S32K142, S32K142W, S32K144, S32K144W, S32K146, and S32K148
- The following two attachments are available with this Data Sheet:
  - S32K1xx\_Orderable\_Part\_Number\_List.xlsx
  - S32K1xx\_Power\_Modes\_Configuration.xlsx



# 1 Features

## 1.1 Key Features

- Operating characteristics
  - Voltage range: 2.7 V to 5.5 V
  - Ambient temperature range: -40 °C to 105 °C for HSRUN mode, -40 °C to 150 °C for RUN mode
- Arm™ Cortex-M4F/M0+ core, 32-bit CPU
  - Supports up to 112 MHz frequency (HSRUN mode) with 1.25 Dhrystone MIPS per MHz
  - Arm Core based on the Armv7 Architecture and Thumb®-2 ISA
  - Integrated Digital Signal Processor (DSP)
  - Configurable Nested Vectored Interrupt Controller (NVIC)
  - Single Precision Floating Point Unit (FPU)
- Clock interfaces
  - 4 - 40 MHz fast external oscillator (SOSC) with up to 50 MHz DC external square input clock in external clock mode
  - 48 MHz Fast Internal RC oscillator (FIRC)
  - 8 MHz Slow Internal RC oscillator (SIRC)
  - 128 kHz Low Power Oscillator (LPO)
  - Up to 112 MHz (HSRUN) System Phased Lock Loop (SPLL)
  - Up to 20 MHz TCLK and 25 MHz SWD\_CLK
  - 32 kHz Real Time Counter external clock (RTC\_CLKIN)
- Power management
  - Low-power Arm Cortex-M4F/M0+ core with excellent energy efficiency
  - Power Management Controller (PMC) with multiple power modes: HSRUN, RUN, STOP, VLPR, and VLPS

**Note:** CSEc (Security) or EEPROM writes/erase will trigger error flags in HSRUN mode (112 MHz) because this use case is not allowed to execute simultaneously. The device will need to switch to RUN mode (80 MHz) to execute CSEc (Security) or EEPROM writes/erase.
  - Clock gating and low power operation supported on specific peripherals
- Memory and memory interfaces
  - Up to 2 MB program flash memory with ECC
  - 64 KB FlexNVM for data flash memory with ECC and EEPROM emulation


**Note:** CSEc (Security) or EEPROM writes/erase will trigger error flags in HSRUN mode (112 MHz) because this use case is not allowed to execute simultaneously. The device will need to switch to RUN mode (80 MHz) to execute CSEc (Security) or EEPROM writes/erase.
  - Up to 256 KB SRAM with ECC
  - Up to 4 KB of FlexRAM for use as SRAM or EEPROM emulation
  - Up to 4 KB Code cache to minimize performance impact of memory access latencies
  - QuadSPI with HyperBus™ support
- Mixed-signal analog
  - Up to two 12-bit Analog-to-Digital Converter (ADC) with up to 32 channel analog inputs per module
  - One Analog Comparator (CMP) with internal 8-bit Digital to Analog Converter (DAC)

- Debug functionality
  - Serial Wire JTAG Debug Port (SWJ-DP) combines
  - Debug Watchpoint and Trace (DWT)
  - Instrumentation Trace Macrocell (ITM)
  - Test Port Interface Unit (TPIU)
  - Flash Patch and Breakpoint (FPB) Unit
- Human-machine interface (HMI)
  - Up to 156 GPIO pins with interrupt functionality
  - Non-Maskable Interrupt (NMI)
- Communications interfaces
  - Up to three Low Power Universal Asynchronous Receiver/Transmitter (LPUART/LIN) modules with DMA support and low power availability
  - Up to three Low Power Serial Peripheral Interface (LPSPI) modules with DMA support and low power availability
  - Up to two Low Power Inter-Integrated Circuit (LPI2C) modules with DMA support and low power availability
  - Up to three FlexCAN modules (with optional CAN-FD support)
  - FlexIO module for emulation of communication protocols and peripherals (UART, I2C, SPI, I2S, LIN, PWM, etc)
  - Up to one 10/100Mbps Ethernet with IEEE1588 support and two Synchronous Audio Interface (SAI) modules
- Safety and security
  - Cryptographic Services Engine (CSEc) implements a comprehensive set of cryptographic functions as described in the SHE (Secure Hardware Extension) Functional Specification

**Note:** CSEc (Security) or EEPROM writes/erase will trigger error flags in HSRUN mode (112 MHz) because this use case is not allowed to execute simultaneously. The device will need to switch to RUN mode (80 MHz) to execute CSEc (Security) or EEPROM writes/erase.
  - 128-bit Unique Identification (ID) number
  - Error-Correcting Code (ECC) on flash and SRAM memories
  - System Memory Protection Unit (System MPU)
  - Cyclic Redundancy Check (CRC) module
  - Internal watchdog (WDOG)
  - External Watchdog monitor (EWM) module
- Timing and control
  - Up to eight independent 16-bit FlexTimers (FTM) modules, offering up to 64 standard channels (IC/OC/PWM)
  - One 16-bit Low Power Timer (LPTMR) with flexible wake up control
  - Two Programmable Delay Blocks (PDB) with flexible trigger system
  - One 32-bit Low Power Interrupt Timer (LPIT) with 4 channels
  - 32-bit Real Time Counter (RTC)
- Package
  - 32-pin QFN, 48-pin LQFP, 64-pin LQFP, 100-pin LQFP, 100-pin MAPBGA, 144-pin LQFP, 176-pin LQFP package options
- 16 channel DMA with up to 63 request sources using DMAMUX

## 2 Block diagram

Following figures show superset high level architecture block diagrams of S32K14x, S32K14xW and S32K11x series respectively. Other devices within the family have a subset of the features. See [Feature comparison](#) for chip specific values.

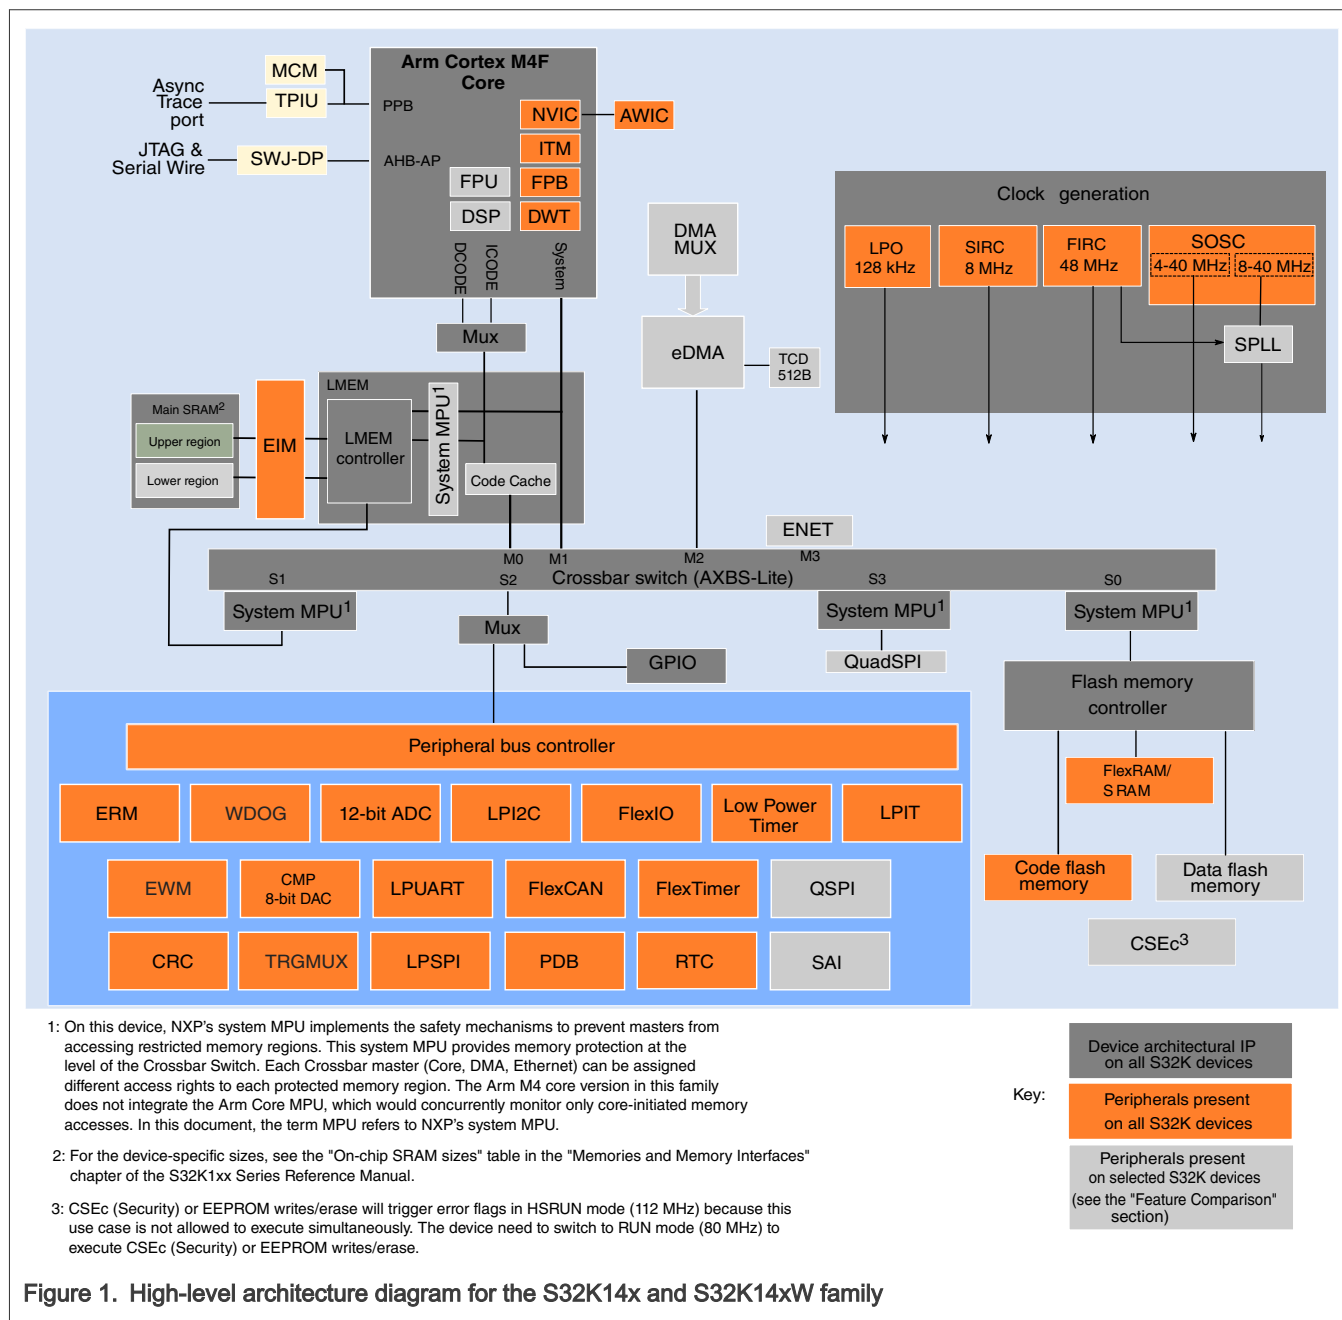



### 3 Features comparison

#### 3.1 Feature comparison

The following figure summarizes the memory, peripherals and packaging options for the S32K1xx and S32K14xW devices. All devices which share a common package are pin-to-pin compatible.

**Note:** Availability of peripherals depends on the pin availability in a particular package. For more information see IO Signal Description Input Multiplexing sheet(s) attached with Reference Manual.

|               |                                                                                                    | S32K11x                                                                    |                            | S32K14x                                                                    |                                                              |                                                               |                                                                             |
|---------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------|
| Parameter     |                                                                                                    | K116                                                                       | K118                       | K142                                                                       | K144                                                         | K146                                                          | K148                                                                        |
| System        | Core                                                                                               | Arm® Cortex™-M0+                                                           |                            | Arm® Cortex™-M4F                                                           |                                                              |                                                               |                                                                             |
|               | Frequency                                                                                          | 48 MHz                                                                     |                            | 80 MHz (RUN mode) or 112 MHz (HSRUN mode) <sup>1</sup>                     |                                                              |                                                               |                                                                             |
|               | IEEE-754 FPU                                                                                       | ○                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | Cryptographic Services Engine (CSEc) <sup>1</sup>                                                  | ●                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | CRC module                                                                                         | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
|               | ISO 26262                                                                                          | capable up to ASIL-B                                                       |                            | capable up to ASIL-B                                                       |                                                              |                                                               |                                                                             |
|               | Peripheral speed                                                                                   | up to 48 MHz                                                               |                            | up to 112 MHz (HSRUN)                                                      |                                                              |                                                               |                                                                             |
|               | Crossbar                                                                                           | ●                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | DMA                                                                                                | ●                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | External Watchdog Monitor (EWM)                                                                    | ○                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | Memory Protection Unit (MPU)                                                                       | ●                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | FIRC CMU                                                                                           | ●                                                                          |                            | ○                                                                          |                                                              |                                                               |                                                                             |
|               | Watchdog                                                                                           | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
|               | Low power modes                                                                                    | ●                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | HSRUN mode <sup>1</sup>                                                                            | ○                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | Number of I/Os                                                                                     | up to 43                                                                   | up to 58                   | up to 89                                                                   | up to 128                                                    | up to 156                                                     |                                                                             |
|               | Single supply voltage                                                                              | 2.7 - 5.5 V                                                                |                            | 2.7 - 5.5 V                                                                |                                                              |                                                               |                                                                             |
|               | Ambient Operation Temperature (T <sub>a</sub> )                                                    | -40°C to +105°C / +125°C                                                   |                            | -40°C to +105°C / +125°C                                                   |                                                              |                                                               |                                                                             |
| Memory        | Flash                                                                                              | 128 KB                                                                     | 256 KB                     | 256 KB                                                                     | 512 KB                                                       | 1 MB                                                          | 2 MB <sup>2</sup>                                                           |
|               | Error Correcting Code (ECC)                                                                        | ●                                                                          |                            | ●                                                                          |                                                              |                                                               |                                                                             |
|               | System RAM (including FlexRAM and MTB)                                                             | 17 KB                                                                      | 25 KB                      | 32 KB                                                                      | 64 KB                                                        | 128 KB                                                        | 256 KB                                                                      |
|               | FlexRAM (also available as system RAM)                                                             | 2 KB                                                                       |                            | 4 KB                                                                       |                                                              |                                                               |                                                                             |
|               | Cache                                                                                              | ○                                                                          |                            | 4 KB                                                                       |                                                              |                                                               |                                                                             |
|               | EEPROM emulated by FlexRAM <sup>1</sup>                                                            | 2 KB (up to 32 KB D-Flash)                                                 |                            | 4 KB (up to 64 KB D-Flash)                                                 |                                                              |                                                               | See footnote 3                                                              |
|               | External memory interface                                                                          | ○                                                                          |                            | ○                                                                          |                                                              |                                                               | QuadSPI incl. HyperBus™                                                     |
| Timer         | Low Power Interrupt Timer (LPIT)                                                                   | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
|               | FlexTimer (16-bit counter) 8 channels                                                              | 2x (16)                                                                    |                            | 4x (32)                                                                    |                                                              | 6x (48)                                                       | 8x (64)                                                                     |
|               | Low Power Timer (LPTMR)                                                                            | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
|               | Real Time Counter (RTC)                                                                            | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
|               | Programmable Delay Block (PDB)                                                                     | 1x                                                                         |                            | 2x                                                                         |                                                              |                                                               |                                                                             |
| Analog        | Trigger mux (TRGMUX)                                                                               | 1x (43)                                                                    | 1x (45)                    | 1x (64)                                                                    |                                                              | 1x (73)                                                       | 1x (81)                                                                     |
|               | 12-bit SAR ADC (1 Msps each)                                                                       | 1x (13)                                                                    |                            | 2x (16)                                                                    |                                                              | 2x (24)                                                       | 2x (32)                                                                     |
|               | Comparator with 8-bit DAC                                                                          | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
| Communication | 10/100 Mbps IEEE-1588 Ethernet MAC                                                                 | ○                                                                          |                            | ○                                                                          |                                                              |                                                               | 1x                                                                          |
|               | Serial Audio Interface (AC97, TDM, I2S)                                                            | ○                                                                          |                            | ○                                                                          |                                                              |                                                               | 2x                                                                          |
|               | Low Power UART/LIN (LPUART)<br>(Supports LIN protocol versions 1.3, 2.0, 2.1, 2.2A, and SAE J2602) | 2x                                                                         |                            | 2x                                                                         | 3x                                                           |                                                               |                                                                             |
|               | Low Power SPI (LPSPi)                                                                              | 1x                                                                         | 2x                         | 2x                                                                         | 3x                                                           |                                                               |                                                                             |
|               | Low Power I2C (LPI2C)                                                                              | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               | 2x                                                                          |
|               | FlexCAN<br>(CAN-FD ISO/CD 11898-1)                                                                 | 1x<br>(1x with FD)                                                         |                            | 2x<br>(1x with FD)                                                         | 3x<br>(1x with FD)                                           | 3x<br>(2x with FD)                                            | 3x<br>(3x with FD)                                                          |
| IDEs          | FlexIO (8 pins configurable as UART, SPI, I2C, I2S)                                                | 1x                                                                         |                            | 1x                                                                         |                                                              |                                                               |                                                                             |
|               | Debug & trace                                                                                      | SWD, MTB (1 KB), JTAG <sup>4</sup>                                         |                            | SWD, JTAG (ITM, SWV, SWO)                                                  |                                                              |                                                               | SWD, JTAG (ITM, SWV, SWO), ETM                                              |
| Other         | Ecosystem<br>(IDE, compiler, debugger)                                                             | NXP S32 Design Studio (GCC) + SDK,<br>IAR, GHS, Arm®, Lauterbach, iSystems |                            | NXP S32 Design Studio (GCC) + SDK,<br>IAR, GHS, Arm®, Lauterbach, iSystems |                                                              |                                                               |                                                                             |
|               | Packages <sup>5</sup>                                                                              | 32-pin QFN<br>48-pin LQFP                                                  | 48-pin LQFP<br>64-pin LQFP | 48-pin LQFP<br>64-pin LQFP<br>100-pin LQFP                                 | 48-pin LQFP<br>64-pin LQFP<br>100-pin LQFP<br>100-pin MAPBGA | 64-pin LQFP<br>100-pin MAPBGA<br>100-pin LQFP<br>144-pin LQFP | 100-pin MAPBGA<br>100-pin LQFP <sup>6</sup><br>144-pin LQFP<br>176-pin LQFP |

## LEGEND:

- Not implemented
- Available on the device

1 No write or erase access to Flash module, including Security (CSEc) and EEPROM commands, are allowed when device is running at HSRUN mode (112MHz) or VLPR mode.

2 Available when EEPROM, CSEc and Data Flash are not used. Else only up to 1,984 KB is available for Program Flash.

3 4 KB (up to 512 KB D-Flash as a part of 2 MB Flash). Up to 64 KB of flash is used as EEPROM backup and the remaining 448 KB of the last 512 KB block can be used as Data flash or Program flash. See chapter FTFC for details.

4 Only for Boundary Scan Register

5 See Dimensions section for package drawings

6 QuadSPI is not supported for S32K148 in 100-pin LQFP

Figure 3. S32K1xx product series comparison

|               |                                                                                                    | S32K14xW                                                                                        |                               |
|---------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------|
| Parameter     |                                                                                                    | S32K144W                                                                                        | S32K142W                      |
| System        | Core                                                                                               | Arm® Cortex™-M4F                                                                                |                               |
|               | Frequency                                                                                          | up to 80 MHz                                                                                    |                               |
|               | IEEE-754 FPU                                                                                       | •                                                                                               |                               |
|               | Cryptographic Services Engine (CSEc)                                                               | •                                                                                               |                               |
|               | CRC module                                                                                         | 1x                                                                                              |                               |
|               | ISO 26262                                                                                          | capable up to ASIL-B                                                                            |                               |
|               | Peripheral speed                                                                                   | up to 80 MHz                                                                                    |                               |
|               | Crossbar                                                                                           | •                                                                                               |                               |
|               | DMA                                                                                                | •                                                                                               |                               |
|               | External Watchdog Monitor (EWM)                                                                    | •                                                                                               |                               |
|               | Memory Protection Unit (MPU)                                                                       | •                                                                                               |                               |
|               | FIRC CMU                                                                                           | o                                                                                               |                               |
|               | Watchdog                                                                                           | •                                                                                               |                               |
|               | Low power modes                                                                                    | •                                                                                               |                               |
|               | HSRUN mode                                                                                         | o                                                                                               |                               |
|               | Number of I/Os                                                                                     | 43 (48-pin LQFP)                                                                                | 58 (64-pin LQFP)              |
|               | Single supply voltage                                                                              | 3.13 - 5.5 V                                                                                    |                               |
|               | Ambient Operation Temperature (T <sub>A</sub> )                                                    | -40°C to +150°C                                                                                 |                               |
| Memory        | Flash                                                                                              | 512 KB                                                                                          | 256 KB                        |
|               | Error Correcting Code (ECC)                                                                        | •                                                                                               |                               |
|               | System RAM (including FlexRAM)                                                                     | 64 KB                                                                                           | 32 KB                         |
|               | FlexRAM                                                                                            | 4 KB                                                                                            |                               |
|               | Cache                                                                                              | 4 KB                                                                                            |                               |
|               | EEPROM emulated by FlexRAM                                                                         | 4 KB (up to 64 KB D-Flash)                                                                      |                               |
|               | External memory interface                                                                          | o                                                                                               |                               |
| Timer         | Low Power Interrupt Timer (LPIT)                                                                   | 1x                                                                                              |                               |
|               | FlexTimer (16-bit counter) 8 channels                                                              | 48-pin LQFP: 4x (26 channels)                                                                   | 64-pin LQFP: 4x (30 channels) |
|               | Low Power Timer (LPTMR)                                                                            | 1x                                                                                              |                               |
|               | Real Time Counter (RTC)                                                                            | 1x                                                                                              |                               |
|               | Programmable Delay Block (PDB)                                                                     | 2x                                                                                              |                               |
| Analog        | Trigger mux (TRGMUX)                                                                               | 1x (59)                                                                                         |                               |
|               | 12-bit SAR ADC (1 Msps each)                                                                       | 48-pin LQFP: 1x (14 channels), 1x(9 channels)<br>64-pin LQFP: 1x (16 channels), 1x(13 channels) |                               |
|               | Comparator with 8-bit DAC                                                                          | 48-pin LQFP: 1x (6 channels)                                                                    | 64-pin LQFP: 1x (8 channels)  |
| Communication | 10/100 Mbps IEEE-1588 Ethernet MAC                                                                 | o                                                                                               |                               |
|               | Serial Audio Interface (AC97, TDM, I2S)                                                            | o                                                                                               |                               |
|               | Low Power UART/LIN (LPUART)<br>(Supports LIN protocol versions 1.3, 2.0, 2.1, 2.2A, and SAE J2602) | 48-pin LQFP: 2x                                                                                 | 64-pin LQFP: 3x               |
|               | Low Power SPI (LPSPi)                                                                              | 48-pin LQFP: 2x                                                                                 | 64-pin LQFP: 3x               |
|               | Low Power I2C (LPI2C)                                                                              | 1x                                                                                              |                               |
|               | FlexCAN<br>(CAN-FD ISO/CD 11898-1)                                                                 | 48-pin LQFP: 2x(2x FD)                                                                          | 64-pin LQFP: 2x(2x FD)        |
| IDEs          | FlexIO (8 pins configurable as UART, SPI, I2C, I2S)                                                | 1x                                                                                              |                               |
|               | Debug & trace                                                                                      | SWD, JTAG (ITM, SWV, SWO)                                                                       |                               |
| Other         | Ecosystem<br>(IDE, compiler, debugger)                                                             | NXP S32 Design Studio (GCC) + SDK,<br>IAR, GHS, Arm®, Lauterbach, iSystems                      |                               |
|               | Packages <sup>1</sup>                                                                              | 48-pin LQFP                                                                                     | 64-pin LQFP                   |

## LEGEND:

- o Not implemented
- Available on the device

<sup>1</sup> See Dimensions section of Datasheet for package drawings

Figure 4. S32K14xW product series comparison

## 4 Ordering information

### 4.1 Selecting orderable part number

Not all part number combinations are available. See the attachment *S32K1xx\_Orderable\_Part\_Number\_List.xlsx* attached with the Datasheet for a list of standard orderable part numbers.

4.2 Ordering information



## 5 General

### 5.1 Absolute maximum ratings

**Note:**

- Functional operating conditions appear in the DC electrical characteristics. Absolute maximum ratings are stress ratings only, and functional operation at the maximum values is not guaranteed. See footnotes in the following table for specific conditions.
- Stress beyond the listed maximum values may affect device reliability or cause permanent damage to the device.
- All the limits defined in the datasheet specification must be honored together and any violation to any one or more will not guarantee desired operation.
- Unless otherwise specified, all maximum and minimum values in the datasheet are across process, voltage, and temperature.

Table 1. Absolute maximum ratings for S32K1xx series

| Symbol                              | Parameter                                                                              | Conditions <sup>[1]</sup> | Min       | Max                | Unit |
|-------------------------------------|----------------------------------------------------------------------------------------|---------------------------|-----------|--------------------|------|
| $V_{DD}$ <sup>[2]</sup>             | 2.7 V - 5.5 V input supply voltage                                                     | —                         | -0.3      | 5.8 <sup>[3]</sup> | V    |
| $V_{REFH}$                          | 3.3 V / 5.0 V ADC high reference voltage                                               | —                         | -0.3      | 5.8 <sup>[3]</sup> | V    |
| $I_{INPAD\_DC\_ABS}$ <sup>[4]</sup> | Continuous DC input current (positive / negative) that can be injected into an I/O pin | —                         | -3        | +3                 | mA   |
| $V_{IN\_DC}$                        | Continuous DC Voltage on any I/O pin with respect to $V_{SS}$                          | —                         | -0.8      | 5.8 <sup>[5]</sup> | V    |
| $I_{INJSUM\_DC\_ABS}$               | Sum of absolute value of injected currents on all the pins (Continuous DC limit)       | —                         | —         | 30                 | mA   |
| $T_{ramp}$ <sup>[6]</sup>           | ECU supply ramp rate                                                                   | —                         | 0.5 V/min | 500 V/ms           | —    |
| $T_{ramp\_MCU}$ <sup>[7]</sup>      | MCU supply ramp rate                                                                   | —                         | 0.5 V/min | 100 V/ms           | —    |
| $T_A$ <sup>[8]</sup>                | Ambient temperature                                                                    | —                         | -40       | 125                | °C   |
| $T_{STG}$                           | Storage temperature                                                                    | —                         | -55       | 165                | °C   |
| $V_{IN\_TRANSIENT}$                 | Transient overshoot voltage allowed on I/O pin beyond $V_{IN\_DC}$ limit               | —                         | —         | 6.8 <sup>[9]</sup> | V    |

[1] All voltages are referred to  $V_{SS}$  unless otherwise specified.

[2] As  $V_{DD}$  varies between the minimum value and the absolute maximum value the analog characteristics of the I/O and the ADC will both change. See section [I/O parameters](#) and [ADC electrical specifications](#) respectively for details.

[3] 60 seconds lifetime – No restrictions i.e. the part is not held in reset and can switch.

10 hours lifetime – The part is held in reset by an external circuit i.e. the part cannot switch.

The supply should be kept in operating conditions and once out of operating conditions, the device should be either reset or powered off.

Operation with supply between 5.5 V and 5.8 V not in reset condition is allowed for 60 seconds cumulative over lifetime, the part will operate with reduced functionality.

Operation with supply between 5.5 V and 5.8 V but held in reset condition by external circuit is allowed for 10 hours cumulative over lifetime.

If the given time limits or supply levels are exceeded, the device may get damaged.

[4] When input pad voltage levels are close to  $V_{DD}$  or  $V_{SS}$ , practically no current injection is possible.

[5] While respecting the maximum current injection limit

[6] This is the Electronic Control Unit (ECU) supply ramp rate and not directly the MCU ramp rate. Limit applies to both maximum absolute maximum ramp rate and typical operating conditions.

[7] This is the MCU supply ramp rate and the ramp rate assumes that the S32K1xx HW design guidelines in AN5426 are followed. Limit applies to both maximum absolute maximum ramp rate and typical operating conditions.

[8]  $T_J$  (Junction temperature)=135 °C. Assumes  $T_A$ =125 °C for RUN mode

$T_J$  (Junction temperature)=125 °C. Assumes  $T_A$ =105 °C for HSRUN mode

- Assumes maximum 0JA for 2s2p board. See [Table 55](#) Thermal characteristics

[9] 60 seconds lifetime; device in reset (no outputs enabled/toggling)

Table 2. Absolute maximum ratings for S32K14xW series

| Symbol                              | Parameter                                                                              | Conditions <sup>[1]</sup> | Min       | Max                | Unit |
|-------------------------------------|----------------------------------------------------------------------------------------|---------------------------|-----------|--------------------|------|
| $V_{DD}$ <sup>[2]</sup>             | 2.7 V - 5.5 V input supply voltage                                                     | —                         | -0.3      | 5.8 <sup>[3]</sup> | V    |
| $V_{REFH}$                          | 3.3 V / 5.0 V ADC high reference voltage                                               | —                         | -0.3      | 5.8 <sup>[3]</sup> | V    |
| $I_{INPAD\_DC\_ABS}$ <sup>[4]</sup> | Continuous DC input current (positive / negative) that can be injected into an I/O pin | —                         | -3        | +3                 | mA   |
| $V_{IN\_DC}$                        | Continuous DC Voltage on any I/O pin with respect to $V_{SS}$                          | —                         | -0.8      | 5.8 <sup>[5]</sup> | V    |
| $I_{INJSUM\_DC\_ABS}$               | Sum of absolute value of injected currents on all the pins (Continuous DC limit)       | —                         | —         | 30                 | mA   |
| $T_{ramp}$ <sup>[6]</sup>           | ECU supply ramp rate                                                                   | —                         | 0.5 V/min | 500 V/ms           | —    |
| $T_{ramp\_MCU}$ <sup>[7]</sup>      | MCU supply ramp rate                                                                   | —                         | 0.5 V/min | 100 V/ms           | —    |
| $T_A$ <sup>[8]</sup>                | Ambient temperature                                                                    | —                         | -40       | 150                | °C   |
| $T_{STG}$                           | Storage temperature                                                                    | —                         | -55       | 165                | °C   |
| $V_{IN\_TRANSIENT}$                 | Transient overshoot voltage allowed on I/O pin beyond $V_{IN\_DC}$ limit               | —                         | —         | 6.8 <sup>[9]</sup> | V    |

[1] All voltages are referred to  $V_{SS}$  unless otherwise specified.

[2] As  $V_{DD}$  varies between the minimum value and the absolute maximum value the analog characteristics of the I/O and the ADC will both change. See section [I/O parameters](#) and [ADC electrical specifications](#) respectively for details.

[3] 60 seconds lifetime – No restrictions i.e. the part is not held in reset and can switch.

10 hours lifetime – The part is held in reset by an external circuit i.e. the part cannot switch.

The supply should be kept in operating conditions and once out of operating conditions, the device should be either reset or powered off.

Operation with supply between 5.5 V and 5.8 V not in reset condition is allowed for 60 seconds cumulative over lifetime, the part will operate with reduced functionality.

Operation with supply between 5.5 V and 5.8 V but held in reset condition by external circuit is allowed for 10 hours cumulative over lifetime.

If the given time limits or supply levels are exceeded, the device may get damaged.

[4] When input pad voltage levels are close to  $V_{DD}$  or  $V_{SS}$ , practically no current injection is possible.

[5] While respecting the maximum current injection limit

[6] This is the Electronic Control Unit (ECU) supply ramp rate and not directly the MCU ramp rate. Limit applies to both maximum absolute maximum ramp rate and typical operating conditions.

[7] This is the MCU supply ramp rate and the ramp rate assumes that the S32K1xx HW design guidelines in AN5426 are followed. Limit applies to both maximum absolute maximum ramp rate and typical operating conditions.

[8]  $T_J$  (Junction temperature)=170 °C. Assumes  $T_A$ =150 °C for RUN mode

- $T_J$  is the absolute maximum rating temperature at which the product will not be damaged, guaranteed by intrinsic reliability.

- Assumes maximum 0JA for 2s2p board. See [Thermal characteristics](#)

[9] 60 seconds lifetime; device in reset (no outputs enabled/toggling)

## 5.2 Voltage and current operating requirements

**Note:** Device functionality is guaranteed up to the LVR assert level, however electrical performance of 12-bit ADC, CMP with 8-bit DAC, IO electrical characteristics, and communication modules electrical characteristics would be degraded when voltage drops below 2.7 V

Table 3. Voltage and current operating requirements for S32K1xx series [1]

| Symbol                     | Description                                                                                                                                                                                           | Min.               | Max.            | Unit | Notes |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------|------|-------|
| $V_{DD}^{[2]}$             | Supply voltage                                                                                                                                                                                        | 2.7 <sup>[3]</sup> | 5.5             | V    | [4]   |
| $V_{DD\_OFF}$              | Voltage allowed to be developed on $V_{DD}$ pin when it is not powered from any external power supply source.                                                                                         | 0                  | 0.1             | V    |       |
| $V_{DDA}$                  | Analog supply voltage                                                                                                                                                                                 | 2.7                | 5.5             | V    | [4]   |
| $V_{DD} - V_{DDA}$         | $V_{DD}$ -to- $V_{DDA}$ differential voltage                                                                                                                                                          | -0.1               | 0.1             | V    | [4]   |
| $V_{REFH}$                 | ADC reference voltage high                                                                                                                                                                            | 2.7                | $V_{DDA} + 0.1$ | V    | [5]   |
| $V_{REFL}$                 | ADC reference voltage low                                                                                                                                                                             | -0.1               | 0.1             | V    |       |
| $V_{ODPU}$                 | Open drain pullup voltage level                                                                                                                                                                       | $V_{DD}$           | $V_{DD}$        | V    | [6]   |
| $I_{INJPAD\_DC\_OP}^{[7]}$ | Continuous DC input current (positive / negative) that can be injected into an I/O pin                                                                                                                | -3                 | +3              | mA   |       |
| $I_{INJSUM\_DC\_OP}$       | Continuous total DC input current that can be injected across all I/O pins such that there's no degradation in accuracy of analog modules: ADC and ACMP (See section <a href="#">Analog Modules</a> ) | —                  | 30              | mA   |       |

[1] Typical conditions assumes  $V_{DD} = V_{DDA} = V_{REFH} = 5\text{ V}$ , temperature = 25 °C and typical silicon process unless otherwise stated.

[2] As  $V_{DD}$  varies between the minimum value and the absolute maximum value the analog characteristics of the I/O and the ADC will both change. See section [I/O parameters](#) and [ADC electrical specifications](#) respectively for details.

[3] S32K148 will operate from 2.7 V when executing from internal FIRC. When the PLL is engaged S32K148 is guaranteed to operate from 2.97 V. All other S32K family devices operate from 2.7 V in all modes.

[4]  $V_{DD}$  and  $V_{DDA}$  must be shorted to a common source on PCB. The differential voltage between  $V_{DD}$  and  $V_{DDA}$  is for RF-AC only. Appropriate decoupling capacitors to be used to filter noise on the supplies. See application note [AN5032](#) for reference supply design for SAR ADC.

[5]  $V_{REFH}$  should always be equal to or less than  $V_{DDA} + 0.1\text{ V}$  and  $V_{DD} + 0.1\text{ V}$

[6] Open drain outputs must be pulled to  $V_{DD}$ .

[7] When input pad voltage levels are close to  $V_{DD}$  or  $V_{SS}$ , practically no current injection is possible.

Table 4. Voltage and current operating requirements for S32K14xW series [1]

| Symbol                     | Description                                                                                                   | Min.     | Max.            | Unit | Notes |
|----------------------------|---------------------------------------------------------------------------------------------------------------|----------|-----------------|------|-------|
| $V_{DD}^{[2]}$             | Supply voltage                                                                                                | 3.13     | 5.5             | V    | [3]   |
| $V_{DD\_OFF}$              | Voltage allowed to be developed on $V_{DD}$ pin when it is not powered from any external power supply source. | 0        | 0.1             | V    |       |
| $V_{DDA}$                  | Analog supply voltage                                                                                         | 3.13     | 5.5             | V    | [3]   |
| $V_{DD} - V_{DDA}$         | $V_{DD}$ -to- $V_{DDA}$ differential voltage                                                                  | -0.1     | 0.1             | V    | [3]   |
| $V_{REFH}$                 | ADC reference voltage high                                                                                    | 3.13     | $V_{DDA} + 0.1$ | V    | [4]   |
| $V_{REFL}$                 | ADC reference voltage low                                                                                     | -0.1     | 0.1             | V    |       |
| $V_{ODPU}$                 | Open drain pullup voltage level                                                                               | $V_{DD}$ | $V_{DD}$        | V    | [5]   |
| $I_{INJPAD\_DC\_OP}^{[6]}$ | Continuous DC input current (positive / negative) that can be injected into an I/O pin                        | -3       | +3              | mA   |       |

Table continues on the next page...

Table 4. Voltage and current operating requirements for S32K14xW series [1]...continued

| Symbol               | Description                                                                                                                                                                                           | Min. | Max. | Unit | Notes |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| $I_{INJSUM\_DC\_OP}$ | Continuous total DC input current that can be injected across all I/O pins such that there's no degradation in accuracy of analog modules: ADC and ACMP (See section <a href="#">Analog Modules</a> ) | —    | 30   | mA   |       |

[1] Typical conditions assumes  $V_{DD} = V_{DDA} = V_{REFH} = 5\text{ V}$ , temperature = 25 °C and typical silicon process unless otherwise stated.

[2] As  $V_{DD}$  varies between the minimum value and the absolute maximum value the analog characteristics of the I/O and the ADC will both change. See section [I/O parameters](#) and [ADC electrical specifications](#) respectively for details.

[3]  $V_{DD}$  and  $V_{DDA}$  must be shorted to a common source on PCB. The differential voltage between  $V_{DD}$  and  $V_{DDA}$  is for RF-AC only. Appropriate decoupling capacitors to be used to filter noise on the supplies. See application note [AN5032](#) for reference supply design for SAR ADC.

[4]  $V_{REFH}$  should always be equal to or less than  $V_{DDA} + 0.1\text{ V}$  and  $V_{DD} + 0.1\text{ V}$

[5] Open drain outputs must be pulled to  $V_{DD}$ .

[6] When input pad voltage levels are close to  $V_{DD}$  or  $V_{SS}$ , practically no current injection is possible.

### 5.3 Thermal operating characteristics

Table 5. Thermal operating characteristics for S32K1xx series

| Symbol             | Parameter                       | Value |      |                    | Unit |
|--------------------|---------------------------------|-------|------|--------------------|------|
|                    |                                 | Min.  | Typ. | Max.               |      |
| $T_A$ C-Grade Part | Ambient temperature under bias  | −40   | —    | 85 <sup>[1]</sup>  | °C   |
| $T_J$ C-Grade Part | Junction temperature under bias | −40   | —    | 105 <sup>[1]</sup> | °C   |
| $T_A$ V-Grade Part | Ambient temperature under bias  | −40   | —    | 105 <sup>[1]</sup> | °C   |
| $T_J$ V-Grade Part | Junction temperature under bias | −40   | —    | 125 <sup>[1]</sup> | °C   |
| $T_A$ M-Grade Part | Ambient temperature under bias  | −40   | —    | 125 <sup>[2]</sup> | °C   |
| $T_J$ M-Grade Part | Junction temperature under bias | −40   | —    | 135 <sup>[2]</sup> | °C   |

[1] Values mentioned are measured at  $\leq 112\text{ MHz}$  in HSRUN mode.

[2] Values mentioned are measured at  $\leq 80\text{ MHz}$  in RUN mode.

Table 6. Thermal operating characteristics for S32K14xW series

| Symbol             | Parameter                       | Value |      |                    | Unit |
|--------------------|---------------------------------|-------|------|--------------------|------|
|                    |                                 | Min.  | Typ. | Max.               |      |
| $T_A$ C-Grade Part | Ambient temperature under bias  | −40   | —    | 85                 | °C   |
| $T_J$ C-Grade Part | Junction temperature under bias | −40   | —    | 105                | °C   |
| $T_A$ V-Grade Part | Ambient temperature under bias  | −40   | —    | 105                | °C   |
| $T_J$ V-Grade Part | Junction temperature under bias | −40   | —    | 125                | °C   |
| $T_A$ M-Grade Part | Ambient temperature under bias  | −40   | —    | 125 <sup>[1]</sup> | °C   |
| $T_J$ M-Grade Part | Junction temperature under bias | −40   | —    | 135 <sup>[1]</sup> | °C   |
| $T_A$ W-Grade Part | Ambient temperature under bias  | −40   | —    | 150 <sup>[1]</sup> | °C   |
| $T_J$ W-Grade Part | Junction temperature under bias | −40   | —    | 170 <sup>[1]</sup> | °C   |

[1] Values mentioned are measured at  $\leq 80\text{ MHz}$  in RUN mode.

# 5.4 Power and ground pins



Table 7. Supplies decoupling capacitors [1][2]

| Symbol                    | Description                               | Min. [3] | Typ. | Max. | Unit |
|---------------------------|-------------------------------------------|----------|------|------|------|
| $C_{REF}^{[4], [5]}$      | ADC reference high decoupling capacitance | 70       | 100  | —    | nF   |
| $C_{DEC}^{[5], [6], [7]}$ | Recommended decoupling capacitance        | 70       | 100  | —    | nF   |

- [1]  $V_{DD}$  and  $V_{DDA}$  must be shorted to a common source on PCB. The differential voltage between  $V_{DD}$  and  $V_{DDA}$  is for RF-AC only. Appropriate decoupling capacitors to be used to filter noise on the supplies. See application note AN5032 for reference supply design for SAR ADC. All  $V_{SS}$  pins should be connected to common ground at the PCB level.
- [2] All decoupling capacitors must be low ESR ceramic capacitors (for example X7R type).
- [3] Minimum recommendation is after considering component aging and tolerance.
- [4] For improved performance, it is recommended to use 10  $\mu$ F, 0.1  $\mu$ F and 1 nF capacitors in parallel.
- [5] All decoupling capacitors should be placed as close as possible to the corresponding supply and ground pins.
- [6] Contact your local Field Applications Engineer for details on best analog routing practices.
- [7] The filtering used for decoupling the device supplies must comply with the following best practices rules:
- The protection/decoupling capacitors must be on the path of the trace connected to that component.
  - No trace exceeding 1 mm from the protection to the trace or to the ground.
  - The protection/decoupling capacitors must be as close as possible to the input pin of the device (maximum 2 mm).
  - The ground of the protection is connected as short as possible to the ground plane under the integrated circuit.



### 5.5 LVR, LVD and POR operating requirements

Table 8.  $V_{DD}$  supply LVR, LVD and POR operating requirements for S32K1xx series<sup>[1]</sup>

| Symbol    | Description                                    | Min. | Typ. | Max. | Unit | Notes |
|-----------|------------------------------------------------|------|------|------|------|-------|
| $V_{POR}$ | Rising and falling $V_{DD}$ POR detect voltage | 1.1  | 1.6  | 2.0  | V    |       |

Table continues on the next page...

Table 8. V<sub>DD</sub> supply LVR, LVD and POR operating requirements for S32K1xx series<sup>[1]...continued</sup>

| Symbol                  | Description                                                    | Min. | Typ.  | Max. | Unit | Notes |
|-------------------------|----------------------------------------------------------------|------|-------|------|------|-------|
| V <sub>LVR</sub>        | LVR falling threshold (RUN, HSRUN, and STOP modes)             | 2.50 | 2.58  | 2.7  | V    |       |
| V <sub>LVR_HYST</sub>   | LVR hysteresis                                                 | —    | 45    | —    | mV   | [2]   |
| V <sub>LVR_LP</sub>     | LVR falling threshold (VLPS/VLPR modes)                        | 1.97 | 2.22  | 2.44 | V    |       |
| V <sub>LVD</sub>        | Falling low-voltage detect threshold                           | 2.8  | 2.875 | 3    | V    |       |
| V <sub>LVD_HYST</sub>   | LVD hysteresis                                                 | —    | 50    | —    | mV   | [2]   |
| V <sub>LVW</sub>        | Falling low-voltage warning threshold                          | 4.19 | 4.305 | 4.5  | V    |       |
| V <sub>LVW_HYST</sub>   | LVW hysteresis                                                 | —    | 75    | —    | mV   | [2]   |
| V <sub>BG</sub>         | Bandgap voltage reference                                      | 0.97 | 1.00  | 1.03 | V    | [3]   |
| V <sub>OSC</sub>        | Oscillator Regulator Output                                    | —    | 3.3   | —    | V    | [4]   |
| V <sub>Flash</sub>      | Flash Regulator Output                                         | —    | 3.3   | —    | V    | [4]   |
| V <sub>CORE_RUN</sub>   | V <sub>core_RUN</sub> to Core Regulator Output in Run and VLPR | —    | 1.2   | —    | V    | [4]   |
| V <sub>CORE_HSRUN</sub> | Core Regulator Output in HSRUN                                 | —    | 1.4   | —    | V    | [4]   |

[1] In 3.3 V range, the VLWV is always set since supply remains below VLWV range. Hence PMC.LVDSC2[LVWIE] should remain cleared while device operates in 3.3 V range.

[2] Rising threshold is the sum of falling threshold and hysteresis voltage.

[3] Does not take into consideration the accuracy associated with the ADC or other application-specific factors such as variations in power supply, reference voltage instability, and external sources of noise. See section ADC electrical specification and applicable application note(s) and assess sources of variation in the application when determining limits.

[4] Not intended to be used in production and is intended to be used for informational and debug purposes only.

Table 9. V<sub>DD</sub> supply LVR and POR operating requirements for S32K14xW series<sup>[1]</sup>

| Symbol                             | Description                                           | Min. | Typ.  | Max. | Unit | Notes |
|------------------------------------|-------------------------------------------------------|------|-------|------|------|-------|
| V <sub>POR</sub>                   | Rising and falling V <sub>DD</sub> POR detect voltage | 1.1  | 1.6   | 2.0  | V    |       |
| V <sub>LVR</sub>                   | LVR falling threshold (RUN and STOP modes)            | 2.95 | 3.02  | 3.07 | V    |       |
| V <sub>LVR_HYST</sub>              | LVR hysteresis                                        | —    | 45    | —    | mV   | [2]   |
| V <sub>LVR_LP</sub> <sup>[3]</sup> | LVR falling threshold (VLPS/VLPR modes)               | 1.97 | 2.22  | 2.44 | V    |       |
| V <sub>LVW</sub>                   | Falling low-voltage warning threshold                 | 4.17 | 4.305 | 4.5  | V    |       |
| V <sub>LVW_HYST</sub>              | LVW hysteresis                                        | —    | 75    | —    | mV   | [2]   |
| V <sub>BG</sub>                    | Bandgap voltage reference                             | 0.97 | 1.00  | 1.03 | V    | [4]   |
| V <sub>OSC</sub>                   | Oscillator Regulator Output                           | —    | 3.3   | —    | V    | [5]   |
| V <sub>Flash</sub>                 | Flash Regulator Output                                | —    | 3.3   | —    | V    | [5]   |
| V <sub>CORE</sub>                  | Core Regulator Output                                 | —    | 1.2   | —    | V    | [5]   |

[1] In 3.3 V range, the VLWV is always set since supply remains below VLWV range. Hence PMC.LVDSC2[LVWIE] should remain cleared while device operates in 3.3 V range.

[2] Rising threshold is the sum of falling threshold and hysteresis voltage.

- [3] An internal monitor could reset the chip at a higher supply level, but 3.13 V onward the chip is fully functional.
- [4] Does not take into consideration the accuracy associated with the ADC or other application-specific factors such as variations in power supply, reference voltage instability, and external sources of noise. See section ADC electrical specification and applicable application note(s) and assess sources of variation in the application when determining limits.
- [5] To be used for informational or debug purposes only.

## 5.6 Power mode transition operating behaviors

All specifications in the following table assume this clock configuration:

Table 10. Clock configuration

|                  | S32K1xx                                  | S32K14xW |
|------------------|------------------------------------------|----------|
| RUN mode         |                                          |          |
| Clock source     | FIRC                                     | FIRC     |
| SYS_CLK/CORE_CLK | 48 MHz                                   | 48 MHz   |
| BUS_CLK          | 48 MHz                                   | 48 MHz   |
| FLASH_CLK        | 24 MHz                                   | 16 MHz   |
| HRUN mode        |                                          |          |
| Clock source     | SPLL                                     | NA       |
| SYS_CLK/CORE_CLK | 112 MHz                                  | NA       |
| BUS_CLK          | 56 MHz                                   | NA       |
| FLASH_CLK        | 28 MHz                                   | NA       |
| VLPR mode        |                                          |          |
| Clock source     | SIRC                                     | SIRC     |
| SYS_CLK/CORE_CLK | 4 MHz                                    | 1 MHz    |
| BUS_CLK          | 4 MHz                                    | 1 MHz    |
| FLASH_CLK        | 1 MHz                                    | 0.25     |
| STOP1/STOP2 mode |                                          |          |
| Clock source     | FIRC                                     | FIRC     |
| SYS_CLK/CORE_CLK | 48 MHz                                   | 48 MHz   |
| BUS_CLK          | 48 MHz                                   | 48 MHz   |
| FLASH_CLK        | 24 MHz                                   | 16 MHz   |
| VLPS mode        |                                          |          |
|                  | All clock source disabled <sup>[1]</sup> |          |

- [1]
- For S32K11x – FIRC/SOSC
  - For S32K14x, S32K14xW – FIRC/SOSC/SPLL

Table 11. Power mode transition operating behaviors for S32K1xx series

| Symbol    | Description                                                                                                                                                       | Min. | Typ.  | Max.  | Unit    |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|-------|---------|
| $t_{POR}$ | After a POR event, amount of time from the point $V_{DD}$ reaches 2.7 V to execution of the first instruction across the operating temperature range of the chip. | —    | 325   | —     | $\mu s$ |
|           | VLPS → RUN                                                                                                                                                        | 8    | —     | 17    | $\mu s$ |
|           | STOP1 → RUN                                                                                                                                                       | 0.07 | 0.075 | 0.08  | $\mu s$ |
|           | STOP2 → RUN                                                                                                                                                       | 0.07 | 0.075 | 0.08  | $\mu s$ |
|           | VLPR → RUN                                                                                                                                                        | 19   | —     | 26    | $\mu s$ |
|           | VLPR → VLPS                                                                                                                                                       | 5.1  | 5.7   | 6.5   | $\mu s$ |
|           | VLPS → VLPR                                                                                                                                                       | 18.8 | 23    | 27.75 | $\mu s$ |
|           | RUN → Compute operation                                                                                                                                           | 0.72 | 0.75  | 0.77  | $\mu s$ |
|           | HSRUN → Compute operation                                                                                                                                         | 0.3  | 0.31  | 0.35  | $\mu s$ |
|           | RUN → STOP1                                                                                                                                                       | 0.35 | 0.38  | 0.4   | $\mu s$ |
|           | RUN → STOP2                                                                                                                                                       | 0.2  | 0.23  | 0.25  | $\mu s$ |
|           | RUN → VLPS                                                                                                                                                        | 0.3  | 0.35  | 0.4   | $\mu s$ |
|           | RUN → VLPR                                                                                                                                                        | 3.5  | 3.8   | 5     | $\mu s$ |
|           | VLPS → Asynchronous DMA Wakeup                                                                                                                                    | 105  | 110   | 125   | $\mu s$ |
|           | STOP1 → Asynchronous DMA Wakeup                                                                                                                                   | 1    | 1.1   | 1.3   | $\mu s$ |
|           | STOP2 → Asynchronous DMA Wakeup                                                                                                                                   | 1    | 1.1   | 1.3   | $\mu s$ |
|           | Pin reset → Code execution                                                                                                                                        | —    | 214   | —     | $\mu s$ |

**Note:** HSRUN should only be used when frequencies in excess of 80 MHz are required. When using 80 MHz and below, RUN mode is the recommended operating mode.

Table 12. Power mode transition operating behaviors for S32K14xW series

| Symbol    | Description                                                                                                                                                        | Min. | Typ.  | Max.  | Unit    |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|-------|---------|
| $t_{POR}$ | After a POR event, amount of time from the point $V_{DD}$ reaches 3.13 V to execution of the first instruction across the operating temperature range of the chip. | —    | 375   | —     | $\mu s$ |
|           | VLPS → RUN                                                                                                                                                         | 8    | —     | 17    | $\mu s$ |
|           | STOP1 → RUN                                                                                                                                                        | 0.07 | 0.075 | 0.08  | $\mu s$ |
|           | STOP2 → RUN                                                                                                                                                        | 0.07 | 0.075 | 0.08  | $\mu s$ |
|           | VLPR → RUN                                                                                                                                                         | 152  | —     | 208   | $\mu s$ |
|           | VLPR → VLPS                                                                                                                                                        | 25   | 34    | 39    | $\mu s$ |
|           | VLPS → VLPR                                                                                                                                                        | 18.8 | 23    | 27.75 | $\mu s$ |
|           | RUN → Compute operation                                                                                                                                            | 0.72 | 0.75  | 0.77  | $\mu s$ |
|           | RUN → STOP1                                                                                                                                                        | 0.35 | 0.38  | 0.4   | $\mu s$ |

Table continues on the next page...

Table 12. Power mode transition operating behaviors for S32K14xW series...continued

| Symbol | Description                     | Min. | Typ. | Max. | Unit |
|--------|---------------------------------|------|------|------|------|
|        | RUN → STOP2                     | 0.2  | 0.23 | 0.25 | μs   |
|        | RUN → VLPS                      | 0.3  | 0.35 | 0.4  | μs   |
|        | RUN → VLPR                      | 7    | 7.6  | 10   | μs   |
|        | VLPS → Asynchronous DMA Wakeup  | 105  | 110  | 125  | μs   |
|        | STOP1 → Asynchronous DMA Wakeup | 1    | 1.1  | 1.3  | μs   |
|        | STOP2 → Asynchronous DMA Wakeup | 1    | 1.1  | 1.3  | μs   |
|        | Pin reset → Code execution      | —    | 255  | —    | μs   |

## 5.7 Power consumption

The following table shows the power consumption targets for the device in various mode of operations. Attached *S32K1xx\_Power\_Modes\_Configuration.xlsx* details the modes used in gathering the power consumption data stated in the following table [Power consumption](#). For full functionality refer to table: Module operation in available power modes of the *Reference Manual*.

Table 13. Power consumption (Typicals unless stated otherwise) <sup>[1]</sup>

| Chip/Device | Ambient Temperature (°C) |     | VLPS (μA) <sup>[2]</sup>            |               | VLPR (mA)                           |                                               |                                               | STOP1 (mA) | STOP2 (mA) | RUN@48 MHz (mA)      |                     | RUN@64 MHz (mA)      |                     | RUN@80 MHz (mA)      |                     | HSRUN@112 MHz (mA) <sup>[3]</sup> |                     | IDD/MHz (μA/MHz) <sup>[4]</sup> |
|-------------|--------------------------|-----|-------------------------------------|---------------|-------------------------------------|-----------------------------------------------|-----------------------------------------------|------------|------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|-----------------------------------|---------------------|---------------------------------|
|             |                          |     | Peripherals disabled <sup>[5]</sup> | LPTMR enabled | Peripherals disabled <sup>[6]</sup> | Peripherals enabled use case 1 <sup>[6]</sup> | Peripherals enabled use case 2 <sup>[7]</sup> |            |            | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled              | Peripherals enabled |                                 |
| S32K116     | 25                       | Typ | 26                                  | 40            | 1.05                                | 1.07                                          | 1.70                                          | 6.3        | 7.2        | 11.8                 | 20.3                | NA                   |                     |                      |                     |                                   |                     | 245                             |
|             | 85                       | Typ | 76                                  | 93            | 1.1                                 | 1.11                                          | 1.77                                          | 6.6        | 7.5        | 12                   | 20.6                |                      |                     |                      |                     |                                   |                     | 251                             |
|             |                          | Max | 287                                 | 300           | 1.39                                | 1.4                                           | NA                                            | 8          | 8.9        | 13.4                 | 22.1                |                      |                     |                      |                     |                                   |                     | 279                             |
|             | 105                      | Typ | 139                                 | 164           | 1.15                                | 1.16                                          | 1.81                                          | 6.8        | 7.7        | 12.3                 | 20.8                |                      |                     |                      |                     |                                   |                     | 255                             |
|             |                          | Max | 590                                 | 603           | 1.68                                | 1.69                                          | NA                                            | 9.2        | 10.1       | 14.5                 | 23.1                |                      |                     |                      |                     |                                   |                     | 302                             |
|             | 125                      | Typ | NA                                  | NA            | NA                                  | NA                                            | 1.96                                          | NA         | NA         | NA                   | NA                  |                      |                     |                      |                     |                                   |                     | NA                              |
|             |                          | Max | 891                                 | 904           | 2.02                                | 2.04                                          | NA                                            | 10.4       | 11.3       | 15.6                 | 24.1                |                      |                     |                      |                     |                                   |                     | 325                             |
| S32K118     | 25                       | Typ | 27                                  | 40            | 1.15                                | 1.16                                          | 1.76                                          | 6.4        | 7.3        | 12.8                 | 21.5                | NA                   |                     |                      |                     |                                   |                     | 268                             |
|             | 85                       | Typ | 81                                  | 100           | 1.20                                | 1.21                                          | 1.82                                          | 6.7        | 7.6        | 13.2                 | 21.8                |                      |                     |                      |                     |                                   |                     | 274                             |
|             |                          | Max | 304                                 | 323           | 1.46                                | 1.47                                          | NA                                            | 8          | 9          | 14.5                 | 23.4                |                      |                     |                      |                     |                                   |                     | 301                             |
|             | 105                      | Typ | 149                                 | 175           | 1.27                                | 1.28                                          | 1.89                                          | 6.9        | 7.9        | 13.4                 | 22.1                |                      |                     |                      |                     |                                   |                     | 279                             |
|             |                          | Max | 606                                 | 637           | 1.76                                | 1.77                                          | NA                                            | 9.3        | 10.4       | 15.4                 | 24.2                |                      |                     |                      |                     |                                   |                     | 320                             |
|             | 125                      | Typ | NA                                  | NA            | NA                                  | NA                                            | 2.03                                          | NA         | NA         | NA                   | NA                  |                      |                     |                      |                     |                                   |                     | NA                              |
|             |                          | Max | 1111                                | 1126          | 2.32                                | 2.33                                          | NA                                            | 11.0       | 11.9       | 17.1                 | 25.9                |                      |                     |                      |                     |                                   |                     | 357                             |

Table continues on the next page...

Table 13. Power consumption (Typicals unless stated otherwise) <sup>[1]</sup>...continued

| Chip/Device    | Ambient Temperature (°C) |     | VLPS (µA) <sup>[2]</sup>            |               | VLPR (mA)                           |                                               |                                               | STOP1 (mA) | STOP2 (mA) | RUN@48 MHz (mA)      |                     | RUN@64 MHz (mA)      |                     | RUN@80 MHz (mA)      |                     | HSRUN@112 MHz (mA) <sup>[3]</sup> |                     | IDD/MHz (µA/MHz) <sup>[4]</sup> |
|----------------|--------------------------|-----|-------------------------------------|---------------|-------------------------------------|-----------------------------------------------|-----------------------------------------------|------------|------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|-----------------------------------|---------------------|---------------------------------|
|                |                          |     | Peripherals disabled <sup>[5]</sup> | LPTMR enabled | Peripherals disabled <sup>[6]</sup> | Peripherals enabled use case 1 <sup>[6]</sup> | Peripherals enabled use case 2 <sup>[7]</sup> |            |            | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled              | Peripherals enabled |                                 |
| <b>S32K142</b> | 25                       | Typ | 29                                  | 40            | 1.17                                | 1.21                                          | 2.19                                          | 6.4        | 7.4        | 17.3                 | 24.6                | 24.5                 | 31.3                | 28.8                 | 37.5                | 40.5                              | 52.2                | 360                             |
|                | 85                       | Typ | 128                                 | 137           | 1.48                                | 1.51                                          | 2.31                                          | 7          | 8          | 17.6                 | 24.9                | 25                   | 31.6                | 29.1                 | 37.7                | 41.1                              | 52.5                | 364                             |
|                |                          | Max | 335                                 | 360           | 1.87                                | 1.89                                          | NA                                            | 8.6        | 9.4        | 22                   | 28.2                | 26.9                 | 33.5                | 32                   | 40                  | 44                                | 55.6                | 400                             |
|                | 105                      | Typ | 240                                 | 257           | 1.58                                | 1.61                                          | 2.44                                          | 7.6        | 8.3        | 18.3                 | 25.7                | 25.5                 | 31.9                | 29.8                 | 38                  | 41.5                              | 53.1                | 373                             |
|                |                          | Max | 740                                 | 791           | 2.32                                | 2.34                                          | NA                                            | 9.9        | 10.9       | 23.1                 | 30.2                | 27.8                 | 35.3                | 33.8                 | 40.7                | 44.9                              | 57.4                | 423                             |
|                | 125                      | Typ | NA                                  | NA            | NA                                  | NA                                            | 2.84                                          | NA         | NA         | NA                   | NA                  | NA                   | NA                  | NA                   | NA                  | NA                                |                     | NA                              |
|                |                          | Max | 1637                                | 1694          | 3.1                                 | 3.21                                          | NA                                            | 12.7       | 13.7       | 25                   | 32.9                | 30.7                 | 38.8                | 36                   | 43.8                | NA                                |                     | 450                             |
| <b>S32K144</b> | 25                       | Typ | 29.8                                | 42            | 1.48                                | 1.50                                          | 2.91                                          | 7          | 7.7        | 19.7                 | 26.9                | 25.1                 | 33.3                | 30.2                 | 39.6                | 43.3                              | 55.6                | 378                             |
|                | 85                       | Typ | 150                                 | 159           | 1.72                                | 1.85                                          | 3.08                                          | 7.2        | 8.1        | 20.4                 | 27.1                | 26.1                 | 33.5                | 30.5                 | 40                  | 43.9                              | 56.1                | 381                             |
|                |                          | Max | 359                                 | 384           | 2.60                                | 2.65                                          | NA                                            | 9.2        | 9.9        | 23.2                 | 29.6                | 29.3                 | 36.2                | 34.8                 | 42.1                | 46.3                              | 59.7                | 435                             |
|                | 105                      | Typ | 256                                 | 273           | 1.80                                | 2.10                                          | 3.23                                          | 7.8        | 8.5        | 20.6                 | 27.4                | 26.6                 | 33.8                | 31.2                 | 40.5                | 44.8                              | 57.1                | 390                             |
|                |                          | Max | 850                                 | 900           | 2.65                                | 2.70                                          | NA                                            | 10.3       | 11.1       | 23.9                 | 30.6                | 30.3                 | 37.3                | 35.6                 | 43.5                | 47.9                              | 61.3                | 445                             |
|                | 125                      | Typ | NA                                  | NA            | NA                                  | NA                                            | 3.65                                          | NA         | NA         | NA                   | NA                  | NA                   | NA                  | NA                   | NA                  | NA                                |                     | NA                              |
|                |                          | Max | 1960                                | 1998          | 3.18                                | 3.25                                          | NA                                            | 12.9       | 13.8       | 26.9                 | 33.6                | 35                   | 40.3                | 38.7                 | 46.8                | NA                                |                     | 484                             |

Table continues on the next page...

Table 13. Power consumption (Typicals unless stated otherwise) <sup>[1]</sup>...continued

| Chip/Device     | Ambient Temperature (°C) |     | VLPS (µA) <sup>[2]</sup>            |               | VLPR (mA)                           |                                               |                                               | STOP1 (mA) | STOP2 (mA) | RUN@48 MHz (mA)      |                     | RUN@64 MHz (mA)      |                     | RUN@80 MHz (mA)      |                     | HSRUN@112 MHz (mA) <sup>[3]</sup> |                     | IDD/MHz (µA/MHz) <sup>[4]</sup> |
|-----------------|--------------------------|-----|-------------------------------------|---------------|-------------------------------------|-----------------------------------------------|-----------------------------------------------|------------|------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|-----------------------------------|---------------------|---------------------------------|
|                 |                          |     | Peripherals disabled <sup>[5]</sup> | LPTMR enabled | Peripherals disabled <sup>[6]</sup> | Peripherals enabled use case 1 <sup>[6]</sup> | Peripherals enabled use case 2 <sup>[7]</sup> |            |            | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled              | Peripherals enabled |                                 |
| <b>S32K14xW</b> | 25                       | Typ | 37.7                                | 42            | 1.6                                 | 1.61                                          | 3                                             | 7.31       | 8.05       | 19.9                 | 26.9                | 27                   | 33.3                | 30.2                 | 39.6                | N/A                               |                     | 378                             |
|                 | 85                       | Typ | N/A                                 | N/A           | N/A                                 | N/A                                           | N/A                                           | N/A        | N/A        | N/A                  | N/A                 | N/A                  | N/A                 | N/A                  | N/A                 | N/A                               |                     | N/A                             |
|                 |                          | Max | N/A                                 | N/A           | N/A                                 | N/A                                           | N/A                                           | N/A        | N/A        | N/A                  | N/A                 | N/A                  | N/A                 | N/A                  | N/A                 | N/A                               |                     | N/A                             |
|                 | 105                      | Typ | 277                                 | 280           | 1.9                                 | 2.1                                           | 3.42                                          | 8.28       | 9.03       | 21.1                 | 27.4                | 27.5                 | 33.8                | 31.2                 | 40.5                | N/A                               |                     | 390                             |
|                 |                          | Max | 905                                 | 910           | 2.68                                | 2.71                                          | N/A                                           | 10.4       | 11.1       | 25.9                 | 30.7                | 32.4                 | 37.4                | 36.4                 | 43.6                | N/A                               |                     | 455                             |
|                 | 125                      | Typ | 745                                 | 747           | 2.38                                | 2.39                                          | 3.84                                          | 9.9        | 10.7       | 22.8                 | 28.6                | 29                   | 34.5                | 32.7                 | 41                  | N/A                               |                     | 409                             |
|                 |                          | Max | 1970                                | 1999          | 3.29                                | 3.3                                           | N/A                                           | 13.3       | 14         | 30                   | 34.6                | 36.4                 | 41.5                | 40.1                 | 47.3                | N/A                               |                     | 501                             |
|                 | 150                      | Typ | N/A                                 | N/A           | N/A                                 | N/A                                           | 4.93                                          | N/A        | N/A        | N/A                  | N/A                 | N/A                  | N/A                 | N/A                  | N/A                 | N/A                               |                     | N/A                             |
|                 |                          | Max | 3946                                | 3980          | 6.39                                | 6.41                                          | N/A                                           | 23.2       | 23.9       | 41                   | 45.7                | 47.4                 | 52.1                | 51                   | 57.2                | N/A                               |                     | 638                             |
| <b>S32K146</b>  | 25                       | Typ | 37                                  | 47            | 1.57                                | 1.61                                          | 3.3                                           | 8          | 9.2        | 23.4                 | 31.4                | 30.5                 | 40.2                | 36.2                 | 47.6                | 52                                | 68.3                | 452                             |
|                 | 85                       | Typ | 207                                 | 209           | 1.79                                | 1.83                                          | 3.54                                          | 8.9        | 10.1       | 24.4                 | 32.4                | 31.5                 | 41.3                | 37.2                 | 48.7                | 53.3                              | 69.8                | 465                             |
|                 |                          | Max | 974                                 | 981           | 3.32                                | 3.38                                          | NA                                            | 12.7       | 13.9       | 29.3                 | 37.9                | 36.7                 | 47                  | 42.4                 | 54.4                | 60.3                              | 78                  | 530                             |
|                 | 105                      | Typ | 419                                 | 422           | 1.99                                | 2.04                                          | 3.78                                          | 9.8        | 11         | 25.3                 | 33.4                | 32.5                 | 42.2                | 38.1                 | 49.6                | 54.4                              | 70.8                | 477                             |
|                 |                          | Max | 2004                                | 2017          | 4.06                                | 4.13                                          | NA                                            | 17.1       | 18.3       | 34.1                 | 42.6                | 41.3                 | 51.4                | 46.9                 | 58.8                | 65.7                              | 82.8                | 587                             |

Table continues on the next page...

Table 13. Power consumption (Typicals unless stated otherwise) <sup>[1]</sup>...continued

| Chip/Device                      | Ambient Temperature (°C) |     | VLPS (μA) <sup>[2]</sup>            |               | VLPR (mA)                           |                                               |                                               | STOP1 (mA) | STOP2 (mA) | RUN@48 MHz (mA)      |                     | RUN@64 MHz (mA)      |                     | RUN@80 MHz (mA)      |                     | HSRUN@112 MHz (mA) <sup>[3]</sup> |                     | IDD/MHz (μA/MHz) <sup>[4]</sup> |
|----------------------------------|--------------------------|-----|-------------------------------------|---------------|-------------------------------------|-----------------------------------------------|-----------------------------------------------|------------|------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------|-----------------------------------|---------------------|---------------------------------|
|                                  |                          |     | Peripherals disabled <sup>[5]</sup> | LPTMR enabled | Peripherals disabled <sup>[6]</sup> | Peripherals enabled use case 1 <sup>[6]</sup> | Peripherals enabled use case 2 <sup>[7]</sup> |            |            | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled | Peripherals enabled | Peripherals disabled              | Peripherals enabled |                                 |
|                                  | 125                      | Typ | NA                                  | NA            | NA                                  | NA                                            | 4.44                                          | NA         | NA         | NA                   | NA                  | NA                   | NA                  | NA                   | NA                  | NA                                | NA                  | NA                              |
|                                  |                          | Max | 3358                                | 3380          | 5.28                                | 5.38                                          | NA                                            | 22.6       | 23.7       | 40.2                 | 48.8                | 47.3                 | 57.4                | 52.8                 | 64.8                | NA                                | NA                  | 660                             |
| <b>S32K148</b><br><sup>[8]</sup> | 25                       | Typ | 38                                  | 54            | 2.17                                | 2.20                                          | 3.45                                          | 8.5        | 9.6        | 27.6                 | 34.9                | 35.5                 | 45.3                | 42.1                 | 57.7                | 60.3                              | 83.3                | 526                             |
|                                  |                          | Max | 1660                                | 1736          | 3.48                                | 3.55                                          | NA                                            | 14.5       | 15.6       | 34.8                 | 43.6                | 41.9                 | 53.9                | 48.7                 | 65.1                | 70.4                              | 96.1                | 609                             |
|                                  | 105                      | Typ | 560                                 | 577           | 2.49                                | 2.54                                          | 4.03                                          | 10.9       | 11.9       | 29.8                 | 37.8                | 37.6                 | 47.5                | 45.2                 | 61.5                | 63.8                              | 89.1                | 565                             |
|                                  |                          | Max | 2945                                | 2970          | 4.40                                | 4.47                                          | NA                                            | 18.0       | 19.0       | 38.4                 | 46.8                | 44.9                 | 55.3                | 51.6                 | 66.8                | 73.6                              | 97.4                | 645                             |
|                                  | 125                      | Typ | NA                                  | NA            | NA                                  | NA                                            | 4.85                                          | NA         | NA         | NA                   | NA                  | NA                   | NA                  | NA                   | NA                  | NA                                | NA                  | NA                              |
|                                  |                          | Max | 3990                                | 4166          | 6.00                                | 6.08                                          | NA                                            | 23.4       | 24.5       | 44.3                 | 52.5                | 50.9                 | 61.3                | 57.5                 | 71.6                | NA                                | NA                  | 719                             |

[1] Typical current numbers are indicative for typical silicon process and may vary based on the silicon distribution and user configuration. Typical conditions assumes  $V_{DD} = V_{DDA} = V_{REFH} = 5\text{ V}$ , temperature = 25 °C and typical silicon process unless otherwise stated. All output pins are floating and On-chip pulldown is enabled for all unused input pins.

[2] Current numbers are for reduced configuration and may vary based on user configuration and silicon process variation.

[3] HSRUN mode must not be used at 125°C. Max ambient temperature for HSRUN mode is 105°C.

[4] Values mentioned for S32K14x devices are measured at RUN@80 MHz with peripherals disabled and values mentioned for S32K11x devices are measured at RUN@48 MHz with peripherals disabled.

[5] With PMC\_REGSC[CLKBIASDIS] set to 1. See Reference Manual for details.

[6] Data collected using RAM

[7] Numbers on limited samples size and data collected with Flash

[8] The S32K148 data points assume that ENET/QuadSPI/SAI etc. are inactive.

Table 14. VLPS additional use-case power consumption at typical conditions <sup>[1][2][3]</sup>

| Use-case                | Description                                                                                                                                                 | Temp. | Device  |         |         |         |          |         |         | Unit |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------|---------|---------|---------|----------|---------|---------|------|
|                         |                                                                                                                                                             |       | S32K116 | S32K118 | S32K142 | S32K144 | S32K14xW | S32K146 | S32K148 |      |
| VLPS and RTC            | <ul style="list-style-type: none"> <li>Clock source: LPO or RTC_CLKIN</li> </ul>                                                                            | 25    | 30      | 30      | 30      | 31      | 31       | 38      | 40      | μA   |
|                         |                                                                                                                                                             | 85    | 96      | 102     | 148     | 170     | –        | 227     | 356     | μA   |
|                         |                                                                                                                                                             | 105   | 179     | 189     | 280     | 290     | 305      | 460     | 600     | μA   |
|                         |                                                                                                                                                             | 125   | 281     | 327     | 570     | 680     | 700      | 810     | 1250    | μA   |
|                         |                                                                                                                                                             | 150   | –       | –       | –       | –       | 1310     | –       | –       | μA   |
| VLPS and LPUART TX/RX   | <ul style="list-style-type: none"> <li>Clock source: SIRC</li> <li>Transmitting or receiving continuously using DMA</li> <li>Baudrate: 19.2 kbps</li> </ul> | 25    | 179     | 187     | 230     | 230     | 248      | 250     | 250     | μA   |
|                         |                                                                                                                                                             | 85    | 235     | 244     | 320     | 400     | –        | 410     | 490     | μA   |
|                         |                                                                                                                                                             | 105   | 304     | 325     | 490     | 550     | 563      | 600     | 850     | μA   |
|                         |                                                                                                                                                             | 125   | 499     | 551     | 890     | 1070    | 1102     | 1250    | 1960    | μA   |
|                         |                                                                                                                                                             | 150   | –       | –       | –       | –       | 2048     | –       | –       | μA   |
| VLPS and LPUART wake-up | <ul style="list-style-type: none"> <li>Clock source: SIRC</li> <li>Wake-up address feature enabled</li> <li>Baudrate: 19.2 kbps</li> </ul>                  | 25    | 107     | 107     | 135     | 138     | 140      | 146     | 146     | μA   |
|                         |                                                                                                                                                             | 85    | 149     | 157     | 170     | 240     | –        | 280     | 350     | μA   |
|                         |                                                                                                                                                             | 105   | 199     | 223     | 260     | 400     | 424      | 480     | 600     | μA   |
|                         |                                                                                                                                                             | 125   | 347     | 405     | 530     | 580     | 703      | 1000    | 1280    | μA   |
|                         |                                                                                                                                                             | 150   | –       | –       | –       | –       | 1340     | –       | –       | μA   |
| VLPS and LPI2C master   | <ul style="list-style-type: none"> <li>Clock Source: SIRC</li> <li>Transmit/receive using DMA</li> <li>Baudrate: 100 kHz</li> </ul>                         | 25    | 600     | 600     | 670     | 690     | 691      | 820     | 900     | μA   |
|                         |                                                                                                                                                             | 85    | 696     | 712     | 880     | 960     | –        | 1220    | 1370    | μA   |
|                         |                                                                                                                                                             | 105   | 815     | 852     | 1080    | 1250    | 1320     | 1660    | 2060    | μA   |
|                         |                                                                                                                                                             | 125   | 1152    | 1251    | 1970    | 1980    | 2001     | 2860    | 3690    | μA   |
|                         |                                                                                                                                                             | 150   | –       | –       | –       | –       | 4228     | –       | –       | μA   |

Table continues on the next page...

Table 14. VLPS additional use-case power consumption at typical conditions <sup>[1][2][3]</sup>...continued

| Use-case                             | Description                                                                                                                                    | Temp. | Device  |         |         |         |          |         |         | Unit |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------|---------|---------|---------|----------|---------|---------|------|
|                                      |                                                                                                                                                |       | S32K116 | S32K118 | S32K142 | S32K144 | S32K14xW | S32K146 | S32K148 |      |
| VLPS and LPI2C slave wake-up         | <ul style="list-style-type: none"> <li>• Clock source: SIRC</li> <li>• Wake-up address feature enabled</li> <li>• Baudrate: 100 kHz</li> </ul> | 25    | 260     | 260     | 260     | 260     | 260      | 270     | 280     | μA   |
|                                      |                                                                                                                                                | 85    | 293     | 308     | 340     | 340     | –        | 410     | 510     | μA   |
|                                      |                                                                                                                                                | 105   | 339     | 367     | 430     | 430     | 458      | 610     | 810     | μA   |
|                                      |                                                                                                                                                | 125   | 478     | 543     | 740     | 760     | 774      | 1170    | 1540    | μA   |
|                                      |                                                                                                                                                | 150   | –       | –       | –       | –       | 1691     | –       | –       | μA   |
| VLPS and LPSPi master <sup>[4]</sup> | <ul style="list-style-type: none"> <li>• Clock source: SIRC</li> <li>• Transmit/receive using DMA</li> <li>• Baudrate: 500 kHz</li> </ul>      | 25    | 2.51    | 2.94    | 2.99    | 3.19    | 3.2      | 3.75    | 4.11    | mA   |
|                                      |                                                                                                                                                | 85    | 2.67    | 3.09    | 3.26    | 3.7     | –        | 4.35    | 4.93    | mA   |
|                                      |                                                                                                                                                | 105   | 2.83    | 3.21    | 3.5     | 4.2     | 4.34     | 4.93    | 5.74    | mA   |
|                                      |                                                                                                                                                | 125   | 3.34    | 3.53    | 3.93    | 4.63    | 5.38     | 5.97    | 7.38    | mA   |
|                                      |                                                                                                                                                | 150   | –       | –       | –       | –       | 7.49     | –       | –       | mA   |
| VLPS and LPiT                        | <ul style="list-style-type: none"> <li>• Clock source: SIRC</li> <li>• 1 channel enable</li> <li>• Mode: 32-bit periodic counter</li> </ul>    | 25    | 114     | 114     | 114     | 114     | 116      | 120     | 130     | μA   |
|                                      |                                                                                                                                                | 85    | 158     | 164     | 190     | 250     | –        | 260     | 320     | μA   |
|                                      |                                                                                                                                                | 105   | 210     | 223     | 310     | 410     | 425      | 440     | 570     | μA   |
|                                      |                                                                                                                                                | 125   | 371     | 408     | 640     | 750     | 780      | 910     | 1280    | μA   |
|                                      |                                                                                                                                                | 150   | –       | –       | –       | –       | 1380     | –       | –       | μA   |

[1] All power numbers listed in this table are typical power numbers

[2] Current numbers are quoted for a certain application code and may vary on user configuration and silicon process variation.

[3] The power numbers are not strictly for the VLPS mode operation alone, but also includes power due to periodic wakeup. The power therefore includes wakeup plus VLPS mode activity. This leads to greater dependence of power numbers on application code.

[4] The single LPSPi used is LPSPi1 in S32K14X devices but LPSPi0 in S32K11x devices.

The following table shows the power consumption targets for S32K148 in various mode of operations measure at 3.3 V.

Table 15. Power consumption at 3.3 V

| Chip/Device | Ambient Temperature (°C) |     | RUN@80 MHz (mA)            |                                  | HSRUN@112 MHz (mA) <sup>[1]</sup> |                                  |
|-------------|--------------------------|-----|----------------------------|----------------------------------|-----------------------------------|----------------------------------|
|             |                          |     | Peripherals enabled + QSPI | Peripherals enabled + ENET + SAI | Peripherals enabled + QSPI        | Peripherals enabled + ENET + SAI |
| S32K148     | 25                       | Typ | 67.3                       | 79.1                             | 89.8                              | 105.5                            |
|             | 85                       | Typ | 67.4                       | 79.2                             | 95.6                              | 105.9                            |
|             |                          | Max | 82.5                       | 88.2                             | 109.7                             | 117.4                            |
|             | 105                      | Typ | 68.0                       | 79.8                             | 96.6                              | 106.7                            |
|             |                          | Max | 80.3                       | 89.1                             | 109.0                             | 119.0                            |
|             | 125                      | Max | 83.5                       | 94.7                             | NA                                |                                  |

[1] HSRUN mode must not be used at 125°C. Max ambient temperature for HSRUN mode is 105°C.

## 5.8 ESD and latch-up protection characteristics

| Symbol           | Description                                                                    | Min.   | Max. | Unit |
|------------------|--------------------------------------------------------------------------------|--------|------|------|
| V <sub>HBM</sub> | Electrostatic discharge voltage, human body model <sup>[1], [2], [3]</sup>     | – 4000 | 4000 | V    |
| V <sub>CDM</sub> | Electrostatic discharge voltage, charged-device model <sup>[1], [2], [4]</sup> |        |      |      |
|                  | All pins except the corner pins                                                | – 500  | 500  | V    |
|                  | Corner pins only                                                               | – 750  | 750  | V    |
| I <sub>LAT</sub> | Latch-up current at ambient temperature of 125 °C <sup>[5]</sup>               | – 100  | 100  | mA   |

[1] Device failure is defined as: "If after exposure to ESD pulses, the device does not meet specification requirements."

[2] All ESD testing conforms with AEC-Q100 Stress Test Qualification for Automotive Grade Integrated Circuits.

[3] This parameter is tested in conformity with AEC-Q100-002.

[4] This parameter is tested in conformity with AEC-Q100-011.

[5] This parameter is tested in conformity with AEC-Q100-004.

## 5.9 EMC radiated emissions operating behaviors

EMC measurements to IC-level IEC standards are available from NXP on request.

# 6 I/O parameters

## 6.1 AC electrical characteristics

Unless otherwise specified, propagation delays are measured from the 50% to the 50% point, and rise and fall times are measured at the 20% and 80% points, as shown in the following figure.



## 6.2 General AC specifications

These general purpose specifications apply to all signals configured for GPIO, UART, and timers.

Table 16. General switching specifications

| Symbol | Description                                                                                                  | Min.                                  | Max. | Unit             | Notes   |
|--------|--------------------------------------------------------------------------------------------------------------|---------------------------------------|------|------------------|---------|
|        | GPIO pin interrupt pulse width (digital glitch filter disabled) — Synchronous path                           | 1.5                                   | —    | Bus clock cycles | [1] [2] |
|        | GPIO pin interrupt pulse width (digital glitch filter disabled, passive filter disabled) — Asynchronous path | 50                                    | —    | ns               | [3]     |
| WFRST  | RESET_B input filtered pulse                                                                                 | —                                     | 10   | ns               | [4]     |
| WNFRST | RESET_B input not filtered pulse                                                                             | Maximum of (100 ns, bus clock period) | —    | ns               | [5]     |

- [1] This is the minimum pulse width that is guaranteed to pass through the pin synchronization circuitry. Shorter pulses may or may not be recognized. In Stop and VLPS modes, the synchronizer is bypassed so shorter pulses can be recognized in that case.
- [2] The greater of synchronous and asynchronous timing must be met.
- [3] These pins do not have a passive filter on the inputs. This is the shortest pulse width that is guaranteed to be recognized.
- [4] Maximum length of RESET\_B pulse which will be filtered by internal filter only if PCR\_PTA5[PFE] is at its reset value of 1'b1.
- [5] Minimum length of RESET\_B pulse, guaranteed not to be filtered by the internal filter only if PCR\_PTA5[PFE] is at its reset value of 1'b1. This number depends on the bus clock period also. In this case, minimum pulse width which will cause reset is 250 ns. For faster clock frequencies which have clock period less than 100 ns, the minimum pulse width not filtered will be 100 ns. After this filtering mechanism, the software has an option to put additional filtering in addition to this, by means of PCM\_RPC register and/or PORT\_DFER register for PTA5.

## 6.3 DC electrical specifications at 3.3 V Range

**Note:** For details on the pad types defined in Table 17 and Table 19, see Reference Manual section IO Signal Table and IO Signal Description Input Multiplexing sheet(s) attached with Reference Manual.

Table 17. DC electrical specifications at 3.3 V Range for S32K1xx series

| Symbol   | Parameter                 | Value               |      |                     | Unit | Notes |
|----------|---------------------------|---------------------|------|---------------------|------|-------|
|          |                           | Min.                | Typ. | Max.                |      |       |
| $V_{DD}$ | I/O Supply Voltage        | 2.7                 | 3.3  | 4                   | V    | [1]   |
| $V_{ih}$ | Input Buffer High Voltage | $0.7 \times V_{DD}$ | —    | $V_{DD} + 0.3$      | V    | [2]   |
| $V_{il}$ | Input Buffer Low Voltage  | $V_{SS} - 0.3$      | —    | $0.3 \times V_{DD}$ | V    | [3]   |

Table continues on the next page...

Table 17. DC electrical specifications at 3.3 V Range for S32K1xx series...continued

| Symbol                                        | Parameter                                                                              | Value                |       |                    | Unit | Notes |
|-----------------------------------------------|----------------------------------------------------------------------------------------|----------------------|-------|--------------------|------|-------|
|                                               |                                                                                        | Min.                 | Typ.  | Max.               |      |       |
| $V_{hys}$                                     | Input Buffer Hysteresis                                                                | $0.06 \times V_{DD}$ | —     | —                  | V    | [4]   |
| $I_{oh_{GPIO}}$<br>$I_{oh_{GPIO-HD\_DSE\_0}}$ | I/O current source capability measured when pad $V_{oh} = (V_{DD} - 0.8 \text{ V})$    | 3.5                  | —     | —                  | mA   |       |
| $I_{ol_{GPIO}}$<br>$I_{ol_{GPIO-HD\_DSE\_0}}$ | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 3                    | —     | —                  | mA   |       |
| $I_{oh_{GPIO-HD\_DSE\_1}}$                    | I/O current source capability measured when pad $V_{oh} = (V_{DD} - 0.8 \text{ V})$    | 14                   | —     | —                  | mA   | [5]   |
| $I_{ol_{GPIO-HD\_DSE\_1}}$                    | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 12                   | —     | —                  | mA   | [5]   |
| $I_{oh_{GPIO-FAST\_DSE\_0}}$                  | I/O current sink capability measured when pad $V_{oh}=V_{DD}-0.8 \text{ V}$            | 9.5                  | —     | —                  | mA   | [6]   |
| $I_{ol_{GPIO-FAST\_DSE\_0}}$                  | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 10                   | —     | —                  | mA   | [6]   |
| $I_{oh_{GPIO-FAST\_DSE\_1}}$                  | I/O current sink capability measured when pad $V_{oh}=V_{DD}-0.8 \text{ V}$            | 16                   | —     | —                  | mA   | [6]   |
| $I_{ol_{GPIO-FAST\_DSE\_1}}$                  | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 15.5                 | —     | —                  | mA   | [6]   |
| IOHT                                          | Output high current total for all ports                                                | —                    | —     | 100                | mA   |       |
| IIN                                           | Input leakage current (per pin) for full temperature range at $V_{DD} = 3.3 \text{ V}$ |                      | 5     | 500 <sup>[7]</sup> | nA   | [8]   |
|                                               | All pins other than high drive port pins                                               |                      | 0.005 | 0.5                | μA   |       |
|                                               | High drive port pins <sup>[9]</sup>                                                    |                      | 0.010 | 0.5                | μA   |       |
| $R_{PU}$                                      | Internal pullup resistors                                                              | 20                   |       | 60                 | kΩ   | [10]  |
| $R_{PD}$                                      | Internal pulldown resistors                                                            | 20                   |       | 60                 | kΩ   | [11]  |

[1] S32K148 will operate from 2.7 V when executing from internal FIRC. When the PLL is engaged S32K148 is guaranteed to operate from 2.97 V. All other S32K family devices operate from 2.7 V in all modes.

[2] For reset pads, same  $V_{ih}$  levels are applicable

[3] For reset pads, same  $V_{il}$  levels are applicable

[4] GPIO-Fast pads do not support input hysteresis (applicable for S32K148 only).

[5] The value given is measured at high drive strength mode. For value at low drive strength mode see the  $I_{oh\_Standard}$  value given above.

[6] For reference only. Run simulations with the IBIS model and custom board for accurate results.

[7] Typical leakage is given at room temperature. Maximum is given for 125°C. Leakage numbers increase with temperature, approximately every 12 – 14°C the value doubles. Leakage is tested at hot temperature. We ensure maximums are not exceeded. Please note that when the ADC module samples a pin, additional currents beyond the leakage number are drawn to charge the sample and hold capacitances and internal analog busses. These are difficult to predict

[8] Several I/O have both high drive and normal drive capability selected by the associated Portx\_PCRn[DSE] control bit. All other GPIOs are normal drive only. For details see IO Signal Description Input Multiplexing sheet(s) attached with the *Reference Manual*.

[9] When using ENET and SAI on S32K148, the overall device limits associated with high drive pin configurations must be respected i.e. On 144-pin LQFP the general purpose pins: PTA10, PTDO, and PTE4 must be set to low drive.

[10] Measured at input  $V = V_{SS}$

[11] Measured at input  $V = V_{DD}$

Table 18. DC electrical specifications at 3.3 V Range for S32K14xW series

| Symbol                                        | Parameter                                                                              | Value                |       |                     | Unit          | Notes |
|-----------------------------------------------|----------------------------------------------------------------------------------------|----------------------|-------|---------------------|---------------|-------|
|                                               |                                                                                        | Min.                 | Typ.  | Max.                |               |       |
| $V_{DD}$                                      | I/O Supply Voltage                                                                     | 3.13                 | 3.3   | 4                   | V             |       |
| $V_{ih}$                                      | Input Buffer High Voltage                                                              | $0.7 \times V_{DD}$  | —     | $V_{DD} + 0.3$      | V             | [1]   |
| $V_{il}$                                      | Input Buffer Low Voltage                                                               | $V_{SS} - 0.3$       | —     | $0.3 \times V_{DD}$ | V             | [2]   |
| $V_{hys}$                                     | Input Buffer Hysteresis                                                                | $0.06 \times V_{DD}$ | —     | —                   | V             | [3]   |
| $I_{oh_{GPIO}}$<br>$I_{oh_{GPIO-HD\_DSE\_0}}$ | I/O current source capability measured when pad $V_{oh} = (V_{DD} - 0.8 \text{ V})$    | 3.5                  | —     | —                   | mA            |       |
| $I_{ol_{GPIO}}$<br>$I_{ol_{GPIO-HD\_DSE\_0}}$ | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 3                    | —     | —                   | mA            |       |
| $I_{oh_{GPIO-HD\_DSE\_1}}$                    | I/O current source capability measured when pad $V_{oh} = (V_{DD} - 0.8 \text{ V})$    | 14                   | —     | —                   | mA            | [4]   |
| $I_{ol_{GPIO-HD\_DSE\_1}}$                    | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 12                   | —     | —                   | mA            | [4]   |
| IOHT                                          | Output high current total for all ports                                                | —                    | —     | 100                 | mA            |       |
| IIN                                           | Input leakage current (per pin) for full temperature range at $V_{DD} = 3.3 \text{ V}$ |                      |       |                     |               | [5]   |
|                                               | All pins other than high drive port pins                                               |                      | 0.005 | 0.5                 | $\mu\text{A}$ |       |
|                                               | High drive port pins (excluding XTAL pin)                                              |                      | 0.010 | 0.5                 | $\mu\text{A}$ |       |
|                                               | XTAL pin (PTB6) temperature $\leq 125^\circ \text{ C}$                                 |                      | 0.010 | 0.5                 | $\mu\text{A}$ |       |
|                                               | XTAL pin (PTB6) temperature $\geq 125^\circ \text{ C}$                                 |                      |       | 1.1                 | $\mu\text{A}$ |       |
| $R_{PU}$                                      | Internal pullup resistors                                                              | 20                   |       | 60                  | k $\Omega$    | [6]   |
| $R_{PD}$                                      | Internal pulldown resistors                                                            | 20                   |       | 60                  | k $\Omega$    | [7]   |

[1] For reset pads, same  $V_{ih}$  levels are applicable[2] For reset pads, same  $V_{il}$  levels are applicable

[3] GPIO-Fast pads do not support input hysteresis (applicable for S32K148 only).

[4] The value given is measured at high drive strength mode. For value at low drive strength mode see the  $I_{oh\_Standard}$  value given above.[5] Several I/O have both high drive and normal drive capability selected by the associated Portx\_PCRn[DSE] control bit. All other GPIOs are normal drive only. For details see IO Signal Description Input Multiplexing sheet(s) attached with the *Reference Manual*.[6] Measured at input  $V = V_{SS}$ [7] Measured at input  $V = V_{DD}$ 

## 6.4 DC electrical specifications at 5.0 V Range

Table 19. DC electrical specifications at 5.0 V Range for S32K1xx series

| Symbol   | Parameter                 | Value                |      |                | Unit | Notes |
|----------|---------------------------|----------------------|------|----------------|------|-------|
|          |                           | Min.                 | Typ. | Max.           |      |       |
| $V_{DD}$ | I/O Supply Voltage        | 4                    | —    | 5.5            | V    |       |
| $V_{ih}$ | Input Buffer High Voltage | $0.65 \times V_{DD}$ | —    | $V_{DD} + 0.3$ | V    | [1]   |

Table continues on the next page...

Table 19. DC electrical specifications at 5.0 V Range for S32K1xx series...continued

| Symbol                                  | Parameter                                                                              | Value                |       |                      | Unit | Notes |
|-----------------------------------------|----------------------------------------------------------------------------------------|----------------------|-------|----------------------|------|-------|
|                                         |                                                                                        | Min.                 | Typ.  | Max.                 |      |       |
| $V_{il}$                                | Input Buffer Low Voltage                                                               | $V_{SS} - 0.3$       | —     | $0.35 \times V_{DD}$ | V    | [2]   |
| $V_{hys}$                               | Input Buffer Hysteresis                                                                | $0.06 \times V_{DD}$ | —     | —                    | V    | [3]   |
| $I_{ohGPIO}$<br>$I_{ohGPIO-HD\_DSE\_0}$ | I/O current source capability measured when pad $V_{oh} = (V_{DD} - 0.8 \text{ V})$    | 5                    | —     | —                    | mA   |       |
| $I_{olGPIO}$<br>$I_{olGPIO-HD\_DSE\_0}$ | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 5                    | —     | —                    | mA   |       |
| $I_{ohGPIO-HD\_DSE\_1}$                 | I/O current source capability measured when pad $V_{oh} = V_{DD} - 0.8 \text{ V}$      | 20                   | —     | —                    | mA   | [4]   |
| $I_{olGPIO-HD\_DSE\_1}$                 | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 20                   | —     | —                    | mA   | [4]   |
| $I_{ohGPIO-FAST\_DSE\_0}$               | I/O current sink capability measured when pad $V_{oh} = V_{DD} - 0.8 \text{ V}$        | 14.0                 | —     | —                    | mA   | [5]   |
| $I_{olGPIO-FAST\_DSE\_0}$               | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 14.5                 | —     | —                    | mA   | [5]   |
| $I_{ohGPIO-FAST\_DSE\_1}$               | I/O current sink capability measured when pad $V_{oh} = V_{DD} - 0.8 \text{ V}$        | 21                   | —     | —                    | mA   | [5]   |
| $I_{olGPIO-FAST\_DSE\_1}$               | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 20.5                 | —     | —                    | mA   | [5]   |
| IOHT                                    | Output high current total for all ports                                                | —                    | —     | 100                  | mA   |       |
| IIN                                     | Input leakage current (per pin) for full temperature range at $V_{DD} = 3.3 \text{ V}$ |                      | 5     | 500 <sup>[6]</sup>   | nA   | [7]   |
|                                         | All pins other than high drive port pins                                               |                      | 0.005 | 0.5                  | μA   |       |
|                                         | High drive port pins (excluding XTAL pin)                                              |                      | 0.010 | 0.5                  | μA   |       |
| $R_{PU}$                                | Internal pullup resistors                                                              | 20                   |       | 50                   | kΩ   | [8]   |
| $R_{PD}$                                | Internal pulldown resistors                                                            | 20                   |       | 50                   | kΩ   | [9]   |

[1] For reset pads, same  $V_{ih}$  levels are applicable

[2] For reset pads, same  $V_{il}$  levels are applicable

[3] GPIO-Fast pads do not support input hysteresis (applicable for S32K148 only).

[4] The strong pad I/O pin is capable of switching a 50 pF load up to 40 MHz.

[5] For reference only. Run simulations with the IBIS model and custom board for accurate results.

[6] Typical leakage is given at room temperature. Maximum is given for 125°C. Leakage numbers increase with temperature, approximately every 12–14°C the value doubles. Leakage is tested at hot temperature. We ensure maximums are not exceeded. Please note that when the ADC module samples a pin, additional currents beyond the leakage number are drawn to charge the sample and hold capacitances and internal analog busses. These are difficult to predict

[7] Several I/O have both high drive and normal drive capability selected by the associated Portx\_PCRn[DSE] control bit. All other GPIOs are normal drive only. For details see IO Signal Description Input Multiplexing sheet(s) attached with the *Reference Manual*.

[8] Measured at input  $V = V_{SS}$

[9] Measured at input  $V = V_{DD}$

Table 20. DC electrical specifications at 5.0 V Range for S32K14xW series

| Symbol                                  | Parameter                                                                              | Value                |       |                      | Unit          | Notes |
|-----------------------------------------|----------------------------------------------------------------------------------------|----------------------|-------|----------------------|---------------|-------|
|                                         |                                                                                        | Min.                 | Typ.  | Max.                 |               |       |
| $V_{DD}$                                | I/O Supply Voltage                                                                     | 4                    | —     | 5.5                  | V             |       |
| $V_{ih}$                                | Input Buffer High Voltage                                                              | $0.65 \times V_{DD}$ | —     | $V_{DD} + 0.3$       | V             | [1]   |
| $V_{il}$                                | Input Buffer Low Voltage                                                               | $V_{SS} - 0.3$       | —     | $0.35 \times V_{DD}$ | V             | [2]   |
| $V_{hys}$                               | Input Buffer Hysteresis                                                                | $0.06 \times V_{DD}$ | —     | —                    | V             | [3]   |
| $I_{ohGPIO}$<br>$I_{ohGPIO-HD\_DSE\_0}$ | I/O current source capability measured when pad $V_{oh} = (V_{DD} - 0.8 \text{ V})$    | 5                    | —     | —                    | mA            |       |
| $I_{olGPIO}$<br>$I_{olGPIO-HD\_DSE\_0}$ | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 5                    | —     | —                    | mA            |       |
| $I_{ohGPIO-HD\_DSE\_1}$                 | I/O current source capability measured when pad $V_{oh} = V_{DD} - 0.8 \text{ V}$      | 20                   | —     | —                    | mA            | [4]   |
| $I_{olGPIO-HD\_DSE\_1}$                 | I/O current sink capability measured when pad $V_{ol} = 0.8 \text{ V}$                 | 20                   | —     | —                    | mA            | [4]   |
| IOHT                                    | Output high current total for all ports                                                | —                    | —     | 100                  | mA            |       |
| IIN                                     | Input leakage current (per pin) for full temperature range at $V_{DD} = 5.5 \text{ V}$ |                      |       |                      |               | [5]   |
|                                         | All pins other than high drive port pins                                               |                      | 0.005 | 0.5                  | $\mu\text{A}$ |       |
|                                         | High drive port pins                                                                   |                      | 0.010 | 0.5                  | $\mu\text{A}$ |       |
|                                         | XTAL pin (PTB6) temperature $\leq 125^\circ \text{ C}$                                 |                      | 0.010 | 0.5                  | $\mu\text{A}$ |       |
|                                         | XTAL pin (PTB6) temperature $\geq 125^\circ \text{ C}$                                 |                      |       | 1.1                  | $\mu\text{A}$ |       |
| $R_{PU}$                                | Internal pullup resistors                                                              | 20                   |       | 50                   | k $\Omega$    | [6]   |
| $R_{PD}$                                | Internal pulldown resistors                                                            | 20                   |       | 50                   | k $\Omega$    | [7]   |

[1] For reset pads, same  $V_{ih}$  levels are applicable[2] For reset pads, same  $V_{il}$  levels are applicable

[3] GPIO-Fast pads do not support input hysteresis (applicable for S32K148 only).

[4] The strong pad I/O pin is capable of switching a 50 pF load up to 40 MHz.

[5] Several I/O have both high drive and normal drive capability selected by the associated Portx\_PCRn[DSE] control bit. All other GPIOs are normal drive only. For details see IO Signal Description Input Multiplexing sheet(s) attached with the *Reference Manual*.[6] Measured at input  $V = V_{SS}$ [7] Measured at input  $V = V_{DD}$ 

## 6.5 AC electrical specifications at 3.3 V range

Table 21. AC electrical specifications at 3.3 V Range for S32K1xx series

| Symbol         | DSE | Rise time (nS) [1] |      | Fall time (nS) [1] |      | Capacitance (pF) [2] |
|----------------|-----|--------------------|------|--------------------|------|----------------------|
|                |     | Min.               | Max. | Min.               | Max. |                      |
| $t_{RF\_GPIO}$ | NA  | 3.2                | 14.5 | 3.4                | 15.7 | 25                   |

Table continues on the next page...

Table 21. AC electrical specifications at 3.3 V Range for S32K1xx series...continued

| Symbol                   | DSE | Rise time (nS) [1] |      | Fall time (nS) [1] |      | Capacitance (pF) [2] |
|--------------------------|-----|--------------------|------|--------------------|------|----------------------|
|                          |     | Min.               | Max. | Min.               | Max. |                      |
| tRF <sub>GPIO-HD</sub>   |     | 5.7                | 23.7 | 6.0                | 26.2 | 50                   |
|                          |     | 20.0               | 80.0 | 20.8               | 88.4 | 200                  |
|                          |     | 3.2                | 14.5 | 3.4                | 15.7 | 25                   |
|                          | 0   | 5.7                | 23.7 | 6.0                | 26.2 | 50                   |
|                          |     | 20.0               | 80.0 | 20.8               | 88.4 | 200                  |
|                          |     | 1.5                | 5.8  | 1.7                | 6.1  | 25                   |
|                          | 1   | 2.4                | 8.0  | 2.6                | 8.3  | 50                   |
|                          |     | 6.3                | 22.0 | 6.0                | 23.8 | 200                  |
|                          |     | 0.6                | 2.8  | 0.5                | 2.8  | 25                   |
| tRF <sub>GPIO-FAST</sub> | 0   | 3.0                | 7.1  | 2.6                | 7.5  | 50                   |
|                          |     | 12.0               | 27.0 | 10.3               | 26.8 | 200                  |
|                          |     | 0.4                | 1.3  | 0.38               | 1.3  | 25                   |
|                          | 1   | 1.5                | 3.8  | 1.4                | 3.9  | 50                   |
|                          |     | 7.4                | 14.9 | 7.0                | 15.3 | 200                  |
|                          |     |                    |      |                    |      |                      |
|                          |     |                    |      |                    |      |                      |
|                          |     |                    |      |                    |      |                      |
|                          |     |                    |      |                    |      |                      |

[1] For reference only. Run simulations with the IBIS model and your custom board for accurate results.

[2] Maximum capacitances supported on Standard IOs. However interface or protocol specific specifications might be different, for example for ENET, QSPI etc. . For protocol specific AC specifications, see respective sections.

Table 22. AC electrical specifications at 3.3 V Range for S32K14xW series

| Symbol                 | DSE | Rise time (nS) [1] |      | Fall time (nS) [1] |      | Capacitance (pF) [2] |
|------------------------|-----|--------------------|------|--------------------|------|----------------------|
|                        |     | Min.               | Max. | Min.               | Max. |                      |
| tRF <sub>GPIO</sub>    | NA  | 3.2                | 14.5 | 3.4                | 15.7 | 25                   |
|                        |     | 5.7                | 23.7 | 6.0                | 26.2 | 50                   |
|                        |     | 20.0               | 80.0 | 20.8               | 88.4 | 200                  |
| tRF <sub>GPIO-HD</sub> | 0   | 3.2                | 14.5 | 3.4                | 15.7 | 25                   |
|                        |     | 5.7                | 23.7 | 6.0                | 26.2 | 50                   |
|                        |     | 20.0               | 80.0 | 20.8               | 88.4 | 200                  |
|                        | 1   | 1.5                | 5.8  | 1.7                | 6.1  | 25                   |
|                        |     | 2.4                | 8.0  | 2.6                | 8.3  | 50                   |
|                        |     | 6.3                | 22.0 | 6.0                | 23.8 | 200                  |
|                        |     |                    |      |                    |      |                      |
|                        |     |                    |      |                    |      |                      |
|                        |     |                    |      |                    |      |                      |

[1] For reference only. Run simulations with the IBIS model and your custom board for accurate results.

[2] Maximum capacitances supported on Standard IOs. However interface or protocol specific specifications might be different. For protocol specific AC specifications, see respective sections.

## 6.6 AC electrical specifications at 5 V range

Table 23. AC electrical specifications at 5 V Range for S32K1xx series

| Symbol                   | DSE | Rise time (nS) <sup>[1]</sup> |       | Fall time (nS) <sup>[1]</sup> |      | Capacitance (pF) <sup>[2]</sup> |
|--------------------------|-----|-------------------------------|-------|-------------------------------|------|---------------------------------|
|                          |     | Min.                          | Max . | Min.                          | Max. |                                 |
| tRF <sub>GPIO</sub>      | NA  | 2.8                           | 9.4   | 2.9                           | 10.7 | 25                              |
|                          |     | 5.0                           | 15.7  | 5.1                           | 17.4 | 50                              |
|                          |     | 17.3                          | 54.8  | 17.6                          | 59.7 | 200                             |
| tRF <sub>GPIO-HD</sub>   | 0   | 2.8                           | 9.4   | 2.9                           | 10.7 | 25                              |
|                          |     | 5.0                           | 15.7  | 5.1                           | 17.4 | 50                              |
|                          |     | 17.3                          | 54.8  | 17.6                          | 59.7 | 200                             |
|                          | 1   | 1.1                           | 4.6   | 1.1                           | 5.0  | 25                              |
|                          |     | 2.0                           | 5.7   | 2.0                           | 5.8  | 50                              |
|                          |     | 5.4                           | 16.0  | 5.0                           | 16.0 | 200                             |
| tRF <sub>GPIO-FAST</sub> | 0   | 0.42                          | 2.2   | 0.37                          | 2.2  | 25                              |
|                          |     | 2.0                           | 5.0   | 1.9                           | 5.2  | 50                              |
|                          |     | 9.3                           | 18.8  | 8.5                           | 19.3 | 200                             |
|                          | 1   | 0.37                          | 0.9   | 0.35                          | 0.9  | 25                              |
|                          |     | 1.2                           | 2.7   | 1.2                           | 2.9  | 50                              |
|                          |     | 6.0                           | 11.8  | 6.0                           | 12.3 | 200                             |

[1] For reference only. Run simulations with the IBIS model and your custom board for accurate results.

[2] Maximum capacitances supported on Standard IOs. However interface or protocol specific specifications might be different, for example for ENET, QSPI etc. . For protocol specific AC specifications, see respective sections.

Table 24. AC electrical specifications at 5 V Range for S32K14xW series

| Symbol                 | DSE | Rise time (nS) <sup>[1]</sup> |       | Fall time (nS) <sup>[1]</sup> |      | Capacitance (pF) <sup>[2]</sup> |
|------------------------|-----|-------------------------------|-------|-------------------------------|------|---------------------------------|
|                        |     | Min.                          | Max . | Min.                          | Max. |                                 |
| tRF <sub>GPIO</sub>    | NA  | 2.8                           | 9.4   | 2.9                           | 10.7 | 25                              |
|                        |     | 5.0                           | 15.7  | 5.1                           | 17.4 | 50                              |
|                        |     | 17.3                          | 54.8  | 17.6                          | 59.7 | 200                             |
| tRF <sub>GPIO-HD</sub> | 0   | 2.8                           | 9.4   | 2.9                           | 10.7 | 25                              |
|                        |     | 5.0                           | 15.7  | 5.1                           | 17.4 | 50                              |
|                        |     | 17.3                          | 54.8  | 17.6                          | 59.7 | 200                             |
|                        | 1   | 1.1                           | 4.6   | 1.1                           | 5.0  | 25                              |
|                        |     | 2.0                           | 5.7   | 2.0                           | 5.8  | 50                              |
|                        |     | 5.4                           | 16.0  | 5.0                           | 16.0 | 200                             |

[1] For reference only. Run simulations with the IBIS model and your custom board for accurate results.

[2] Maximum capacitances supported on Standard IOs. However interface or protocol specific specifications might be different. For protocol specific AC specifications, see respective sections.

## 6.7 Standard input pin capacitance

Table 25. Standard input pin capacitance

| Symbol            | Description                     | Min. | Max. | Unit |
|-------------------|---------------------------------|------|------|------|
| C <sub>IN_D</sub> | Input capacitance: digital pins | —    | 7    | pF   |

**Note:** Please refer to [External System Oscillator electrical specifications](#) for EXTAL/XTAL pins.

## 6.8 Device clock specifications

Table 26. Device clock specifications <sup>[1]</sup>

| Symbol                                           | Description           | Min. | Max.              | Unit |
|--------------------------------------------------|-----------------------|------|-------------------|------|
| High Speed run mode <sup>[2]</sup>               |                       |      |                   |      |
| f <sub>SYS</sub>                                 | System and core clock | —    | 112               | MHz  |
| f <sub>BUS</sub>                                 | Bus clock             | —    | 56                | MHz  |
| f <sub>FLASH</sub>                               | Flash clock           | —    | 28                | MHz  |
| Normal run mode (S32K11x series)                 |                       |      |                   |      |
| f <sub>SYS</sub>                                 | System and core clock | —    | 48                | MHz  |
| f <sub>BUS</sub>                                 | Bus clock             | —    | 48                | MHz  |
| f <sub>FLASH</sub>                               | Flash clock           | —    | 24                | MHz  |
| Normal run mode (S32K14x series) <sup>[3]</sup>  |                       |      |                   |      |
| f <sub>SYS</sub>                                 | System and core clock | —    | 80                | MHz  |
| f <sub>BUS</sub>                                 | Bus clock             | —    | 40 <sup>[4]</sup> | MHz  |
| f <sub>FLASH</sub>                               | Flash clock           | —    | 26.67             | MHz  |
| Normal run mode (S32K14xW series) <sup>[5]</sup> |                       |      |                   |      |
| f <sub>SYS</sub>                                 | System and core clock | —    | 80                | MHz  |
| f <sub>BUS</sub>                                 | Bus clock             | —    | 40 <sup>[4]</sup> | MHz  |
| f <sub>FLASH</sub>                               | Flash clock           | —    | 20                | MHz  |
| VLPR mode (S32K1xx series) <sup>[6]</sup>        |                       |      |                   |      |
| f <sub>SYS</sub>                                 | System and core clock | —    | 4                 | MHz  |
| f <sub>BUS</sub>                                 | Bus clock             | —    | 4                 | MHz  |
| f <sub>FLASH</sub>                               | Flash clock           | —    | 1                 | MHz  |
| VLPR mode (S32K14xW series) <sup>[6]</sup>       |                       |      |                   |      |
| f <sub>SYS</sub>                                 | System and core clock | —    | 1                 | MHz  |
| f <sub>BUS</sub>                                 | Bus clock             | —    | 1                 | MHz  |
| f <sub>FLASH</sub>                               | Flash clock           | —    | 0.25              | MHz  |

[1] Refer to the section [Feature comparison](#) for the availability of modes and other specifications.

[2] Only available on some devices. See section [Feature comparison](#).

[3] With SPL as system clock source.

[4] 48 MHz when f<sub>SYS</sub> is 48 MHz

[5] With SPL as system clock source.

[6] The frequency limitations in VLPR mode here override any frequency specification listed in the timing specification for any other module.

## 7 Peripheral operating requirements and behaviors

### 7.1 System modules

There are no electrical specifications necessary for the device's system modules.

### 7.2 Clock interface modules

#### 7.2.1 External System Oscillator electrical specifications



Table 27. External System Oscillator electrical specifications

| Symbol                | Description                                                      | Min.                  | Typ. | Max.            | Unit | Notes   |
|-----------------------|------------------------------------------------------------------|-----------------------|------|-----------------|------|---------|
| g <sub>mXOSC</sub>    | Crystal oscillator transconductance                              |                       |      |                 |      |         |
|                       | SCG_SOSCCFG[RANGE]=2'b10 for 4-8 MHz                             | 2.2                   | —    | 13.7            | mA/V |         |
|                       | SCG_SOSCCFG[RANGE]=2'b11 for 8-40 MHz                            | 16                    | —    | 47              | mA/V |         |
| V <sub>IL</sub>       | Input low voltage — EXTAL pin in external clock mode             | V <sub>SS</sub>       | —    | 1.15            | V    |         |
| V <sub>IH</sub>       | Input high voltage — EXTAL pin in external clock mode            | 0.7 * V <sub>DD</sub> | —    | V <sub>DD</sub> | V    |         |
| C <sub>1</sub>        | EXTAL load capacitance                                           | —                     | —    | —               |      | [1]     |
| C <sub>2</sub>        | XTAL load capacitance                                            | —                     | —    | —               |      | [1]     |
| R <sub>F</sub>        | Feedback resistor                                                |                       |      |                 |      | [2]     |
|                       | Low-gain mode (HGO=0)                                            | —                     | —    | —               | MΩ   |         |
|                       | High-gain mode (HGO=1)                                           | —                     | 1    | —               | MΩ   |         |
| R <sub>S</sub> [3]    | Series resistor                                                  |                       |      |                 |      |         |
|                       | Low-gain mode (HGO=0)                                            | —                     | 0    | —               | kΩ   |         |
|                       | High-gain mode (HGO=1)                                           | —                     | 0    | —               | kΩ   |         |
| V <sub>pp_XTAL</sub>  | Peak-to-peak amplitude of oscillation (oscillator mode) at XTAL  |                       |      |                 |      | [4]     |
|                       | Low-gain mode (HGO=0)                                            | —                     | 1.0  | —               | V    |         |
|                       | High-gain mode (HGO=1)                                           | —                     | 3.3  | —               | V    |         |
| V <sub>pp_EXTAL</sub> | Peak-to-peak amplitude of oscillation (oscillator mode) at EXTAL |                       |      |                 |      | [4] [5] |
|                       | Low-gain mode (HGO=0)                                            | 0.8                   | —    | —               | V    |         |
|                       | High-gain mode (HGO=1), V <sub>DD</sub> = 4.0 V to 5.5 V         | 1.7                   | —    | —               | V    |         |
| V <sub>SOSCOP</sub>   | Oscillation operating point                                      |                       |      |                 |      | [4]     |
|                       | High-gain mode (HGO=1)                                           | 1.15                  | —    | —               | V    |         |

[1] Crystal oscillator circuit provides stable oscillations when  $g_{mXOSC} > 5 * g_{m\_crit}$ . The  $g_{m\_crit}$  is defined as:

$$g_{m\_crit} = 4 * (ESR + R_S) * (2\pi F)^2 * (C_0 + C_L)^2$$

where:

- $g_{mXOSC}$  is the transconductance of the internal oscillator circuit
- ESR is the equivalent series resistance of the external crystal
- $R_S$  is the series resistance connected between XTAL pin and external crystal for current limitation
- F is the external crystal oscillation frequency
- $C_0$  is the shunt capacitance of the external crystal
- $C_L$  is the external crystal total load capacitance.  $C_L = C_s + [C_1 * C_2 / (C_1 + C_2)]$
- $C_s$  is stray or parasitic capacitance on the pin due to any PCB traces
- $C_1$ ,  $C_2$  external load capacitances on EXTAL and XTAL pins

See manufacture datasheet for external crystal component values

- [2] • When low-gain is selected, internal  $R_F$  will be selected and external  $R_F$  should not be attached.
- When high-gain is selected, external  $R_F$  (1 M Ohm) needs to be connected for proper operation of the crystal. For external resistor, up to 5% tolerance is allowed.
- [3]  $R_S$  should be selected carefully to have appropriate oscillation amplitude for both protecting crystal or resonator device and satisfying proper oscillation startup condition.
- [4] The EXTAL and XTAL pins should only be connected to required oscillator components and must not be connected to any other devices.

- [5] Minimum value is shown as a reference only, however the HW design needs to ensure it reaches the maximum value by following the guidelines given in above notes (notes 1, 2, and 3) and performs the required robustness testing at the application level. During testing, a low capacitance probe ( $< 5 \text{ pF}$ ) must be used to avoid any decrease in the  $V_{pp\_EXTAL}$  value.

## 7.2.2 External System Oscillator frequency specifications

Table 28. External System Oscillator frequency specifications

| Symbol                | Description                                  | Min.                 |         | Typ.                 |         | Max.                 |         | Unit | Notes         |
|-----------------------|----------------------------------------------|----------------------|---------|----------------------|---------|----------------------|---------|------|---------------|
|                       |                                              | S32K14x/<br>S32K14xW | S32K11x | S32K14x/<br>S32K14xW | S32K11x | S32K14x/<br>S32K14xW | S32K11x |      |               |
| f <sub>osc_hi</sub>   | Oscillator crystal or resonator frequency    | 4                    |         | —                    |         | 40 <sup>[1][2]</sup> |         | MHz  |               |
| f <sub>ec_extal</sub> | Input clock frequency (external clock mode)  | —                    |         | —                    |         | 50                   | 48      | MHz  | [3], [2], [4] |
| t <sub>dc_extal</sub> | Input clock duty cycle (external clock mode) | 48                   |         | 50                   |         | 52                   |         | %    | [3], [2], [4] |
| t <sub>cst</sub>      | Crystal Start-up Time                        |                      |         |                      |         |                      |         |      |               |
|                       | 8 MHz low-gain mode (HGO=0)                  | —                    |         | 1.5                  |         | —                    |         | ms   | [5]           |
|                       | 8 MHz high-gain mode (HGO=1)                 | —                    |         | 2.5                  |         | —                    |         |      |               |
|                       | 40 MHz low-gain mode (HGO=0)                 | —                    |         | 2                    |         | —                    |         |      |               |
|                       | 40 MHz high-gain mode (HGO=1)                | —                    |         | 2                    |         | —                    |         |      |               |

[1] For an ideal clock of 40 MHz, if permitted by application requirements, an error of +/- 5% is supported with 50% duty cycle.

[2] (S32K14xW) At 40 MHz to 36 MHz when sourcing for ADC clock please use divider ADCn.ADC\_CFG1[ADICLK] to ½ or lower for the specific ADC instance. This will help achieve duty cycle requirement. For 36 MHz and 32 MHz 45-55% or better duty cycle to be maintained. For frequencies lower than 32 MHz, please maintain duty cycle of 40-50% or better.

[3] S32K1xx : Frequencies below 40 MHz can be used for degraded duty cycle upto 40-60%. When using for ADC clock further restrictions apply. At 50 MHz to 45 MHz when sourcing for ADC clock please use divider ADCn.ADC\_CFG1[ADICLK] to ½ or lower for the specific ADC instance. This will help achieve duty cycle requirement. for 45 MHz and 41 MHz 45-55% or higher duty cycle should be maintained.

[4] (S32K14xW) The limits to source ADC clock are 40 MHz, so in cases the input clock is higher than 40 MHz, it cannot be used as a source of ADC clock.

[5] Proper PC board layout procedures must be followed to achieve specifications.

## 7.2.3 System Clock Generation (SCG) specifications

### 7.2.3.1 Fast internal RC Oscillator (FIRC) electrical specifications

Table 29. Fast internal RC Oscillator electrical specifications for S32K1xx series

| Symbol                          | Parameter <sup>[1]</sup>                                             | Value |      |      | Unit               |
|---------------------------------|----------------------------------------------------------------------|-------|------|------|--------------------|
|                                 |                                                                      | Min.  | Typ. | Max. |                    |
| F <sub>FIRC</sub>               | FIRC target frequency                                                | —     | 48   | —    | MHz                |
| ΔF                              | Frequency deviation across process, voltage, and temperature < 105°C | —     | ±0.5 | ±1   | %F <sub>FIRC</sub> |
| ΔF125                           | Frequency deviation across process, voltage, and temperature < 125°C | —     | ±0.5 | ±1.1 | %F <sub>FIRC</sub> |
| T <sub>Startup</sub>            | Startup time                                                         |       | 3.4  | 5    | μs <sup>[2]</sup>  |
| T <sub>JIT</sub> <sup>[3]</sup> | Cycle-to-Cycle jitter                                                | —     | 300  | 500  | ps                 |
| T <sub>JIT</sub> <sup>[3]</sup> | Long term jitter over 1000 cycles                                    | —     | 0.04 | 0.1  | %F <sub>FIRC</sub> |

[1] With FIRC regulator enable

[2] Startup time is defined as the time between clock enablement and clock availability for system use.

[3] FIRC as system clock

Table 30. Fast internal RC Oscillator electrical specifications for S32K14xW series

| Symbol                          | Parameter <sup>[1]</sup>                                     | Value |      |      | Unit               |
|---------------------------------|--------------------------------------------------------------|-------|------|------|--------------------|
|                                 |                                                              | Min.  | Typ. | Max. |                    |
| F <sub>FIRC</sub>               | FIRC target frequency                                        | —     | 48   | —    | MHz                |
| ΔF                              | Frequency deviation across process, voltage, and temperature | —     | ±0.5 | ±1.4 | %F <sub>FIRC</sub> |
| T <sub>Startup</sub>            | Startup time                                                 |       | 3.4  | 5    | μs <sup>[2]</sup>  |
| T <sub>JIT</sub> <sup>[3]</sup> | Cycle-to-Cycle jitter                                        | —     | 300  | 500  | ps                 |
| T <sub>JIT</sub> <sup>[3]</sup> | Long term jitter over 1000 cycles                            | —     | 0.04 | 0.1  | %F <sub>FIRC</sub> |

[1] With FIRC regulator enable

[2] Startup time is defined as the time between clock enablement and clock availability for system use.

[3] FIRC as system clock

**Note:** Fast internal RC oscillator is compliant with LIN when device is used as a slave node.

### 7.2.3.2 Slow internal RC oscillator (SIRC) electrical specifications

Table 31. Slow internal RC oscillator (SIRC) electrical specifications for S32K1xx series

| Symbol            | Parameter                                                            | Value |      |      | Unit               |
|-------------------|----------------------------------------------------------------------|-------|------|------|--------------------|
|                   |                                                                      | Min.  | Typ. | Max. |                    |
| F <sub>SIRC</sub> | SIRC target frequency                                                | —     | 8    | —    | MHz                |
| ΔF                | Frequency deviation across process, voltage, and temperature < 105°C | —     | —    | ±3   | %F <sub>SIRC</sub> |

Table continues on the next page...

Table 31. Slow internal RC oscillator (SIRC) electrical specifications for S32K1xx series...continued

| Symbol               | Parameter                                                            | Value |      |      | Unit               |
|----------------------|----------------------------------------------------------------------|-------|------|------|--------------------|
|                      |                                                                      | Min.  | Typ. | Max. |                    |
| $\Delta F_{125}$     | Frequency deviation across process, voltage, and temperature < 125°C | —     | —    | ±3.3 | %F <sub>SIRC</sub> |
| T <sub>Startup</sub> | Startup time                                                         | —     | 9    | 12.5 | μs <sup>[1]</sup>  |

[1] Startup time is defined as the time between clock enablement and clock availability for system use.

Table 32. Slow internal RC oscillator (SIRC) electrical specifications for S32K14xW series

| Symbol               | Parameter                                                    | Value |      |      | Unit               |
|----------------------|--------------------------------------------------------------|-------|------|------|--------------------|
|                      |                                                              | Min.  | Typ. | Max. |                    |
| F <sub>SIRC</sub>    | SIRC target frequency                                        | —     | 8    | —    | MHz                |
| $\Delta F$           | Frequency deviation across process, voltage, and temperature | —     | —    | ±3.3 | %F <sub>SIRC</sub> |
| T <sub>Startup</sub> | Startup time                                                 | —     | 9    | 12.5 | μs <sup>[1]</sup>  |

[1] Startup time is defined as the time between clock enablement and clock availability for system use.

## 7.2.4 Low Power Oscillator (LPO) electrical specifications

Table 33. Low Power Oscillator (LPO) electrical specifications

| Symbol               | Parameter                               | Value                |                      |         |          | Unit |
|----------------------|-----------------------------------------|----------------------|----------------------|---------|----------|------|
|                      |                                         | Min.                 | Typ.                 | Max.    |          |      |
|                      |                                         | S32K1xx/<br>S32K14xW | S32K1xx/<br>S32K14xW | S32K1xx | S32K14xW |      |
| F <sub>LPO</sub>     | Internal low power oscillator frequency | 113                  | 128                  | 139     | 141      | kHz  |
| T <sub>startup</sub> | Startup Time                            | —                    | —                    | 20      |          | μs   |

## 7.2.5 SPLL electrical specifications

Table 34. SPLL electrical specifications

| Symbol                                 | Parameter                              | Min.                 | Typ.                 | Max.    |          | Unit |
|----------------------------------------|----------------------------------------|----------------------|----------------------|---------|----------|------|
|                                        |                                        | S32K1xx/<br>S32K14xW | S32K1xx/<br>S32K14xW | S32K1xx | S32K14xW |      |
| F <sub>SPLL_REF</sub> <sup>[1]</sup>   | PLL Reference Frequency Range          | 8                    | —                    | 16      |          | MHz  |
| F <sub>SPLL_Input</sub> <sup>[2]</sup> | PLL Input Frequency                    | 8                    | —                    | 40      | 48       | MHz  |
| F <sub>VCO_CLK</sub>                   | VCO output frequency                   | 180                  | —                    | 320     |          | MHz  |
| F <sub>SPLL_CLK</sub>                  | PLL output frequency                   | 90                   | —                    | 160     |          | MHz  |
| J <sub>CYC_SPLL</sub>                  | PLL Period Jitter (RMS) <sup>[3]</sup> |                      |                      |         |          |      |

Table continues on the next page...

Table 34. SPLL electrical specifications...continued

| Symbol                 | Parameter                                            | Min.                 | Typ.                 | Max.                                                    |          | Unit |
|------------------------|------------------------------------------------------|----------------------|----------------------|---------------------------------------------------------|----------|------|
|                        |                                                      | S32K1xx/<br>S32K14xW | S32K1xx/<br>S32K14xW | S32K1xx                                                 | S32K14xW |      |
|                        | at F <sub>VCO_CLK</sub> 180 MHz                      | —                    | 120                  | —                                                       |          | ps   |
|                        | at F <sub>VCO_CLK</sub> 320 MHz                      | —                    | 75                   | —                                                       |          | ps   |
| J <sub>ACC_SPLL</sub>  | PLL accumulated jitter over 1μs (RMS) <sup>[3]</sup> |                      |                      |                                                         |          |      |
|                        | at F <sub>VCO_CLK</sub> 180 MHz                      | —                    | —                    | 1350 <sup>[4]</sup>                                     |          | ps   |
|                        | at F <sub>VCO_CLK</sub> 320 MHz                      | —                    | —                    | 600 <sup>[4]</sup>                                      |          | ps   |
| D <sub>UNL</sub>       | Lock exit frequency tolerance                        | ± 4.47               | —                    | ± 5.97                                                  |          | %    |
| T <sub>SPLL_LOCK</sub> | Lock detector detection time <sup>[5]</sup>          | —                    | —                    | 150 × 10 <sup>-6</sup> + 1075(1/F <sub>SPLL_REF</sub> ) |          | s    |

[1] F<sub>SPLL\_REF</sub> is PLL reference frequency range after the PREDIV. For PREDIV and MULT settings refer SCG\_SPLLCFG register of Reference Manual.

[2] F<sub>SPLL\_input</sub> is PLL input frequency range before the PREDIV must be limited to the range 8 MHz to 40 MHz. This input source could be derived from a crystal oscillator or some other external square wave clock source using OSC bypass mode. For external clock source settings refer SCG\_SOSCCFG register of Reference Manual.

[3] This specification was obtained using a NXP developed PCB. PLL jitter is dependent on the noise characteristics of each PCB and results will vary

[4] The behavior of the accumulated PLL jitter saturates over 1us.

[5] Lock detector detection time is defined as the time between PLL enablement and clock availability for system use.

## 7.3 Memory and memory interfaces

### 7.3.1 Flash memory module (FTFC/FTFM) electrical specifications

This section describes the electrical characteristics of the flash memory module.

#### 7.3.1.1 Flash timing specifications — commands

Table 35. Flash command timing specifications for S32K14x series

| Symbol              | Description <sup>[1]</sup>    |              | S32K142 |     | S32K144 |     | S32K146 |     | S32K148 |     | Unit | Notes |
|---------------------|-------------------------------|--------------|---------|-----|---------|-----|---------|-----|---------|-----|------|-------|
|                     |                               |              | Typ     | Max | Typ     | Max | Typ     | Max | Typ     | Max |      |       |
| t <sub>rd1blk</sub> | Read 1 Block execution time   | 32 KB flash  | —       | —   | —       | —   | —       | —   | —       | —   | ms   |       |
|                     |                               | 64 KB flash  | —       | 0.5 | —       | 0.5 | —       | 0.5 | —       | —   |      |       |
|                     |                               | 128 KB flash | —       | —   | —       | —   | —       | —   | —       | —   |      |       |
|                     |                               | 256 KB flash | —       | 2   | —       | —   | —       | —   | —       | —   |      |       |
|                     |                               | 512 KB flash | —       | —   | —       | 1.8 | —       | 2   | —       | 2   |      |       |
| t <sub>rd1sec</sub> | Read 1 Section execution time | 2 KB flash   | —       | 75  | —       | 75  | —       | 75  | —       | 75  | μs   |       |
|                     |                               | 4 KB flash   | —       | 100 | —       | 100 | —       | 100 | —       | 100 |      |       |
| t <sub>pgmchk</sub> | Program Check execution time  | —            | —       | 95  | —       | 95  | —       | 95  | —       | 100 | μs   |       |
| t <sub>pgm8</sub>   | Program Phase execution time  | —            | 90      | 225 | 90      | 225 | 90      | 225 | 90      | 225 | μs   |       |

Table continues on the next page...

Table 35. Flash command timing specifications for S32K14x series...continued

| Symbol         | Description <sup>[1]</sup>                  |                     | S32K142 |      | S32K144 |      | S32K146 |       | S32K148 |       | Unit Notes |     |
|----------------|---------------------------------------------|---------------------|---------|------|---------|------|---------|-------|---------|-------|------------|-----|
|                |                                             |                     | Typ     | Max  | Typ     | Max  | Typ     | Max   | Typ     | Max   |            |     |
| $t_{ersblk}$   | Erase Flash Block execution time            | 32 KB flash         | —       | —    | —       | —    | —       | —     | —       | —     | ms         | [2] |
|                |                                             | 64 KB flash         | 30      | 550  | 30      | 550  | 30      | 550   | —       | —     |            |     |
|                |                                             | 128 KB flash        | —       | —    | —       | —    | —       | —     | —       | —     |            |     |
|                |                                             | 256 KB flash        | 250     | 2125 | —       | —    | —       | —     | —       | —     |            |     |
|                |                                             | 512 KB flash        | —       | —    | 250     | 4250 | 250     | 4250  | 250     | 4250  |            |     |
| $t_{ersscr}$   | Erase Flash Sector execution time           | —                   | 12      | 130  | 12      | 130  | 12      | 130   | 12      | 130   | ms         | [2] |
| $t_{pgmsec1k}$ | Program Section execution time (1KB flash)  | —                   | 5       | —    | 5       | —    | 5       | —     | 5       | —     | ms         |     |
| $t_{rd1all}$   | Read 1s All Block execution time            | —                   | —       | 2.8  | —       | 2.3  | —       | 5.2   | —       | 8.2   | ms         |     |
| $t_{rdonce}$   | Read Once execution time                    | —                   | —       | 30   | —       | 30   | —       | 30    | —       | 30    | μs         |     |
| $t_{pgmonce}$  | Program Once execution time                 | —                   | 90      | —    | 90      | —    | 90      | —     | 90      | —     | μs         |     |
| $t_{ersall}$   | Erase All Blocks execution time             | —                   | 250     | 2800 | 400     | 4900 | 700     | 10000 | 1400    | 17000 | ms         | [2] |
| $t_{vfykey}$   | Verify Backdoor Access Key execution time   | —                   | —       | 35   | —       | 35   | —       | 35    | —       | 35    | μs         |     |
| $t_{ersallu}$  | Erase All Blocks Unsecure execution time    | —                   | 250     | 2800 | 400     | 4900 | 700     | 10000 | 1400    | 17000 | ms         | [2] |
| $t_{pgmpart}$  | Program Partition for EEPROM execution time | 32 KB EEPROM backup | 70      | —    | 70      | —    | 70      | —     | —       | —     | ms         | [3] |
|                |                                             | 64 KB EEPROM backup | 71      | —    | 71      | —    | 71      | —     | 150     | —     |            |     |
| $t_{setram}$   | Set FlexRAM Function execution time         | Control Code 0xFF   | 0.08    | —    | 0.08    | —    | 0.08    | —     | 0.08    | —     | ms         | [3] |
|                |                                             | 32 KB EEPROM backup | 0.8     | 1.2  | 0.8     | 1.2  | 0.8     | 1.2   | —       | —     |            |     |

Table continues on the next page...

Table 35. Flash command timing specifications for S32K14x series...continued

| Symbol                  | Description <sup>[1]</sup>                                                   |                          | S32K142 |      | S32K144 |      | S32K146 |      | S32K148 |      | Unit Notes |                 |
|-------------------------|------------------------------------------------------------------------------|--------------------------|---------|------|---------|------|---------|------|---------|------|------------|-----------------|
|                         |                                                                              |                          | Typ     | Max  | Typ     | Max  | Typ     | Max  | Typ     | Max  |            |                 |
|                         |                                                                              | 48 KB EEPROM backup      | 1       | 1.5  | 1       | 1.5  | 1       | 1.5  | —       | —    |            |                 |
|                         |                                                                              | 64 KB EEPROM backup      | 1.3     | 1.9  | 1.3     | 1.9  | 1.3     | 1.9  | 1.3     | 1.9  |            |                 |
| t <sub>eewr8b</sub>     | Byte write to FlexRAM execution time                                         | 32 KB EEPROM backup      | 385     | 1700 | 385     | 1700 | 385     | 1700 | —       | —    | μs         | [3] , [4]       |
|                         |                                                                              | 48 KB EEPROM backup      | 430     | 1850 | 430     | 1850 | 430     | 1850 | —       | —    |            |                 |
|                         |                                                                              | 64 KB EEPROM backup      | 475     | 2000 | 475     | 2000 | 475     | 2000 | 475     | 4000 |            |                 |
| t <sub>eewr16b</sub>    | 16-bit write to FlexRAM execution time                                       | 32 KB EEPROM backup      | 385     | 1700 | 385     | 1700 | 385     | 1700 | —       | —    | μs         | [3] , [4]       |
|                         |                                                                              | 48 KB EEPROM backup      | 430     | 1850 | 430     | 1850 | 430     | 1850 | —       | —    |            |                 |
|                         |                                                                              | 64 KB EEPROM backup      | 475     | 2000 | 475     | 2000 | 475     | 2000 | 475     | 4000 |            |                 |
| t <sub>eewr32bers</sub> | 32-bit write to erased FlexRAM location execution time                       | —                        | 360     | 2000 | 360     | 2000 | 360     | 2000 | 360     | 2000 | μs         |                 |
| t <sub>eewr32b</sub>    | 32-bit write to FlexRAM execution time                                       | 32 KB EEPROM backup      | 630     | 2000 | 630     | 2000 | 630     | 2000 | —       | —    | μs         | [3] , [4]       |
|                         |                                                                              | 48 KB EEPROM backup      | 720     | 2125 | 720     | 2125 | 720     | 2125 | —       | —    |            |                 |
|                         |                                                                              | 64 KB EEPROM backup      | 810     | 2250 | 810     | 2250 | 810     | 2250 | 810     | 4500 |            |                 |
| t <sub>quickwr</sub>    | 32-bit Quick Write execution time: Time from CCIF clearing (start the write) | 1st 32-bit write         | 200     | 550  | 200     | 550  | 200     | 550  | 200     | 1100 | μs         | [4] , [5] , [6] |
|                         |                                                                              | 2nd through Next to Last | 150     | 550  | 150     | 550  | 150     | 550  | 150     | 550  |            |                 |

Table continues on the next page...

Table 35. Flash command timing specifications for S32K14x series...continued

| Symbol                    | Description <sup>[1]</sup>                                              |                                                            | S32K142 |                            | S32K144 |                            | S32K146 |                            | S32K148 |                            | Unit | Notes |
|---------------------------|-------------------------------------------------------------------------|------------------------------------------------------------|---------|----------------------------|---------|----------------------------|---------|----------------------------|---------|----------------------------|------|-------|
|                           |                                                                         |                                                            | Typ     | Max                        | Typ     | Max                        | Typ     | Max                        | Typ     | Max                        |      |       |
|                           | until CCIF setting (32-bit write complete, ready for next 32-bit write) | (Nth-1) 32-bit write                                       |         |                            |         |                            |         |                            |         |                            |      |       |
|                           |                                                                         | Last (Nth) 32-bit write (time for write only, not cleanup) | 200     | 550                        | 200     | 550                        | 200     | 550                        | 200     | 550                        |      |       |
| t <sub>quickwrClnup</sub> | Quick Write Cleanup execution time                                      | —                                                          | —       | (# of Quick Writes ) * 2.0 | —       | (# of Quick Writes ) * 2.0 | —       | (# of Quick Writes ) * 2.0 | —       | (# of Quick Writes ) * 2.0 | ms   | [7]   |

[1] All command times assume 25 MHz or greater flash clock frequency (for synchronization time between internal/external clocks).

[2] Maximum times for erase parameters based on expectations at cycling end-of-life.

[3] For all EEPROM Emulation terms, the specified timing shown assumes previous record cleanup has occurred (t<sub>quickwrClnup</sub>). This may be verified by executing FCCOB Command 0x77, and checking FCCOB number 5 contents show 0x00 - No EEPROM issues detected.

[4] 1st time EERAM writes after a Reset or SETRAM may incur additional overhead for EEE cleanup, resulting in up to 2× the times shown.

[5] Only after the Nth write completes will any data be valid. Emulated EEPROM record scheme cleanup overhead may occur after this point even after a brownout or reset. If power on reset occurs before the Nth write completes, the last valid record set will still be valid and the new records will be discarded.

[6] Quick Write times may take up to 550 μs, as additional cleanup may occur when crossing sector boundaries.

[7] Time for emulated EEPROM record scheme overhead cleanup. Automatically done after last (Nth) write completes, assuming still powered. Or via SETRAM cleanup execution command is requested at a later point.

Table 36. Flash command timing specifications

|                     |                                   |              | S32K142W |      | S32K144W |      |      |       |
|---------------------|-----------------------------------|--------------|----------|------|----------|------|------|-------|
| Symbol              | Description <sup>[1]</sup>        |              | Typ      | Max  | Typ      | Max  | Unit | Notes |
| t <sub>rd1blk</sub> | Read 1 Block execution time       | 64 KB flash  | —        | 0.8  | —        | 0.8  | ms   |       |
|                     |                                   | 256 KB flash | —        | 2.5  | —        | —    |      |       |
|                     |                                   | 512 KB flash | —        | —    | —        | 2.6  |      |       |
| t <sub>rd1sec</sub> | Read 1 Section execution time     | 2 KB flash   | —        | 200  | —        | 200  | μs   |       |
|                     |                                   | 4 KB flash   | —        | 220  | —        | 220  |      |       |
| t <sub>pgmchk</sub> | Program Check execution time      | —            | —        | 200  | —        | 200  | μs   |       |
| t <sub>pgm8</sub>   | Program Phase execution time      | —            | 150      | 330  | 150      | 330  | μs   |       |
| t <sub>ersblk</sub> | Erase Flash Block execution time  | 64 KB flash  | 100      | 1100 | 100      | 1100 | ms   | [2]   |
|                     |                                   | 256 KB flash | 350      | 4400 | —        | —    |      |       |
|                     |                                   | 512 KB flash | —        | —    | 700      | 8600 |      |       |
| t <sub>ersscr</sub> | Erase Flash Sector execution time | —            | 20       | 275  | 20       | 275  | ms   | [2]   |
| t <sub>pgmsec</sub> | Program Section execution time    | 1 KB flash   | 7        | —    | 7        | —    | ms   |       |

Table continues on the next page...

Table 36. Flash command timing specifications...continued

|                      |                                                                                                                                                      |                                                            | S32K142W |       | S32K144W |       |      |                 |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|----------|-------|----------|-------|------|-----------------|
| Symbol               | Description <sup>[1]</sup>                                                                                                                           |                                                            | Typ      | Max   | Typ      | Max   | Unit | Notes           |
| t <sub>rd1all</sub>  | Read 1s All Block execution time                                                                                                                     | —                                                          | —        | 3.5   | —        | 3.5   | ms   |                 |
| t <sub>rdonce</sub>  | Read Once execution time                                                                                                                             | —                                                          | —        | 40    | —        | 40    | μs   |                 |
| t <sub>pgmonce</sub> | Program Once execution time                                                                                                                          | —                                                          | 150      | —     | 150      | —     | μs   |                 |
| t <sub>ersall</sub>  | Erase All Blocks execution time                                                                                                                      | —                                                          | 475      | 5550  | 825      | 9750  | ms   | [2]             |
| t <sub>vyfkey</sub>  | Verify Backdoor Access Key execution time                                                                                                            | —                                                          | —        | 45    | —        | 45    | μs   |                 |
| t <sub>ersallu</sub> | Erase All Blocks Unsecure execution time                                                                                                             | —                                                          | 475      | 5550  | 825      | 9750  | ms   | [2]             |
| t <sub>pgmpart</sub> | Program Partition for EEPROM execution time                                                                                                          | 32 KB EEPROM backup                                        | 98       | —     | 98       | —     | ms   | [3]             |
|                      |                                                                                                                                                      | 64 KB EEPROM backup                                        | 100      | —     | 100      | —     |      |                 |
| t <sub>setram</sub>  | Set FlexRAM Function execution time                                                                                                                  | Control Code 0xFF                                          | 0.125    | 0.160 | 0.125    | 0.160 | ms   | [3]             |
|                      |                                                                                                                                                      | 32 KB EEPROM backup                                        | 1.0      | 1.5   | 1.0      | 1.5   |      |                 |
|                      |                                                                                                                                                      | 48 KB EEPROM backup                                        | 1.2      | 1.8   | 1.2      | 1.8   |      |                 |
|                      |                                                                                                                                                      | 64 KB EEPROM backup                                        | 1.4      | 2.1   | 1.4      | 2.1   |      |                 |
| t <sub>eevr32b</sub> | 32-bit write to FlexRAM execution time                                                                                                               | 32 KB EEPROM backup                                        | 1250     | 4000  | 1250     | 4000  | μs   | [3] , [1]       |
|                      |                                                                                                                                                      | 48 KB EEPROM backup                                        | 1500     | 4125  | 1500     | 4125  |      |                 |
|                      |                                                                                                                                                      | 64 KB EEPROM backup                                        | 1700     | 4250  | 1700     | 4250  |      |                 |
| t <sub>quickwr</sub> | 32-bit Quick Write execution time: Time from CCIF clearing (start the write) until CCIF setting (32-bit write complete, ready for next 32-bit write) | 1st 32-bit write                                           | 300      | 1400  | 300      | 1400  | μs   | [1] , [5] , [2] |
|                      |                                                                                                                                                      | 2nd through Next to Last (Nth-1) 32-bit write              | 275      | 1000  | 275      | 1000  |      |                 |
|                      |                                                                                                                                                      | Last (Nth) 32-bit write (time for write only, not cleanup) | 375      | 1200  | 375      | 1200  |      |                 |

Table continues on the next page...

Table 36. Flash command timing specifications...continued

|                           |                                    |   | S32K142W |                               | S32K144W |                               |      |       |
|---------------------------|------------------------------------|---|----------|-------------------------------|----------|-------------------------------|------|-------|
| Symbol                    | Description <sup>[1]</sup>         |   | Typ      | Max                           | Typ      | Max                           | Unit | Notes |
| t <sub>quickwrClnup</sub> | Quick Write Cleanup execution time | — | —        | (# of Quick Writes ) *<br>3.6 | —        | (# of Quick Writes ) *<br>3.6 | ms   | [7]   |

[1] 1st time FlexRAM writes after a Reset or SETRAM may incur additional overhead for emulated EEPROM cleanup, resulting in up to 2× the times shown.

[2] Quick Write times may take up to 1200 μs, as additional cleanup may occur when crossing sector boundaries.

Table 37. Flash command timing specifications for S32K11x series

| Symbol                | Description <sup>[1]</sup>                  |              | S32K116 |      | S32K118 |      | Unit |  | Notes |
|-----------------------|---------------------------------------------|--------------|---------|------|---------|------|------|--|-------|
|                       |                                             |              | Typ     | Max  | Typ     | Max  |      |  |       |
| t <sub>rd1blk</sub>   | Read 1 Block execution time                 | 32 KB flash  | —       | 0.36 | —       | 0.36 | ms   |  |       |
|                       |                                             | 64 KB flash  | —       | —    | —       | —    |      |  |       |
|                       |                                             | 128 KB flash | —       | 1.2  | —       | —    |      |  |       |
|                       |                                             | 256 KB flash | —       | —    | —       | 2    |      |  |       |
|                       |                                             | 512 KB flash | —       | —    | —       | —    |      |  |       |
| t <sub>rd1sec</sub>   | Read 1 Section execution time               | 2 KB flash   | —       | 75   | —       | 75   | μs   |  |       |
|                       |                                             | 4 KB flash   | —       | 100  | —       | 100  |      |  |       |
| t <sub>pgmchk</sub>   | Program Check execution time                | —            | —       | 100  | —       | 100  | μs   |  |       |
| t <sub>pgm8</sub>     | Program Phase execution time                | —            | 90      | 225  | 90      | 225  | μs   |  |       |
| t <sub>ersblk</sub>   | Erase Flash Block execution time            | 32 KB flash  | 15      | 300  | 15      | 300  | ms   |  | [1]   |
|                       |                                             | 64 KB flash  | —       | —    | —       | —    |      |  |       |
|                       |                                             | 128 KB flash | 120     | 1100 | —       | —    |      |  |       |
|                       |                                             | 256 KB flash | —       | —    | 250     | 2125 |      |  |       |
|                       |                                             | 512 KB flash | —       | —    | —       | —    |      |  |       |
| t <sub>ersscr</sub>   | Erase Flash Sector execution time           | —            | 12      | 130  | 12      | 130  | ms   |  | [1]   |
| t <sub>pgmsec1k</sub> | Program Section execution time (1 KB flash) | —            | 5       | —    | 5       | —    | ms   |  |       |
| t <sub>rd1all</sub>   | Read 1s All Block execution time            | —            | —       | 1.7  | —       | 2.8  | ms   |  |       |
| t <sub>rdonce</sub>   | Read Once execution time                    | —            | —       | 30   | —       | 30   | μs   |  |       |
| t <sub>pgmonce</sub>  | Program Once execution time                 | —            | 90      | —    | 90      | —    | μs   |  |       |

Table continues on the next page...

Table 37. Flash command timing specifications for S32K11x series...continued

| Symbol                 | Description <sup>[1]</sup>                             |                     | S32K116 |      | S32K118 |      | Unit Notes |           |
|------------------------|--------------------------------------------------------|---------------------|---------|------|---------|------|------------|-----------|
|                        |                                                        |                     | Typ     | Max  | Typ     | Max  |            |           |
| t <sub>ersall</sub>    | Erase All Blocks execution time                        | —                   | 150     | 1500 | 230     | 2500 | ms         | [1]       |
| t <sub>vykey</sub>     | Verify Backdoor Access Key execution time              | —                   | —       | 35   | —       | 35   | μs         |           |
| t <sub>ersallu</sub>   | Erase All Blocks Unsecure execution time               | —                   | 150     | 1500 | 230     | 2500 | ms         | [1]       |
| t <sub>pgmpart</sub>   | Program Partition for EEPROM execution time            | 32 KB EEPROM backup | 71      | —    | 71      | —    | ms         | [3]       |
|                        |                                                        | 64 KB EEPROM backup | —       | —    | —       | —    |            |           |
| t <sub>setram</sub>    | Set FlexRAM Function execution time                    | Control Code 0xFF   | 0.08    | —    | 0.08    | —    | ms         | [3]       |
|                        |                                                        | 32 KB EEPROM backup | 0.8     | 1.2  | 0.8     | 1.2  |            |           |
|                        |                                                        | 48 KB EEPROM backup | —       | —    | —       | —    |            |           |
|                        |                                                        | 64 KB EEPROM backup | —       | —    | —       | —    |            |           |
| t <sub>ewr8b</sub>     | Byte write to FlexRAM execution time                   | 32 KB EEPROM backup | 385     | 1700 | 385     | 1700 | μs         | [3] , [2] |
|                        |                                                        | 48 KB EEPROM backup | —       | —    | —       | —    |            |           |
|                        |                                                        | 64 KB EEPROM backup | —       | —    | —       | —    |            |           |
| t <sub>ewr16b</sub>    | 16-bit write to FlexRAM execution time                 | 32 KB EEPROM backup | 385     | 1700 | 385     | 1700 | μs         | [3] , [2] |
|                        |                                                        | 48 KB EEPROM backup | —       | —    | —       | —    |            |           |
|                        |                                                        | 64 KB EEPROM backup | —       | —    | —       | —    |            |           |
| t <sub>ewr32bers</sub> | 32-bit write to erased FlexRAM location execution time | —                   | 360     | 2000 | 360     | 2000 | μs         |           |
| t <sub>ewr32b</sub>    | 32-bit write to FlexRAM execution time                 | 32 KB EEPROM backup | 630     | 2000 | 630     | 2000 | μs         | [3] , [2] |
|                        |                                                        | 48 KB EEPROM backup | —       | —    | —       | —    |            |           |

Table continues on the next page...

Table 37. Flash command timing specifications for S32K11x series...continued

| Symbol                    | Description <sup>[1]</sup>                                                                                                                           |                                                            | S32K116 |                            | S32K118 |                            | Unit | Notes           |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------|----------------------------|---------|----------------------------|------|-----------------|
|                           |                                                                                                                                                      |                                                            | Typ     | Max                        | Typ     | Max                        |      |                 |
|                           |                                                                                                                                                      | 64 KB EEPROM backup                                        | —       | —                          | —       | —                          |      |                 |
| t <sub>quickwr</sub>      | 32-bit Quick Write execution time: Time from CCIF clearing (start the write) until CCIF setting (32-bit write complete, ready for next 32-bit write) | 1st 32-bit write                                           | 200     | 550                        | 200     | 550                        | μs   | [2] , [5] , [6] |
|                           |                                                                                                                                                      | 2nd through Next to Last (Nth-1) 32-bit write              | 150     | 550                        | 150     | 550                        |      |                 |
|                           |                                                                                                                                                      | Last (Nth) 32-bit write (time for write only, not cleanup) | 200     | 550                        | 200     | 550                        |      |                 |
| t <sub>quickwrClnup</sub> | Quick Write Cleanup execution time                                                                                                                   | —                                                          | —       | (# of Quick Writes ) * 2.0 | —       | (# of Quick Writes ) * 2.0 | ms   | [7]             |

[1] Maximum times for erase parameters based on expectations at cycling end-of-life.

[2] 1st time EERAM writes after a Reset or SETRAM may incur additional overhead for EEE cleanup, resulting in up to 2x the times shown.

**Note:** Under certain circumstances FlexMEM maximum times may be exceeded. In this case the user or application may wait, or assert reset to the FTFC/FTFM macro to stop the operation.

### 7.3.1.2 Reliability specifications

Table 38. NVM reliability specifications

| Symbol                                                     | Description                                                                                        | Min.           | Typ.   | Max.   | Unit             | Notes       |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------|--------|--------|------------------|-------------|
| When using as Program and Data Flash                       |                                                                                                    |                |        |        |                  |             |
| t <sub>nvmretp1k</sub>                                     | Data retention after up to 1 K cycles                                                              | 20             | —      | —      | years            | [1]         |
| n <sub>nvmcycp</sub>                                       | Cycling endurance                                                                                  | 1 K            | —      | —      | cycles           | [2] [3]     |
| When using FlexMemory feature : FlexRAM as Emulated EEPROM |                                                                                                    |                |        |        |                  |             |
| t <sub>nvmretee100</sub>                                   | Data retention up to 100% of write endurance                                                       | 5              | —      | —      | years            | [1] [4]     |
| t <sub>nvmretee10</sub>                                    | Data retention up to 10% of write endurance                                                        | 20             | —      | —      | years            | [1]         |
| n <sub>nvmwree16</sub><br>n <sub>nvmwree256</sub>          | Write endurance<br>• EEPROM backup to FlexRAM ratio = 16<br>• EEPROM backup to FlexRAM ratio = 256 | 100 K<br>1.6 M | —<br>— | —<br>— | writes<br>writes | [5] [6] [7] |

[1] Data retention period per block begins upon initial user factory programming or after each subsequent erase.

[2] Program and Erase for PFlash and DFlash are supported across product temperature specification.

[3] Cycling endurance is per DFlash or PFlash Sector.

[4] Background maintenance operations during normal FlexRAM usage extend effective data retention life beyond 5 years.

[5] FlexMemory write endurance specified for 32-bit writes to FlexRAM and is supported across product temperature specification. Greater write endurance may be achieved with larger ratios of EEPROM backup to FlexRAM.

[6] For usage of any emulated EEPROM driver other than the FlexMemory feature, the endurance spec will fall back to the specified endurance value of the DFlash specification (1K).

[7] [FlexMemory calculator tool](#) is available at NXP web site for help in estimation of the maximum write endurance achievable at specific EEPROM/FlexRAM ratios. The "In Spec" portions of the online calculator refer to the NVM reliability specifications section of data sheet. This calculator only applies to the FlexMemory feature.

### 7.3.2 QuadSPI AC specifications

The following table describes the QuadSPI electrical characteristics.

- Measurements are with maximum output load of 25 pF, input transition of 1 ns and pad configured with fastest slew settings (DSE = 1'b1).
- I/O operating voltage ranges from 2.97 V to 3.6 V
- While doing the mode transition (RUN -> HSRUN or HSRUN -> RUN ), the interface should be OFF.
- Add 50 ohm series termination on board in QuadSPI SCK for Flash A to avoid loop back reflection when using in Internal DQS (PAD Loopback) mode.
- QuadSPI trace length should be 3 inches.
- For non-Quad mode of operation if external device doesn't have pull-up feature, external pull-up needs to be added at board level for non-used pads.
- With external pull-up, performance of the interface may degrade based on load associated with external pull-up.

Table 39. QuadSPI electrical specifications

| FLASH PORT             | Sym              | Unit | FLASH A            |     |              |     |                   |     |                      |     |              |     |                   |     | FLASH B                  |     |                    |                   |
|------------------------|------------------|------|--------------------|-----|--------------|-----|-------------------|-----|----------------------|-----|--------------|-----|-------------------|-----|--------------------------|-----|--------------------|-------------------|
|                        |                  |      | RUN <sup>[1]</sup> |     |              |     |                   |     | HSRUN <sup>[1]</sup> |     |              |     |                   |     | RUN/HSRUN <sup>[2]</sup> |     |                    |                   |
| QuadSPI Mode           |                  |      | SDR                |     |              |     |                   |     | SDR                  |     |              |     |                   |     | SDR                      |     | DDR <sup>[3]</sup> |                   |
|                        |                  |      | Internal Sampling  |     | Internal DQS |     |                   |     | Internal Sampling    |     | Internal DQS |     |                   |     | Internal Sampling        |     | External DQS       |                   |
|                        |                  |      | N1                 |     | PAD Loopback |     | Internal Loopback |     | N1                   |     | PAD Loopback |     | Internal Loopback |     | N1                       |     | External DQS       |                   |
|                        |                  |      | Min                | Max | Min          | Max | Min               | Max | Min                  | Max | Min          | Max | Min               | Max | Min                      | Max | Min                | Max               |
|                        |                  |      |                    |     |              |     |                   |     |                      |     |              |     |                   |     |                          |     |                    |                   |
| Register Settings      |                  |      |                    |     |              |     |                   |     |                      |     |              |     |                   |     |                          |     |                    |                   |
| MCR[DDR_EN]            |                  | -    | 0                  |     | 0            |     | 0                 |     | 0                    |     | 0            |     | 0                 |     | 0                        |     | 1                  |                   |
| MCR[DQS_EN]            |                  | -    | 0                  |     | 1            |     | 1                 |     | 0                    |     | 1            |     | 1                 |     | 0                        |     | 1                  |                   |
| MCR[SCLKCFG[0]]        |                  | -    | -                  |     | 1            |     | 0                 |     | -                    |     | 1            |     | 0                 |     | -                        |     | -                  |                   |
| MCR[SCLKCFG[1]]        |                  | -    | -                  |     | 1            |     | 0                 |     | -                    |     | 1            |     | 0                 |     | -                        |     | -                  |                   |
| MCR[SCLKCFG[2]]        |                  | -    | -                  |     | -            |     | -                 |     | -                    |     | -            |     | -                 |     | -                        |     | 0                  |                   |
| MCR[SCLKCFG[3]]        |                  | -    | -                  |     | -            |     | -                 |     | -                    |     | -            |     | -                 |     | -                        |     | 0                  |                   |
| MCR[SCLKCFG[5]]        |                  | -    | 0                  |     | 0            |     | 0                 |     | 0                    |     | 0            |     | 0                 |     | 0                        |     | 1                  |                   |
| SMPR[FSPHS]            |                  | -    | 0                  |     | 1            |     | 0                 |     | 0                    |     | 1            |     | 0                 |     | 0                        |     | 0                  |                   |
| SMPR[FSDLY]            |                  | -    | 0                  |     | 0            |     | 0                 |     | 0                    |     | 0            |     | 0                 |     | 0                        |     | 0                  |                   |
| SOCCR<br>[SOCCFG[7:0]] |                  |      | -                  |     | 0            |     | 23                |     | -                    |     | 0            |     | 30                |     | -                        |     | -                  |                   |
| SOCCR[SOCCFG[15:8]]    |                  | -    | -                  |     | -            |     | -                 |     | -                    |     | -            |     | -                 |     | -                        |     | 30                 |                   |
| FLSHCR[TDH]            |                  | -    | 0x00               |     | 0x00         |     | 0x00              |     | 0x00                 |     | 0x00         |     | 0x00              |     | 0x00                     |     | 0x01               |                   |
| Timing Parameters      |                  |      |                    |     |              |     |                   |     |                      |     |              |     |                   |     |                          |     |                    |                   |
| SCK Clock Frequency    | f <sub>SCK</sub> | MHz  | -                  | 38  | -            | 64  | -                 | 48  | -                    | 40  | -            | 80  | -                 | 50  | -                        | 20  | -                  | 20 <sup>[4]</sup> |

Table continues on the next page...

Table 39. QuadSPI electrical specifications...continued

| FLASH PORT                    | Sym                | Unit | FLASH A            |              |              |              |                   |              |                      |              |                |                  |                   |              | FLASH B                  |              |                     |              |
|-------------------------------|--------------------|------|--------------------|--------------|--------------|--------------|-------------------|--------------|----------------------|--------------|----------------|------------------|-------------------|--------------|--------------------------|--------------|---------------------|--------------|
|                               |                    |      | RUN <sup>[1]</sup> |              |              |              |                   |              | HSRUN <sup>[1]</sup> |              |                |                  |                   |              | RUN/HSRUN <sup>[2]</sup> |              |                     |              |
| QuadSPI Mode                  |                    |      | SDR                |              |              |              |                   |              | SDR                  |              |                |                  |                   |              | SDR                      |              | DDR <sup>[3]</sup>  |              |
|                               |                    |      | Internal Sampling  |              | Internal DQS |              |                   |              | Internal Sampling    |              | Internal DQS   |                  |                   |              | Internal Sampling        |              | External DQS        |              |
|                               |                    |      | N1                 |              | PAD Loopback |              | Internal Loopback |              | N1                   |              | PAD Loopback   |                  | Internal Loopback |              | N1                       |              | External DQS        |              |
|                               |                    |      | Min                | Max          | Min          | Max          | Min               | Max          | Min                  | Max          | Min            | Max              | Min               | Max          | Min                      | Max          | Min                 | Max          |
| SCK Clock Period              | t <sub>SCK</sub>   | ns   | 1/fSCK             | -            | 1/fSCK       | -            | 1/fSCK            | -            | 1/fSCK               | -            | 1/fSCK         | -                | 1/fSCK            | -            | 50.0                     | -            | 50.0 <sup>[4]</sup> | -            |
| SCK Duty Cycle                | t <sub>SDC</sub>   | ns   | tSCK/2 - 1.5       | tSCK/2 + 1.5 | tSCK/2 - 1.5 | tSCK/2 + 1.5 | tSCK/2 - 1.5      | tSCK/2 + 1.5 | tSCK/2 - 1.5         | tSCK/2 + 1.5 | tSCK/2 - 0.750 | tSCK/2 - 0.750   | tSCK/2 - 1.5      | tSCK/2 + 1.5 | tSCK/2 - 2.5             | tSCK/2 + 2.5 | tSCK/2 - 2.5        | tSCK/2 + 2.5 |
| Data Input Setup Time         | t <sub>IS</sub>    | ns   | 15                 | -            | 2.5          | -            | 10                | -            | 14                   | -            | 1.6            | -                | 9                 | -            | 25                       | -            | 2                   | -            |
| Data Input Hold Time          | t <sub>IH</sub>    | ns   | 0                  | -            | 1            | -            | 1                 | -            | 0                    | -            | 1              | -                | 1                 | -            | 0                        | -            | 20                  | -            |
| Data Output Valid Time        | t <sub>OV</sub>    | ns   | -                  | 4.5          | -            | 4.5          | -                 | 4.5          | -                    | 4            | -              | 4                | -                 | 4            | -                        | 10           | -                   | 10           |
| Data Output In-Valid Time     | t <sub>IV</sub>    | ns   | -                  | 5            | -            | 5            | -                 | 5            | -                    | 5            | -              | 3 <sup>[5]</sup> | -                 | 5            | -                        | 5            | 5                   | -            |
| CS to SCK Time <sup>[6]</sup> | t <sub>CSSCK</sub> | ns   | 5                  | -            | 5            | -            | 5                 | -            | 5                    | -            | 5              | -                | 5                 | -            | 10                       | -            | 10                  | -            |
| SCK to CS Time <sup>[7]</sup> | t <sub>SCKCS</sub> | ns   | 5                  | -            | 5            | -            | 5                 | -            | 5                    | -            | 5              | -                | 5                 | -            | 5                        | -            | 5                   | -            |
| Output Load                   |                    | pf   | 25                 |              | 25           |              | 25                |              | 25                   |              | 25             |                  | 25                |              | 25                       |              | 25                  |              |

[1] See Reference Manual for details on mode settings

[2] See Reference Manual for details on mode settings

[3] Valid for HyperRAM only

[4] RWDS(External DQS CLK) frequency

[5] For operating frequency ≤ 64 Mhz, Output invalid time is 5 ns.

[6] Program register value QuadSPI\_FLSHCR[TCSS] = 4'h2

[7] Program register value QuadSPI\_FLSHCR[TCSH] = 4'h1



Figure 10. QuadSPI input timing (SDR mode) diagram

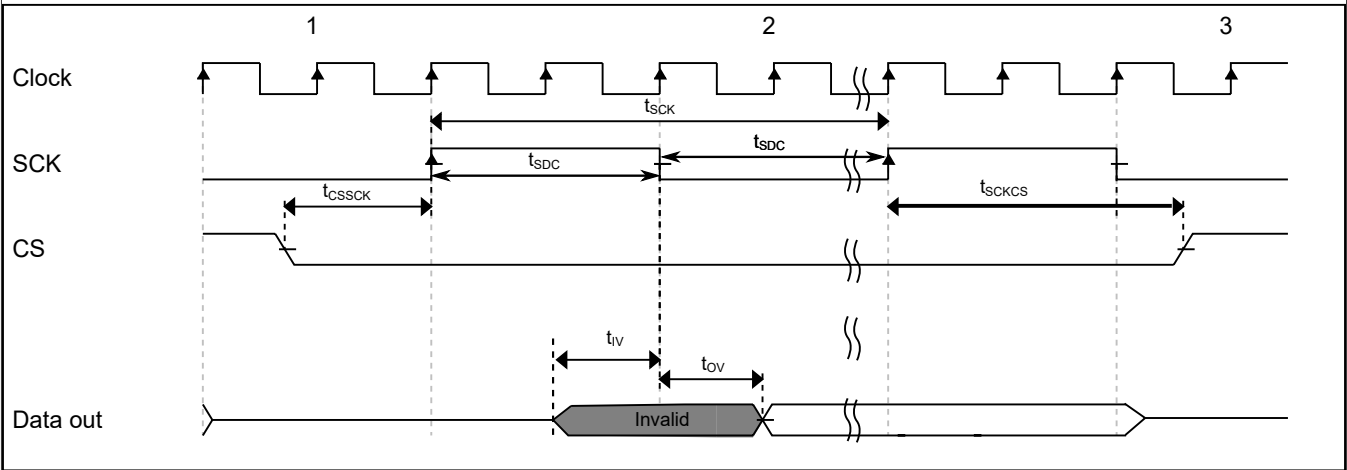


Figure 11. QuadSPI output timing (SDR mode) diagram



TIS – Setup Time

TIH – Hold Time

Figure 12. QuadSPI input timing (HyperRAM mode) diagram



Figure 13. QuadSPI output timing (HyperRAM mode) diagram

## 7.4 Analog modules

### 7.4.1 ADC electrical specifications

#### 7.4.1.1 12-bit ADC operating conditions

Table 40. 12-bit ADC operating conditions<sup>[1]</sup>

| Symbol            | Description                        | Conditions                                               | Min.                                                                      | Typ. <sup>[2]</sup>                | Max.                                                                      |          | Unit | Notes    |
|-------------------|------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------|----------|------|----------|
|                   |                                    |                                                          | S32K1xx/<br>S32K14xW                                                      | S32K1xx/<br>S32K14xW               | S32K1xx                                                                   | S32K14xW |      |          |
| V <sub>REFH</sub> | ADC reference voltage high         |                                                          | See <a href="#">Voltage and current operating requirements</a> for values | V <sub>DDA</sub>                   | See <a href="#">Voltage and current operating requirements</a> for values |          | V    | [3]      |
| V <sub>REFL</sub> | ADC reference voltage low          |                                                          | See <a href="#">Voltage and current operating requirements</a> for values | 0                                  | See <a href="#">Voltage and current operating requirements</a> for values |          | mV   | [3]      |
| V <sub>ADIN</sub> | Input voltage                      |                                                          | V <sub>REFL</sub>                                                         | —                                  | V <sub>REFH</sub>                                                         |          | V    |          |
| R <sub>S</sub>    | Source impedence                   | f <sub>ADCK</sub> < 4 MHz                                | —                                                                         | —                                  | 5                                                                         |          | kΩ   |          |
| R <sub>SW1</sub>  | Channel Selection Switch Impedance |                                                          | —                                                                         | 0.650                              | 0.780                                                                     |          | kΩ   |          |
| R <sub>AD</sub>   | Sampling Switch Impedance          |                                                          | —                                                                         | 0.155                              | 1.0                                                                       |          | kΩ   |          |
| C <sub>P1</sub>   | Pin Capacitance                    |                                                          | —                                                                         | 2.1                                | 2.5                                                                       |          | pF   |          |
| C <sub>P2</sub>   | Analog Bus Capacitance             |                                                          | —                                                                         | 3 (S32K144)<br>2 (S32K116)         | 4                                                                         |          | pF   |          |
| C <sub>S</sub>    | Sampling capacitance               |                                                          | —                                                                         | 5.1 (gain = 0)... 7.2 (gain = max) | 6.36 (gain = 0)... 9.36 (gain = max)                                      |          | pF   |          |
| f <sub>ADCK</sub> | ADC conversion clock frequency     | Normal usage                                             | 2                                                                         | 40                                 | 50                                                                        | 40       | MHz  | [4], [5] |
| f <sub>CONV</sub> | ADC conversion frequency           | No ADC hardware averaging.<br>[6] Continuous conversions | 46.4                                                                      | 928                                | 1160                                                                      |          | Ksps | [7] [8]  |

Table continues on the next page...

Table 40. 12-bit ADC operating conditions<sup>[1]...continued</sup>

| Symbol | Description | Conditions                                                                                                  | Min.                 | Typ. <sup>[2]</sup>  | Max.    |          | Unit | Notes   |
|--------|-------------|-------------------------------------------------------------------------------------------------------------|----------------------|----------------------|---------|----------|------|---------|
|        |             |                                                                                                             | S32K1xx/<br>S32K14xW | S32K1xx/<br>S32K14xW | S32K1xx | S32K14xW |      |         |
|        |             | enabled, subsequent conversion time                                                                         |                      |                      |         |          |      |         |
|        |             | ADC hardware averaging set to 32. <sup>[6]</sup> Continuous conversions enabled, subsequent conversion time | 1.45                 | 29                   | 36.25   |          | Ksps | [7] [8] |

[1] All the data mention in this table is only validated in a simulation and granted by NXP design team.

[2] Typical values assume  $V_{DDA} = 5\text{ V}$ , Temp = 25 °C,  $f_{ADCK} = 40\text{ MHz}$ ,  $R_{AS} = 20\ \Omega$ , and  $C_{AS} = 10\text{ nF}$  unless otherwise stated. Typical values are for reference only, and are not tested in production.

[3] For packages without dedicated  $V_{REFH}$  and  $V_{REFL}$  pins,  $V_{REFH}$  is internally tied to  $V_{DDA}$ , and  $V_{REFL}$  is internally tied to  $V_{SS}$ . To get maximum performance, reference supply quality should be better than SAR ADC. See application note [AN5032](#) for details.

[4] Clock and compare cycle need to be set according to the guidelines mentioned in the *Reference Manual*.

[5] ADC conversion will become less reliable above maximum frequency.

[6] When using ADC hardware averaging, see the *Reference Manual* to determine the most appropriate setting for AVGS.

[7] Numbers based on the minimum sampling time of 275 ns.

[8] For guidelines and examples of conversion rate calculation, see the *Reference Manual* section 'Calibration function'



Figure 14. ADC input impedance equivalency diagram

7.4.1.2 12-bit ADC electrical characteristics

**Note:**

- ADC performance specifications are documented using a single ADC. For parallel/simultaneous operation of both ADCs, either for sampling the same channel by both ADCs or for sampling different channels by each ADC, some amount of decrease in performance can be expected. Care must be taken to stagger the two ADC conversions, in particular the sample phase, to minimize the impact of simultaneous conversions.
- On reduced pin packages where ADC reference pins are shared with supply pins, ADC analog performance characteristics may be impacted. The amount of variation will be directly impacted by the external PCB layout and hence care must be taken with PCB routing. See [AN5426](#) for details
- All accuracy numbers assume the ADC is calibrated with  $V_{REFH}=V_{DDA}=V_{DD}$ , with the calibration frequency set to less than or equal to half of the maximum specified ADC clock frequency.

Table 41. 12-bit ADC characteristics (2.7 V to 3 V) ( $V_{REFH} = V_{DDA}$ ,  $V_{REFL} = V_{SS}$ ) <sup>[1]</sup>

| Symbol             | Description                | Min. | Typ. <sup>[2]</sup> | Max.                                | Unit               | Notes              |
|--------------------|----------------------------|------|---------------------|-------------------------------------|--------------------|--------------------|
| $V_{DDA}$          | Supply voltage             | 2.7  | —                   | 3                                   | V                  |                    |
| $I_{DDA\_ADC}$     | Supply current per ADC     | —    | 0.6                 | —                                   | mA                 | [3]                |
| SMPLTS             | Sample Time                | 275  | —                   | Refer to the<br>Reference<br>Manual | ns                 |                    |
| TUE <sup>[4]</sup> | Total unadjusted error     | —    | ±4                  | ±8                                  | LSB <sup>[5]</sup> | [6], [7], [8], [9] |
| DNL                | Differential non-linearity | —    | ±1.0                | —                                   | LSB <sup>[5]</sup> | [6], [7], [8], [9] |
| INL                | Integral non-linearity     | —    | ±2.0                | —                                   | LSB <sup>[5]</sup> | [6], [7], [8], [9] |

- [1] This table is not applicable to S32K14xW.  
 [2] Typical values assume  $V_{DDA} = 3\text{ V}$ ,  $\text{Temp} = 25\text{ }^{\circ}\text{C}$ ,  $f_{\text{ADCK}} = 40\text{ MHz}$ ,  $R_{\text{AS}} = 20\text{ }\Omega$ , and  $C_{\text{AS}} = 10\text{ nF}$ .  
 [3] The ADC supply current depends on the ADC conversion rate.  
 [4] Represents total static error, which includes offset and full scale error.  
 [5]  $1\text{ LSB} = (V_{\text{REFH}} - V_{\text{REFL}})/2^N$   
 [6] The specifications are with averaging and in standalone mode only. Performance may degrade depending upon device use case scenario. When using ADC averaging, refer to the *Reference Manual* to determine the most appropriate settings for AVGS.  
 [7] For ADC signals adjacent to  $V_{\text{DD}}/V_{\text{SS}}$  or XTAL/EXTAL or high frequency switching pins, some degradation in the ADC performance may be observed.  
 [8] All values guarantee the performance of the ADC for multiple ADC input channel pins. When using ADC to monitor the internal analog parameters, assume minor degradation.  
 [9] All the parameters in the table are given assuming system clock as the clocking source for ADC.

**Table 42. 12-bit ADC characteristics (3 V to 5.5 V) ( $V_{\text{REFH}} = V_{\text{DDA}}$ ,  $V_{\text{REFL}} = V_{\text{SS}}$ )**

| Symbol                | Description                | Min.    |          | Typ. <sup>[1]</sup>  | Max.                                    | Unit               | Notes              |
|-----------------------|----------------------------|---------|----------|----------------------|-----------------------------------------|--------------------|--------------------|
|                       |                            | S32K1xx | S32K14xW | S32K1xx/<br>S32K14xW | S32K1xx/<br>S32K14xW                    |                    |                    |
| $V_{\text{DDA}}$      | Supply voltage             | 3       | 3.13     | —                    | 5.5                                     | V                  |                    |
| $I_{\text{DDA\_ADC}}$ | Supply current per ADC     | —       |          | 1                    | —                                       | mA                 | [2]                |
| SMPLTS                | Sample Time                | 275     |          | —                    | Refer to the<br><i>Reference Manual</i> | ns                 |                    |
| TUE <sup>[3]</sup>    | Total unadjusted error     | —       |          | $\pm 4$              | $\pm 8$                                 | LSB <sup>[4]</sup> | [5], [6], [7], [8] |
| DNL                   | Differential non-linearity | —       |          | $\pm 0.7$            | —                                       | LSB <sup>[4]</sup> | [5], [6], [7], [8] |
| INL                   | Integral non-linearity     | —       |          | $\pm 1.0$            | —                                       | LSB <sup>[4]</sup> | [5], [6], [7], [8] |

- [1] Typical values assume  $V_{\text{DDA}} = 5.0\text{ V}$ ,  $\text{Temp} = 25\text{ }^{\circ}\text{C}$ ,  $f_{\text{ADCK}} = 40\text{ MHz}$ ,  $R_{\text{AS}} = 20\text{ }\Omega$ , and  $C_{\text{AS}} = 10\text{ nF}$  unless otherwise stated.  
 [2] The ADC supply current depends on the ADC conversion rate.  
 [3] Represents total static error, which includes offset and full scale error.  
 [4]  $1\text{ LSB} = (V_{\text{REFH}} - V_{\text{REFL}})/2^N$   
 [5] The specifications are with averaging and in standalone mode only. Performance may degrade depending upon device use case scenario. When using ADC averaging, refer to the *Reference Manual* to determine the most appropriate settings for AVGS.  
 [6] For ADC signals adjacent to  $V_{\text{DD}}/V_{\text{SS}}$  or XTAL/EXTAL or high frequency switching pins, some degradation in the ADC performance may be observed.  
 [7] All values guarantee the performance of the ADC for multiple ADC input channel pins. When using ADC to monitor the internal analog parameters, assume minor degradation.  
 [8] All the parameters in the table are given assuming system clock as the clocking source for ADC.

**Note:**

- Due to triple bonding in lower pin packages like 32-QFN, 48-LQFP, and 64-LQFP degradation might be seen in ADC parameters.
- When using high speed interfaces such as the QuadSPI, SAI0, SAI1 or ENET there may be some ADC degradation on the adjacent analog input paths. See following table for details.

**Table 43.**

| Pin name | TGATE purpose      |
|----------|--------------------|
| PTE8     | CMP0_IN3           |
| PTC3     | ADC0_SE11/CMP0_IN4 |
| PTC2     | ADC0_SE10/CMP0_IN5 |
| PTD7     | CMP0_IN6           |

*Table continues on the next page...*

Table 43. ...continued

| Pin name | TGATE purpose |
|----------|---------------|
| PTD6     | CMP0_IN7      |
| PTD28    | ADC1_SE22     |
| PTD27    | ADC1_SE21     |

## 7.4.2 CMP with 8-bit DAC electrical specifications

Table 44. Comparator with 8-bit DAC electrical specifications for S32K1xx series

| Symbol       | Description                                          | Min. | Typ.          | Max.      | Unit    |
|--------------|------------------------------------------------------|------|---------------|-----------|---------|
| $I_{DDHS}$   | Supply current, High-speed mode <sup>[1]</sup>       |      |               |           | $\mu A$ |
|              | -40 - 125 °C                                         | —    | 230           | 300       |         |
| $I_{DDL S}$  | Supply current, Low-speed mode <sup>[1]</sup>        |      |               |           | $\mu A$ |
|              | -40 - 105 °C                                         | —    | 6             | 11        |         |
|              | -40 - 125 °C                                         |      | 6             | 13        |         |
| $V_{AIN}$    | Analog input voltage                                 | 0    | 0 - $V_{DDA}$ | $V_{DDA}$ | V       |
| $V_{AIO}$    | Analog input offset voltage, High-speed mode         |      |               |           | mV      |
|              | -40 - 125 °C                                         | -25  | $\pm 1$       | 25        |         |
| $V_{AIO}$    | Analog input offset voltage, Low-speed mode          |      |               |           | mV      |
|              | -40 - 125 °C                                         | -40  | $\pm 4$       | 40        |         |
| $t_{DHSB}$   | Propagation delay, High-speed mode <sup>[2]</sup>    |      |               |           | ns      |
|              | -40 - 105 °C                                         | —    | 35            | 200       |         |
|              | -40 - 125 °C                                         |      | 35            | 300       |         |
| $t_{DL S B}$ | Propagation delay, Low-speed mode <sup>[2]</sup>     |      |               |           | $\mu s$ |
|              | -40 - 105 °C                                         | —    | 0.5           | 2         |         |
|              | -40 - 125 °C                                         | —    | 0.5           | 3         |         |
| $t_{DHSS}$   | Propagation delay, High-speed mode <sup>[3]</sup>    |      |               |           | ns      |
|              | -40 - 105 °C                                         | —    | 70            | 400       |         |
|              | -40 - 125 °C                                         | —    | 70            | 500       |         |
| $t_{DLSS}$   | Propagation delay, Low-speed mode <sup>[3]</sup>     |      |               |           | $\mu s$ |
|              | -40 - 105 °C                                         | —    | 1             | 5         |         |
|              | -40 - 125 °C                                         | —    | 1             | 5         |         |
| $t_{IDHS}$   | Initialization delay, High-speed mode <sup>[4]</sup> |      |               |           | $\mu s$ |
|              | -40 - 125 °C                                         | —    | 1.5           | 3         |         |

Table continues on the next page...

Table 44. Comparator with 8-bit DAC electrical specifications for S32K1xx series...continued

| Symbol             | Description                                          | Min.  | Typ. | Max. | Unit               |
|--------------------|------------------------------------------------------|-------|------|------|--------------------|
| t <sub>IDLS</sub>  | Initialization delay, Low-speed mode <sup>[4]</sup>  |       |      |      | μs                 |
|                    | -40 - 125 °C                                         | —     | 10   | 30   |                    |
| V <sub>HYST0</sub> | Analog comparator hysteresis, Hyst0                  |       |      |      | mV                 |
|                    | -40 - 125 °C                                         | —     | 0    | —    |                    |
| V <sub>HYST1</sub> | Analog comparator hysteresis, Hyst1, High-speed mode |       |      |      | mV                 |
|                    | -40 - 125 °C                                         | —     | 19   | 66   |                    |
|                    | Analog comparator hysteresis, Hyst1, Low-speed mode  |       |      |      |                    |
|                    | -40 - 125 °C                                         | —     | 15   | 40   |                    |
| V <sub>HYST2</sub> | Analog comparator hysteresis, Hyst2, High-speed mode |       |      |      | mV                 |
|                    | -40 - 125 °C                                         | —     | 34   | 133  |                    |
|                    | Analog comparator hysteresis, Hyst2, Low-speed mode  |       |      |      |                    |
|                    | -40 - 125 °C                                         | —     | 23   | 80   |                    |
| V <sub>HYST3</sub> | Analog comparator hysteresis, Hyst3, High-speed mode |       |      |      | mV                 |
|                    | -40 - 125 °C                                         | —     | 46   | 200  |                    |
|                    | Analog comparator hysteresis, Hyst3, Low-speed mode  |       |      |      |                    |
|                    | -40 - 125 °C                                         | —     | 32   | 120  |                    |
| I <sub>DAC8b</sub> | 8-bit DAC current adder (enabled)                    |       |      |      |                    |
|                    | 3.3V Reference Voltage                               | —     | 6    | 9    | μA                 |
|                    | 5V Reference Voltage                                 | —     | 10   | 16   | μA                 |
| INL <sup>[5]</sup> | 8-bit DAC integral non-linearity                     | −0.75 | —    | 0.75 | LSB <sup>[6]</sup> |
| DNL                | 8-bit DAC differential non-linearity                 | −0.5  | —    | 0.5  | LSB <sup>[6]</sup> |
| t <sub>DDAC</sub>  | Initialization and switching settling time           | —     | —    | 30   | μs                 |

[1] Difference at input &gt; 200mV

[2] Applied  $\pm (100 \text{ mV} + V_{HYST0/1/2/3} + \text{max. of } V_{AIO})$  around switch point.[3] Applied  $\pm (30 \text{ mV} + 2 \times V_{HYST0/1/2/3} + \text{max. of } V_{AIO})$  around switch point.[4] Applied  $\pm (100 \text{ mV} + V_{HYST0/1/2/3})$ .

[5] Calculation method used: Linear Regression Least Square Method

[6]  $1 \text{ LSB} = V_{\text{reference}}/256$

Table 45. Comparator with 8-bit DAC electrical specifications for S32K14xW series

| Symbol      | Description                                          | Min. | Typ.          | Max.      | Unit          |
|-------------|------------------------------------------------------|------|---------------|-----------|---------------|
| $I_{DDHS}$  | Supply current, High-speed mode <sup>[1]</sup>       |      |               |           | $\mu\text{A}$ |
|             | -40 - 125 °C                                         | —    | 230           | 300       |               |
|             | -40 - 150 °C                                         |      | 230           | 300       |               |
| $I_{DDL S}$ | Supply current, Low-speed mode <sup>[1]</sup>        |      |               |           | $\mu\text{A}$ |
|             | -40 - 105 °C                                         | —    | 6             | 11        |               |
|             | -40 - 125 °C                                         |      | 6             | 13        |               |
|             | -40 - 150 °C                                         |      | 6             | 13        |               |
| $V_{AIN}$   | Analog input voltage                                 | 0    | 0 - $V_{DDA}$ | $V_{DDA}$ | V             |
| $V_{AIO}$   | Analog input offset voltage, High-speed mode         |      |               |           | mV            |
|             | -40 - 125 °C                                         | -25  | $\pm 1$       | 25        |               |
|             | -40 - 150 °C                                         | -50  | $\pm 1$       | 50        |               |
| $V_{AIO}$   | Analog input offset voltage, Low-speed mode          |      |               |           | mV            |
|             | -40 - 125 °C                                         | -40  | $\pm 4$       | 40        |               |
|             | -40 - 150 °C                                         | -50  | $\pm 4$       | 50        |               |
| $t_{DHSB}$  | Propagation delay, High-speed mode <sup>[2]</sup>    |      |               |           | ns            |
|             | -40 - 105 °C                                         | —    | 35            | 200       |               |
|             | -40 - 125 °C                                         |      | 35            | 300       |               |
|             | -40 - 150 °C                                         |      | 35            | 400       |               |
| $t_{DLSB}$  | Propagation delay, Low-speed mode <sup>[2]</sup>     |      |               |           | $\mu\text{s}$ |
|             | -40 - 105 °C                                         | —    | 0.5           | 2         |               |
|             | -40 - 125 °C                                         | —    | 0.5           | 3         |               |
|             | -40 - 150 °C                                         | —    | 0.5           | 3         |               |
| $t_{DHSS}$  | Propagation delay, High-speed mode <sup>[3]</sup>    |      |               |           | ns            |
|             | -40 - 105 °C                                         | —    | 70            | 400       |               |
|             | -40 - 125 °C                                         | —    | 70            | 500       |               |
|             | -40 - 150 °C                                         | —    | 70            | 600       |               |
| $t_{DLSS}$  | Propagation delay, Low-speed mode <sup>[3]</sup>     |      |               |           | $\mu\text{s}$ |
|             | -40 - 105 °C                                         | —    | 1             | 5         |               |
|             | -40 - 125 °C                                         | —    | 1             | 5         |               |
|             | -40 - 150 °C                                         | —    | 1             | 5         |               |
| $t_{IDHS}$  | Initialization delay, High-speed mode <sup>[4]</sup> |      |               |           | $\mu\text{s}$ |

Table continues on the next page...

Table 45. Comparator with 8-bit DAC electrical specifications for S32K14xW series...continued

| Symbol             | Description                                          | Min. | Typ. | Max. | Unit |
|--------------------|------------------------------------------------------|------|------|------|------|
|                    | -40 - 125 °C                                         | —    | 1.5  | 3    |      |
|                    | -40 - 150 °C                                         | —    | 1.5  | 3    |      |
| t <sub>IDLS</sub>  | Initialization delay, Low-speed mode <sup>[4]</sup>  |      |      |      | μs   |
|                    | -40 - 125 °C                                         | —    | 10   | 30   |      |
|                    | -40 - 150 °C                                         | —    | 10   | 30   |      |
| V <sub>HYST0</sub> | Analog comparator hysteresis, Hyst0                  |      |      |      | mV   |
|                    | -40 - 125 °C                                         | —    | 0    | —    |      |
|                    | -40 - 150 °C                                         | —    | 0    | —    |      |
| V <sub>HYST1</sub> | Analog comparator hysteresis, Hyst1, High-speed mode |      |      |      | mV   |
|                    | -40 - 125 °C                                         | —    | 19   | 66   |      |
|                    | -40 - 150 °C                                         | —    | 19   | 90   |      |
|                    | Analog comparator hysteresis, Hyst1, Low-speed mode  |      |      |      |      |
|                    | -40 - 125 °C                                         | —    | 15   | 40   |      |
|                    | -40 - 150 °C                                         | —    | 15   | 40   |      |
| V <sub>HYST2</sub> | Analog comparator hysteresis, Hyst2, High-speed mode |      |      |      | mV   |
|                    | -40 - 125 °C                                         | —    | 34   | 133  |      |
|                    | -40 - 150 °C                                         | —    | 34   | 186  |      |
|                    | Analog comparator hysteresis, Hyst2, Low-speed mode  |      |      |      |      |
|                    | -40 - 125 °C                                         | —    | 23   | 80   |      |
|                    | -40 - 150 °C                                         | —    | 23   | 80   |      |
| V <sub>HYST3</sub> | Analog comparator hysteresis, Hyst3, High-speed mode |      |      |      | mV   |
|                    | -40 - 125 °C                                         | —    | 46   | 200  |      |
|                    | -40 - 150 °C                                         | —    | 46   | 280  |      |
|                    | Analog comparator hysteresis, Hyst3, Low-speed mode  |      |      |      |      |
|                    | -40 - 125 °C                                         | —    | 32   | 120  |      |
|                    | -40 - 150 °C                                         | —    | 32   | 120  |      |
| I <sub>DAC8b</sub> | 8-bit DAC current adder (enabled)                    |      |      |      |      |
|                    | 3.3V Reference Voltage                               | —    | 6    | 9    |      |

Table continues on the next page...

Table 45. Comparator with 8-bit DAC electrical specifications for S32K14xW series...continued

| Symbol             | Description                                | Min.  | Typ. | Max. | Unit               |
|--------------------|--------------------------------------------|-------|------|------|--------------------|
|                    | 5V Reference Voltage                       | —     | 10   | 16   | $\mu\text{A}$      |
| INL <sup>[5]</sup> | 8-bit DAC integral non-linearity           |       |      |      | LSB <sup>[6]</sup> |
|                    | -40 - 125 °C                               | -0.75 | —    | 0.75 |                    |
|                    | -40 - 150 °C                               | -2    | —    | 2    |                    |
| DNL                | 8-bit DAC differential non-linearity       | -0.5  | —    | 0.5  | LSB <sup>[6]</sup> |
| t <sub>DDAC</sub>  | Initialization and switching settling time | —     | —    | 30   | $\mu\text{s}$      |

- [1] Difference at input > 200mV  
 [2] Applied  $\pm (100 \text{ mV} + V_{\text{HYST0}/1/2/3+ \text{ max. of } V_{\text{AIO}})$  around switch point.  
 [3] Applied  $\pm (30 \text{ mV} + 2 \times V_{\text{HYST0}/1/2/3+ \text{ max. of } V_{\text{AIO}})$  around switch point.  
 [4] Applied  $\pm (100 \text{ mV} + V_{\text{HYST0}/1/2/3-)$ .  
 [5] Calculation method used: Linear Regression Least Square Method  
 [6] 1 LSB =  $V_{\text{reference}}/256$

**Note:** For comparator IN signals adjacent to  $V_{\text{DD}}/V_{\text{SS}}$  or XTAL/EXTAL or switching pins cross coupling may happen and hence hysteresis settings can be used to obtain the desired comparator performance. Additionally, an external capacitor (1nF) should be used to filter noise on input signal. Also, source drive should not be weak (Signal with < 50 K pull up/down is recommended).

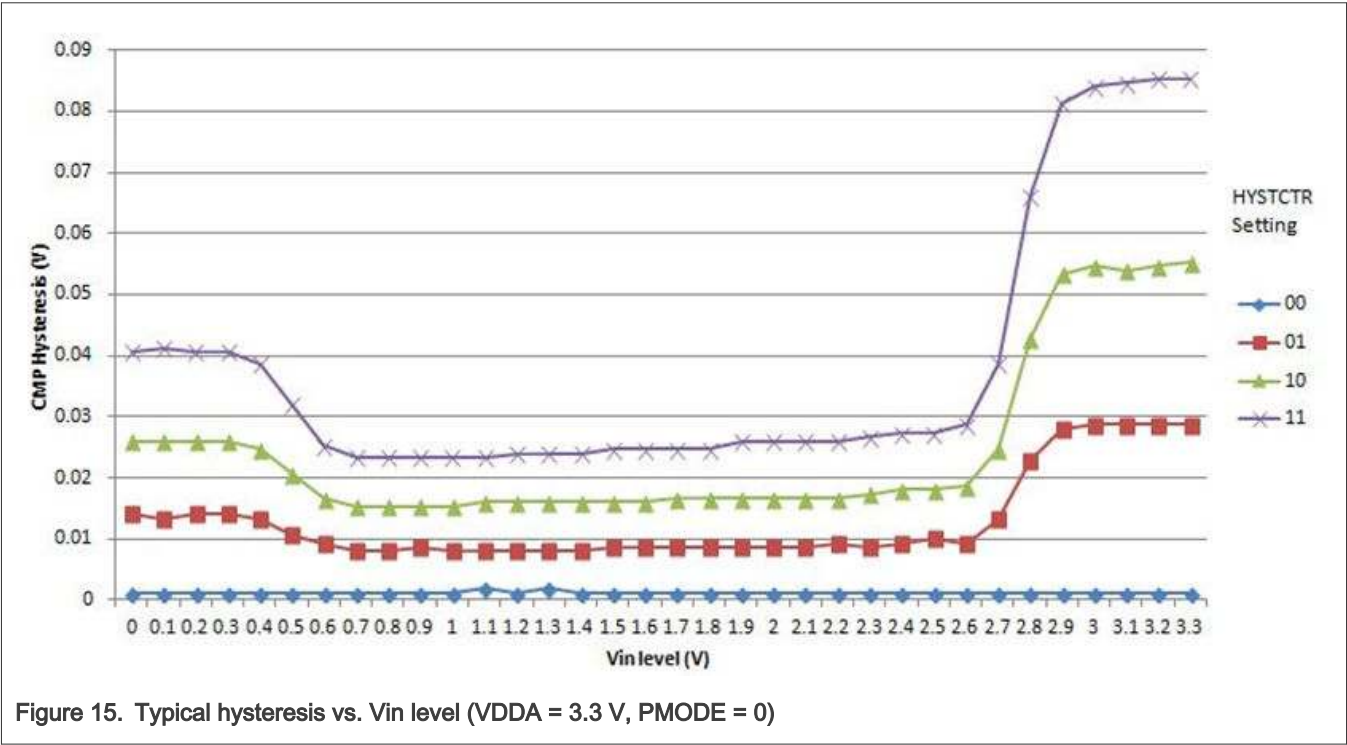



Figure 15. Typical hysteresis vs. Vin level (VDDA = 3.3 V, PMODE = 0)



Figure 16. Typical hysteresis vs. Vin level (VDDA = 3.3 V, PMODE = 1)



Figure 17. Typical hysteresis vs. Vin level (VDDA = 5 V, PMODE = 0)

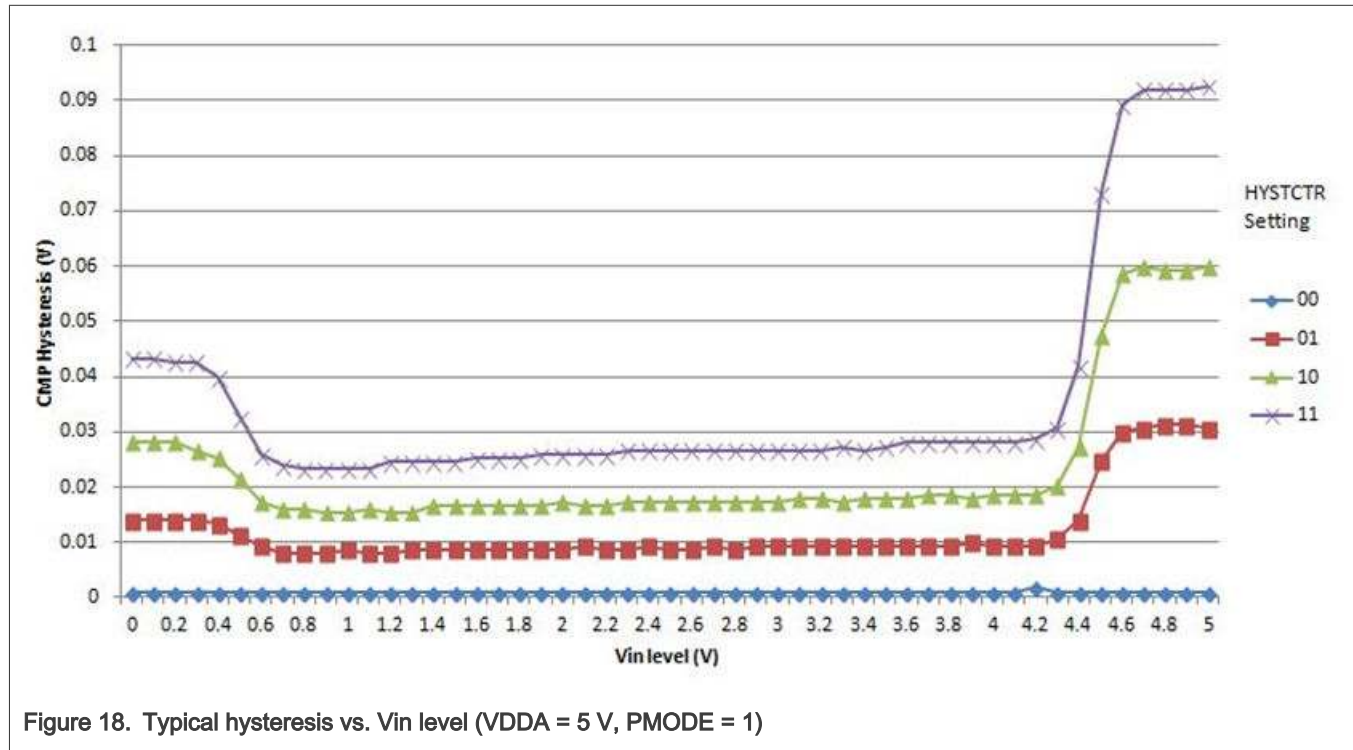

## 7.5 Communication modules

### 7.5.1 LPUART electrical specifications

Refer to [General AC specifications](#) for LPUART specifications.

#### Supported baud rate

Baud rate = Baud clock / ((OSR+1) \* SBR).

For details, see section: 'Baud rate generation' of the *Reference Manual*.

### 7.5.2 LPSPI electrical specifications

The Low Power Serial Peripheral Interface (LPSPI) provides a synchronous serial bus with master and slave operations. Many of the transfer attributes are programmable. The following tables provide timing characteristics for classic LPSPI timing modes.

- All timing is shown with respect to 20%  $V_{DD}$  and 80%  $V_{DD}$  thresholds.
- All measurements are with maximum output load of 50 pF, input transition of 1 ns and pad configured with fastest slew setting (DSE = 1).

Table 46. LPSPi electrical specifications<sup>[1]</sup>

| Num | Symbol                                    | Description              | Conditions                           | Run Mode <sup>[2]</sup> |     |          |     | HSRUN Mode <sup>[2]</sup> |     |          |                   | VLPR Mode (S32K1xx) |     |          |     | VLPR Mode (S32K14xW) |      |          |      | Unit |
|-----|-------------------------------------------|--------------------------|--------------------------------------|-------------------------|-----|----------|-----|---------------------------|-----|----------|-------------------|---------------------|-----|----------|-----|----------------------|------|----------|------|------|
|     |                                           |                          |                                      | 5.0 V IO                |     | 3.3 V IO |     | 5.0 V IO                  |     | 3.3 V IO |                   | 5.0 V IO            |     | 3.3 V IO |     | 5.0 V IO             |      | 3.3 V IO |      |      |
|     |                                           |                          |                                      | Min                     | Max | Min      | Max | Min                       | Max | Min      | Max               | Min                 | Max | Min      | Max | Min                  | Max  | Min      | Max  |      |
|     | $f_{\text{periph}}$ <sup>[3]</sup><br>[4] | Peripheral Frequency     | Slave                                | -                       | 40  | -        | 40  | -                         | 56  | -        | 56                | -                   | 4   | -        | 4   | -                    | 1    | -        | 1    | MHz  |
|     |                                           |                          | Master                               | -                       | 40  | -        | 40  | -                         | 56  | -        | 56                | -                   | 4   | -        | 4   | -                    | 1    | -        | 1    |      |
|     |                                           |                          | Master Loopback <sup>[5]</sup>       | -                       | 40  | -        | 48  | -                         | 48  | -        | 48                | -                   | 4   | -        | 4   | -                    | 1    | -        | 1    |      |
|     |                                           |                          | Master Loopback(slow) <sup>[6]</sup> | -                       | 48  | -        | 48  | -                         | 48  | -        | 48                | -                   | 4   | -        | 4   | -                    | 1    | -        | 1    |      |
| 1   | $f_{\text{op}}$                           | Frequency of operation   | Slave                                | -                       | 10  | -        | 10  | -                         | 14  | -        | 14 <sup>[7]</sup> | -                   | 2   | -        | 2   | -                    | 0.5  | -        | 0.5  | MHz  |
|     |                                           |                          | Master                               | -                       | 10  | -        | 10  | -                         | 14  | -        | 14 <sup>[7]</sup> | -                   | 2   | -        | 2   | -                    | 0.5  | -        | 0.5  |      |
|     |                                           |                          | Master Loopback <sup>[5]</sup>       | -                       | 20  | -        | 12  | -                         | 24  | -        | 12                | -                   | 2   | -        | 2   | -                    | 0.5  | -        | 0.5  |      |
|     |                                           |                          | Master Loopback(slow) <sup>[6]</sup> | -                       | 12  | -        | 12  | -                         | 12  | -        | 12                | -                   | 2   | -        | 2   | -                    | 0.5  | -        | 0.5  |      |
| 2   | $t_{\text{SPSCK}}$                        | SPSCK period             | Slave                                | 100                     | -   | 100      | -   | 72                        | -   | 72       | -                 | 500                 | -   | 500      | -   | -                    | 2000 | -        | 2000 | ns   |
|     |                                           |                          | Master                               | 100                     | -   | 100      | -   | 72                        | -   | 72       | -                 | 500                 | -   | 500      | -   | -                    | 2000 | -        | 2000 |      |
|     |                                           |                          | Master Loopback <sup>[5]</sup>       | 50                      | -   | 83       | -   | 42                        | -   | 83       | -                 | 500                 | -   | 500      | -   | -                    | 2000 | -        | 2000 |      |
|     |                                           |                          | Master Loopback(slow) <sup>[6]</sup> | 83                      | -   | 83       | -   | 83                        | -   | 83       | -                 | 500                 | -   | 500      | -   | -                    | 2000 | -        | 2000 |      |
| 3   | $t_{\text{Lead}}$ <sup>[8]</sup>          | Enable lead time (PCS to | Slave                                | 3                       | -   | 5        | -   | 3                         | -   | 5        | -                 | 18                  | -   | 18       | -   | 55                   | -    | 55       | -    | ns   |

Table continues on the next page...

Table 46. LPSPi electrical specifications<sup>[1]...continued</sup>

| Num | Symbol                               | Description                                      | Conditions                           | Run Mode <sup>[2]</sup>            |                         |                                    |                         | HSRUN Mode <sup>[2]</sup>          |                         |                                    |                         | VLPR Mode (S32K1xx)                |                         |                                     |                         | VLPR Mode (S32K14xW)                |            |                                     |            | Unit |
|-----|--------------------------------------|--------------------------------------------------|--------------------------------------|------------------------------------|-------------------------|------------------------------------|-------------------------|------------------------------------|-------------------------|------------------------------------|-------------------------|------------------------------------|-------------------------|-------------------------------------|-------------------------|-------------------------------------|------------|-------------------------------------|------------|------|
|     |                                      |                                                  |                                      | 5.0 V IO                           |                         | 3.3 V IO                           |                         | 5.0 V IO                           |                         | 3.3 V IO                           |                         | 5.0 V IO                           |                         | 3.3 V IO                            |                         | 5.0 V IO                            |            | 3.3 V IO                            |            |      |
|     |                                      |                                                  |                                      | Min                                | Max                     | Min                                | Max                     | Min                                | Max                     | Min                                | Max                     | Min                                | Max                     | Min                                 | Max                     | Min                                 | Max        | Min                                 | Max        |      |
|     |                                      | SPSCK delay)                                     | Master                               | (PCSSCK+1)*t <sub>periph</sub> -25 | -                       | (PCSSCK+1)*t <sub>periph</sub> -25 | -                       | (PCSSCK+1)*t <sub>periph</sub> -25 | -                       | (PCSSCK+1)*t <sub>periph</sub> -25 | -                       | (PCSSCK+1)*t <sub>periph</sub> -50 | -                       | (PCSSCK+1)*t <sub>periph</sub> -50  | -                       | (PCSSCK+1)*t <sub>periph</sub> -115 | -          | (PCSSCK+1)*t <sub>periph</sub> -115 | -          |      |
|     | Master Loopback <sup>[5]</sup>       |                                                  |                                      |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
|     | Master Loopback(slow) <sup>[6]</sup> |                                                  |                                      |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
| 4   | t <sub>Lag</sub> <sup>[9]</sup>      | Enable lag time (After SPSCK delay)              | Slave                                | 3                                  | -                       | 3                                  | -                       | 3                                  | -                       | 3                                  | -                       | 14                                 | -                       | 14                                  | -                       | 27                                  | -          | 27                                  | -          | ns   |
|     |                                      |                                                  | Master                               | (SCKPCS+1)*t <sub>periph</sub> -25 | -                       | (SCKPCS+1)*t <sub>periph</sub> -25 | -                       | (SCKPCS+1)*t <sub>periph</sub> -25 | -                       | (SCKPCS+1)*t <sub>periph</sub> -50 | -                       | (SCKPCS+1)*t <sub>periph</sub> -50 | -                       | (PCSSCK+1)*t <sub>periph</sub> -115 | -                       | (PCSSCK+1)*t <sub>periph</sub> -115 | -          |                                     |            |      |
|     |                                      |                                                  | Master Loopback <sup>[5]</sup>       |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
|     |                                      |                                                  | Master Loopback(slow) <sup>[6]</sup> |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
| 5   | t <sub>WSPSK</sub> <sup>[10]</sup>   | Clock(SPSCK) high or low time (SPSCK duty cycle) | Slave                                | t <sub>SPSCK</sub> /2-3            | t <sub>SPSCK</sub> /2+3 | t <sub>SPSCK</sub> /2-3            | t <sub>SPSCK</sub> /2+3 | t <sub>SPSCK</sub> /2-3            | t <sub>SPSCK</sub> /2+3 | t <sub>SPSCK</sub> /2-3            | t <sub>SPSCK</sub> /2+3 | t <sub>SPSCK</sub> /2-5            | t <sub>SPSCK</sub> /2+5 | t <sub>SPSCK</sub> /2-5             | t <sub>SPSCK</sub> /2+5 | SPSCK/2-12                          | SPSCK/2+12 | SPSCK/2-12                          | SPSCK/2+12 | ns   |
|     |                                      |                                                  | Master                               |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
|     |                                      |                                                  | Master Loopback <sup>[5]</sup>       |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
|     |                                      |                                                  | Master Loopback(slow) <sup>[6]</sup> |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                    |                         |                                     |                         |                                     |            |                                     |            |      |
| 6   | t <sub>SU</sub>                      | Data setup                                       | Slave                                | 3                                  | -                       | 5                                  | -                       | 3                                  | -                       | 5                                  | -                       | 18                                 | -                       | 18                                  | -                       | 55                                  | -          | 55                                  | -          | ns   |
|     |                                      |                                                  | Master                               | 29                                 | -                       | 38                                 | -                       | 26                                 | -                       | 37 <sup>[11]</sup>                 | -                       | 72                                 | -                       | 78                                  | -                       | 145                                 | -          | 145                                 | -          |      |

Table continues on the next page...

Table 46. LPSPi electrical specifications<sup>[1]</sup>...continued

| Num | Symbol           | Description                    | Conditions                           | Run Mode <sup>[2]</sup> |     |          |     | HSRUN Mode <sup>[2]</sup> |     |                    |                                          | VLPR Mode (S32K1xx) |     |          |     | VLPR Mode (S32K14xW) |     |          |     | Unit |
|-----|------------------|--------------------------------|--------------------------------------|-------------------------|-----|----------|-----|---------------------------|-----|--------------------|------------------------------------------|---------------------|-----|----------|-----|----------------------|-----|----------|-----|------|
|     |                  |                                |                                      | 5.0 V IO                |     | 3.3 V IO |     | 5.0 V IO                  |     | 3.3 V IO           |                                          | 5.0 V IO            |     | 3.3 V IO |     | 5.0 V IO             |     | 3.3 V IO |     |      |
|     |                  |                                |                                      | Min                     | Max | Min      | Max | Min                       | Max | Min                | Max                                      | Min                 | Max | Min      | Max | Min                  | Max | Min      | Max |      |
|     |                  | time(input s)                  |                                      |                         |     |          |     |                           |     | 32 <sup>[12]</sup> |                                          |                     |     |          |     |                      |     |          |     |      |
|     |                  |                                | Master Loopback <sup>[5]</sup>       | 7                       | -   | 8        | -   | 5                         | -   | 7                  | -                                        | 20                  | -   | 20       | -   | 60                   | -   | 60       | -   |      |
|     |                  |                                | Master Loopback(slow) <sup>[6]</sup> | 8                       | -   | 10       | -   | 7                         | -   | 9                  | -                                        | 20                  | -   | 20       | -   | 61                   | -   | 61       | -   |      |
| 7   | t <sub>HI</sub>  | Data hold time(input s)        | Slave                                | 3                       | -   | 3        | -   | 3                         | -   | 3                  | -                                        | 14                  | -   | 14       | -   | 27                   | -   | 27       | -   | ns   |
|     |                  |                                | Master                               | 0                       | -   | 0        | -   | 0                         | -   | 0                  | -                                        | 0                   | -   | 0        | -   | 0                    | -   | 0        | -   |      |
|     |                  |                                | Master Loopback <sup>[5]</sup>       | 3                       | -   | 3        | -   | 2                         | -   | 3                  | -                                        | 11                  | -   | 11       | -   | 26                   | -   | 26       | -   |      |
|     |                  |                                | Master Loopback(slow) <sup>[6]</sup> | 3                       | -   | 3        | -   | 3                         | -   | 3                  | -                                        | 12                  | -   | 12       | -   | 20                   | -   | 20       | -   |      |
| 8   | t <sub>a</sub>   | Slave access time              | Slave                                | -                       | 50  | -        | 50  | -                         | 50  | -                  | 50                                       | -                   | 100 | -        | 100 | -                    | 180 | -        | 180 | ns   |
| 9   | t <sub>dis</sub> | Slave MISO (SOUT) disable time | Slave                                | -                       | 50  | -        | 50  | -                         | 50  | -                  | 50                                       | -                   | 100 | -        | 100 | -                    | 180 | -        | 180 | ns   |
| 10  | t <sub>v</sub>   | Data valid (after SPSC edge)   | Slave                                | -                       | 30  | -        | 39  | -                         | 26  | -                  | 36 <sup>[11]</sup><br>31 <sup>[12]</sup> | -                   | 92  | -        | 96  | -                    | 190 | -        | 190 | ns   |
|     |                  |                                | Master                               | -                       | 12  | -        | 16  | -                         | 11  | -                  | 15                                       | -                   | 47  | -        | 48  | -                    | 113 | -        | 113 |      |

Table continues on the next page...

Table 46. LPSPi electrical specifications<sup>[1]...continued</sup>

| Num | Symbol             | Description             | Conditions                           | Run Mode <sup>[2]</sup> |     |          |     | HSRUN Mode <sup>[2]</sup> |     |          |     | VLPR Mode (S32K1xx) |     |          |     | VLPR Mode (S32K14xW) |     |          |     | Unit |   |
|-----|--------------------|-------------------------|--------------------------------------|-------------------------|-----|----------|-----|---------------------------|-----|----------|-----|---------------------|-----|----------|-----|----------------------|-----|----------|-----|------|---|
|     |                    |                         |                                      | 5.0 V IO                |     | 3.3 V IO |     | 5.0 V IO                  |     | 3.3 V IO |     | 5.0 V IO            |     | 3.3 V IO |     | 5.0 V IO             |     | 3.3 V IO |     |      |   |
|     |                    |                         |                                      | Min                     | Max | Min      | Max | Min                       | Max | Min      | Max | Min                 | Max | Min      | Max | Min                  | Max | Min      | Max |      |   |
|     |                    |                         | Master Loopback <sup>[5]</sup>       | -                       | 12  | -        | 16  | -                         | 11  | -        | 15  | -                   | 47  | -        | 48  | -                    | 112 | -        | 112 |      |   |
|     |                    |                         | Master Loopback(slow) <sup>[6]</sup> | -                       | 8   | -        | 10  | -                         | 7   | -        | 9   | -                   | 44  | -        | 44  | -                    | 99  | -        | 99  |      |   |
| 11  | t <sub>HO</sub>    | Data hold time(outputs) | Slave                                | 4                       | -   | 4        | -   | 4                         | -   | 4        | -   | 4                   | -   | 4        | -   | 4                    | -   | 4        | -   | ns   |   |
|     |                    |                         | Master                               | -15                     | -   | -22      | -   | -15                       | -   | -23      | -   | -22                 | -   | -29      | -   | -30                  | -   | -30      | -   |      |   |
|     |                    |                         | Master Loopback <sup>[5]</sup>       | -10                     | -   | -14      | -   | -10                       | -   | -14      | -   | -14                 | -   | -19      | -   | -19                  | -   | -19      | -   |      |   |
|     |                    |                         | Master Loopback(slow) <sup>[6]</sup> | -15                     | -   | -22      | -   | -15                       | -   | -22      | -   | -21                 | -   | -27      | -   | -30                  | -   | -30      | -   |      |   |
| 12  | t <sub>RI/FI</sub> | Rise/Fall time input    | Slave                                | -                       | 1   | -        | 1   | -                         | 1   | -        | 1   | -                   | 1   | -        | 1   | -                    | 1   | -        | 1   | ns   |   |
|     |                    |                         | Master                               | -                       |     | -        |     | -                         |     | -        |     | -                   |     | -        |     | -                    |     | -        |     |      | - |
|     |                    |                         | Master Loopback <sup>[5]</sup>       | -                       |     | -        |     | -                         |     | -        |     | -                   |     | -        |     | -                    |     | -        |     |      | - |
|     |                    |                         | Master Loopback(slow) <sup>[6]</sup> | -                       |     | -        |     | -                         |     | -        |     | -                   |     | -        |     | -                    |     | -        |     |      | - |
| 13  | t <sub>RO/FO</sub> | Rise/Fall time output   | Slave                                | -                       | 25  | -        | 25  | -                         | 25  | -        | 25  | -                   | 25  | -        | 25  | -                    | 25  | -        | 25  | ns   |   |
|     |                    |                         | Master                               | -                       |     | -        |     | -                         |     | -        |     | -                   |     | -        |     | -                    |     | -        |     |      | - |
|     |                    |                         | Master Loopback <sup>[5]</sup>       | -                       |     | -        |     | -                         |     | -        |     | -                   |     | -        |     | -                    |     | -        |     |      | - |

Table continues on the next page...

Table 46. LPSPi electrical specifications<sup>[1]...continued</sup>

| Num | Symbol | Description | Conditions                           | Run Mode <sup>[2]</sup> |     |          |     | HSRUN Mode <sup>[2]</sup> |     |          |     | VLPR Mode (S32K1xx) |     |          |     | VLPR Mode (S32K14xW) |     |          |     | Unit |
|-----|--------|-------------|--------------------------------------|-------------------------|-----|----------|-----|---------------------------|-----|----------|-----|---------------------|-----|----------|-----|----------------------|-----|----------|-----|------|
|     |        |             |                                      | 5.0 V IO                |     | 3.3 V IO |     | 5.0 V IO                  |     | 3.3 V IO |     | 5.0 V IO            |     | 3.3 V IO |     | 5.0 V IO             |     | 3.3 V IO |     |      |
|     |        |             |                                      | Min                     | Max | Min      | Max | Min                       | Max | Min      | Max | Min                 | Max | Min      | Max | Min                  | Max | Min      | Max |      |
|     |        |             | Master Loopback(slow) <sup>[6]</sup> | -                       |     | -        |     | -                         |     | -        |     | -                   |     | -        |     | -                    |     | -        |     |      |

[1] Trace length should not exceed 11 inches for SCK pad when used in Master loopback mode.

[2] While transitioning from HSRUN mode to RUN mode, LPSPi output clock should not be more than 14 MHz.

[3]  $f_{\text{periph}}$  = LPSPi peripheral clock

[4]  $t_{\text{periph}} = 1/f_{\text{periph}}$

[5] Master Loopback mode - In this mode LPSPi\_SCK clock is delayed for sampling the input data which is enabled by setting LPSPi\_CFGR1[SAMPLE] bit as 1. Clock pads used are PTD15 and PTE0. Applicable only for LPSPi0.

[6] Master Loopback (slow) - In this mode LPSPi\_SCK clock is delayed for sampling the input data which is enabled by setting LPSPi\_CFGR1[SAMPLE] bit as 1. Clock pad used is PTB2. Applicable only for LPSPi0.

[7] This is the maximum operating frequency ( $f_{\text{op}}$ ) for LPSPi0 with GPIO-HD PAD type only. Otherwise, the maximum operating frequency ( $f_{\text{op}}$ ) is 12 Mhz.


[8] Set the PCSSCK configuration bit as 0, for a minimum of 1 delay cycle of LPSPi baud rate clock, where PCSSCK ranges from 0 to 255.

[9] Set the SCKPCS configuration bit as 0, for a minimum of 1 delay cycle of LPSPi baud rate clock, where SCKPCS ranges from 0 to 255.

[10] While selecting odd dividers, ensure Duty Cycle is meeting this parameter.


[11] Maximum operating frequency ( $f_{\text{op}}$ ) is 12 MHz irrespective of PAD type and LPSPi instance.

[12] Applicable for LPSPi0 only with GPIO-HD PAD type, with maximum operating frequency ( $f_{\text{op}}$ ) as 14 MHz.

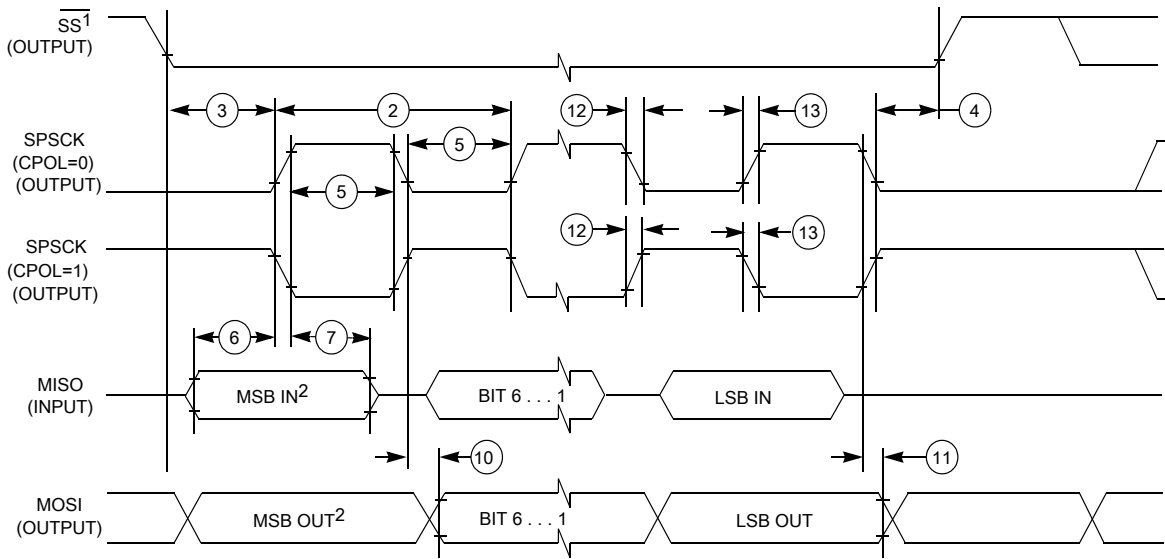

1. If configured as an output.
2. LSBF = 0. For LSBF = 1, bit order is LSB, bit 1, ..., bit 6, MSB.

Figure 19. LPSPi master mode timing (CPHA = 0)

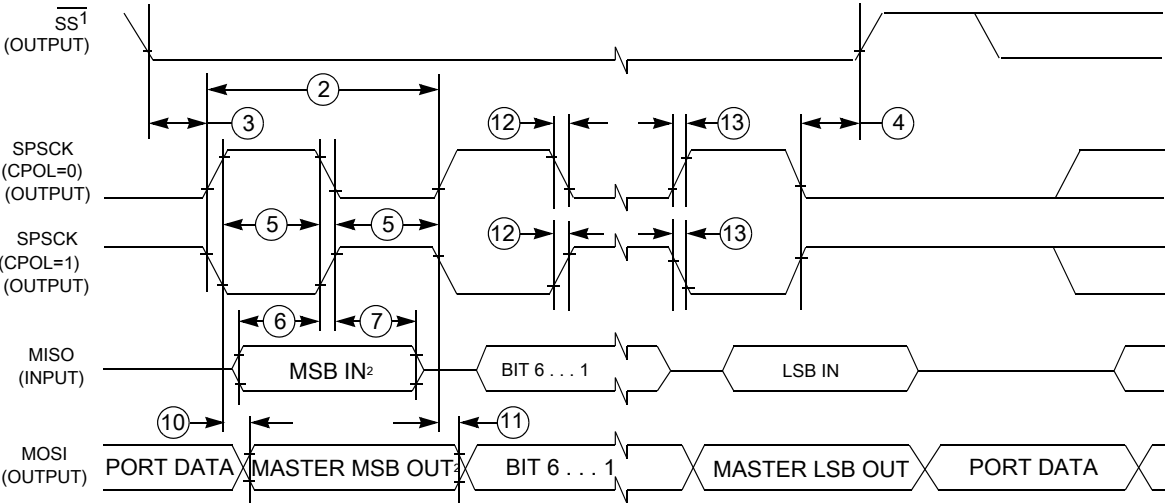

- 1.If configured as output
2. LSBF = 0. For LSBF = 1, bit order is LSB, bit 1, ..., bit 6, MSB.

Figure 20. LPSPi master mode timing (CPHA = 1)

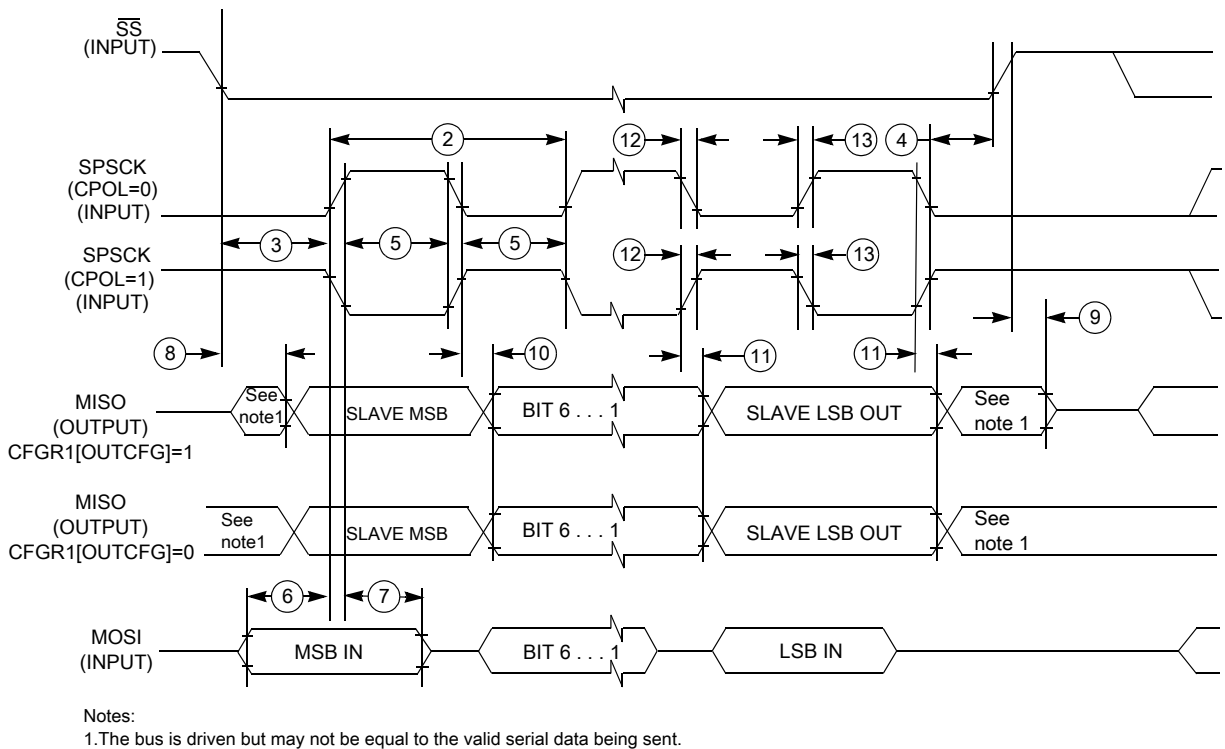


Figure 21. LPSPI slave mode timing (CPHA = 0)

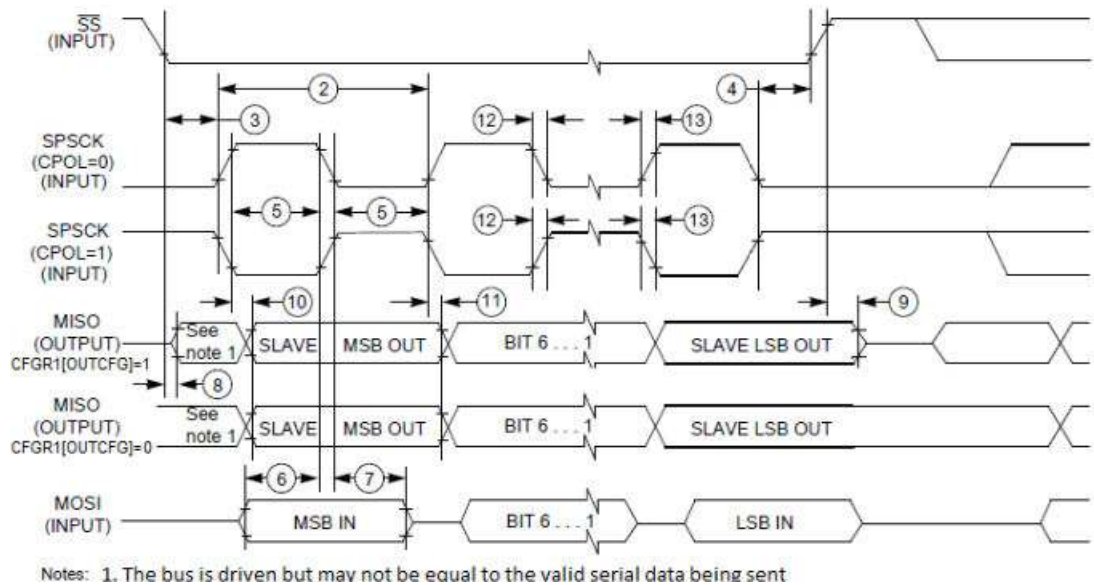


Figure 22. LPSPI slave mode timing (CPHA = 1)

### 7.5.3 LPI2C electrical specifications

See [General AC specifications](#) for LPI2C specifications.

For supported baud rate see section 'Chip-specific LPI2C information' of the *Reference Manual*.

### 7.5.4 FlexCAN electrical specifications

For supported baud rate, see section 'Protocol timing' of the *Reference Manual*.

### 7.5.5 SAI electrical specifications

The following table describes the SAI electrical characteristics.

- Measurements are with maximum output load of 50 pF, input transition of 1 ns and pad configured with fastest slew settings (DSE = 1'b1).
- I/O operating voltage ranges from 2.97 V to 3.6 V
- While doing the mode transition (RUN -> HSRUN or HSRUN -> RUN ), the interface should be OFF.

**Table 47. Master mode timing specifications**

| Symbol | Description                         | Min. | Max. | Unit        |
|--------|-------------------------------------|------|------|-------------|
| —      | Operating voltage                   | 2.97 | 3.6  | V           |
| S1     | SAI_MCLK cycle time                 | 40   | —    | ns          |
| S2     | SAI_MCLK pulse width high/low       | 45%  | 55%  | MCLK period |
| S3     | SAI_BCLK cycle time                 | 80   | —    | ns          |
| S4     | SAI_BCLK pulse width high/low       | 45%  | 55%  | BCLK period |
| S5     | SAI_RXD input setup before SAI_BCLK | 28   | —    | ns          |
| S6     | SAI_RXD input hold after SAI_BCLK   | 0    | —    | ns          |
| S7     | SAI_BCLK to SAI_TXD output valid    | —    | 8    | ns          |
| S8     | SAI_BCLK to SAI_TXD output invalid  | -2   | —    | ns          |
| S9     | SAI_FS input setup before SAI_BCLK  | 28   | —    | ns          |
| S10    | SAI_FS input hold after SAI_BCLK    | 0    | —    | ns          |
| S11    | SAI_BCLK to SAI_FS output valid     | —    | 8    | ns          |
| S12    | SAI_BCLK to SAI_FS output invalid   | -2   | —    | ns          |



Figure 23. SAI Timing — Master modes

Table 48. Slave mode timing specifications

| Symbol             | Description                           | Min. | Max. | Unit        |
|--------------------|---------------------------------------|------|------|-------------|
| —                  | Operating voltage                     | 2.97 | 3.6  | V           |
| S13                | SAI_BCLK cycle time (input)           | 80   | —    | ns          |
| S14 <sup>[1]</sup> | SAI_BCLK pulse width high/low (input) | 45%  | 55%  | BCLK period |
| S15                | SAI_RXD input setup before SAI_BCLK   | 8    | —    | ns          |
| S16                | SAI_RXD input hold after SAI_BCLK     | 2    | —    | ns          |
| S17                | SAI_BCLK to SAI_TXD output valid      | —    | 28   | ns          |
| S18                | SAI_BCLK to SAI_TXD output invalid    | 0    | —    | ns          |
| S19                | SAI_FS input setup before SAI_BCLK    | 8    | —    | ns          |
| S20                | SAI_FS input hold after SAI_BCLK      | 2    | —    | ns          |
| S21                | SAI_BCLK to SAI_FS output valid       | —    | 28   | ns          |
| S22                | SAI_BCLK to SAI_FS output invalid     | 0    | —    | ns          |

[1] The slave mode parameters (S15 - S22) assume 50% duty cycle on SAI\_BCLK input. Any change in SAI\_BCLK duty cycle input must be taken care during the board design or by the master timing.

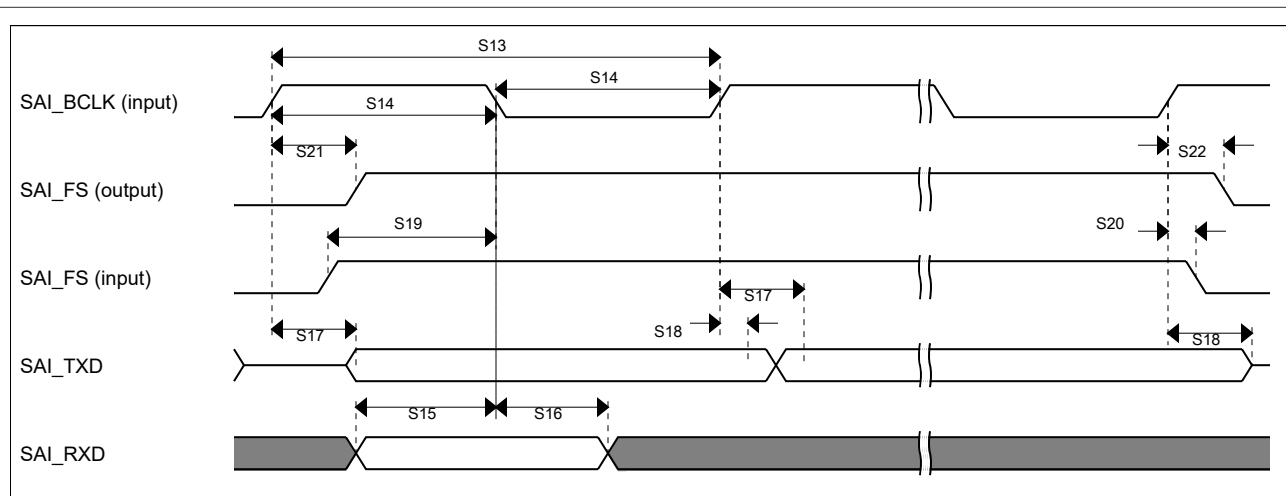


Figure 24. SAI Timing — Slave modes

### 7.5.6 Ethernet AC specifications

The following timing specs are defined at the chip I/O pin and must be translated appropriately to arrive at timing specs/constraints for the physical interface.

The following table describes the MII electrical characteristics.

- Measurements are with maximum output load of 25 pF, input transition of 1 ns and pad configured with fastest slew settings (DSE = 1'b1).
- I/O operating voltage ranges from 2.97 V to 3.6 V
- While doing the mode transition (RUN -> HSRUN or HSRUN -> RUN ), the interface should be OFF.

Table 49. MII signal switching specifications

| Symbol | Description                           | Min. | Max. | Unit         |
|--------|---------------------------------------|------|------|--------------|
| —      | RXCLK frequency                       | —    | 25   | MHz          |
| MII1   | RXCLK pulse width high                | 35%  | 65%  | RXCLK period |
| MII2   | RXCLK pulse width low                 | 35%  | 65%  | RXCLK period |
| MII3   | RXD[3:0], RXDV, RXER to RXCLK setup   | 5    | —    | ns           |
| MII4   | RXCLK to RXD[3:0], RXDV, RXER hold    | 5    | —    | ns           |
| —      | TXCLK frequency                       | —    | 25   | MHz          |
| MII5   | TXCLK pulse width high                | 35%  | 65%  | TXCLK period |
| MII6   | TXCLK pulse width low                 | 35%  | 65%  | TXCLK period |
| MII7   | TXCLK to TXD[3:0], TXEN, TXER invalid | 2    | —    | ns           |
| MII8   | TXCLK to TXD[3:0], TXEN, TXER valid   | —    | 25   | ns           |

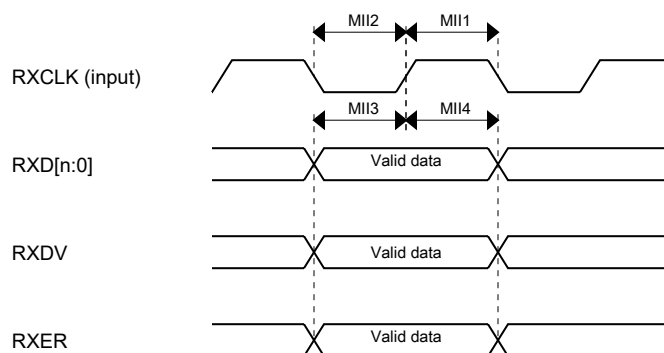


Figure 25. MII receive diagram

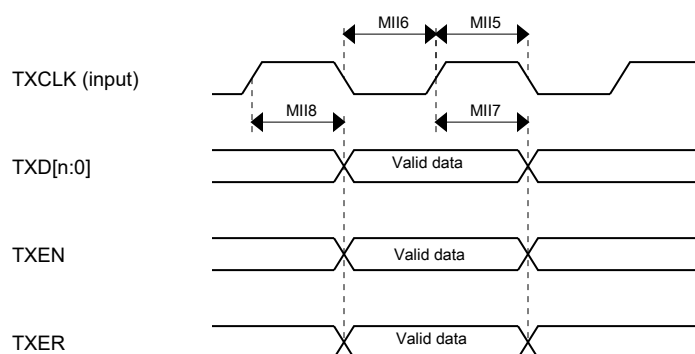


Figure 26. MII transmit signal diagram

The following table describes the RMII electrical characteristics.

- Measurements are with maximum output load of 25 pF, input transition of 1 ns and pad configured with fastest slew settings (DSE = 1'b1).
- I/O operating voltage ranges from 2.97 V to 3.6 V
- While doing the mode transition (RUN -> HSRUN or HSRUN -> RUN ), the interface should be OFF.

Table 50. RMII signal switching specifications

| Symbol       | Description                              | Min. | Max. | Unit            |
|--------------|------------------------------------------|------|------|-----------------|
| —            | RMII input clock RMII_CLK Frequency      | —    | 50   | MHz             |
| RMII1, RMII5 | RMII_CLK pulse width high                | 35%  | 65%  | RMII_CLK period |
| RMII2, RMII6 | RMII_CLK pulse width low                 | 35%  | 65%  | RMII_CLK period |
| RMII3        | RXD[1:0], CRS_DV, RXER to RMII_CLK setup | 4    | —    | ns              |
| RMII4        | RMII_CLK to RXD[1:0], CRS_DV, RXER hold  | 2    | —    | ns              |
| RMII7        | RMII_CLK to TXD[1:0], TXEN invalid       | 2    | —    | ns              |
| RMII8        | RMII_CLK to TXD[1:0], TXEN valid         | —    | 15   | ns              |



Figure 27. RMIi receive diagram



Figure 28. RMIi transmit diagram

The following table describes the MDIO electrical characteristics.

- Measurements are with maximum output load of 25 pF, input transition of 1 ns and pad configured with fastest slew settings (DSE = 1'b1).
- I/O operating voltage ranges from 2.97 V to 3.6 V
- While doing the mode transition (RUN -> HSRUN or HSRUN -> RUN ), the interface should be OFF.
- MDIO pin must have external Pull-up.

Table 51. MDIO timing specifications

| Symbol | Description                                                         | Min. | Max. | Unit       |
|--------|---------------------------------------------------------------------|------|------|------------|
| —      | MDC Clock Frequency                                                 | —    | 2.5  | MHz        |
| MDC1   | MDC pulse width high                                                | 40%  | 60%  | MDC period |
| MDC2   | MDC pulse width low                                                 | 40%  | 60%  | MDC period |
| MDC3   | MDIO (input) to MDC rising edge setup                               | 25   | —    | ns         |
| MDC4   | MDIO (input) to MDC rising edge hold                                | 0    | —    | ns         |
| MDC5   | MDC falling edge to MDIO output valid (maximum propagation delay)   | —    | 25   | ns         |
| MDC6   | MDC falling edge to MDIO output invalid (minimum propagation delay) | -10  | —    | ns         |



Figure 29. MII/RMII serial management channel timing diagram

### 7.5.7 Clockout frequency

Maximum supported clock out frequency for this device is 20 MHz

## 7.6 Debug modules

### 7.6.1 SWD electrical specifications

Table 52. SWD electrical specifications

| Symbol | Description                                     | Run Mode |          |          |          | HSRUN Mode |          |          |          | VLPR Mode (S32K1xx) |          |          |          | VLPR Mode (S32K14xW) |        |          |        | Unit |
|--------|-------------------------------------------------|----------|----------|----------|----------|------------|----------|----------|----------|---------------------|----------|----------|----------|----------------------|--------|----------|--------|------|
|        |                                                 | 5.0 V IO |          | 3.3 V IO |          | 5.0 V IO   |          | 3.3 V IO |          | 5.0 V IO            |          | 3.3 V IO |          | 5.0 V IO             |        | 3.3 V IO |        |      |
|        |                                                 | Min.     | Max.     | Min.     | Max.     | Min.       | Max.     | Min.     | Max.     | Min.                | Max.     | Min.     | Max.     | Min.                 | Max.   | Min.     | Max.   |      |
| S1     | SWD_CLK frequency of operation                  | -        | 25       | -        | 25       | -          | 25       | -        | 25       | -                   | 10       | -        | 10       | -                    | 1      | -        | 1      | MHz  |
| S2     | SWD_CLK cycle period                            | 1/S1     | -        | 1/S1     | -        | 1/S1       | -        | 1/S1     | -        | 1/S1                | -        | 1/S1     | -        | 1/S1                 | -      | 1/S1     | -      | ns   |
| S3     | SWD_CLK clock pulse width                       | S2/2 - 5 | S2/2 + 5 | S2/2 - 5 | S2/2 + 5 | S2/2 - 5   | S2/2 + 5 | S2/2 - 5 | S2/2 + 5 | S2/2 - 5            | S2/2 + 5 | S2/2 - 5 | S2/2 + 5 | S2/2-5               | S2/2+5 | S2/2-5   | S2/2+5 | ns   |
| S4     | SWD_CLK rise and fall times                     | -        | 1        | -        | 1        | -          | 1        | -        | 1        | -                   | 1        | -        | 1        | -                    | 1      | -        | 1      | ns   |
| S9     | SWD_DIO input data setup time to SWD_CLK rise   | 4        | -        | 4        | -        | 4          | -        | 4        | -        | 16                  | -        | 16       | -        | 30                   | -      | 30       | -      | ns   |
| S10    | SWD_DIO input data hold time after SWD_CLK rise | 3        | -        | 3        | -        | 3          | -        | 3        | -        | 10                  | -        | 10       | -        | 19                   | -      | 19       | -      | ns   |
| S11    | SWD_CLK high to SWD_DIO data valid              | -        | 28       | -        | 38       | -          | 28       | -        | 38       | -                   | 70       | -        | 77       | -                    | 180    | -        | 180    | ns   |
| S12    | SWD_CLK high to SWD_DIO high-Z                  | -        | 28       | -        | 38       | -          | 28       | -        | 38       | -                   | 70       | -        | 77       | -                    | 180    | -        | 180    | ns   |
| S13    | SWD_CLK high to SWD_DIO data invalid            | 0        | -        | 0        | -        | 0          | -        | 0        | -        | 0                   | -        | 0        | -        | 0                    | -      | 0        | -      | ns   |

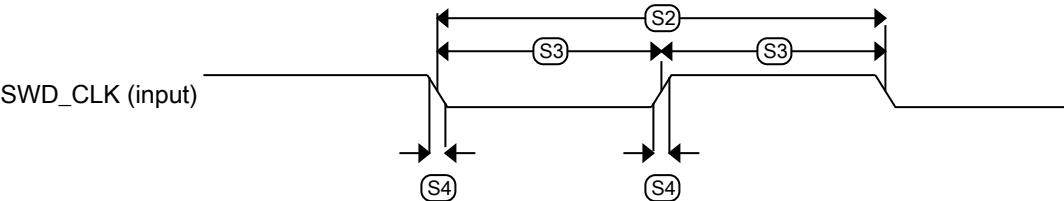


Figure 30. Serial wire clock input timing

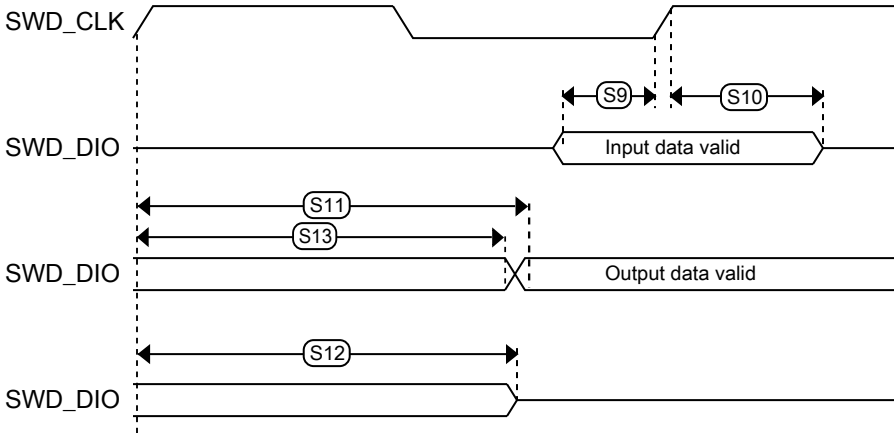


Figure 31. Serial wire data timing

### 7.6.2 Trace electrical specifications

The following table describes the ETM Trace electrical characteristics.

- Measurements are with maximum output load of 50 pF, input transition of 1 ns and pad configured with fastest slew settings (DSE = 1'b1).
- While doing the mode transition (RUN -> HSRUN or HSRUN -> RUN ), the interface should be OFF.

**Note:** ETM trace is supported only on S32K148.

Table 53. ETM Trace specifications

|                    | Symbol             | Description         | RUN Mode |    |    | HSRUN Mode |    | VLPR Mode | Unit |
|--------------------|--------------------|---------------------|----------|----|----|------------|----|-----------|------|
| —                  | Fsys               | System frequency    | 80       | 48 | 40 | 112        | 80 | 4         | MHz  |
| Trace on fast pads | f <sub>TRACE</sub> | Max Trace frequency | 80       | 48 | 40 | 74.667     | 80 | 4         | MHz  |
|                    | t <sub>DVO</sub>   | Data Output Valid   | 4        | 4  | 4  | 4          | 4  | 20        | ns   |
|                    | t <sub>DIV</sub>   | Data Output Invalid | -2       | -2 | -2 | -2         | -2 | -10       | ns   |

Table continues on the next page...

Table 53. ETM Trace specifications...continued

|                    | Symbol             | Description         | RUN Mode |    |    | HSRUN Mode |       | VLPR Mode | Unit |
|--------------------|--------------------|---------------------|----------|----|----|------------|-------|-----------|------|
| Trace on slow pads | f <sub>TRACE</sub> | Max Trace frequency | 22.86    | 24 | 20 | 22.4       | 22.86 | 4         | MHz  |
|                    | t <sub>DVO</sub>   | Data Output Valid   | 8        | 8  | 8  | 8          | 8     | 20        | ns   |
|                    | t <sub>DIV</sub>   | Data Output Invalid | -4       | -4 | -4 | -4         | -4    | -10       | ns   |



7.6.3 JTAG electrical specifications

Table 54. JTAG electrical specifications

| Symbol | Description                                        | Run Mode |          |          |          | HSRUN Mode |          |          |          | VLPR Mode (S32K1xx) |          |          |          | VLPR Mode (S32K14xW) |          |          |     | Unit |
|--------|----------------------------------------------------|----------|----------|----------|----------|------------|----------|----------|----------|---------------------|----------|----------|----------|----------------------|----------|----------|-----|------|
|        |                                                    | 5.0 V IO |          | 3.3 V IO |          | 5.0 V IO   |          | 3.3 V IO |          | 5.0 V IO            |          | 3.3 V IO |          | 5.0 V IO             |          | 5.0 V IO |     |      |
|        |                                                    | Min.     | Max.     | Min.     | Max.     | Min.       | Max.     | Min.     | Max.     | Min.                | Max.     | Min.     | Max.     | Min                  | Max      | Min      | Max |      |
| J1     | TCLK frequency of operation                        |          |          |          |          |            |          |          |          |                     |          |          |          |                      |          |          |     | MHz  |
|        | Boundary Scan                                      | -        | 20       | -        | 20       | -          | 20       | -        | 20       | -                   | 10       | -        | 10       | -                    | 1        | -        | 1   |      |
|        | JTAG                                               | -        | 20       | -        | 20       | -          | 20       | -        | 20       | -                   | 10       | -        | 10       | -                    | 1        | -        | 1   |      |
| J2     | TCLK cycle period                                  | 1/J1     | -        | 1/J1     | -        | 1/J1       | -        | 1/J1     | -        | 1/J1                | -        | 1/J1     | -        | 1/J1                 | -        | 1/J1     | -   | ns   |
| J3     | TCLK clock pulse width                             |          |          |          |          |            |          |          |          |                     |          |          |          |                      |          |          |     | ns   |
|        | Boundary Scan                                      | J2/2 - 5 | J2/2 + 5 | J2/2 - 5 | J2/2 + 5 | J2/2 - 5   | J2/2 + 5 | J2/2 - 5 | J2/2 + 5 | J2/2 - 5            | J2/2 + 5 | J2/2 - 5 | J2/2 + 5 | J2/2 - 5             | J2/2 + 5 |          |     |      |
|        | JTAG                                               |          |          |          |          |            |          |          |          |                     |          |          |          |                      |          |          |     |      |
| J4     | TCLK rise and fall times                           | -        | 1        | -        | 1        | -          | 1        | -        | 1        | -                   | 1        | -        | 1        | -                    | 1        | -        | 1   | ns   |
| J5     | Boundary scan input data setup time to TCLK rise   | 5        | -        | 5        | -        | 5          | -        | 5        | -        | 15                  | -        | 15       | -        | 23                   | -        | 23       | -   | ns   |
| J6     | Boundary scan input data hold time after TCLK rise | 5        | -        | 5        | -        | 5          | -        | 5        | -        | 8                   | -        | 8        | -        | 20                   | -        | 20       | -   | ns   |
| J7     | TCLK low to boundary scan output data valid        | -        | 28       | -        | 32       | -          | 28       | -        | 32       | -                   | 80       | -        | 80       | -                    | 184      | -        | 184 | ns   |
| J8     | TCLK low to boundary scan output data invalid      | 0        | -        | 0        | -        | 0          | -        | 0        | -        | 0                   | -        | 0        | -        | 0                    | -        | 0        | -   |      |
| J9     | TCLK low to boundary scan output high-Z            | -        | 28       | -        | 32       | -          | 28       | -        | 32       | -                   | 80       | -        | 80       | -                    | 184      | -        | 184 | ns   |

Table continues on the next page...

Table 54. JTAG electrical specifications...continued

| Symbol | Description                                   | Run Mode |      |          |      | HSRUN Mode |      |          |      | VLPR Mode (S32K1xx) |      |          |      | VLPR Mode (S32K14xW) |     |          |     | Unit |
|--------|-----------------------------------------------|----------|------|----------|------|------------|------|----------|------|---------------------|------|----------|------|----------------------|-----|----------|-----|------|
|        |                                               | 5.0 V IO |      | 3.3 V IO |      | 5.0 V IO   |      | 3.3 V IO |      | 5.0 V IO            |      | 3.3 V IO |      | 5.0 V IO             |     | 5.0 V IO |     |      |
|        |                                               | Min.     | Max. | Min.     | Max. | Min.       | Max. | Min.     | Max. | Min.                | Max. | Min.     | Max. | Min                  | Max | Min      | Max |      |
| J10    | TMS, TDI input data setup time to TCLK rise   | 3        | -    | 3        | -    | 3          | -    | 3        | -    | 15                  | -    | 15       | -    | 23                   | -   | 23       | -   | ns   |
| J11    | TMS, TDI input data hold time after TCLK rise | 2        | -    | 2        | -    | 2          | -    | 2        | -    | 8                   | -    | 8        | -    | 20                   | -   | 20       | -   | ns   |
| J12    | TCLK low to TDO data valid                    | -        | 28   | -        | 32   | -          | 28   | -        | 32   | -                   | 80   | -        | 80   | -                    | 184 | -        | 184 | ns   |
| J13    | TCLK low to TDO data invalid                  | 0        | -    | 0        | -    | 0          | -    | 0        | -    | 0                   | -    | 0        | -    | 0                    | -   | 0        | -   | ns   |
| J14    | TCLK low to TDO high-Z                        | -        | 28   | -        | 32   | -          | 28   | -        | 32   | -                   | 80   | -        | 80   | -                    | 184 | -        | 184 | ns   |



Figure 33. Test clock input timing



Figure 34. Boundary scan (JTAG) timing



Figure 35. Test Access Port timing

## 8 Thermal attributes

### 8.1 Description

The tables in the following sections describe the thermal characteristics of the device.

**Note:** Junction temperature is a function of die size, on-chip power dissipation, package thermal resistance, mounting side (board) temperature, ambient temperature, air flow, power dissipation or other components on the board, and board thermal resistance.

### 8.2 Thermal characteristics

Table 55. Thermal characteristics for 32-pin QFN and 48/64/100/144/176-pin LQFP package

| Rating                                                                                        | Conditions              | Symbol            | Package | Values (in °C/W) |         |         |              |         |              |         |         |
|-----------------------------------------------------------------------------------------------|-------------------------|-------------------|---------|------------------|---------|---------|--------------|---------|--------------|---------|---------|
|                                                                                               |                         |                   |         | S32K116          | S32K118 | S32K142 | S32K142<br>W | S32K144 | S32K144<br>W | S32K146 | S32K148 |
| Thermal resistance, Junction to Ambient (Natural Convection) <sup>[1]</sup><br><sub>[2]</sub> | Single layer board (1s) | R <sub>θJA</sub>  | 32      | 93               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                                               |                         |                   | 48      | 79               | 71      | 70      | 69           | 69      | 69           | NA      | NA      |
|                                                                                               |                         |                   | 64      | NA               | 62      | 61      | 60           | 61      | 60           | 59      | NA      |
|                                                                                               |                         |                   | 100     | NA               | NA      | 53      | NA           | 52      | NA           | 51      | 46      |
|                                                                                               |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 51      | 44      |
|                                                                                               |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 42      |
| Thermal resistance, Junction to Ambient (Natural Convection) <sup>[1]</sup>                   | Two layer board (1s1p)  | R <sub>θJA</sub>  | 32      | 50               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                                               |                         |                   | 48      | 58               | 50      | 49      | 48           | 48      | 48           | NA      | NA      |
|                                                                                               |                         |                   | 64      | NA               | 46      | 45      | 45           | 45      | 45           | 44      | NA      |
|                                                                                               |                         |                   | 100     | NA               | NA      | 42      | NA           | 42      | NA           | 40      | 36      |
|                                                                                               |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 44      | 37      |
|                                                                                               |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 36      |
| Thermal resistance, Junction to Ambient (Natural Convection) <sup>[1]</sup><br><sub>[2]</sub> | Four layer board (2s2p) | R <sub>θJA</sub>  | 32      | 32               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                                               |                         |                   | 48      | 55               | 47      | 46      | 45           | 45      | 45           | NA      | NA      |
|                                                                                               |                         |                   | 64      | NA               | 44      | 43      | 42           | 43      | 42           | 41      | NA      |
|                                                                                               |                         |                   | 100     | NA               | NA      | 40      | NA           | 40      | NA           | 39      | 34      |
|                                                                                               |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 42      | 36      |
|                                                                                               |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 35      |
| Thermal resistance, Junction to Ambient (@200 ft/min) <sup>[1]</sup> <sub>[3]</sub>           | Single layer board (1s) | R <sub>θJMA</sub> | 32      | 77               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                                               |                         |                   | 48      | 66               | 58      | 57      | 56           | 57      | 56           | NA      | NA      |
|                                                                                               |                         |                   | 64      | NA               | 50      | 49      | 49           | 49      | 49           | 48      | NA      |

Table continues on the next page...

Table 55. Thermal characteristics for 32-pin QFN and 48/64/100/144/176-pin LQFP package...continued

| Rating                                                                  | Conditions              | Symbol            | Package | Values (in °C/W) |         |         |              |         |              |         |         |
|-------------------------------------------------------------------------|-------------------------|-------------------|---------|------------------|---------|---------|--------------|---------|--------------|---------|---------|
|                                                                         |                         |                   |         | S32K116          | S32K118 | S32K142 | S32K142<br>W | S32K144 | S32K144<br>W | S32K146 | S32K148 |
|                                                                         |                         |                   | 100     | NA               | NA      | 43      | NA           | 42      | NA           | 41      | 37      |
|                                                                         |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 42      | 36      |
|                                                                         |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 34      |
| Thermal resistance, Junction to Ambient (@200 ft/min) <sup>[1]</sup>    | Two layer board (1s1p)  | R <sub>θJMA</sub> | 32      | 43               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                         |                         |                   | 48      | 51               | 43      | 42      | 41           | 41      | 41           | NA      | NA      |
|                                                                         |                         |                   | 64      | NA               | 39      | 38      | 38           | 38      | 38           | 37      | NA      |
|                                                                         |                         |                   | 100     | NA               | NA      | 35      | NA           | 35      | NA           | 34      | 30      |
|                                                                         |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 37      | 31      |
|                                                                         |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 30      |
| Thermal resistance, Junction to Ambient (@200 ft/min) <sup>[1][3]</sup> | Four layer board (2s2p) | R <sub>θJMA</sub> | 32      | 26               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                         |                         |                   | 48      | 48               | 41      | 40      | 39           | 39      | 39           | NA      | NA      |
|                                                                         |                         |                   | 64      | NA               | 37      | 36      | 36           | 36      | 36           | 35      | NA      |
|                                                                         |                         |                   | 100     | NA               | NA      | 34      | NA           | 34      | NA           | 33      | 28      |
|                                                                         |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 36      | 30      |
|                                                                         |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 29      |
| Thermal resistance, Junction to Board <sup>[4]</sup>                    | —                       | R <sub>θJB</sub>  | 32      | 11               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                                         |                         |                   | 48      | 33               | 24      | 23      | 22           | 23      | 22           | NA      | NA      |
|                                                                         |                         |                   | 64      | NA               | 26      | 25      | 24           | 25      | 24           | 23      | NA      |
|                                                                         |                         |                   | 100     | NA               | NA      | 25      | NA           | 25      | NA           | 24      | 19      |
|                                                                         |                         |                   | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 30      | 24      |
|                                                                         |                         |                   | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 24      |

Table continues on the next page...

Table 55. Thermal characteristics for 32-pin QFN and 48/64/100/144/176-pin LQFP package...continued

| Rating                                                       | Conditions         | Symbol                | Package | Values (in °C/W) |         |         |              |         |              |         |         |
|--------------------------------------------------------------|--------------------|-----------------------|---------|------------------|---------|---------|--------------|---------|--------------|---------|---------|
|                                                              |                    |                       |         | S32K116          | S32K118 | S32K142 | S32K142<br>W | S32K144 | S32K144<br>W | S32K146 | S32K148 |
| Thermal resistance, Junction to Case <sup>[5]</sup>          | —                  | $R_{\theta JC}$       | 32      | NA               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 48      | 23               | 19      | 17      | 16           | 17      | 16           | NA      | NA      |
|                                                              |                    |                       | 64      | NA               | 14      | 13      | 12           | 12      | 12           | 11      | NA      |
|                                                              |                    |                       | 100     | NA               | NA      | 13      | NA           | 12      | NA           | 11      | 9       |
|                                                              |                    |                       | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 12      | 9       |
|                                                              |                    |                       | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 9       |
| Thermal resistance, Junction to Case (Bottom) <sup>[6]</sup> | —                  | $R_{\theta JCBottom}$ | 32      | 1                | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 48      | NA               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 64      | NA               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 100     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 144     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
| Thermal resistance, Junction to Package Top <sup>[7]</sup>   | Natural Convection | $\Psi_{JT}$           | 32      | 1                | NA      | NA      | NA           | NA      | NA           | NA      | NA      |
|                                                              |                    |                       | 48      | 4                | 2       | 2       | 2            | 2       | 2            | NA      | NA      |
|                                                              |                    |                       | 64      | NA               | 2       | 2       | 2            | 2       | 2            | 2       | NA      |
|                                                              |                    |                       | 100     | NA               | NA      | 2       | NA           | 2       | NA           | 2       | 1       |
|                                                              |                    |                       | 144     | NA               | NA      | NA      | NA           | NA      | NA           | 2       | 1       |
|                                                              |                    |                       | 176     | NA               | NA      | NA      | NA           | NA      | NA           | NA      | 1       |

[1] Junction temperature is a function of die size, on-chip power dissipation, package thermal resistance, mounting site (board) temperature, ambient temperature, air flow, power dissipation of other components on the board, and board thermal resistance.

[2] Per JEDEC JESD51-2 with natural convection for horizontally oriented board. Board meets JESD51-9 specification for 1s or 2s2p board, respectively.

[3] Per JEDEC JESD51-6 with forced convection for horizontally oriented board. Board meets JESD51-9 specification for 1s or 2s2p board, respectively.

[4] Thermal resistance between the die and the printed circuit board per JEDEC JESD51-8. Board temperature is measured on the top surface of the board near the package.

[5] Thermal resistance between the die and the case top surface as measured by the cold plate method (MIL SPEC-883 Method 1012.1).

[6] Thermal resistance between the die and the solder pad on the bottom of the package. Interface resistance is ignored.

[7] Thermal characterization parameter indicating the temperature difference between package top and the junction temperature per JEDEC JESD51-2. When Greek letters are not available, the thermal characterization parameter is written as Psi-JT.

Table 56. Thermal characteristics for the 100 MAPBGA package

| Rating                                                                            | Conditions              | Symbol           | Values  |         |         | Unit |
|-----------------------------------------------------------------------------------|-------------------------|------------------|---------|---------|---------|------|
|                                                                                   |                         |                  | S32K146 | S32K144 | S32K148 |      |
| Thermal resistance, Junction to Ambient (Natural Convection) <sup>[1][2]</sup>    | Single layer board (1s) | $R_{\theta JA}$  | 57.2    | 61.0    | 52.5    | °C/W |
| Thermal resistance, Junction to Ambient (Natural Convection) <sup>[1][2][3]</sup> | Four layer board (2s2p) | $R_{\theta JA}$  | 32.1    | 35.6    | 27.5    | °C/W |
| Thermal resistance, Junction to Ambient (@200 ft/min) <sup>[1][2][3]</sup>        | Single layer board (1s) | $R_{\theta JMA}$ | 44.1    | 46.6    | 39.0    | °C/W |
| Thermal resistance, Junction to Ambient (@200 ft/min) <sup>[1][3]</sup>           | Two layer board (2s2p)  | $R_{\theta JMA}$ | 27.2    | 30.9    | 22.8    | °C/W |
| Thermal resistance, Junction to Board <sup>[4]</sup>                              | —                       | $R_{\theta JB}$  | 15.3    | 18.9    | 11.2    | °C/W |
| Thermal resistance, Junction to Case <sup>[5]</sup>                               | —                       | $R_{\theta JC}$  | 10.2    | 14.2    | 7.5     | °C/W |
| Thermal resistance, Junction to Package Top outside center <sup>[6]</sup>         | —                       | $\Psi_{JT}$      | 0.2     | 0.4     | 0.2     | °C/W |
| Thermal resistance, Junction to Package Bottom outside center <sup>[7]</sup>      | —                       | $\Psi_{JB}$      | 12.2    | 15.9    | 18.3    | °C/W |

[1] Junction temperature is a function of die size, on-chip power dissipation, package thermal resistance, mounting site (board) temperature, ambient temperature, air flow, power dissipation of other components on the board, and board thermal resistance.

[2] Per SEMI G38-87 and JEDEC JESD51-2 with the single layer board horizontal.

[3] Per JEDEC JESD51-6 with the board horizontal.

[4] Thermal resistance between the die and the printed circuit board per JEDEC JESD51-8. Board temperature is measured on the top surface of the board near the package.

[5] Thermal resistance between the die and the case top surface as measured by the cold plate method (MIL SPEC-883 Method 1012.1).

[6] Thermal characterization parameter indicating the temperature difference between package top and the junction temperature per JEDEC JESD51-2. When Greek letters are not available, the thermal characterization parameter is written as Psi-JT.

[7] Thermal characterization parameter indicating the temperature difference between package bottom center and the junction temperature per JEDEC JESD51-12. When Greek letters are not available, the thermal characterization parameter is written as Psi-JB.

### 8.3 General notes for specifications at maximum junction temperature

An estimation of the chip junction temperature,  $T_J$ , can be obtained from this equation:

$$T_J = T_A + (R_{\theta JA} \times P_D)$$

where:

- $T_A$  = ambient temperature for the package (°C)
- $R_{\theta JA}$  = junction to ambient thermal resistance (°C/W)
- $P_D$  = power dissipation in the package (W)

The junction to ambient thermal resistance is an industry standard value that provides a quick and easy estimation of thermal performance. Unfortunately, there are two values in common usage: the value determined on a single layer board and the value obtained on a board with two planes. For packages such as the PBGA, these values can be different by a factor of two. Which value is closer to the application depends on the power dissipated by other components on the board. The value obtained on a single layer board is appropriate for the tightly packed printed circuit board. The value obtained on the board with the internal planes is usually appropriate if the board has low power dissipation and the components are well separated.

When a heat sink is used, the thermal resistance is expressed in the following equation as the sum of a junction-to-case thermal resistance and a case-to-ambient thermal resistance:

$$R_{\theta JA} = R_{\theta JC} + R_{\theta CA}$$

where:

- $R_{\theta JA}$  = junction to ambient thermal resistance (°C/W)
- $R_{\theta JC}$  = junction to case thermal resistance (°C/W)
- $R_{\theta CA}$  = case to ambient thermal resistance (°C/W)

$R_{\theta JC}$  is device related and cannot be influenced by the user. The user controls the thermal environment to change the case to ambient thermal resistance,  $R_{\theta CA}$ . For instance, the user can change the size of the heat sink, the air flow around the device, the interface material, the mounting arrangement on printed circuit board, or change the thermal dissipation on the printed circuit board surrounding the device.

To determine the junction temperature of the device in the application when heat sinks are not used, the Thermal Characterization Parameter ( $\Psi_{JT}$ ) can be used to determine the junction temperature with a measurement of the temperature at the top center of the package case using this equation:

$$T_J = T_T + (\Psi_{JT} \times P_D)$$

where:

- $T_T$  = thermocouple temperature on top of the package (°C)
- $\Psi_{JT}$  = thermal characterization parameter (°C/W)
- $P_D$  = power dissipation in the package (W)

The thermal characterization parameter is measured per JESD51-2 specification using a 40 gauge type T thermocouple epoxied to the top center of the package case. The thermocouple should be positioned so that the thermocouple junction rests on the package. A small amount of epoxy is placed over the thermocouple junction and over about 1 mm of wire extending from the

junction. The thermocouple wire is placed flat against the package case to avoid measurement errors caused by cooling effects of the thermocouple wire.

## 9 Dimensions

### 9.1 Obtaining package dimensions

Package dimensions are provided in the package drawings.

To find a package drawing, go to <http://www.nxp.com> and perform a keyword search for the drawing's document number:

| Package option | Document Number                         | Manufacture Code |
|----------------|-----------------------------------------|------------------|
| 32-pin QFN     | <a href="#">SOT617-3</a> <sup>[1]</sup> | 98ASA01350D      |
| 48-pin LQFP    | <a href="#">SOT313-3</a>                | 98ASH00962A      |
| 64-pin LQFP    | <a href="#">SOT1699-1</a>               | 98ASS23234W      |
| 100-pin LQFP   | <a href="#">SOT407-3</a>                | 98ASS23308W      |
| 100-pin MAPBGA | <a href="#">SOT1569-1</a>               | 98ASA00802D      |
| 144-pin LQFP   | <a href="#">SOT486-2</a>                | 98ASS23177W      |
| 176-pin LQFP   | <a href="#">SOT506-2</a>                | 98ASS23479W      |

[1] 5x5 mm package

## 10 Pinouts

### 10.1 Package pinouts and signal descriptions

For package pinouts and signal descriptions, refer to the Reference Manual.

## 11 Revision History

The following table provides a revision history for this document.

Table 57. Revision History

| Document ID  | Release date     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| S32K1XX v.15 | 26 February 2026 | <ul style="list-style-type: none"> <li>Updated <a href="#">LVR, LVD and POR operating requirements</a> section. <ul style="list-style-type: none"> <li>Added <math>V_{OSC}</math>, <math>V_{Flash}</math> and <math>V_{CORE}</math> information in <a href="#">Table 8</a> and <a href="#">Table 9</a>.</li> <li>Added footnotes for <math>V_{BG}</math> in <a href="#">Table 8</a> and <a href="#">Table 9</a>.</li> <li>Updated <math>V_{core}</math> to <math>V_{core\_RUN}</math> and updated the description to "Core Regulator Output in Run and VLPR" in <a href="#">Table 8</a></li> <li>Added <math>V_{core\_HSRUN}</math> in <a href="#">Table 8</a></li> <li>Updated fourth footnote to "Not intended to be used in production and is intended to be used for informational and debug purposes only" in <a href="#">Table 8</a></li> </ul> </li> <li>Added footnotes for <math>V_{hys}</math> in <a href="#">Table 17</a>, <a href="#">Table 18</a>, <a href="#">Table 19</a> and <a href="#">Table 20</a>.</li> <li>Updated <math>t_{Lead}</math> and <math>t_{Lag}</math> slave information in <a href="#">Table 46</a>.</li> </ul> |

*Table continues on the next page...*

Table 57. Revision History...continued

| Document ID  | Release date   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              |                | <ul style="list-style-type: none"> <li>Removed "ADC power consumption" from <a href="#">12-bit ADC operating conditions</a>.</li> <li>Removed the Note "Technical information for S32K142W and S32K144W device families is preliminary until these devices achieve qualification."</li> <li>Updated "S32K1xx_Orderable_Part_Number_List.xlsx".</li> <li>Updated Ordering information figure.</li> <li>Updated Package dimensions document number of 100-pin LQFP.</li> <li>Updated "Phrase" to "Phase" in Memory and memory interfaces section</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| S32K1XX v.14 | 10 August 2020 | <ul style="list-style-type: none"> <li>In <a href="#">Table 45</a>, fixed broken footnotes in symbols <math>I_{DDLs}</math> and DNL.</li> <li>In <a href="#">Table 9</a>, <ul style="list-style-type: none"> <li>Changed <math>V_{LVW}</math> Min from 4.19 to 4.17.</li> <li>Changed values for <math>V_{LVR}</math>.</li> <li>Updated values for <math>V_{LVR}</math> for S32K14xW series.</li> </ul> </li> <li>In <a href="#">ESD and latch-up protection characteristics</a>, changed the name of the section, added footnotes in the table and removed the "Notes" column from the table.</li> <li>In <a href="#">SPLL electrical specifications</a>, moved the Typical timings to Maximum for <math>J_{ACC\_SPLL}</math>.</li> <li>In <a href="#">SPLL electrical specifications</a>, added footnote to Maximum values of <math>J_{ACC\_SPLL}</math>.</li> <li>In <a href="#">Table 8</a> and <a href="#">Table 9</a>, added footnote " In 3.3 V range, the VLVW is always set since supply remains below VLVW range. Hence PMC.LVDSC2[LVWIE] should remain cleared while device operates in 3.3 V range".</li> <li>In <a href="#">External System Oscillator frequency specifications</a> updated the footnotes for symbols <math>f_{osc\_hi}</math>, <math>f_{ec\_extal}</math> and <math>f_{dc\_extal}</math>.</li> <li>Updated <a href="#">Obtaining package dimensions</a>.</li> <li>In <a href="#">Table 11</a>, removed TBD.</li> <li>In <a href="#">Ordering information</a>, updated the ordering information figure.</li> <li>In <a href="#">Table 13</a>, removed TBD for S32K14xW.</li> <li>In <a href="#">Table 18</a> and <a href="#">Table 20</a>, added EXTAL pin PTB6 parameter and values for IIN.</li> <li>In <a href="#">Table 13</a> and <a href="#">Table 14</a>, removed TBD for S32K14xW</li> <li>In <a href="#">Table 26</a> removed the <math>f_{ERCLK}</math> entry.</li> <li>In <a href="#">Table 35</a>, updated the Typical and Max values.</li> <li>In <a href="#">12-bit ADC operating conditions</a>: <ul style="list-style-type: none"> <li>Updated Typ. and Max values for symbols <math>C_{P1}</math>, <math>C_{P2}</math>, <math>C_S</math>, <math>R_{SW1}</math> and <math>R_{AD}</math>.</li> <li>Added ADC power consumption.</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID  | Release date  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              |               | <ul style="list-style-type: none"> <li>— Added footnote "All the data mention...by NXP design team".</li> <li>• In <a href="#">Table 17</a> and <a href="#">Table 19</a> updated the Typ. and Max values for Input leakage current (per pin)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| S32K1XX v.13 | 05 April 2020 | <ul style="list-style-type: none"> <li>• In <a href="#">LVR, LVD and POR operating requirements</a>, <ul style="list-style-type: none"> <li>— Updated table title for S32K14xW series</li> <li>— Updated values for <math>V_{LVR}</math> for S32K14xW series</li> </ul> </li> <li>• In <a href="#">Absolute maximum ratings</a>, updated <math>T_J</math> for S32K14xW series</li> <li>• In <a href="#">Thermal operating characteristics</a>, updated <math>T_J</math> for S32K14xW series</li> <li>• In <a href="#">External System Oscillator electrical specifications</a>, added note 'Minimum value is shown as a reference only ... ' to <math>V_{pp\_EXTAL}</math></li> </ul>                                                                                                                                                                                                  |
| S32K1XX v.12 | 04 Feb 2020   | <ul style="list-style-type: none"> <li>• In Notes: Added note: 'Technical information for ...'</li> <li>• Added S32K14xW information throughout</li> <li>• Removed "Under development" from the footnote number 6 in <a href="#">Figure 4</a>.</li> <li>• Updated <a href="#">Trace electrical specifications</a> to clarify that the section applies only for ETM Trace and is supported only by S32K148.</li> <li>• In <a href="#">Table 28</a>, added a new footnote from <math>f_{osc\_hi}</math> Max entry.</li> <li>• Updated <a href="#">Figure 21</a> for number 8.</li> <li>• In <a href="#">Reliability specifications</a>, <math>t_{nvmretee}</math> is changed to <math>t_{nvmretee100}</math>, and added a new row for the parameter <math>t_{nvmretee10}</math>. And footnotes are updated in this topic.</li> </ul>                                                     |
| S32K1XX v.11 | 27 June 2019  | <ul style="list-style-type: none"> <li>• In Notes: Removed note 'Technical information for the S32K148 ... '</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| S32K1XX v.10 | 09 May 2019   | <ul style="list-style-type: none"> <li>• In Notes: Added note 'Technical information for the S32K148 ... '</li> <li>• In attachment '<a href="#">S32K1xx_Orderable_Part_Number_List</a>': <ul style="list-style-type: none"> <li>— Added ISELED PN</li> <li>— Added PN for new package offering (48-pin LQFP S32K142; 48-pin LQFP S32K144; 100-pin LQFP S32K148)</li> <li>— Added NFC PN</li> <li>— Added UA as S32K148 Standard PN</li> <li>— Updated Standard Base Feature Offer</li> </ul> </li> <li>• In figure '<a href="#">S32K1xx product series comparison</a>' : <ul style="list-style-type: none"> <li>— Added 48-pin LQFP for S32K142 and S32K144</li> <li>— Added 100-pin LQFP for S32K148, along with footnote</li> </ul> </li> <li>• In <a href="#">Ordering information</a> : <ul style="list-style-type: none"> <li>— Updated 'Ordering option'</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>— Updated note 2</li> <li>• In <a href="#">Thermal characteristics</a>: <ul style="list-style-type: none"> <li>— Added values for 48-pin LQFP for S32K142 and S32K144</li> <li>— Added values for 100-pin LQFP for S32K148</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| S32K1XX v.9 | 18 Sep 2018  | <ul style="list-style-type: none"> <li>• In attachment '<i>S32K1xx_Power_Modes_Configuration</i>': <ul style="list-style-type: none"> <li>— Added separate sheet for S32K14x and S32K11x devices</li> <li>— Renamed VLPS (Peripherals Enabled) to VLPS (LPTMR enabled)</li> </ul> </li> <li>• Removed Note "Technical information ..."</li> <li>• In Features: <ul style="list-style-type: none"> <li>— Updated Clock interfaces for '4 – 40 MHz fast external oscillator (SOSC)' and 'Real Time Counter'</li> <li>— Added 'Up to 20 MHz TCLK and 25 MHz SWD_CLK'</li> </ul> </li> <li>• In <a href="#">Absolute maximum ratings</a>: Updated footnote 3 '60 seconds lifetime ...'</li> <li>• Updated title of table <a href="#">Thermal operating characteristics</a></li> <li>• In <a href="#">Ordering information</a> : <ul style="list-style-type: none"> <li>— Updated 'Temperature'</li> <li>— Updated 'Wafer Fab and Mask revision identifier'</li> </ul> </li> <li>• In <a href="#">Power consumption</a>: <ul style="list-style-type: none"> <li>— Renamed 'VLPS Peripheral enabled' to 'LPTMR enabled'</li> <li>— Added IDD's for S32K118 for 85 °C, 105 °C and 125 °C</li> <li>— Updated IDD's for S32K118 for 25 °C</li> <li>— Added IDD's for VLPR Peripherals enabled use case 2 for S32K116</li> <li>— Updated IDD's and added footnotes in table 'VLPS additional use-case power consumption at typical conditions'</li> </ul> </li> <li>• In <a href="#">General AC specifications</a>: <ul style="list-style-type: none"> <li>— Updated footnote of WFRST and WNFRST</li> </ul> </li> <li>• In <a href="#">External System Oscillator electrical specifications</a>: <ul style="list-style-type: none"> <li>— Added footnote to <math>R_S</math></li> <li>— Renamed <math>V_{pp}</math> to <math>V_{pp\_XTAL}</math> and updated the description accordingly</li> <li>— Added <math>V_{pp\_EXTAL}</math></li> <li>— Added <math>V_{SOSCOP}</math></li> <li>— Updated equation '<math>gm\_crit = 4 \dots</math>' in footnote 1</li> </ul> </li> <li>• In <a href="#">External System Oscillator frequency specifications</a> :</li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>— Added footnote "For an ideal clock of 40 MHz, if permitted ..." to <math>f_{osc\_hi}</math> max.</li> <li>• In <a href="#">Fast internal RC Oscillator (FIRC) electrical specifications</a>: <ul style="list-style-type: none"> <li>— Updated note "Fast internal ..."</li> </ul> </li> <li>• In <a href="#">LPSPi electrical specifications</a>: <ul style="list-style-type: none"> <li>— Updated figures 'LPSPi slave mode timing (CPHA = 0)' and 'LPSPi slave mode timing (CPHA = 1)'</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| S32K1XX v.8 | 18 June 2018 | <ul style="list-style-type: none"> <li>• In attachment '<a href="#">S32K1xx_Power_Modes_Configuration</a>': <ul style="list-style-type: none"> <li>— Updated VLPR peripherals disabled and Peripherals Enabled use case #1, using 4 Mhz for System clock, 2 Mhz for bus clock, and 1Mhz for flash.</li> </ul> </li> <li>• Removed S32K116 from Notes</li> <li>• In figure: <a href="#">S32K1xx product series comparison</a>: <ul style="list-style-type: none"> <li>— Added note 'Availability of peripherals depends on the pin availability ...'</li> <li>— Updated 'Ambient Operation Temperature' row</li> <li>— Updated 'System RAM (including FlexRAM and MTB)' row for S32K144, S32K146, and S32K148</li> </ul> </li> <li>• In <a href="#">Ordering information</a> : <ul style="list-style-type: none"> <li>— Updated figure for 'Y: Optional feature'</li> <li>— Updated footnote 3</li> </ul> </li> <li>• In <a href="#">Power and ground pins</a>: <ul style="list-style-type: none"> <li>— In figure 'Power diagram', updated <math>V_{Flash}</math> frequency to 3.3 V</li> </ul> </li> <li>• In <a href="#">Power mode transition operating behaviors</a>: <ul style="list-style-type: none"> <li>— Updated footnote for 'VLPS Mode: All clock sources disabled'</li> </ul> </li> <li>• In <a href="#">Power consumption</a>: <ul style="list-style-type: none"> <li>— Added IDD's for S32K116</li> <li>— Added VLPR Peripherals enabled use case 2 at 125 °C/Typicals</li> <li>— Renamed VLPR 'Peripherals enabled' to 'Peripherals enabled use case 1'</li> <li>— Added footnote 'Data collected using RAM' to VLPR 'Peripherals disabled' and VLPR 'Peripherals enabled use case 1'</li> <li>— Updated VLPS Peripherals enabled at 25 °C/Typicals for S32K142 and S32K144 to 40 <math>\mu</math>A and 42 <math>\mu</math>A respectively</li> <li>— Added table 'VLPS additional use-case power consumption at typical conditions'</li> </ul> </li> <li>• In <a href="#">DC electrical specifications at 3.3 V Range</a>: <ul style="list-style-type: none"> <li>— Updated naming conventions</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |               | <ul style="list-style-type: none"> <li>— Added specs for GPIO-FAST pad</li> <li>• In <a href="#">DC electrical specifications at 5.0 V Range</a>: <ul style="list-style-type: none"> <li>— Updated naming conventions</li> <li>— Added specs for GPIO-FAST pad</li> </ul> </li> <li>• In <a href="#">AC electrical specifications at 3.3 V range</a> : <ul style="list-style-type: none"> <li>— Updated naming conventions</li> <li>— Added specs for GPIO-FAST pad</li> </ul> </li> <li>• In <a href="#">AC electrical specifications at 5 V range</a> : <ul style="list-style-type: none"> <li>— Updated naming conventions</li> <li>— Added specs for GPIO-FAST pad</li> </ul> </li> <li>• In <a href="#">External System Oscillator electrical specifications</a>: <ul style="list-style-type: none"> <li>— Clarified description of <math>g_{mXOSC}</math></li> <li>— Updated <math>V_{IL}</math> max. to 1.15 V</li> </ul> </li> <li>• In <a href="#">Fast internal RC Oscillator (FIRC) electrical specifications</a>: <ul style="list-style-type: none"> <li>— Updated specs for <math>T_{JIT}</math> Cycle-to-Cycle jitter to 300 ps</li> </ul> </li> <li>• In <a href="#">QuadSPI AC specifications</a>: <ul style="list-style-type: none"> <li>— Updated specs for <math>T_{iv}</math> Data Output In-Valid Time</li> <li>— In figure 'QuadSPI output timing (SDR mode) diagram', marked Invalid area</li> </ul> </li> <li>• In <a href="#">CMP with 8-bit DAC electrical specifications</a>: <ul style="list-style-type: none"> <li>— Removed '(VAIO)' from decription of <math>V_{HYST0}</math></li> </ul> </li> <li>• In <a href="#">LPSPI electrical specifications</a>: <ul style="list-style-type: none"> <li>— Added note 'Undefined' in figures 'LPSPI slave mode timing (CPHA = 0)' and 'LPSPI slave mode timing (CPHA = 1)'</li> </ul> </li> </ul> |
| S32K1XX v.7 | 19 April 2018 | <ul style="list-style-type: none"> <li>• Changed Caution to Notes <ul style="list-style-type: none"> <li>— Updated the wordings of Notes and removed S32K146</li> <li>— Added 'Following two are the available ...'</li> </ul> </li> <li>• In 'Key features' : <ul style="list-style-type: none"> <li>— Editorial updates</li> <li>— Updated the note under Power management, Memory and memory interfaces, and Safety and security.</li> <li>— Updated FlexIO under Communications interfaces</li> <li>— Added ENET and SAI under Communications interfaces</li> <li>— Updated Cryptographic Services Engine (CSEc) under 'Safety and security'</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>In <a href="#">High-level architecture diagram for the S32K14x family</a>: <ul style="list-style-type: none"> <li>— Minor editorial updates</li> <li>— Updated note 3</li> </ul> </li> <li>In <a href="#">High-level architecture diagram for the S32K11x family</a>: <ul style="list-style-type: none"> <li>— Minor editorial updates</li> </ul> </li> <li>In figure: <a href="#">S32K1xx product series comparison</a>: <ul style="list-style-type: none"> <li>— Editorial updates</li> <li>— Updated Frequency for S32K14x</li> <li>— Updated footnote 4</li> <li>— Added footnote 5</li> </ul> </li> <li>In <a href="#">Ordering information</a> : <ul style="list-style-type: none"> <li>— Renamed section, updated the starting paragraph</li> <li>— Updated the figure</li> </ul> </li> <li>In <a href="#">Voltage and current operating requirements</a>, updated the note</li> <li>In <a href="#">Power consumption</a>: <ul style="list-style-type: none"> <li>— Updated specs for S32K146</li> <li>— Removed section 'Modes configuration', and moved its content under the first paragraph.</li> </ul> </li> <li>In <a href="#">12-bit ADC operating conditions</a>: <ul style="list-style-type: none"> <li>— Fixed the typo in <math>R_{SW1}</math></li> </ul> </li> <li>In <a href="#">LPSPI electrical specifications</a>: <ul style="list-style-type: none"> <li>— Updated <math>t_{Lead}</math> and <math>t_{Lag}</math></li> <li>— Added footnote in Figure: LPSPI slave mode timing (CPHA = 0) and Figure: LPSPI slave mode timing (CPHA = 1)</li> </ul> </li> <li>In <a href="#">Thermal characteristics</a>: <ul style="list-style-type: none"> <li>— Updated the name of table: Thermal characteristics for 32-pin QFN and 48/64/100/144/176-pin LQFP package</li> <li>— Deleted specs for <math>R_{\theta JC}</math> for 32 QFN package</li> <li>— Added '<math>R_{\theta JCBottom}</math>'</li> </ul> </li> </ul> |
| S32K1XX v.6 | 31 Jan 2018  | <ul style="list-style-type: none"> <li>Changed the representation of ARM trademark throughout.</li> <li>Removed S32K142 from 'Caution'</li> <li>In 'Key features', added the following note under 'Power management', 'Memory and memory interfaces', and 'Reliability, safety and security': <ul style="list-style-type: none"> <li>— No write or erase access to ...</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

*Table continues on the next page...*

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>In <a href="#">High-level architecture diagram for the S32K14x family</a>, added the following footnote: <ul style="list-style-type: none"> <li>— No write or erase access to ...</li> </ul> </li> <li>In <a href="#">High-level architecture diagram for the S32K11x family</a>: <ul style="list-style-type: none"> <li>— Minor editorial update: Fixed the placement of SRAM, under 'Flash memory controller' block</li> </ul> </li> <li>Updated figure: <a href="#">S32K1xx product series comparison</a>: <ul style="list-style-type: none"> <li>— Updated footnote 1, and added against 'HSRUN' in addition to 'HW security module (CSEc)' and 'EEPROM emulated by FlexRAM'.</li> <li>— Updated 'System RAM (including FlexRAM and MTB)' row for S32K144, S32K146, and S32K148.</li> <li>— Updated channel count for S32K116 in row '12-bit SAR ADC (1 MSPS each)'.</li> </ul> </li> <li>Updated <a href="#">Ordering information</a></li> <li>Updated <a href="#">Flash timing specifications — commands</a> for S32K148, S32K142, S32K146, S32K116, and S32K118.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                         |
| S32K1XX v.5 | 06 Dec 2017  | <ul style="list-style-type: none"> <li>Removed S32K148 from 'Caution'</li> <li>Updated figure: <a href="#">S32K1xx product series comparison</a> for <ul style="list-style-type: none"> <li>— 'EEPROM emulated by FlexRAM' of S32K148 (Added content to footnote)</li> <li>— Added support for LIN protocol version 2.2 A</li> </ul> </li> <li>In <a href="#">Absolute maximum ratings</a>: <ul style="list-style-type: none"> <li>— Added note 'Unless otherwise ...'</li> <li>— Added parameter 'Added note <math>T_{ramp\_MCU}</math>'</li> <li>— Updated footnote for <math>T_{ramp}</math></li> </ul> </li> <li>In <a href="#">Voltage and current operating requirements</a>: <ul style="list-style-type: none"> <li>— Added footnote '<math>V_{DD}</math> and <math>V_{DDA}</math> must be shorted ...' against parameter '<math>V_{DD}-V_{DDA}</math>'</li> <li>— Updated footnote '<math>V_{DD}</math> and <math>V_{DDA}</math> must be shorted ...'</li> </ul> </li> <li>In <a href="#">Power and ground pins</a> <ul style="list-style-type: none"> <li>— Added diagrams for 32-QFN and 48-LQFP and footnote below the diagrams.</li> <li>— Updated footnote '<math>V_{DD}</math> and <math>V_{DDA}</math> must be shorted ...'</li> </ul> </li> <li>In <a href="#">Power mode transition operating behaviors</a>: <ul style="list-style-type: none"> <li>— Added footnote 'For S32K11x – FIRC/SOSC/FIRC/LPO; For S32K14x – FIRC/SOSC/FIRC/LPO/SPLL' to 'VLPS Mode: All clock sources disabled'</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>— Updated numbers for: <ul style="list-style-type: none"> <li>◦ VLPR → VLPS</li> <li>◦ VLPS → VLPR</li> <li>◦ 'RUN → Compute operation'</li> <li>◦ RUN → VLPS</li> <li>◦ RUN → VLPR</li> </ul> </li> <li>• In <a href="#">Power consumption</a>: <ul style="list-style-type: none"> <li>— Updated specs for S32K142, S32K144, and S32K148</li> <li>— Updated footnote 'Typical current numbers are indicative ...'</li> <li>— Updated footnote 'The S32K148 data ...'</li> <li>— Removed footnote 'Above S32K148 data is preliminary targets only'</li> <li>— Added new table 'Power consumption at 3.3 V'</li> </ul> </li> <li>• In <a href="#">General AC specifications</a>: <ul style="list-style-type: none"> <li>— Updated max value and footnote of WFRST</li> <li>— Updated symbol for not filtered pulse to 'WNFRST', updated min value, removed max. value, and added footnote</li> </ul> </li> <li>• Fixed naming conventions to align with DS in <a href="#">DC electrical specifications at 3.3 V Range</a> and <a href="#">DC electrical specifications at 5.0 V Range</a></li> <li>• Updated specs for <a href="#">AC electrical specifications at 3.3 V range</a> and <a href="#">AC electrical specifications at 5 V range</a></li> <li>• In <a href="#">Device clock specifications</a>: <ul style="list-style-type: none"> <li>— Updated <math>f_{BUS}</math> to 48 for 11x</li> <li>— Added footnote to <math>f_{BUS}</math> for 14x</li> </ul> </li> <li>• In <a href="#">External System Oscillator frequency specifications</a> : <ul style="list-style-type: none"> <li>— Added specs for S32K11x</li> <li>— Updated '<math>t_{dc\_extal}</math>' for S32K14x</li> <li>— Added footnote 'Frequencies below ... ' to '<math>f_{ec\_extal}</math>' and '<math>t_{dc\_extal}</math>'</li> </ul> </li> <li>• Split <a href="#">Flash timing specifications — commands</a> for S32K14x and S32K11x</li> <li>• Updated <a href="#">Flash timing specifications — commands</a> for S32K14x</li> <li>• In <a href="#">Reliability specifications</a>: <ul style="list-style-type: none"> <li>— Added footnote 'Data retention period ... ' for 'tnvmretp1k' and 'tnvmretee'</li> <li>— Minor update in footnote for 'nnvmwree16' 'nnvmwree256'</li> </ul> </li> <li>• In <a href="#">QuadSPI AC specifications</a>: <ul style="list-style-type: none"> <li>— Updated 'MCR[SCLKCFG[5]]' value to 0</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>— Updated 'Data Input Setup Time' HSRUN Internal DQS PAD Loopback value to 1.6</li> <li>— Updated 'Data Input Setup Time' DDR External DQS min. value to 2</li> <li>— Updated 'Data Input Hold Time' DDR External DQS min. value to 20</li> <li>— Upadted figure 'QuadSPI output timing (SDR mode) diagram' and 'QuadSPI input timing (HyperRAM mode) diagram'</li> <li>• In <a href="#">12-bit ADC electrical characteristics</a>: <ul style="list-style-type: none"> <li>— Added note 'On reduced pin packages where ...'</li> <li>— Removed max. value of '<math>I_{DDA\_ADC}</math>'</li> <li>— Added note 'Due to triple ...'</li> </ul> </li> <li>• In <a href="#">12-bit ADC operating conditions</a>, removed parameter '<math>\Delta V_{DDA}</math>'</li> <li>• In <a href="#">CMP with 8-bit DAC electrical specifications</a>: <ul style="list-style-type: none"> <li>— Updated Typ. and Max. values of '<math>I_{DDL5}</math>'</li> <li>— Upadted Typ. value of '<math>t_{DHSB}</math>'</li> <li>— Updated Typ. value of '<math>V_{HYST1}</math>', '<math>V_{HYST2}</math>', and '<math>V_{HYST3}</math>'</li> </ul> </li> <li>• In <a href="#">LPSPI electrical specifications</a>: <ul style="list-style-type: none"> <li>— Updated '<math>f_{periph}</math>' and '<math>f_{op}</math>', and '<math>t_{SPSCk}</math>'</li> <li>— Updated 3.3 V numbers and added footnote against <math>f_{op}</math>, <math>t_{SU}</math>, and <math>t_V</math> in HSRUN Mode</li> <li>— Added footnote to '<math>t_{WSPSCk}</math>'</li> </ul> </li> <li>• Updated <a href="#">Thermal characteristics</a> for S32K11x</li> </ul> |
| S32K1XX v.4 | 02 June 2017 | <ul style="list-style-type: none"> <li>• In section: <a href="#">Block diagram</a>, added block diagram for S32K11x series.</li> <li>• Updated figure: <a href="#">S32K1xx product series comparison</a>.</li> <li>• In section: <a href="#">Selecting orderable part number</a>, added reference to attachment <a href="#">S32K_Part_Numbers.xlsx</a>.</li> <li>• In section: <a href="#">Ordering information</a> <ul style="list-style-type: none"> <li>— Updated figure: Ordering information.</li> </ul> </li> <li>• In <a href="#">Table 1</a>, <ul style="list-style-type: none"> <li>— Updated note 'All the limits defined ...'</li> <li>— Updated parameter '<math>I_{INJPAD\_DC\_ABS}</math>', '<math>V_{IN\_DC}</math>', <math>I_{INJSUM\_DC\_ABS}</math>.</li> </ul> </li> <li>• In <a href="#">Table 3</a>, <ul style="list-style-type: none"> <li>— Updated parameter <math>I_{INJPAD\_DC\_OP}</math> and <math>I_{INJSUM\_DC\_OP}</math>.</li> </ul> </li> <li>• In <a href="#">Table 8</a>, updated TBDs for <math>V_{LVR\_HYST}</math>, <math>V_{LVD\_HYST}</math>, and <math>V_{LVW\_HYST}</math></li> <li>• In <a href="#">Power mode transition operating behaviors</a>,</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |               | <ul style="list-style-type: none"> <li>— Added VLPR → VLPS</li> <li>— Added VLPS → VLPR</li> <li>— Updated TBDs for VLPS → Asynchronous DMA Wakeup, STOP1 → Asynchronous DMA Wakeup, and STOP2 → Asynchronous DMA Wakeup</li> <li>• In <a href="#">Table 13</a>, updated the specifications for S32K144.</li> <li>• Updated the attachment <i>S32K1xx_Power_Modes_Configuration.xlsx</i>.</li> <li>• In <a href="#">Table 25</a>, removed <math>C_{IN\_A}</math>.</li> <li>• In <a href="#">Table 27</a>, <ul style="list-style-type: none"> <li>— Updated specificatins for <math>g_{mXOSC}</math>.</li> <li>— Removed <math>I_{DDOSC}</math></li> </ul> </li> <li>• In <a href="#">Table 29</a>, <ul style="list-style-type: none"> <li>— Added parameter <math>\Delta F_{125}</math>.</li> <li>— Removed <math>I_{DDFIRC}</math></li> </ul> </li> <li>• In <a href="#">Table 31</a>, <ul style="list-style-type: none"> <li>— Added parameter <math>\Delta F_{125}</math>.</li> <li>— Removed <math>I_{DDSIRC}</math></li> </ul> </li> <li>• In <a href="#">Table 33</a>, removed <math>I_{LPO}</math></li> <li>• Updated section: <a href="#">Flash memory module (FTFC/FTFM) electrical specifications</a></li> <li>• In section: <a href="#">12-bit ADC operating conditions</a>, <ul style="list-style-type: none"> <li>— Updated TBDs for <math>I_{DDA\_ADC}</math> and TUE in <a href="#">Table 41</a></li> <li>— Updated TBDs for <math>I_{DDA\_ADC}</math> and TUE in <a href="#">Table 42</a></li> </ul> </li> <li>• In section: <a href="#">QuadSPI AC specifications</a>, updated figure 'QuadSPI output timing (HyperRAM mode) diagram'.</li> <li>• In section: <a href="#">12-bit ADC operating conditions</a>, updated <a href="#">12-bit ADC operating conditions</a>.</li> <li>• In section: <a href="#">CMP with 8-bit DAC electrical specifications</a>, added note 'For comparator IN signals adjacent ...'</li> <li>• In table: <a href="#">LPSPI electrical specifications</a>, minor update in footnote 6.</li> <li>• In table: <a href="#">Thermal characteristics for the 64/100/144/176-pin LQFP package</a>, updated specifications for S32K146.</li> </ul> |
| S32K1XX v.3 | 14 March 2017 | <ul style="list-style-type: none"> <li>• In <a href="#">Table 3</a> <ul style="list-style-type: none"> <li>— Updated min. value of <math>V_{DD\_OFF}</math></li> <li>— Added parameter <math>I_{INJSUM\_AF}</math></li> </ul> </li> <li>• Updated <a href="#">Power mode transition operating behaviors</a></li> <li>• Updated <a href="#">Power consumption</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |               | <ul style="list-style-type: none"> <li>Updated footnote to <math>T_{SPLL\_LOCK}</math> in <a href="#">SPLL electrical specifications</a></li> <li>In <a href="#">12-bit ADC electrical characteristics</a> <ul style="list-style-type: none"> <li>Updated table: 12-bit ADC characteristics (2.7 V to 3 V) (<math>V_{REFH} = V_{DDA}</math>, <math>V_{REFL} = V_{SS}</math>) <ul style="list-style-type: none"> <li>Added typ. value to <math>I_{DDA\_ADC}</math>, TUE, DNL, and INL</li> <li>Added min. value to SMPLTS</li> <li>Removed footnote 'All the parameters in this table ...'</li> </ul> </li> <li>Updated table: 12-bit ADC characteristics (3 V to 5.5 V) (<math>V_{REFH} = V_{DDA}</math>, <math>V_{REFL} = V_{SS}</math>) <ul style="list-style-type: none"> <li>Added typ. value to <math>I_{DDA\_ADC}</math></li> <li>Removed footnote 'All the parameters in this table ...'</li> </ul> </li> </ul> </li> <li>In <a href="#">Flash timing specifications — commands</a> updated Max. value of <math>t_{vfykey}</math> to 33 <math>\mu s</math></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| S32K1XX v.2 | 03 March 2017 | <ul style="list-style-type: none"> <li>Updated description of QSPI and Clock interfaces in Key Features section</li> <li>Updated figure: <a href="#">High-level architecture diagram for the S32K1xx family</a></li> <li>Updated figure: <a href="#">S32K1xx product series comparison</a></li> <li>Added note in section <a href="#">Selecting orderable part number</a></li> <li>Updated figure: Ordering information</li> <li>In table: <a href="#">Absolute maximum ratings</a>: <ul style="list-style-type: none"> <li>Added footnote to <math>I_{INJPAD\_DC}</math></li> <li>Updated min and max value of <math>I_{INJPAD\_DC}</math></li> <li>Updated description, max and min values for <math>I_{INJSUM}</math></li> <li>Updated <math>V_{IN\_TRANSIENT}</math></li> </ul> </li> <li>In table: <a href="#">Voltage and current operating requirements</a>: <ul style="list-style-type: none"> <li>Renamed <math>V_{SUP\_OFF}</math></li> <li>Updated max value of <math>V_{DD\_OFF}</math></li> <li>Removed <math>V_{INA}</math> and <math>V_{IN}</math></li> <li>Added <math>V_{REFH}</math> and <math>V_{REFL}</math></li> <li>Updated footnote "Typical conditions assumes <math>V_{DD} = V_{DDA} = V_{REFH} = 5</math> V ..."</li> <li>Removed <math>I_{NJSUM\_AF}</math></li> </ul> </li> <li>Updated footnotes in table <a href="#">Table 7</a></li> <li>Updated section <a href="#">Power mode transition operating behaviors</a></li> <li>In table: <a href="#">Power consumption</a></li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>— Added footnote "With PMC_REGSC[CLKBIASDIS] ... "</li> <li>— Updated conditions for VLPR</li> <li>— Removed Idd/MHz for S32K144</li> <li>— Updated numbers for S32K142 and S32K148</li> <li>— Removed use case footnotes</li> <li>• In table: <a href="#">DC electrical specifications at 3.3 V Range</a> : <ul style="list-style-type: none"> <li>— Added footnotes to <math>V_{ih}</math> Input Buffer High Voltage and <math>V_{ih}</math> Input Buffer Low Voltage</li> <li>— Added footnote to High drive port pins</li> </ul> </li> <li>• In table: <a href="#">DC electrical specifications at 5.0 V Range</a> : <ul style="list-style-type: none"> <li>— Added footnotes <math>V_{ih}</math> Input Buffer High Voltage and <math>V_{ih}</math> Input Buffer Low Voltage</li> </ul> </li> <li>• Updated table: <a href="#">AC electrical specifications at 3.3 V range</a></li> <li>• Updated table: <a href="#">AC electrical specifications at 5 V range</a></li> <li>• In table: <a href="#">Standard input pin capacitance</a> <ul style="list-style-type: none"> <li>— Added footnote to Normal run mode (S32K14x series)</li> </ul> </li> <li>• Removed note from 1M ohms Feedback Resistor in figure <a href="#">Oscillator connections scheme</a></li> <li>• In table: <a href="#">External System Oscillator electrical specifications</a> <ul style="list-style-type: none"> <li>— Updated typical of <math>I_{DDOSC}</math> Supply current — low-gain mode (low-power mode) (HGO=0) 1 for 4 and 8 MHz</li> <li>— Removed rows for <math>I_{lk\_ext}</math> EXTAL/XTAL impedance High-frequency, low-gain mode (low-power mode) and high-frequency, high-gain mode and <math>V_{EXTAL}</math></li> <li>— Updated Typ. of <math>R_S</math> low-gain mode</li> <li>— Updated description of <math>R_F</math>, <math>R_S</math>, and <math>V_{PP}</math></li> <li>— Removed footnote from <math>R_F</math> Feedback resistor</li> <li>— Updated footnote for <math>C_1</math> <math>C_2</math> and <math>R_F</math></li> </ul> </li> <li>• In table: <a href="#">Table 28</a> <ul style="list-style-type: none"> <li>— Removed mention of high-frequency</li> <li>— Added HGO 0, 1 information</li> </ul> </li> <li>• In table: <a href="#">Fast internal RC Oscillator electrical specifications</a> <ul style="list-style-type: none"> <li>— Updated <math>F_{FIRC}</math></li> <li>— Updated description of <math>\Delta F</math></li> <li>— Updated typ and max values of <math>T_{JIT}</math> cycle-to-cycle jitter and <math>T_{JIT}</math> Long term jitter over 1000 cycles</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>— Added footnotes to <math>T_{JIT}</math> cycle-to-cycle jitter and <math>T_{JIT}</math> Long term jitter over 1000 cycles</li> <li>— Updated naming convention of <math>I_{DDFIRC}</math> Supply current</li> <li>— Added footnote to <math>I_{DDFIRC}</math> Supply current</li> <li>— Added footnote to column Parameter</li> <li>• In table: <a href="#">Slow internal RC oscillator (SIRC) electrical specifications</a> <ul style="list-style-type: none"> <li>— Removed <math>V_{DD}</math> Supply current in 2 MHz Mode</li> <li>— Removed footnote and updated description of <math>\Delta F</math></li> <li>— Updated footnote to <math>F_{SIRC}</math> and <math>I_{DDSIRC}</math></li> </ul> </li> <li>• In table: <a href="#">SPLL electrical specifications</a> <ul style="list-style-type: none"> <li>— Added row for <math>F_{SPLL\_REF}</math> PLL Reference</li> <li>— Updated naming convention throughout the table</li> <li>— Updated the max value of <math>T_{SPLL\_LOCK}</math> Lock detector detection time</li> </ul> </li> <li>• In table: <a href="#">Flash timing specifications — commands</a> <ul style="list-style-type: none"> <li>— Added footnotes: <ul style="list-style-type: none"> <li>◦ All command times assumes ...</li> <li>◦ For all EEPROM Emulation terms ...</li> <li>◦ 'First time' EERAM writes after a POR ...</li> </ul> </li> <li>— Removed footnote 'Assumes 25 MHz or ...'</li> <li>— Updated Max of <math>t_{ewr32bers}</math></li> <li>— Added parameters <math>t_{quickwr}</math> and <math>t_{quickwrClnup}</math></li> </ul> </li> <li>• In table: <a href="#">Reliability specifications</a> <ul style="list-style-type: none"> <li>— Removed Typ. values for all parameters</li> <li>— Removed footnote 'Typical values represent ...'</li> <li>— Added footnote 'Any other EEE driver usage ...'</li> </ul> </li> <li>• Updated <a href="#">QuadSPI AC specifications</a></li> <li>• Removed topic: Reliability, Safety and Security modules</li> <li>• In table: <a href="#">12-bit ADC operating conditions</a> <ul style="list-style-type: none"> <li>— Updated <math>V_{DDA}</math></li> <li>— Updated values for <math>V_{REFH}</math> and <math>V_{REFL}</math> to add reference to the section "voltage and current operating requirments" for Min and Max valaues</li> <li>— Updated footnote to Typ.</li> <li>— Removed footnote from RAS Analog source resistance</li> <li>— Updated figure: ADC input impedance equivalency diagram</li> </ul> </li> </ul> |

Table continues on the next page...

Table 57. Revision History...continued

| Document ID | Release date | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             |              | <ul style="list-style-type: none"> <li>In table: <a href="#">12-bit ADC characteristics (2.7 V to 3 V) (<math>V_{REFH} = V_{DDA}</math>, <math>V_{REFL} = V_{SS}</math>)</a> <ul style="list-style-type: none"> <li>Removed rows for <math>V_{TEMP\_S}</math> and <math>V_{TEMP25}</math></li> <li>Updated footnote to Typ.</li> </ul> </li> <li>In table: <a href="#">12-bit ADC characteristics (3 V to 5.5 V) (<math>V_{REFH} = V_{DDA}</math>, <math>V_{REFL} = V_{SS}</math>)</a> <ul style="list-style-type: none"> <li>Removed rows for <math>V_{TEMP\_S}</math> and <math>V_{TEMP25}</math></li> <li>Removed number for TUE</li> <li>Updated footnote to Typ.</li> </ul> </li> <li>In table: <a href="#">Comparator with 8-bit DAC electrical specifications</a> <ul style="list-style-type: none"> <li>Updated Typ. of <math>I_{DDL5}</math> Supply current, Low-speed mode</li> <li>Updated Typ. of <math>t_{DLSB}</math> Propagation delay, Low-speed mode</li> <li>Updated Typ. of <math>t_{DHSS}</math> Propagation delay, High-speed mode</li> <li>Updated <math>t_{DLS5}</math> Propagation delay</li> <li>Added row for <math>t_{DDAC}</math> Initialization and switching settling time</li> <li>Updated footnote</li> </ul> </li> <li>Updated section <a href="#">LPSPi electrical specifications</a></li> <li>Added section: <a href="#">SAI electrical specifications</a></li> <li>Updated section: <a href="#">Ethernet AC specifications</a></li> <li>Added section: <a href="#">Clockout frequency</a></li> <li>Added section: <a href="#">Trace electrical specifications</a></li> <li>Updated table: <a href="#">Table 55</a>: Updated numbers for S32K142 and S32K148</li> <li>Updated table: <a href="#">Table 56</a>: Updated numbers for S32K148</li> <li>Updated Document number for 32-pin QFN in topic <a href="#">Obtaining package dimensions</a></li> </ul> |
| S32K1XX v.1 | 12 Aug 2016  | Initial release                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Legal information

### Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <https://www.nxp.com>.

### Definitions

**Draft** — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Suitability for use in non-automotive qualified products** — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**HTML publications** — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

**Translations** — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Security** — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at [PSIRT@nxp.com](mailto:PSIRT@nxp.com)) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

**NXP B.V.** — NXP B.V. is not an operating company and it does not distribute or sell products.

## Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

**NXP** — wordmark and logo are trademarks of NXP B.V.

**AMBA**, **Arm**, **Arm7**, **Arm7TDMI**, **Arm9**, **Arm11**, **Artisan**, **big.LITTLE**, **Cordio**, **CoreLink**, **CoreSight**, **Cortex**, **DesignStart**, **DynamiQ**, **Jazelle**, **Keil**, **Mali**, **Mbed**, **Mbed Enabled**, **NEON**, **POP**, **RealView**, **SecurCore**, **Socrates**, **Thumb**, **TrustZone**, **ULINK**, **ULINK2**, **ULINK-ME**, **ULINK-PLUS**, **ULINKpro**, **µVision**, **Versatile** — are trademarks and/or registered trademarks of Arm Limited (or its subsidiaries or affiliates) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved.

**Airfast** — is a trademark of NXP B.V.

**ColdFire** — is a trademark of NXP B.V.

**ColdFire+** — is a trademark of NXP B.V.

**HITAG** — is a trademark of NXP B.V.

**ICODE** — is a trademark of NXP B.V.

**I2C-bus** — logo is a trademark of NXP B.V.

**Kinetis** — is a trademark of NXP B.V.

**Layerscape** — is a trademark of NXP B.V.

**MagniV** — is a trademark of NXP B.V.

**Mantis** — is a trademark of NXP B.V.

**MIFARE** — is a trademark of NXP B.V.

**MIFARE Ultralight** — is a trademark of NXP B.V.

**MiGLO** — wordmark and logo are trademarks of NXP B.V.

**NTAG** — is a trademark of NXP B.V.

**QorIQ** — is a trademark of NXP B.V.

**QorIQ Qonverge** — is a trademark of NXP B.V.

**RoadLINK** — wordmark and logo are trademarks of NXP B.V.

**SafeAssure** — is a trademark of NXP B.V.

**SafeAssure** — logo is a trademark of NXP B.V.

**SmartMX** — is a trademark of NXP B.V.

**Tower** — is a trademark of NXP B.V.

## Contents

|          |                                                              |           |           |                                                                       |            |
|----------|--------------------------------------------------------------|-----------|-----------|-----------------------------------------------------------------------|------------|
| <b>1</b> | <b>Features.....</b>                                         | <b>2</b>  | 7.2.3     | System Clock Generation (SCG) specifications                          | 38         |
| 1.1      | Key Features.....                                            | 2         | 7.2.4     | Low Power Oscillator (LPO) electrical specifications .....            | 39         |
| <b>2</b> | <b>Block diagram.....</b>                                    | <b>4</b>  | 7.2.5     | SPLL electrical specifications .....                                  | 39         |
| <b>3</b> | <b>Features comparison.....</b>                              | <b>5</b>  | 7.3       | Memory and memory interfaces.....                                     | 40         |
| 3.1      | Feature comparison.....                                      | 5         | 7.3.1     | Flash memory module (FTFC/FTFM) electrical specifications.....        | 40         |
| <b>4</b> | <b>Ordering information.....</b>                             | <b>7</b>  | 7.3.2     | QuadSPI AC specifications.....                                        | 48         |
| 4.1      | Selecting orderable part number .....                        | 7         | 7.4       | Analog modules.....                                                   | 52         |
| 4.2      | Ordering information .....                                   | 8         | 7.4.1     | ADC electrical specifications.....                                    | 52         |
| <b>5</b> | <b>General.....</b>                                          | <b>9</b>  | 7.4.2     | CMP with 8-bit DAC electrical specifications.....                     | 57         |
| 5.1      | Absolute maximum ratings.....                                | 9         | 7.5       | Communication modules.....                                            | 63         |
| 5.2      | Voltage and current operating requirements....               | 10        | 7.5.1     | LPUART electrical specifications.....                                 | 63         |
| 5.3      | Thermal operating characteristics.....                       | 12        | 7.5.2     | LPSPi electrical specifications.....                                  | 63         |
| 5.4      | Power and ground pins.....                                   | 13        | 7.5.3     | LPI2C electrical specifications.....                                  | 70         |
| 5.5      | LVR, LVD and POR operating requirements....                  | 14        | 7.5.4     | FlexCAN electrical specifications.....                                | 71         |
| 5.6      | Power mode transition operating behaviors.....               | 16        | 7.5.5     | SAI electrical specifications.....                                    | 71         |
| 5.7      | Power consumption.....                                       | 18        | 7.5.6     | Ethernet AC specifications.....                                       | 73         |
| 5.8      | ESD and latch-up protection characteristics....              | 25        | 7.5.7     | Clockout frequency.....                                               | 76         |
| 5.9      | EMC radiated emissions operating behaviors..                 | 25        | 7.6       | Debug modules.....                                                    | 76         |
| <b>6</b> | <b>I/O parameters.....</b>                                   | <b>25</b> | 7.6.1     | SWD electrical specifications .....                                   | 76         |
| 6.1      | AC electrical characteristics.....                           | 25        | 7.6.2     | Trace electrical specifications.....                                  | 78         |
| 6.2      | General AC specifications.....                               | 26        | 7.6.3     | JTAG electrical specifications.....                                   | 79         |
| 6.3      | DC electrical specifications at 3.3 V Range....              | 26        | <b>8</b>  | <b>Thermal attributes.....</b>                                        | <b>83</b>  |
| 6.4      | DC electrical specifications at 5.0 V Range....              | 28        | 8.1       | Description.....                                                      | 83         |
| 6.5      | AC electrical specifications at 3.3 V range .....            | 30        | 8.2       | Thermal characteristics.....                                          | 83         |
| 6.6      | AC electrical specifications at 5 V range .....              | 32        | 8.3       | General notes for specifications at maximum junction temperature..... | 88         |
| 6.7      | Standard input pin capacitance.....                          | 33        | <b>9</b>  | <b>Dimensions.....</b>                                                | <b>89</b>  |
| 6.8      | Device clock specifications.....                             | 33        | 9.1       | Obtaining package dimensions .....                                    | 89         |
| <b>7</b> | <b>Peripheral operating requirements and behaviors .....</b> | <b>34</b> | <b>10</b> | <b>Pinouts.....</b>                                                   | <b>89</b>  |
| 7.1      | System modules.....                                          | 34        | 10.1      | Package pinouts and signal descriptions.....                          | 89         |
| 7.2      | Clock interface modules.....                                 | 34        | <b>11</b> | <b>Revision History.....</b>                                          | <b>89</b>  |
| 7.2.1    | External System Oscillator electrical specifications.....    | 34        |           | <b>Legal information.....</b>                                         | <b>104</b> |
| 7.2.2    | External System Oscillator frequency specifications .....    | 36        |           |                                                                       |            |

---

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

---

© 2026 NXP B.V.

All rights reserved.

For more information, please visit: <https://www.nxp.com>

Date of release: 5 March 2026  
Document identifier: S32K1XX