

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: MK10DN512ZVMC10R
Manufacturer: NXP USA Inc.
Package: 121-LFBGA
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/nxp-usa-inc/mk10dn512zvmc10r.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review


CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

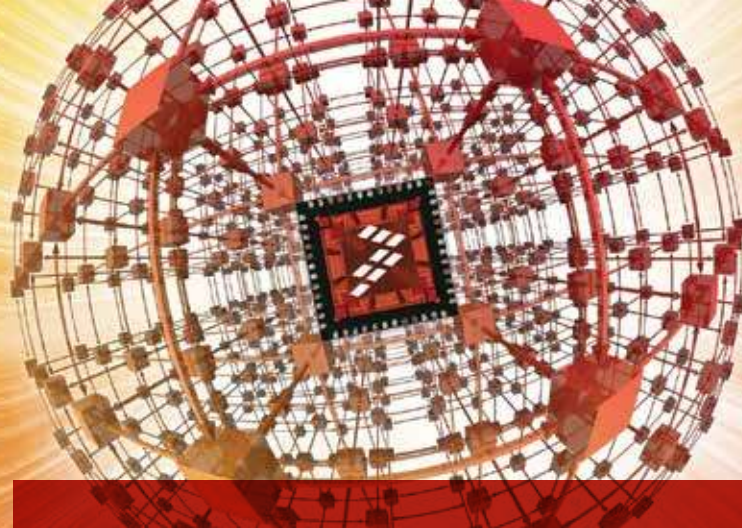

32-bit Microcontrollers

Kinetis K1x MCU Family

Low-power, mixed-signal MCUs

Target Applications


- Electronic point of sales (EPOS)
- Flow meters
- Gaming controllers
- HVAC systems
- Remote sensors

Overview

The Kinetis MCU portfolio consists of multiple pin-, peripheral- and software-compatible MCU families based on the ARM® Cortex®-M4 core. Families are built from innovative 90 nm thin-film storage (TFS) flash technology with unique FlexMemory (EEPROM) capability, and offer industry-leading low power and mixed signal analog integration.

The K1x MCU family is the entry point into the Kinetis MCU portfolio. Devices start from 32 KB of flash in a small-footprint 5x5 mm 32 QFN package, extending up to 1 MB in a 144 MAPBGA package with a rich suite of analog, communication, timing and control peripherals. Additionally, pin compatibility, flexible low-power capabilities and innovative FlexMemory help to solve many of the major pain points for system implementation.

Kinetis K1x MCU Family

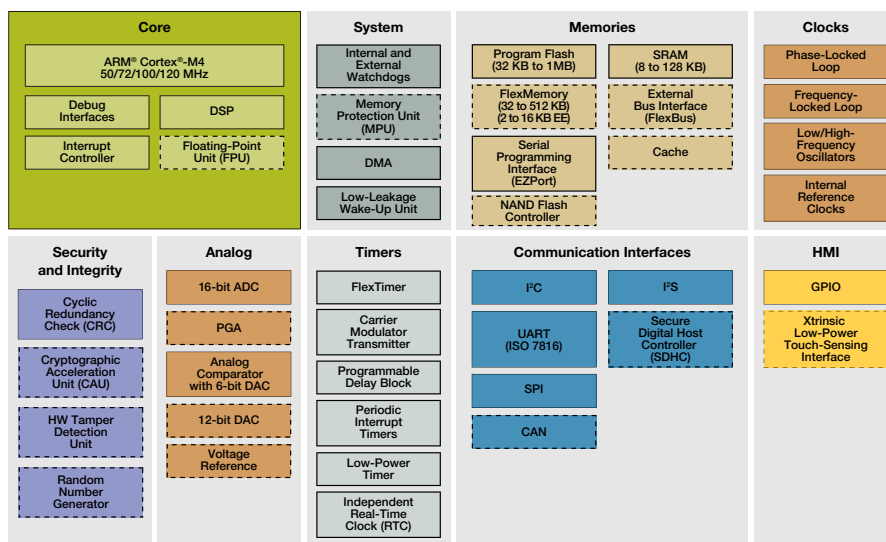

☐ Standard Feature ☐ Optional Feature

One-Stop Enablement Offering—MCU + IDE + RTOS

Freescale Tower System hardware development environment:

- Integrated development environments
 - Eclipse-based CodeWarrior V10.x IDE and Processor Expert
 - IAR Embedded Workbench®
 - MDK®
 - Mentor Graphics Sourcery™ CodeBench
- Runtime software and RTOS
 - Math, DSP and encryption libraries
 - Motor control libraries
 - Complimentary bootloaders (e.g., USB, Ethernet, RF, serial)
 - Complimentary Freescale embedded GUI
 - Complimentary Freescale MQX™
 - Cost-effective Nano™ SSL/Nano™ SSH for Freescale MQX RTOS
 - Micrium µC/OS-III
 - Express Logic ThreadX
 - SEGGER embOS
 - freeRTOS
 - Mocana (security)
- Full ARM ecosystem

Features

- Cortex-M4 core with DSP instruction support and optional single-precision floating-point unit
- Up to 32-channel DMA. Up to 16 KB of cache. Crossbar switch.
- 32 KB–1 MB flash. Up to 128 KB of SRAM.
- 32–512 KB FlexMemory
- 10 ultra-low-power modes with flash programming and analog operation down to 1.71 V
- Low-power timer, low-power RTC, low-leakage wake-up unit
- High-speed 16-bit ADCs. Programmable gain amplifiers
- 12-bit DAC. High-speed comparators
- On-chip voltage reference
- Cryptographic acceleration unit (CAU)
- HW tamper detection unit
- Random number generator
- Low-power capacitive touch-sensing interface
- Up to six UARTs with IrDA support. One UART with ISO 7816 support.
- I²S interface, up to two CAN modules, up to three DSPI interfaces, up to two I²C interfaces

Benefits

- Up to 120 MHz core supporting a broad range of processing bandwidth needs
- Peripheral and memory servicing with reduced CPU loading. Optimized bus bandwidth and flash execution performance. Concurrent multi-master bus accesses for increased bus bandwidth.
- High reliability, fast access program memory with 4-level security protection. Independent flash banks allow concurrent code execution and firmware updating.
- FlexMemory provides 32 byte–16 KB of user-segmentable byte write/erase EEPROM. In addition, FlexNVM from 32–512 KB for extra program code, data or EEPROM backup.
- Peripheral activity and wake-up times can be optimized to suit application requirements, enabling extended battery life (Stop currents of <500 nA, run currents of <200 µA/MHz, 4 µs wake-up from Stop)
- Continual device operation in reduced power states with flexible wake-up options
- Fast, accurate signal conditioning capability with support for single or differential operation for improved noise rejection
- Support for small amplitude signal processing
- Analog signal generation for audio applications
- Fast, accurate motor overcurrent protection
- Eliminates need for external voltage reference reducing overall system cost
- Secure data transfer and storage. Faster than software implementations and with minimal CPU loading. Supports a wide variety of algorithms: DES, 3DES, AES, MD5, SHA-1, SHA-256.
- Secure key storage with internal/external tamper detect for unsecured flash, temperature/clock/supply voltage variations and physical attack
- Provides a modern upgrade from mechanical to touch keypad, rotary and slider user interfaces and operates in all low-power modes with minimal current added. Supports up to 16 inputs.
- Variety of data size, format and transmission/reception settings supported for multiple industrial communication protocols
- Multiple communication interfaces for simple and efficient data exchange, industrial network bridging and audio system interfacing

Kinetis K1x MCU Family Options

Part Number	Memory					Features									Other	√ Packages									
	CPU (MHz)	Flash (KB)	Flex NVM (KB)	SRAM (KB)	Cache (KB)	Single-Precision Floating-Point Unit	Memory Protection	CAN	Secure Digital Host	NAND Flash Controller	External Bus Interface	12-bit DAC	Prog. Gain Amplifier	5 V Tolerant I/O		FM	FT	LF	MP	LH	LK	LL	MC	LQ	MD
																32 QFN (5x5)	48QFN (7X7)	48LQFP (7X7)	64MAPBGA (5X5)	64LQFP (10X10)	80LQFP (12X12)	100LQFP (14X14)	121BGA (8x8)	144LQFP (20x20)	144BGA (13x13)
MK10DN32Vyy5	50	32		8												√	√	√	√	√					
MK10DN64Vyy5	50	64		16												√	√	√	√	√					
MK10DN128Vyy5	50	128		16												√	√	√	√	√					
MK10DN512Vyy10	100	512		128			√	√	√		√	√	√	√	√			√	√	√	√	√	√	√	√
MK10FN1M0Vyy12	120	1 MB		128	16	√	√	√	√	√	√	√	√	√	√							√		√	√
MK10DX32Vyy5	50	32v	32	8												√	√	√	√	√					
MK10DX64Vyy5	50	64	32	16												√	√	√	√	√					
MK10DX128Vyy5	50	128	32	16												√	√	√	√	√					
MK10DX64Vyy7	72	64	32	16				√			√	√	√	√	√			√	√	√		√			
MK10DX128Vyy7	72	128	32	32				√			√	√	√	√	√				√	√		√			
MK10DX256Vyy7	72	256	32	64				√			√	√	√	√	√			√	√	√		√			
MK10DX128Vyy10	100	128	128	32			√	√	√		√	√	√	√	√				√	√	√	√		√	√
MK10DX256Vyy10	100	256	256	64			√	√	√		√	√	√	√	√									√	√
MK10FX512Vyy12	120	512	512	128	16	√	√	√	√	√	√	√	√	√	√									√	√
MK11DX128AVyy5(R)	50	128	64	32								√			Encryption and Tamper Detect					√		√			
MK11DX256AVyy5(R)	50	256	64	32								√			Encryption and Tamper Detect					√		√			
MK11DN512AVyy5(R)	50	512		64								√			Encryption and Tamper Detect					√		√			
MK12DX128Vyy5(R)	50	128	64	32								√						√	√	√		√			
MK12DX256Vyy5(R)	50	256	64	32								√						√	√	√		√			
MK12DN512Vyy5	50	512		64								√						√	√	√		√			

yy = package designator

For current information about Kinetis products and documentation, please visit freescale.com/Kinetis/Kseries

Freescale, the Freescale logo, the Energy Efficient Solutions logo, Kinetis, Processor Expert and Xtrinsic are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Tower is a trademark of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. ARM, Cortex and Keil are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2012, 2014 Freescale Semiconductor, Inc.

Doc Number: KNTSK1xFMLYFS REV 9