

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	LM556CN
Manufacturer:	onsemi
Package:	14-DIP (0.300" , 7.62mm)
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/onsemi/lm556cn.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

LM556/NE556

Dual Timer

Features


- Replaces Two LM555/NE555 Timers
- Operates in Both Astable And Monostable Modes
- High Output Current
- TTL Compatible
- Timing From Microsecond To Hours
- Adjustable Duty Cycle
- Temperature Stability Of 0.005% Per °C

Applications


- Precision Timing
- Pulse Shaping
- Pulse Width Modulation
- Frequency Division
- Traffic Light Control
- Sequential Timing
- Pulse Generator
- Time Delay Generator
- Touch Tone Encoder
- Tone Burst Generator

Description

The LM556/NE556 series dual monolithic timing circuits are a highly stable controller capable of producing accurate time delays or oscillation. The LM556/NE556 is a dual LM555. Timing is provided an external resistor and capacitor for each timing function. The two timers operate independently of each other, sharing only V_{CC} and ground. The circuits may be triggered and reset on falling waveforms. The output structures may sink or source 200mA.

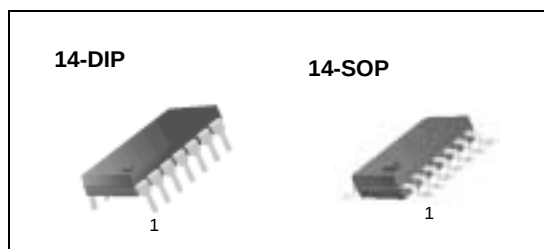

Internal Block Diagram

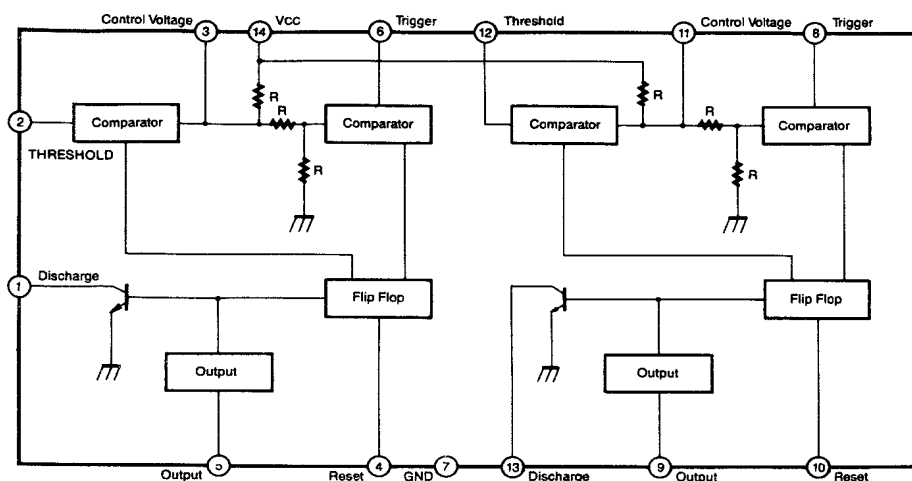

Absolute Maximum Ratings (T_A = 25°C)

Parameter	Symbol	Value	Unit
Supply Voltage	V _{CC}	16	V
Lead Temperature (soldering 10sec)	T _{LEAD}	300	°C
Power Dissipation	P _D	600	mW
Operating Temperature Range LM556/NE556	T _{OPR}	0 ~ + 70	°C
Storage Temperature Range	T _{STG}	- 65 ~ + 150	°C

Electrical Characteristics

(T_A = 25°C, V_{CC} = 5 ~ 15V, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Supply Voltage	V _{CC}	-	4.5	-	16	V
Supply Current *1(two timers) (low state)	I _{CC}	V _{CC} = 5V, R _L = ∞ V _{CC} = 15V, R _L = ∞	-	5 16	12 30	mA mA
Timing Error *2(monostable) Initial Accuracy Drift with Temperature Drift with Supply Voltage	ACCUR Δt/ΔT Δt/ΔV _{CC}	R _A = 2KΩ to 100KΩ C = 0.1μF T = 1.1RC	-	0.75 50 0.1	-	% ppm/°C %/V
Control Voltage	V _C	V _{CC} = 15V	9.0	10.0	11.0	V
		V _{CC} = 5V	2.6	3.33	4.0	V
Threshold Voltage	V _{TH}	V _{CC} = 15V	8.8	10.0	11.2	V
		V _{CC} = 5V	2.4	3.33	4.2	V
Threshold Current*3	I _{TH}	-	-	30	250	nA
Trigger Voltage	V _{TR}	V _{CC} = 15V	4.5	5.0	5.6	V
		V _{CC} = 5V	1.1	1.6	2.2	V
Trigger Current	I _{TR}	V _{TR} = 0V	-	0.01	2.0	μA
Reset Voltage*5	V _{RST}	-	0.4	0.6	1.0	V
Reset Current	I _{RST}	-	-	0.03	0.6	mA
Low Output Voltage	V _{OL}	V _{CC} = 15V I _{SINK} = 10mA I _{SINK} = 50mA I _{SINK} = 100mA I _{SINK} = 200mA	-	0.1 0.4 2.0 2.5	0.25 0.75 3.2	V
		V _{CC} = 5V I _{SINK} = 8mA I _{SINK} = 5mA		0.25 0.15	0.35 0.25	V
High Output Voltage	V _{OH}	V _{CC} = 15V I _{SOURCE} = 200mA I _{SOURCE} = 100mA	12.75	12.5 13.3	-	V
		V _{CC} = 5V I _{SOURCE} = 100mA	2.75	3.3	-	V
Rise Time of Output	t _R	-	-	100	300	ns
Fall Time of Output	t _F	-	-	100	300	ns
Discharge Leakage Current	I _{LKG}	-	-	10	100	nA
Matching Characteristics*4 Initial Accuracy Drift with Temperature Drift with Supply Voltage	ACCUR Δt/ΔT Δt/ΔV _{CC}	-	-	1.0 10 0.2	2.0 0.5	% ppm/°C %/V
Timing Error (astable)*2 Initial Accuracy Drift with Temperature Drift with Supply Voltage	ACCUR Δt/ΔT Δt/ΔV _{CC}	V _{CC} = 15V R _A , R _B = 1KΩ to 100KΩ C = 0.1μF	-	2.25 150 0.3	-	% ppm/°C %/V

Notes:

*1. Supply current when output is high is typically 1.0mA less at V_{CC} = 5V

*2. Tested at V_{CC} = 5V and V_{CC} = 15V

*3. This will determine the maximum value of R_A + R_B for 15V operation.
The maximum total R = 20MΩ, and for 5V operation the maximum total R = 6.6MΩ.


*4. Matching characteristics refer to the difference between performance characteristics of each timer section in the monostable mode.

*5. As reset voltage lowers, timing is inhibited and then the output goes low.

Mechanical Dimensions

Package


14-DIP

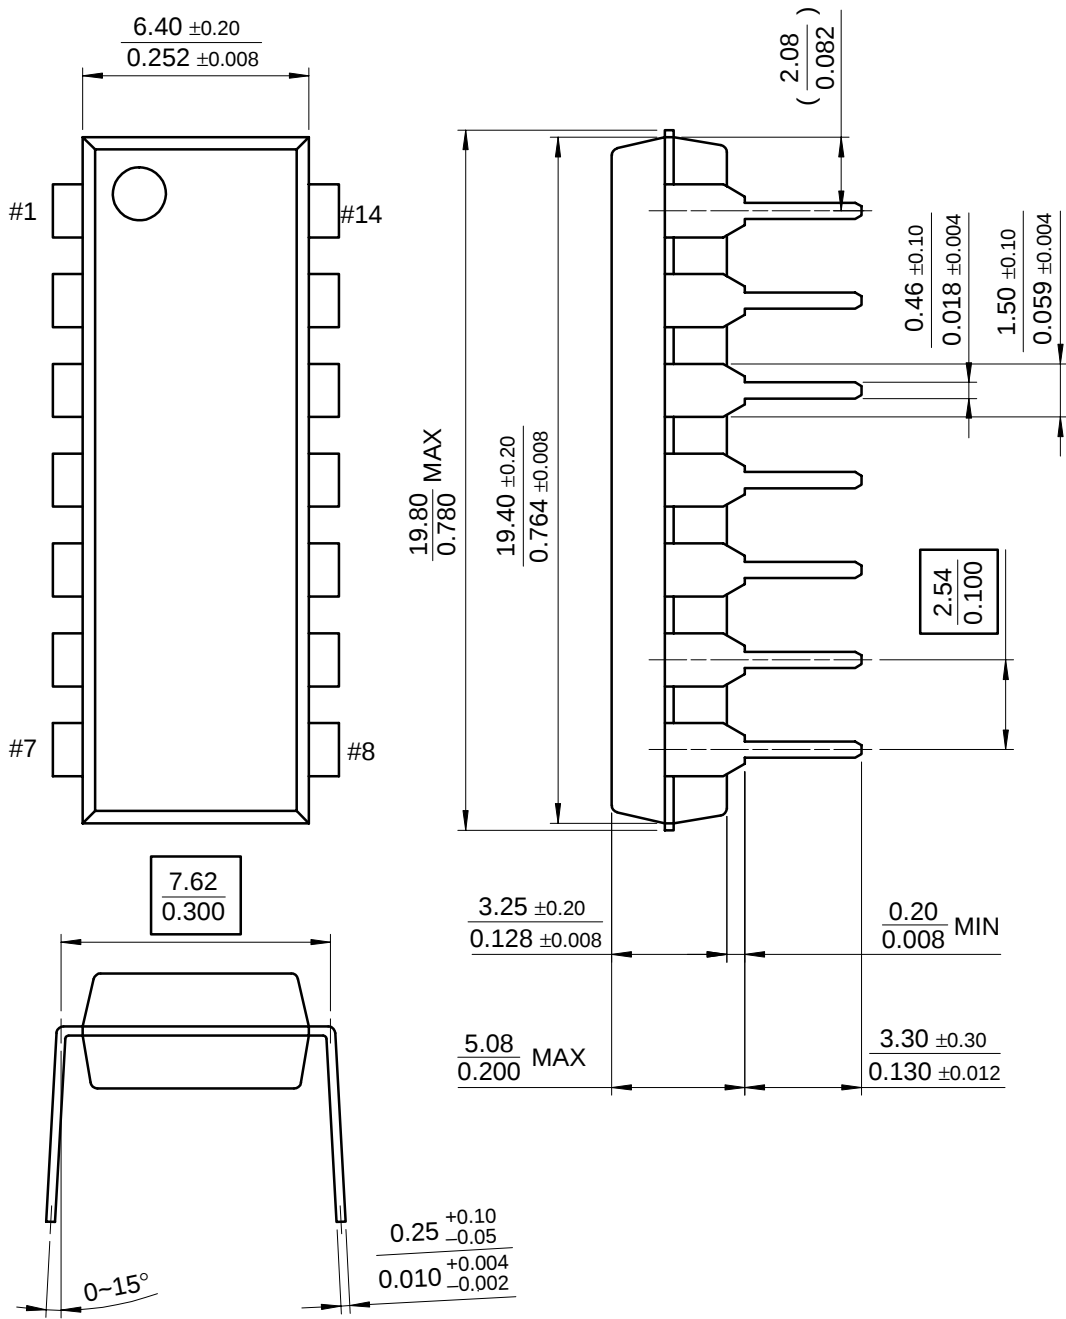

Mechanical Dimensions (Continued)

Package

14-SOP

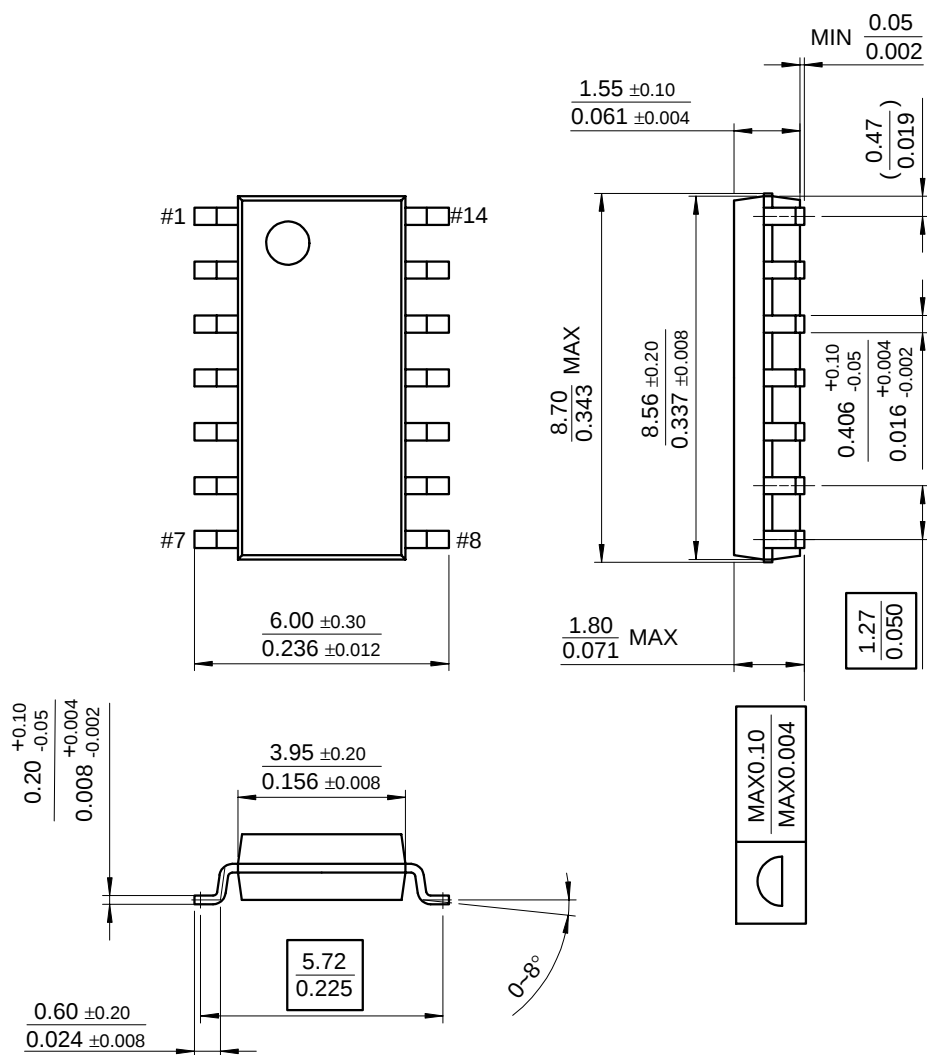

Ordering Information

Product Number	Package	Operating Temperature
LM556CN	14-DIP	0 ~ + 70°C
LM556CM	14-SOP	
NE556	14-DIP	
NE556D	14-SOP	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.