

# ANTREX Electronics

## Electronic Components Sourcing Information

---

### Product Reference Information

**Part Number:** RURG5060-F085  
**Manufacturer:** onsemi  
**Package:** TO-247-2  
**Availability:** Please confirm with sales

**Product Page:**

<https://antrexco.com/product/details/onsemi/rurg5060-f085.html>

**Request a Quote:**

[Submit RFQ for this part](#)



Scan for product page

### Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

### Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

**Note:**

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

# Ultrafast Rectifier

50 A, 600 V

## RURG5060-F085

### Description

The RURG5060-F085 is an ultrafast diode with soft recovery characteristics ( $t_{rr} < 90\text{ns}$ ). It has low forward voltage drop and is silicon nitride passivated ionimplanted epitaxial planar construction.

This device is intended for use as a freewheeling/clamping diode and rectifier in a variety of switching power supplies and other power switching applications. Its low stored charge and ultrafast recovery with soft recovery characteristic minimizes ringing and electrical noise in many power switching circuits, thus reducing power loss in the switching transistors.

### Features

- High Speed Switching ( $t_{rr} = 70\text{ ns}$  (Typ.) @  $I_F = 50\text{ A}$ )
- Low Forward Voltage ( $V_F = 1.6\text{ V}$  (Max.) @  $I_F = 50\text{ A}$ )
- Avalanche Energy Rated
- This Device is Pb-Free
- AEC-Q101 Qualified


### Applications

- Automotive DCDC Converter
- Automotive On Board Charger
- Switching Power Supply
- Power Switching Circuits


### ABSOLUTE MAXIMUM RATINGS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Rating                                                          | Symbol         | Value       | Unit             |
|-----------------------------------------------------------------|----------------|-------------|------------------|
| Peak Repetitive Reverse Voltage                                 | $V_{RRM}$      | 600         | V                |
| Working Peak Reverse Voltage                                    | $V_{RWM}$      | 600         | V                |
| DC Blocking Voltage                                             | $V_R$          | 600         | V                |
| Average Rectified Forward Current<br>@ $T_C = 25^\circ\text{C}$ | $I_{F(AV)}$    | 50          | A                |
| Non-repetitive Peak Surge Current<br>(Halfwave 1 Phase 50 Hz)   | $I_{FSM}$      | 150         | A                |
| Avalanche Energy (1.4 A, 40 mH)                                 | $E_{AVL}$      | 40          | mJ               |
| Operating Junction and Storage Temperature                      | $T_J, T_{STG}$ | -55 to +175 | $^\circ\text{C}$ |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



### MARKING DIAGRAM



$\$Y$  = onsemi Logo  
 $\&Z$  = Assembly Plant Code  
 $\&3$  = Numeric Date Code  
 $\&K$  = Lot Code  
RURG5060 = Specific Device Code

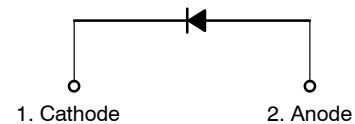

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

## RURG5060–F085

### THERMAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Symbol          | Parameter                                       | Max | Units              |
|-----------------|-------------------------------------------------|-----|--------------------|
| $R_{\theta JC}$ | Maximum Thermal Resistance, Junction-to-Case    | 0.4 | $^\circ\text{C/W}$ |
| $R_{\theta JA}$ | Maximum Thermal Resistance, Junction-to-Ambient | 45  | $^\circ\text{C/W}$ |

### PACKAGE MARKING AND ORDERING INFORMATION

| Device Marking | Device        | Package | Tube | Quantity |
|----------------|---------------|---------|------|----------|
| RURG5060       | RURG5060–F085 | TO–247  | –    | 30       |

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)



| Symbol                     | Parameter                     | Test Conditions                                                                          | Min.                      | Typ. | Max. | Unit              |
|----------------------------|-------------------------------|------------------------------------------------------------------------------------------|---------------------------|------|------|-------------------|
| $I_R$                      | Instantaneous Reverse Current | $V_R = 600\text{ V}$                                                                     | $T_C = 25^\circ\text{C}$  | –    | –    | 250 $\mu\text{A}$ |
|                            |                               |                                                                                          | $T_C = 175^\circ\text{C}$ | –    | –    | 2 $\text{mA}$     |
| $V_{FM}$<br>(Note 1)       | Instantaneous Forward Voltage | $I_F = 50\text{ A}$                                                                      | $T_C = 25^\circ\text{C}$  | –    | 1.28 | 1.6 $\text{V}$    |
|                            |                               |                                                                                          | $T_C = 175^\circ\text{C}$ | –    | 1.09 | 1.4 $\text{V}$    |
| $t_{rr}$<br>(Note 2)       | Reverse Recovery Time         | $I_F = 1\text{ A}$ ,<br>$di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{CC} = 390\text{ V}$  | $T_C = 25^\circ\text{C}$  | –    | 42   | 65 $\text{ns}$    |
|                            |                               |                                                                                          | $T_C = 25^\circ\text{C}$  | –    | 70   | 90 $\text{ns}$    |
|                            |                               |                                                                                          | $T_C = 175^\circ\text{C}$ | –    | 285  | – $\text{ns}$     |
| $t_a$<br>$t_b$<br>$Q_{rr}$ | Reverse Recovery Time         | $I_F = 50\text{ A}$ ,<br>$di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{CC} = 390\text{ V}$ | $T_C = 25^\circ\text{C}$  | –    | 36   | – $\text{ns}$     |
|                            | Reverse Recovery Charge       |                                                                                          |                           | –    | 34   | – $\text{nC}$     |
| $E_{AVL}$                  | Avalanche Energy              | $I_{AV} = 1.4\text{ A}$ , $L = 40\text{ mH}$                                             | 40                        | –    | –    | $\text{mJ}$       |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Pulse : Test Pulse width = 300  $\mu\text{s}$ , Duty Cycle = 2%
2. Guaranteed by design



## TEST CIRCUITS AND WAVEFORMS

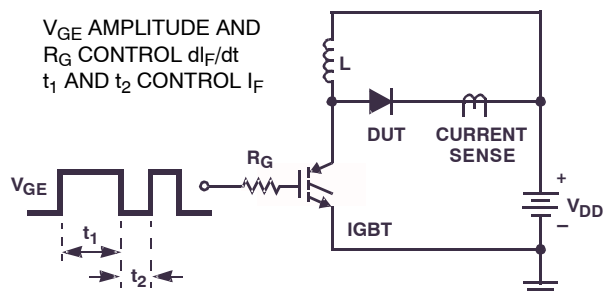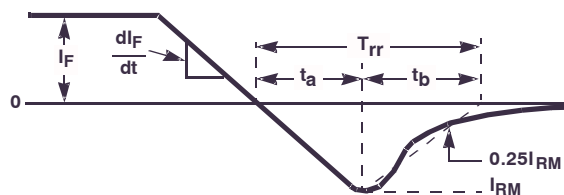Figure 1.  $T_{rr}$  Test CircuitFigure 2.  $T_{rr}$  Waveforms and Definitions

$I = 1.4 \text{ A}$   
 $L = 40 \text{ mH}$   
 $R < 0.1 \Omega$   
 $E_{AVL} = 1/2LI^2 [V_{R(AVL)}/(V_{R(AVL)} - V_{DD})]$   
 $Q_1 = \text{IGBT (BV}_{CES} > \text{DUT } V_{R(AVL)})$

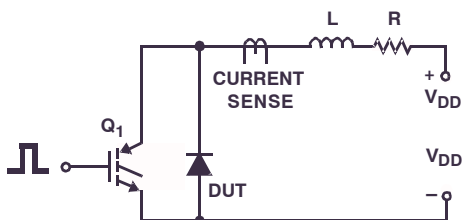


Figure 3. Avalanche Energy Test Circuit

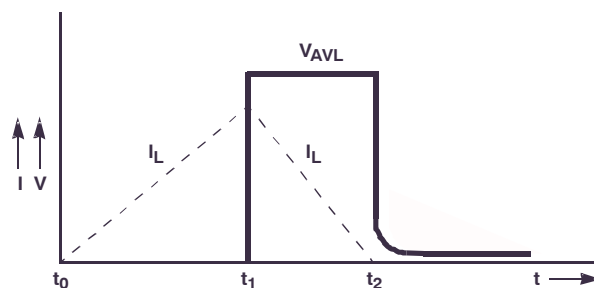


Figure 4. Avalanche Current and Voltage Waveforms

## TYPICAL PERFORMANCE CHARECTERISTICS

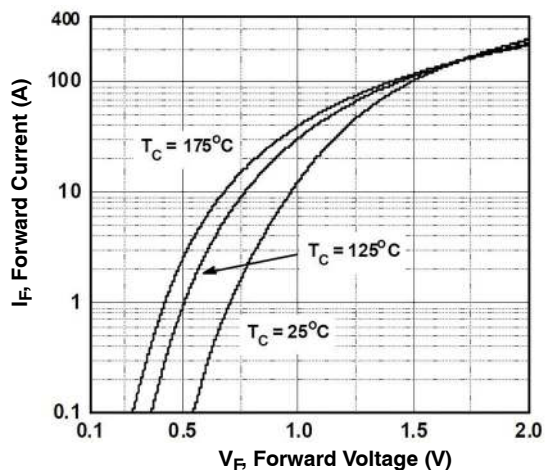


Figure 5. Typical Forward Voltage Drop vs. Forward Current

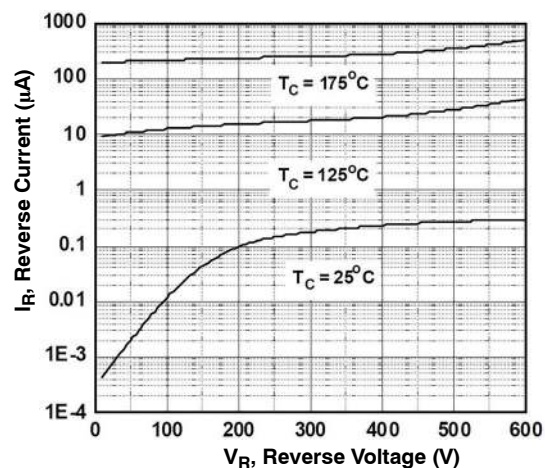


Figure 6. Typical Reverse Current vs. Reverse Voltage

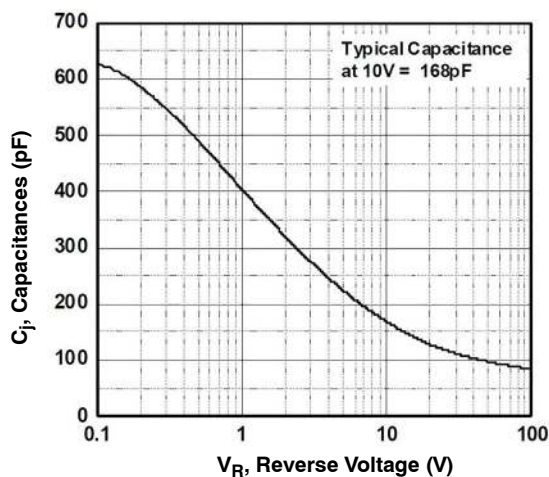


Figure 7. Typical Junction Capacitance

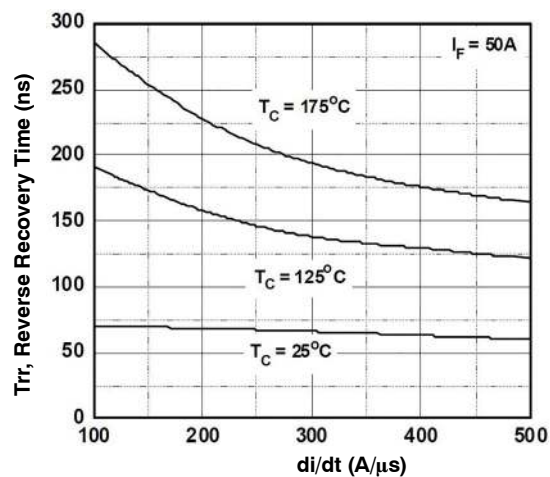


Figure 8. Typical Reverse Recovery Time vs. di/dt

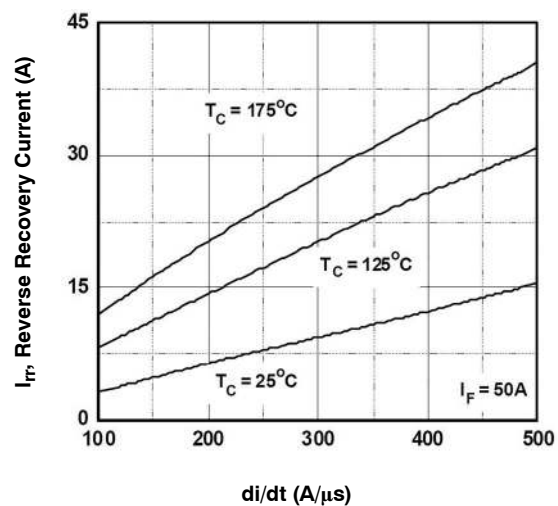


Figure 9. Typical Reverse Recovery Current vs. di/dt

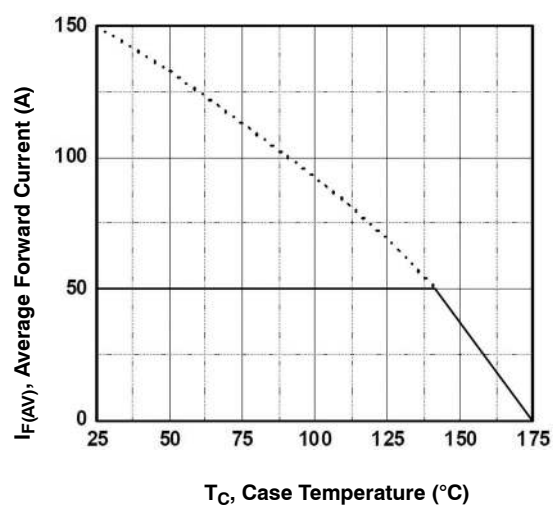


Figure 10. Forward Current Derating Curve

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

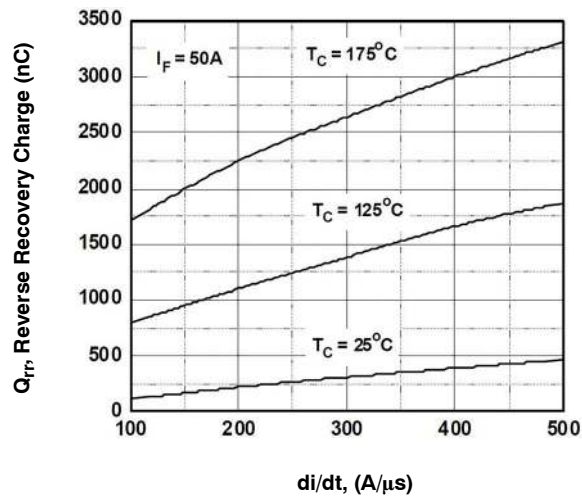


Figure 11. Reverse Recovery Charge


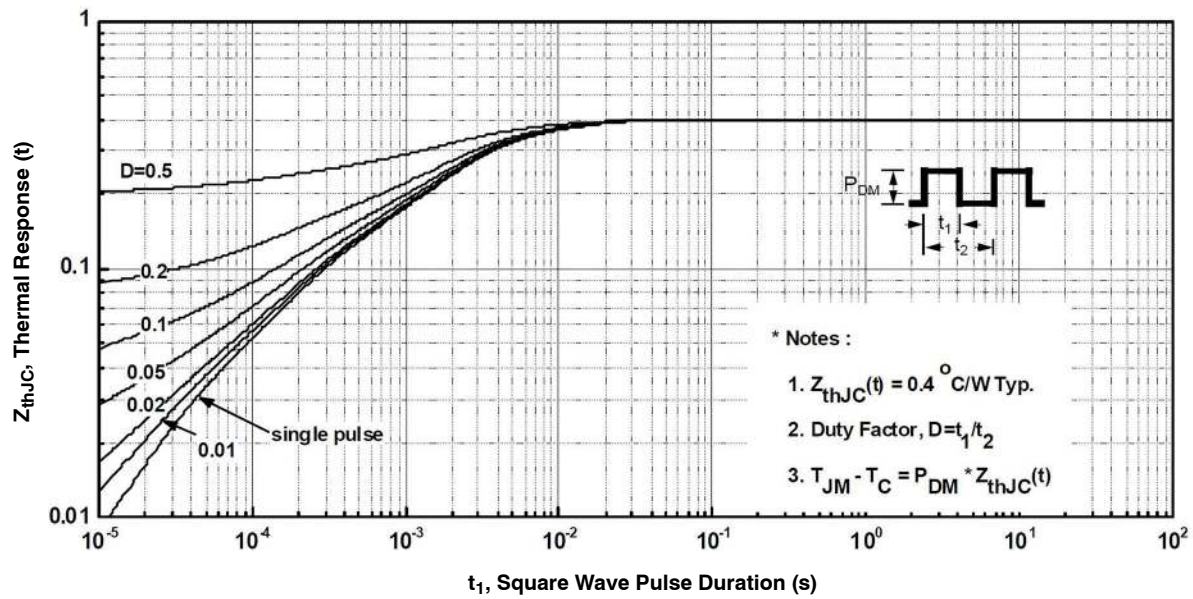


Figure 12. Transient Thermal Response Curve

**TO-247-2LD**  
**CASE 340CL**  
**ISSUE A**


DATE 03 DEC 2019

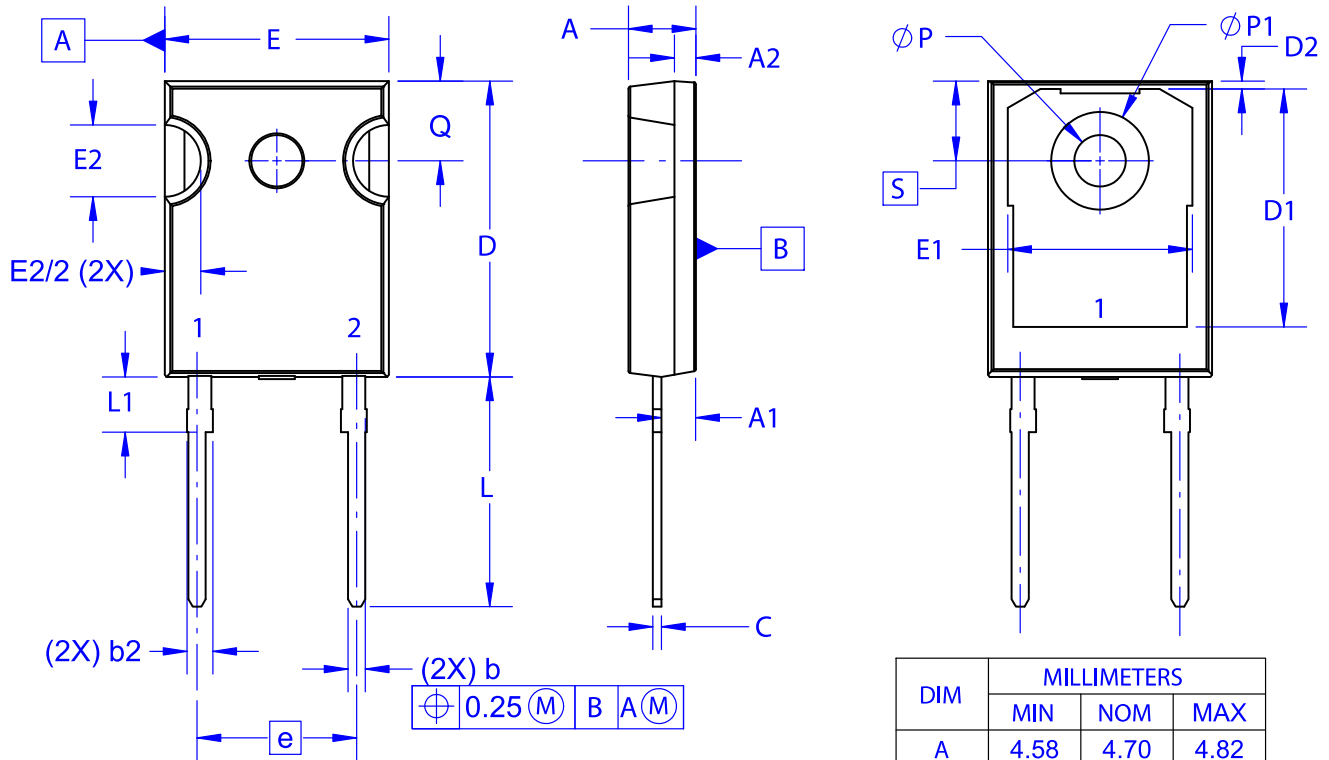

NOTES: UNLESS OTHERWISE SPECIFIED.

- A. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DRAWING CONFORMS TO ASME Y14.5 - 2009.
- D. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
- E. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

**GENERIC  
MARKING DIAGRAM\***

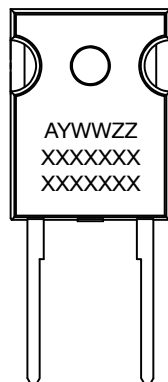

XXXX = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
ZZ = Assembly Lot Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

|                         |                    |                                                                                                                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON13850G</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>TO-247-2LD</b>  | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)