

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 2882776
Manufacturer: Phoenix Contact
Package: Module
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/phoenix-contact/2882776.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

VAL-CP-MCB-3C-350/40/FM

Order No.: 2882776

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2882776>

Combination of type 2 surge protection and arrester backup fuse, with monitoring of arrester and arrester backup fuse, in combination with a status indicator and remote indication contact. Design: 4-conductor system (L1, L2, L3, PEN), mounting on NS 35 DIN rail

**Commercial data**

GTIN (EAN)	 4 046356 175838
sales group	J026
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 43 (TT-2009)

Product notes

WEEE/RoHS-compliant since:
12/05/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Standards**

Housing material	PBT / PA
Inflammability class acc. to UL 94	V0
Color	light gray

Standards for air and creepage distances	DIN VDE 0110-1
	IEC 60664-1: 1992-10
	IEC 61643-1
Degree of protection	IP20
Mounting type	DIN rail: 35 mm
Design	DIN rail module, two-section, divisible
Number of positions	3
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Message: Surge protection fault	Optical, remote indicator contact
Direction of action	3L-N/PE
Width	114.00 mm
Height	76.00 mm
Length	101.00 mm

Protective circuit

IEC category	II
EN type	T2
Nominal voltage U_N	240 V AC (230/400 V AC ... 240/415 V AC)
	415 V AC (L-L)
Arrester rated voltage U_C (L-PEN)	350 V AC
U_T (TOV-proof)	415 V AC (5 s)
Nominal frequency f_N	50 Hz
	60 Hz
Nominal load current I_L	40 A
Ground conductor current I_{PE}	$\leq 250 \mu A$
Standby power consumption P_C	$\leq 3.5 \text{ mW}$
Max. discharge surge current I_{max} (8/20) μs maximum (L-PEN)	90 kA (all channels)
	30 kA (1 channel)
Nominal discharge surge current I_n (8/20) μs (L-PEN)	20 kA (1 channel)
	60 kA (all channels)
Protection level U_P (L-PEN)	$\leq 2.5 \text{ kV}$

Residual voltage (L-PEN)	≤ 2.5 kV (at I_n)
	≤ 1.5 kV (at 10 kA)
	≤ 1.3 kV (at 5 kA)
	≤ 1 kV (at 3 kA)
Response time (L-N)	≤ 25 ns
Max. required backup fuse with branch wiring	(Not required)
Max. required backup fuse with V-type through wiring	(Not required)
Short-circuit resistance I_p with max. backup fuse (effective)	25 kA

Connection, protective circuit

Connection name	PE conductor connection
Type of connection	Screw connection
Connection type IN	Biconnect screw terminal block
Connection type OUT	Biconnect screw terminal block
Connection method	Biconnect terminal block
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	16 mm
Conductor cross section stranded min.	2.5 mm ²
Conductor cross section stranded max.	16 mm ²
Conductor cross section solid min.	2.5 mm ²
Conductor cross section solid max.	25 mm ²
Conductor cross section AWG/kcmil min.	12
Conductor cross section AWG/kcmil max	4
Connection name	Connection protective circuit
Type of connection	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Connection method	Screw connection
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	16 mm
Conductor cross section stranded min.	1 mm ²
Conductor cross section stranded max.	25 mm ²
Conductor cross section solid min.	1 mm ²

Conductor cross section solid max.	35 mm ²
Conductor cross section AWG/kcmil min.	18
Conductor cross section AWG/kcmil max	2

Remote indicator contact

Connection name	Remote fault indicator contact
Switching function	PDT, 1-pos.
Type of connection	Pluggable screw connection
Screw thread	M2
Tightening torque	0.25 Nm
Stripping length	7 mm
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	28
Conductor cross section AWG/kcmil max	16
Maximum operating voltage U _{max} AC	250 V AC
Maximum operating voltage U _{max} DC	250 V DC
Max. operating current I _{max}	2 A AC
	50 mA DC

Standards

Standards/regulations	IEC 61643-1 2005
	EN 61643-11 2002
	IEC 60364-4-443
	IEC 60364-5-534

Certificates / Approvals




Certification


CB, CCA, GOST, KEMA, OEVE, VDE-PZI

Diagrams/Drawings

Dimensioned drawing

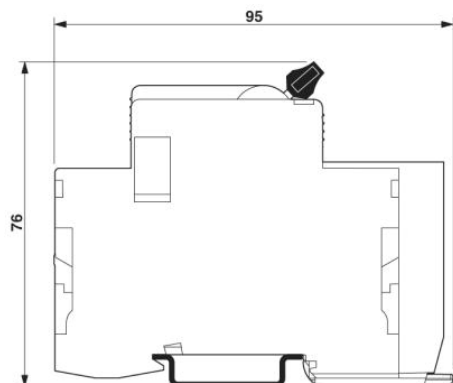

Circuit diagram

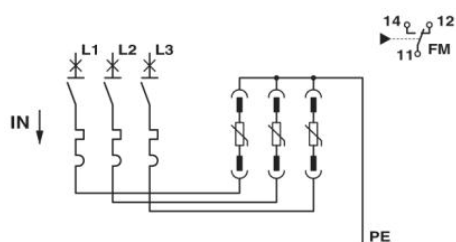

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;