

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	VS-VSKT71/16
Manufacturer:	Powerex Inc.
Package:	TO-200 Variation
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/powerex-inc/vs-vskt71-16.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request


Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Phase Control SCR 750 Amperes Average 1600 Volts

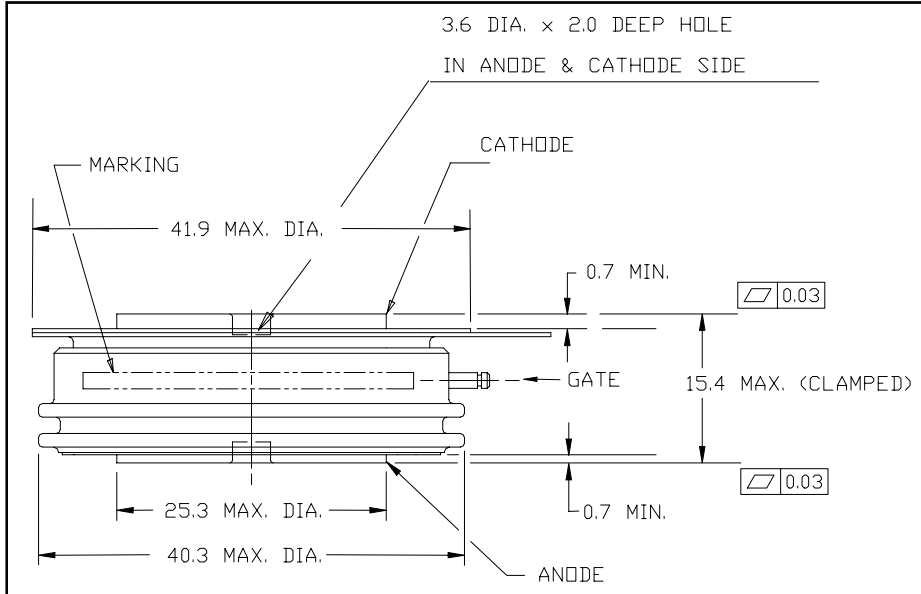

T7H8 750A (Outline Drawing)



T7H8 750A Phase Control SCR
750 Amperes Average, 1600 Volts

Ordering Information:

Select the complete 12 digit module part number from the table below.
Example: T7H8167504DN is a 1600V 750A Phase Control SCR.

Type	Voltage V_{RRM} (Volts)	Current $I_{T(av)}$ (A)	Turn-off Time t_q (μ sec)	Gate Current I_{GT} (mA)	Lead Code
T7H8	02 through 16 200V through 1600V	75 750A	0 150 μ sec typical	4 150 mA	DN 8"

Description:

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak, hermetic Pow-R-Disc devices employing the field proven amplifying gate.

Features:

- ☐ Low On-State Voltage
- ☐ High di/dt Capability
- ☐ High dv/dt Capability
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I^2t Ratings

Applications:

- ☐ Power Supplies
- ☐ Motor Control



**T7H8
750A**

Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272
www.pwrx.com

**Phase Control SCR
750 Amperes Average
1600 Volts**

Absolute Maximum Ratings

Characteristics	Symbol	Units
Non-Repetitive Transient Peak Reverse Blocking Voltage	V_{RSM} $V_{RRM} + 100V$	Volts
RMS On-State Current, $T_C = 62^\circ C$	$I_{T(RMS)}$ 1180	Amperes
Average Current 180° Sine Wave, $T_C = 62^\circ C$	$I_{T(AV)}$ 750	Amperes
RMS On-State Current, $T_C = 55^\circ C$	$I_{T(RMS)}$ 1260	Amperes
Average Current 180° Sine Wave, $T_C = 55^\circ C$	$I_{T(AV)}$ 800	Amperes
Peak One Cycle Surge On-State Current (Non-Repetitive) 60 Hz	I_{TSM} 10500	Amperes
Peak One Cycle Surge On-State Current (Non-Repetitive) 50 Hz	I_{TSM} 9600	Amperes
Critical Rate-of-rise of On-State Current (Non-Repetitive)	di/dt 600	A/ μ sec
Critical Rate-of-rise of On-State Current (Repetitive)	di/dt 150	A/ μ sec
I^2t (for Fusing) for One Cycle, 60 Hz	I^2t 460,000	A ² sec
Peak Gate Power Dissipation	P_{GM} 16	Watts
Average Gate Power Dissipation	$P_{G(av)}$ 3	Watts
Operating Temperature	T_J -40 to +125	$^\circ C$
Storage Temperature	T_{stg} -40 to +150	$^\circ C$
Approximate Weight	4	oz.
	113	g
Mounting Force	2000 to 2400	lb.
	900 to 1090	kg.

Information presented is based upon manufacturers testing and projected capabilities.
This information is subject to change without notice.
The manufacturer makes no claim as to the suitability of use, reliability, capability,
or future availability of this product.

Electrical Characteristics, $T_J=25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Repetitive Peak Reverse Leakage Current	I_{RRM}	$T_J=125^\circ\text{C}$, $V_R = V_{RRM}$			30	mA
Repetitive Peak Forward Leakage Current	I_{DRM}	$T_J=125^\circ\text{C}$, $V_D = V_{DRM}$			30	mA
Peak On-State Voltage	V_{TM}	$I_{FM}=625\text{A}$ peak, Duty Cycle < 0.1 %			1.40	V
Threshold Voltage, Low-level	$V_{(TO)1}$	$T_J = 125^\circ\text{C}$, $I = 15\%I_{T(AV)}$ to $\pi I_{T(AV)}$			0.97192	V
Slope Resistance, Low-level	r_{T1}				0.4818	m Ω
Threshold Voltage, High-level	$V_{(TO)2}$	$T_J = 125^\circ\text{C}$, $I = \pi I_{T(AV)}$ to I_{TSM}			1.4824	V
Slope Resistance, High-level	r_{T2}				0.2845	m Ω
V_{TM} Coefficients, Low-level		$T_J = 125^\circ\text{C}$, $I = 15\%I_{T(AV)}$ to $\pi I_{T(AV)}$		A = B = C = D =	1.221 -0.1259 8.857 E-04 0.03348	
		$V_{TM} = A + B \ln(I) + C(I) + D \text{ Sqrt}(I)$				
Typical Turn-On Time	t_{on}	$I_T = 100\text{A}$, $V_D = 100\text{ V}$		7		μs
Typical Turn-Off Time	t_q	$T_J = 125^\circ\text{C}$, $I_T = 250\text{A}$, $di_R/dt = 25\text{A}/\mu\text{s}$ Reapplied $dv/dt = 20\text{ V}/\mu\text{s}$ Linear to 80% V_{DRM}		150		μs
Minimum Critical dv/dt – Exponential to V_{DRM}	dv/dt	$T_J = 125^\circ\text{C}$	300			V/ μs
Gate Trigger Current	I_{GT}	$T_J = 25^\circ\text{C}$, $V_D = 12\text{ V}$			150	mA
Gate Trigger Voltage	V_{GT}	$T_J = 25^\circ\text{C}$, $V_D = 12\text{ V}$			3.0	V
Non-Triggering Gate Voltage	V_{GDM}	$T_J = 125^\circ\text{C}$, $V_D = V_{DRM}$			0.15	V
Peak Forward Gate Current	I_{GTM}				4	A
Peak Reverse Gate Voltage	V_{GRM}				5	V

Thermal Characteristics

Maximum Thermal Resistance, Double Sided Cooling		Max.	Units
Junction-to-Case	$R_{\theta(J-C)}$	0.04	$^\circ\text{C}/\text{W}$
Case-to-Sink	$R_{\theta(C-S)}$	0.02	$^\circ\text{C}/\text{W}$




**T7H8
750A**

Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272
www.pwr.com

**Phase Control SCR
750 Amperes Average
1600 Volts**


Maximum On-State Forward Voltage Drop

($T_J = 125^\circ\text{C}$)

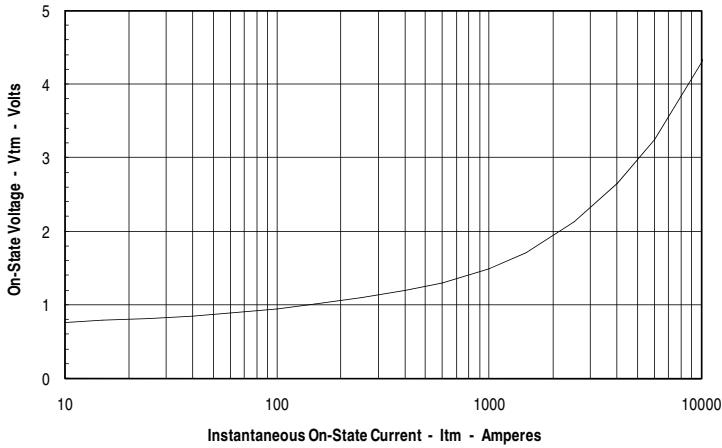


Maximum Transient Thermal Impedance

(Junction to Case)

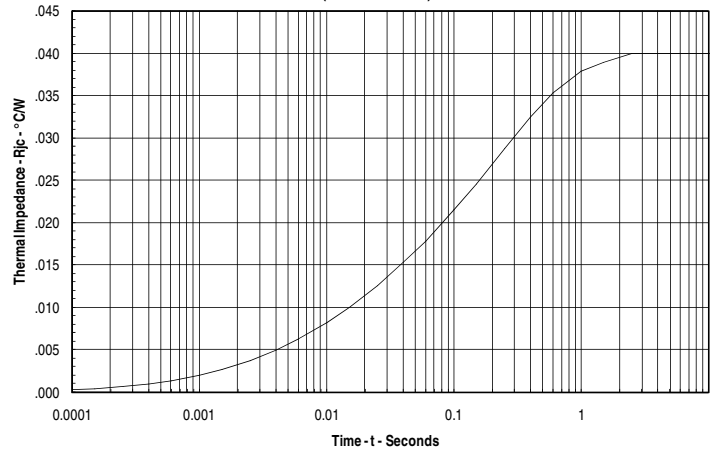


Maximum On-State Power Dissipation

(Sinusoidal Waveform)

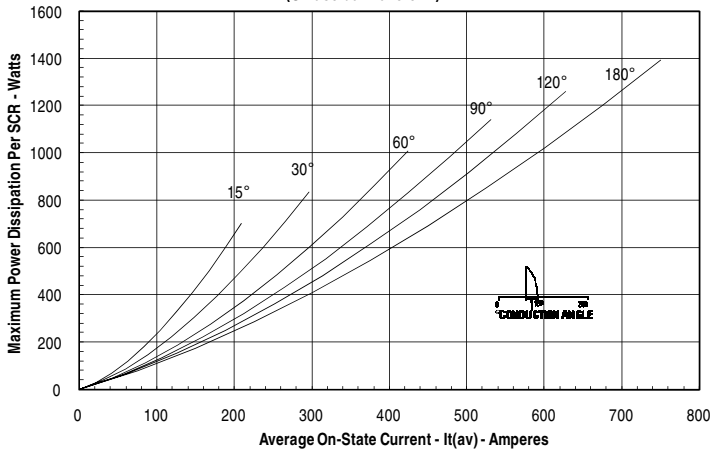


Maximum Allowable Case Temperature

(Sinusoidal Waveform)

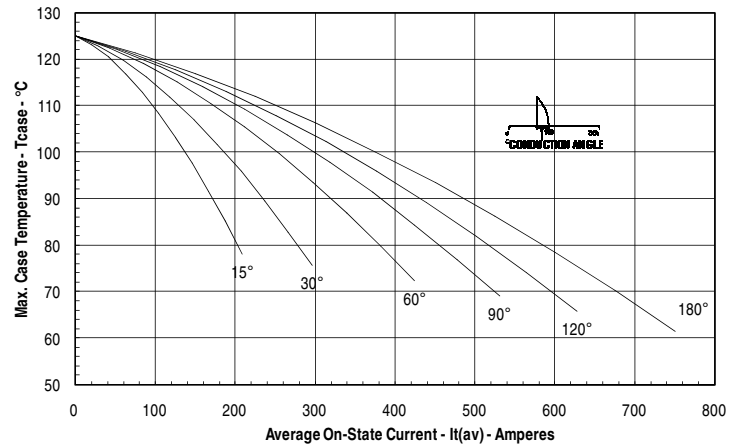

Maximum On-State Power Dissipation

(Rectangular Waveform)

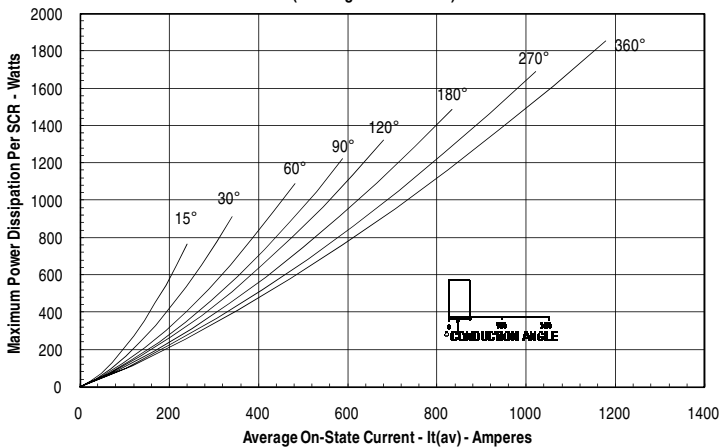

Maximum Allowable Case Temperature

(Rectangular Waveform)

