

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 2SC5287

Manufacturer: Sanken Electric USA Inc.

Package: TO-3P-3, SC-65-3

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/sanken-electric-usa-inc/2sc5287.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

2SC5287

Silicon NPN Triple Diffused Planar Transistor (High Voltage Switching Transistor)

Application : Switching Regulator and General Purpose

Absolute maximum ratings (Ta=25°C)

Symbol	Ratings	Unit
V _{CB0}	900	V
V _{CE0}	550	V
V _{EB0}	7	V
I _C	5(Pulse10)	A
I _B	2.5	A
P _C	80(T _C =25°C)	W
T _J	150	°C
T _{stg}	-55 to +150	°C


Electrical Characteristics (Ta=25°C)

Symbol	Conditions	Ratings	Unit
I _{CB0}	V _{CB} =800V	100max	μA
I _{EB0}	V _{EB} =7V	100max	μA
V _{(BR)CEO}	I _C =10mA	550min	V
h _{FE}	V _{CE} =4V, I _C =1.8A	10 to 25	
V _{CE(sat)}	I _C =1.8A, I _B =0.36A	0.5max	V
V _{BE(sat)}	I _C =1.8A, I _B =0.36A	1.2max	V
f _r	V _{CE} =12V, I _E =-0.35A	6typ	MHz
COB	V _{CB} =10V, f=1MHz	50typ	pF


Typical Switching Characteristics (Common Emitter)

V _{CC} (V)	R _L (Ω)	I _C (A)	V _{BB1} (V)	V _{BB2} (V)	I _{B1} (A)	I _{B2} (A)	t _{on} (μs)	t _{stg} (μs)	t _f (μs)
250	139	1.8	10	-5	0.27	-0.9	0.7max	4.0max	0.5max


External Dimensions MT-100(TO3P)

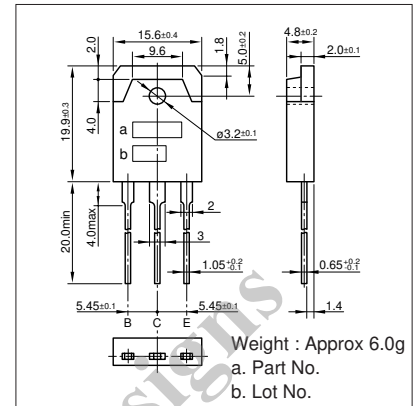


I_C-V_{CE} Characteristics (Typical)

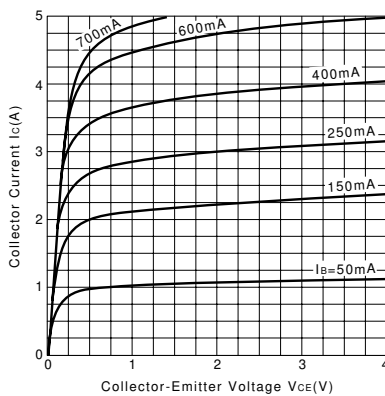


V_{CE(sat)}, V_{BE(sat)}-I_C Temperature Characteristics (Typical)

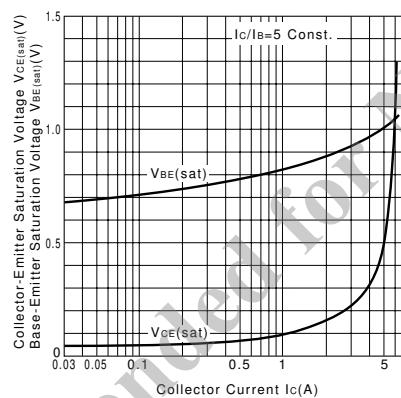


I_C-V_{BE} Temperature Characteristics (Typical)

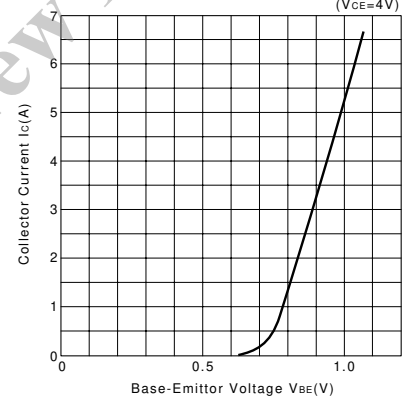


h_{FE}-I_C Characteristics (Typical)

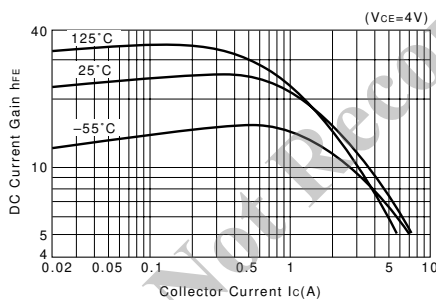


t_{on}•t_{stg}•t_f-I_C Characteristics (Typical)

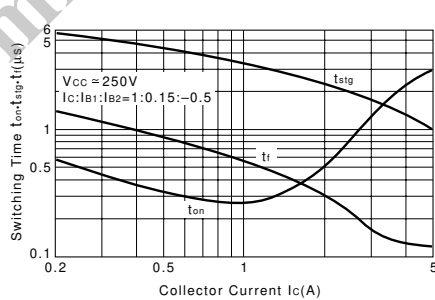


θ_{JA}-t Characteristics

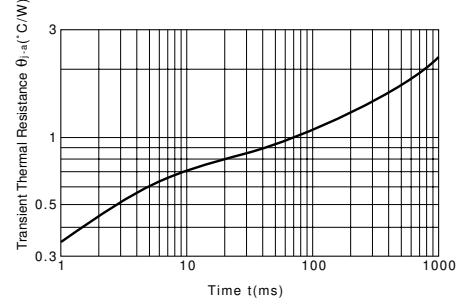

Safe Operating Area (Single Pulse)

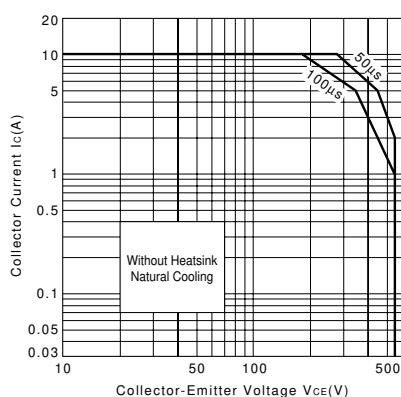

Reverse Bias Safe Operating Area

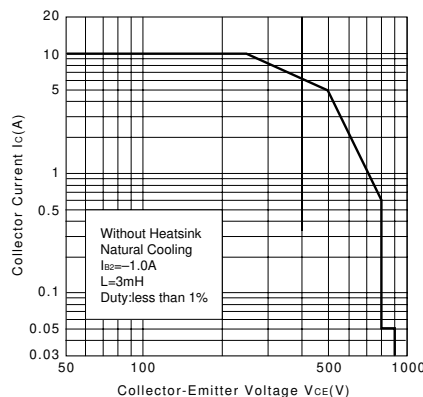

P_C-T_a Derating

