

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: 2SD2141
Manufacturer: Sanken Electric USA Inc.
Package: TO-220-3 Full Pack
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/sanken-electric-usa-inc/2sd2141.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects


Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Built-in Avalanche Diode for Surge Absorbing Darlington

2SD2141



Silicon NPN Triple Diffused Planar Transistor

Application : Ignitor, Driver for Solenoid and Motor, and General Purpose


Absolute maximum ratings (Ta=25°C)

Symbol	Ratings	Unit
V _{CB0}	380±50	V
V _{CE0}	380±50	V
V _{EB0}	6	V
I _C	6(Pulse10)	A
I _B	1	A
P _C	35(Tc=25°C)	W
T _j	150	°C
T _{stg}	-55 to +150	°C


Electrical Characteristics (Ta=25°C)

Symbol	Conditions	Ratings	Unit
I _{CB0}	V _{CB} =330V	10max	μA
I _{EB0}	V _{EB} =6V	20max	mA
V _{(BR)CEO}	I _C =25mA	330 to 430	V
h _{FE}	V _{CE} =2V, I _C =3A	1500min	
V _{CE(sat)}	I _C =4A, I _B =20mA	1.5max	V
f _T	V _{CE} =12V, I _E =-0.5A	20typ	MHz
COB	V _{CB} =10V, f=1MHz	95typ	pF


External Dimensions FM20(TO220F)

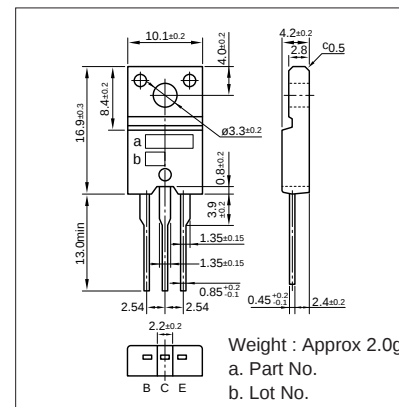


I_C-V_{CE} Characteristics (Typical)

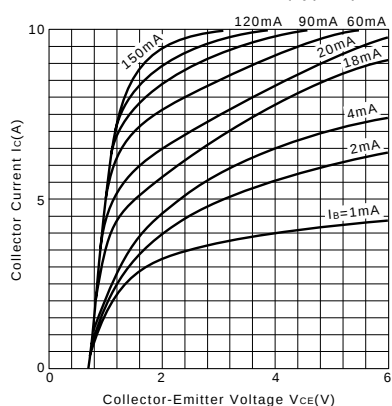


V_{CE(sat)}-I_B Characteristics (Typical)

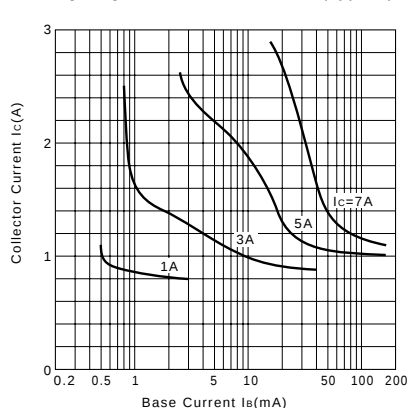


I_C-V_{BE} Temperature Characteristics (Typical)

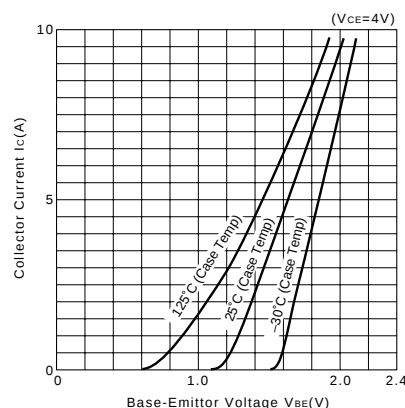


h_{FE}-I_C Characteristics (Typical)

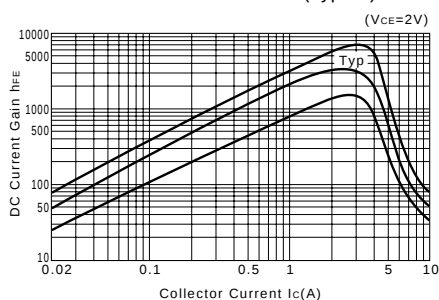


h_{FE}-I_C Temperature Characteristics (Typical)

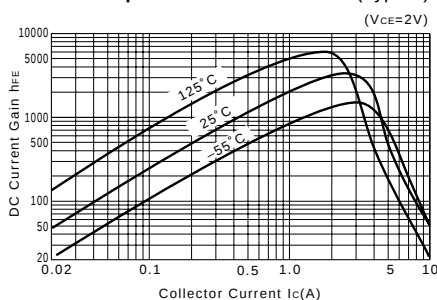


θ_{JA}-t Characteristics

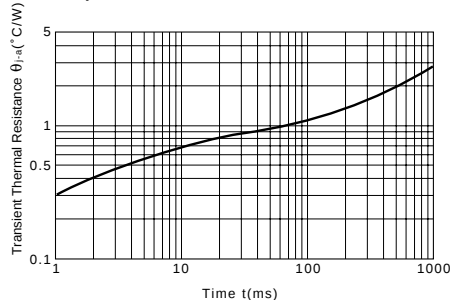

f_T-I_E Characteristics (Typical)

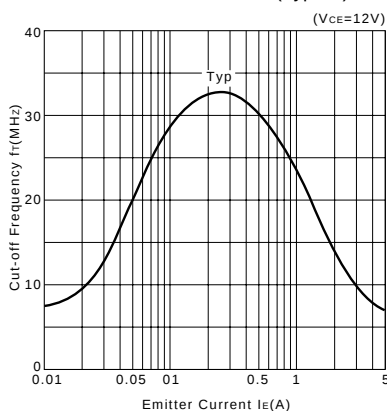

Safe Operating Area (Single Pulse)

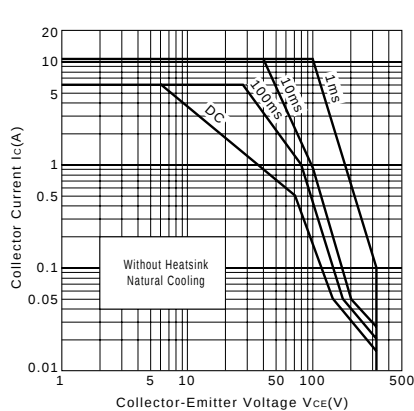

P_C-T_a Derating

