

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	2SK2803
Manufacturer:	Sanken Electric USA Inc.
Package:	Please confirm with sales
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/sanken-electric-usa-inc/2sk2803.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Absolute Maximum Ratings (Ta = 25°C)

Symbol	Ratings	Unit
V _{DSS}	450	V
V _{GSS}	±30	V
I _D	±3	A
I _D (pulse) *1	±12	A
P _D	30 (T _C = 25°C)	W
E _{AS} *2	30	mJ
I _{AS}	3	A
T _{ch}	150	°C
T _{stg}	-55 to +150	°C


*1: P_w ≤ 100μs, duty cycle ≤ 1%

*2: V_{DD} = 30V, L = 6.3mH, I_L = 3.0A, unclamped, R_G = 50Ω, See Figure 1 on Page 5.


Electrical Characteristics (Ta = 25°C)

Symbol	Ratings			Unit	Conditions
	min	typ	max		
V _(BR) DSS	450			V	I _D = 100μA, V _{GS} = 0V
I _{GSS}			±100	nA	V _{GS} = ±30V
I _{DSS}			100	μA	V _{DS} = 450V, V _{GS} = 0V
V _{TH}	2.0		4.0	V	V _{DS} = 10V, I _D = 1mA
Re (yfs)	1.5	2.1		S	V _{DS} = 20V, I _D = 1.5A
R _{DS} (on)		2.1	2.8	Ω	V _{GS} = 10V, I _D = 1.5A
Ciss		340		pF	V _{DS} = 10V, f = 1.0MHz, V _{GS} = 0V
Coss		75		pF	
Crss		26		pF	
t _d (on)		18		ns	I _D = 1.5A, V _{DD} = 200V, R _L = 133Ω, V _{GS} = 10V, See Figure 2 on Page 5.
t _r		30		ns	
t _d (off)		45		ns	
t _f		85		ns	
V _{SD}		0.9	1.4	V	I _{SD} = 3A, V _{GS} = 0V


I_D – V_{DS} Characteristics (typical)




I_D – V_{GS} Characteristics (typical)




R_{DS(ON)} – I_D Characteristics (typical)

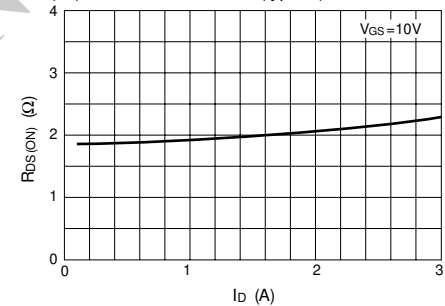


Re (yfs) – I_D Characteristics (typical)




V_{DS} – V_{GS} Characteristics (typical)




R_{DS(ON)} – T_C Characteristics (typical)

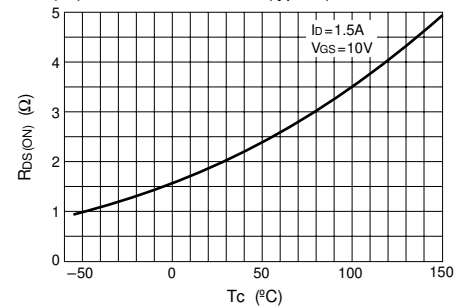


Capacitance – V_{DS} Characteristics (typical)




I_{DR} – V_{SD} Characteristics (typical)



Safe Operating Area (T_C = 25°C)




P_D – T_a Characteristics




External dimensions (Unit: mm)

① FM20 (TO-220F)

General product

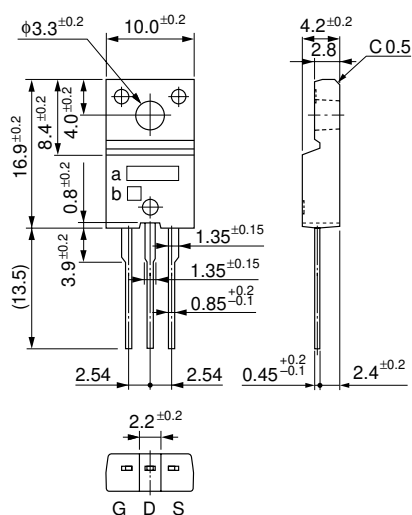

UL approved product

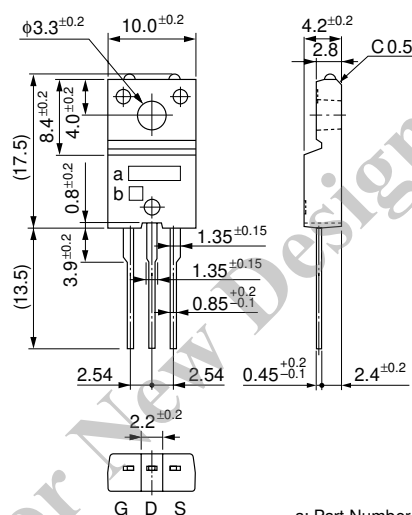


a: Part Number
b: Lot Number


Weight: Approx 2.0g

② FM100 (TO-3PF)

General product

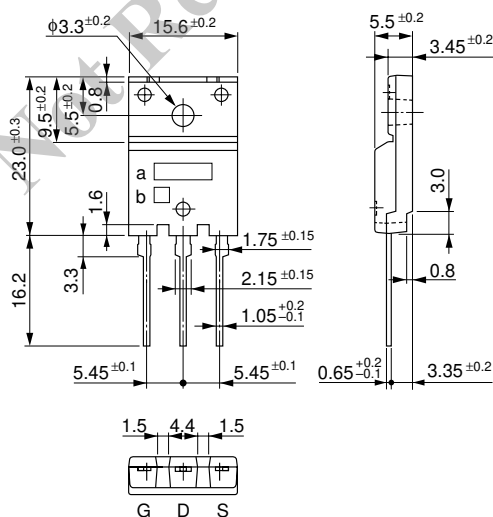

UL approved product

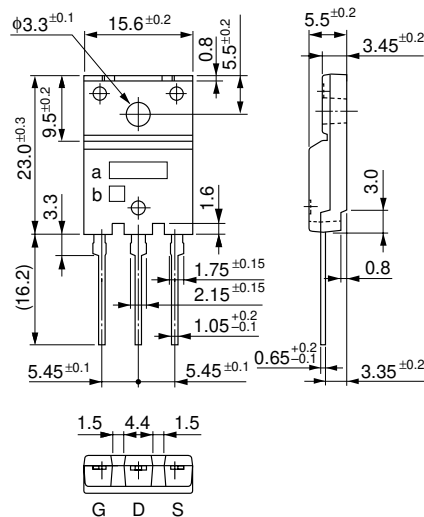

a: Part Number
b: Lot Number

Weight: Approx 6.5g