

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: SMA4036

Manufacturer: Sanken Electric USA Inc.

Package: 15-SIP Exposed Tab, Formed Leads

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/sanken-electric-usa-inc/sma4036.html>

Request a Quote:

Submit RFQ for this part



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

Absolute maximum ratings

($T_a=25^\circ\text{C}$)


Symbol	Ratings	Unit
V_{CB0}	120	V
V_{CEO}	120	V
V_{EBO}	6	V
I_C	2	A
I_{CP}	4 (PW $\leq$ 1ms, Du $\leq$ 50%)	A
I_B	0.2	A
I_F	2 (PW $\leq$ 0.5ms, Du $\leq$ 25%)	A
I_{FSM}	4 (PW $\leq$ 10ms, Single pulse)	A
V_R	120	V
P_T	4 ($T_a=25^\circ\text{C}$) 20 ($T_c=25^\circ\text{C}$)	W
T_J	150	$^\circ\text{C}$
T_{stg}	-40 to +150	$^\circ\text{C}$

Electrical characteristics

($T_a=25^\circ\text{C}$)

Symbol	Specification			Unit	Conditions
	min	typ	max		
I_{CBO}			10	μA	$V_{CB}=120\text{V}$
I_{EBO}			10	mA	$V_{EB}=6\text{V}$
V_{CEO}	120			V	$I_C=10\text{mA}$
$V_{CEO(SUS)}$	120			V	$I_C=1\text{A}$
h_{FE}	2000	5000	12000		$V_{CE}=4\text{V}$, $I_C=1\text{A}$
$V_{CE(sat)}$		1.1	1.5	V	$I_C=1\text{A}$, $I_B=2\text{mA}$
$V_{BE(sat)}$		1.8	2.2	V	
V_{FEC}		1.3	1.8	V	$I_{FEC}=0.5\text{A}$
t_{on}		0.5		μs	$V_{CC}=30\text{V}$, $I_C=0.5\text{A}$, $I_{B1}=-I_{B2}=1\text{mA}$
t_{stg}		4.5		μs	
t_f		1.2		μs	
f_T		50		MHz	$V_{CE}=12\text{V}$, $I_E=-0.1\text{A}$
C_{ob}		20		pF	$V_{CB}=10\text{V}$, $f=1\text{MHz}$

Equivalent circuit diagram

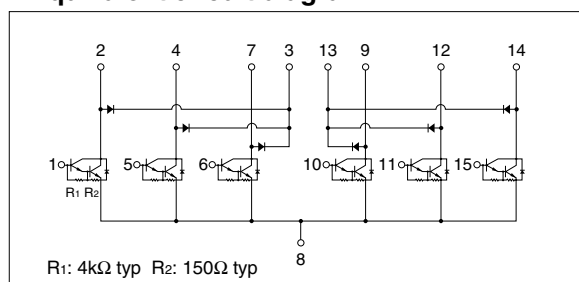


Diode for flyback voltage absorption

($T_a=25^\circ\text{C}$)


Symbol	Specification			Unit	Conditions
	min	typ	max		
V_R	120			V	$I_R=10\mu\text{A}$
V_F			1.8	V	$I_F=1\text{A}$
I_R			10	μA	$V_R=120\text{V}$
t_{rr}		100		ns	$I_F=\pm 100\text{mA}$

Characteristic curves


I_C - V_{CE} Characteristics (Typical)




h_{FE} - I_C Characteristics (Typical)




h_{FE} - I_C Temperature Characteristics (Typical)




$V_{CE(sat)}$ - I_C Temperature Characteristics (Typical)




$V_{CE(sat)}$ - I_B Characteristics (Typical)




I_C - V_{BE} Temperature Characteristics (Typical)




θ_{JA} -PW Characteristics




P_T - T_a Characteristics




Safe Operating Area (SOA)




- SIP 10 (STA10Pin)

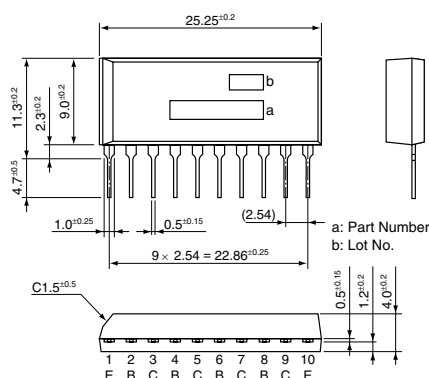


- SIP 12 (SMA12Pin)

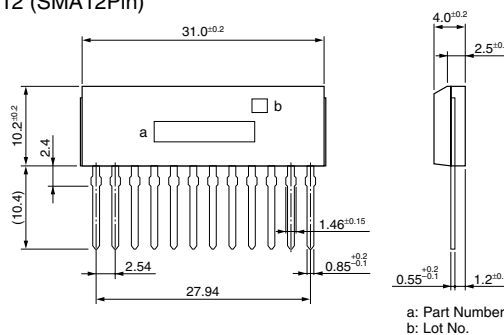

- SIP 12 with Fin (SLA12Pin)

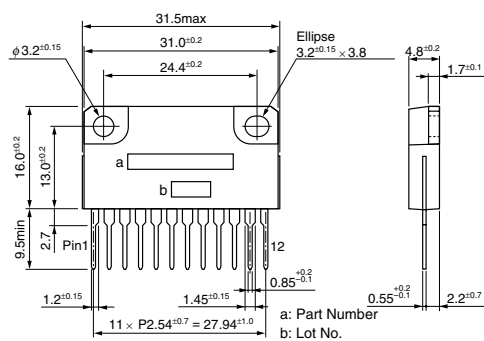

- SIP 21 with Fin (SLA21Pin)

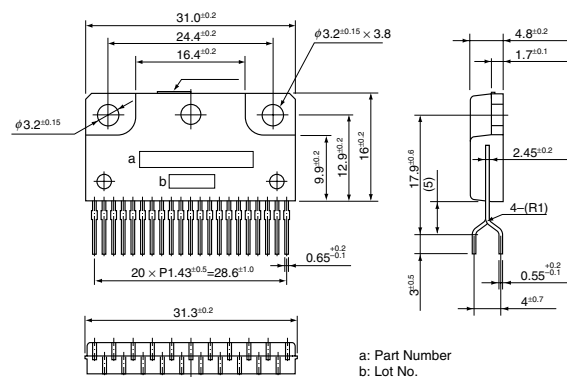

(Unit:mm)