

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information


**Part Number:** SI53102-A3-GMR  
**Manufacturer:** Skyworks Solutions Inc.  
**Package:** 8-TDFN Exposed Pad  
**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/skyworks-solutions-inc/si53102-a3-gmr.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---

# Si53102-A1/A2/A3 Data Sheet

## PCI-Express Gen 1, Gen 2, Gen 3, and Gen 4 1:2 Fan-out Clock Buffer


Si53102-A1/A2/A3 is a family of high-performance 1:2 PCIe fan output buffers. This low-additive-jitter clock buffer family is compliant to PCIe Gen 1, Gen 2, Gen 3, and Gen 4 specifications. The ultra-small footprint (1.4x1.6 mm) and industry-leading low power consumption make the Si53102-A1/A2/A3 the ideal clock solution for consumer and embedded applications. Measuring PCIe clock jitter is quick and easy with the Skyworks PCIe Clock Jitter Tool. Download it for free at <https://www.skyworksinc.com/en/application-pages/pci-express-learning-center>.

### Applications

- Network Attached Storage
- Multi-function Printer
- Wireless Access Point
- Server/Storage

### KEY FEATURES

- PCI-Express Gen 1, Gen 2, Gen 3, and Gen 4 common clock compliant
- Two low-power PCIe clock outputs
- Supports Serial-ATA (SATA) at 100 MHz
- No termination resistors required for differential clocks
- 2.5 V or 3.3 V Power supply
- Spread Spectrum Tolerant
- Extended Temperature Range
  - -40 to 85 °C
- Small package 8-pin TDFN (1.4 x 1.6 mm)
- For PCIe Gen 1: Si53102-A1
- For PCIe Gen 2: Si53102-A2
- For PCIe Gen 3/4: Si53102-A3

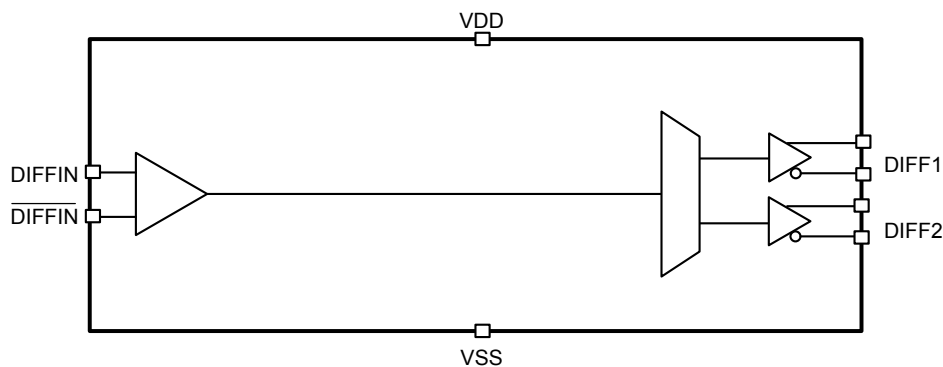

## 1. Ordering Guide

**Table 1.1. Ordering Guide**

| Part Number    | Package Type             | Temperature            |
|----------------|--------------------------|------------------------|
| Si53102-A1-GM  | 8-pin TDFN               | Extended, –40 to 85 °C |
| Si53102-A1-GMR | 8-pin TDFN—Tape and Reel | Extended, –40 to 85 °C |
| Si53102-A2-GM  | 8-pin TDFN               | Extended, –40 to 85 °C |
| Si53102-A2-GMR | 8-pin TDFN—Tape and Reel | Extended, –40 to 85 °C |
| Si53102-A3-GM  | 8-pin TDFN               | Extended, –40 to 85 °C |
| Si53102-A3-GMR | 8-pin TDFN—Tape and Reel | Extended, –40 to 85 °C |

# Table of Contents

- 1. Ordering Guide . . . . . 2
- 2. Electrical Specifications . . . . . 4
- 3. Test and Measurement Setup . . . . . 7
- 4. Recommended Design Guideline . . . . . 9
- 5. Pin Descriptions . . . . . 10
- 6. Package Outline . . . . . 11
- 7. Land Pattern . . . . . 13
- 8. Revision History . . . . . 14
  - 8.1 Revision 1.0 . . . . . 14
  - 8.2 Revision 1.1 . . . . . 14
  - 8.3 Revision 1.2 . . . . . 14
  - 8.4 Revision 1.3 . . . . . 14
  - 8.5 Revision 1.4 . . . . . 14

## 2. Electrical Specifications

**Table 2.1. Recommended Operating Conditions**

| Parameter                     | Symbol          | Test Condition | Min  | Typ | Max  | Unit |
|-------------------------------|-----------------|----------------|------|-----|------|------|
| Supply Voltage (3.3 V Supply) | V <sub>DD</sub> | 3.3 V ± 10%    | 2.97 | 3.3 | 3.63 | V    |
| Supply Voltage (2.5 V Supply) | V <sub>DD</sub> | 2.5 V ± 10%    | 2.25 | 2.5 | 2.75 | V    |

**Table 2.2. DC Electrical Specifications**

| Parameter                                   | Symbol           | Test Condition         | Min  | Typ  | Max  | Unit |
|---------------------------------------------|------------------|------------------------|------|------|------|------|
| Operating Voltage (V <sub>DD</sub> = 3.3 V) | V <sub>DD</sub>  | 3.3 V ± 10%            | 2.97 | 3.30 | 3.63 | V    |
| Operating Voltage (V <sub>DD</sub> = 2.5 V) | V <sub>DD</sub>  | 2.5 V ± 10%            | 2.25 | 2.5  | 2.75 | V    |
| Operating Supply Current                    | I <sub>DD</sub>  | Full Active            | —    | —    | 15   | mA   |
| Input Pin Capacitance                       | C <sub>IN</sub>  | Input Pin Capacitance  | —    | 3    | 5    | pF   |
| Output Pin Capacitance                      | C <sub>OUT</sub> | Output Pin Capacitance | —    | —    | 5    | pF   |

**Table 2.3. AC Electrical Specifications<sup>1, 2, 3</sup>**

| Parameter                                   | Symbol                          | Condition                                                                                    | Min  | Typ | Max  | Unit |
|---------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------|------|-----|------|------|
| <b>DIFFIN at 0.7 V</b>                      |                                 |                                                                                              |      |     |      |      |
| Input frequency                             | F <sub>in</sub>                 |                                                                                              | 10   | 100 | 175  | MHz  |
| DIFFIN and DIFFINb Rising/Falling Slew Rate | T <sub>R</sub> / T <sub>F</sub> | Single ended measurement:<br>V <sub>OL</sub> = 0.175 to V <sub>OH</sub> = 0.525 V (Averaged) | 0.6  | —   | 4    | V/ns |
| Differential Input High Voltage             | V <sub>IH</sub>                 |                                                                                              | 150  | —   | —    | mV   |
| Differential Input Low Voltage              | V <sub>IL</sub>                 |                                                                                              | —    | —   | –150 | mV   |
| Crossing Point Voltage at 0.7 V Swing       | V <sub>OX</sub>                 | Single-ended measurement                                                                     | 250  | —   | 550  | mV   |
| V <sub>cross</sub> Variation Over All edges | ΔV <sub>OX</sub>                | Single-ended measurement                                                                     | —    | —   | 140  | mV   |
| Differential Ringback Voltage               | V <sub>RB</sub>                 |                                                                                              | –100 | —   | 100  | mV   |
| Time before Ringback Allowed                | T <sub>STABLE</sub>             |                                                                                              | 500  | —   | —    | ps   |
| Absolute Maximum Input Voltage              | V <sub>MAX</sub>                |                                                                                              |      | —   | 1.15 | V    |
| Absolute Minimum Input Voltage              | V <sub>MIN</sub>                |                                                                                              | –0.3 | —   | —    | V    |

| Parameter                                                                                                                                                                                                                    | Symbol                | Condition                                                          | Min | Typ | Max  | Unit |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------|-----|-----|------|------|
| DIFFIN and DIFFINb Duty Cycle                                                                                                                                                                                                | T <sub>DC</sub>       | Measured at crossing point VOX                                     | 45  | —   | 55   | %    |
| Rise/Fall Matching                                                                                                                                                                                                           | T <sub>RFM</sub>      | Determined as a fraction of<br>2 x (TR – TF)/(TR + TF)             | —   | —   | 20   | %    |
| DIFF Clocks                                                                                                                                                                                                                  |                       |                                                                    |     |     |      |      |
| Duty Cycle                                                                                                                                                                                                                   | T <sub>DC</sub>       | Measured at crossing point VOX                                     | 45  | —   | 55   | %    |
| Output Skew                                                                                                                                                                                                                  | T <sub>SKEW</sub>     | Measured at 0 V differential                                       | —   | —   | 100  | ps   |
| Frequency Accuracy                                                                                                                                                                                                           | F <sub>ACC</sub>      | All output clocks                                                  | —   | —   | 100  | ppm  |
| Slew Rate                                                                                                                                                                                                                    | t <sub>r/f2</sub>     | Measured differentially from<br>±150 mV                            | 0.6 | —   | 4.0  | V/ns |
| PCIe Gen 1 Pk-Pk Additive Jitter                                                                                                                                                                                             | Pk-Pk <sub>GEN1</sub> | PCIe Gen 1<br>Si53102-A1                                           | —   | —   | 10   | ps   |
| PCIe Gen 2 Additive Phase Jitter                                                                                                                                                                                             | RMS <sub>GEN2</sub>   | 10 kHz < F < 1.5 MHz,<br>Si53102-A2                                | —   | —   | 0.50 | ps   |
| PCIe Gen 2 Additive Phase Jitter                                                                                                                                                                                             | RMS <sub>GEN2</sub>   | 1.5 MHz < F < Nyquist,<br>Si53102-A2                               | —   | —   | 0.50 | ps   |
| PCIe Gen 3 Additive Phase Jitter                                                                                                                                                                                             | RMS <sub>GEN3</sub>   | Includes PLL BW 2–4 MHz,<br>CDR = 10 MHz,<br>Si53102-A3, VDD=3.3 V | —   | —   | 0.22 | ps   |
|                                                                                                                                                                                                                              |                       | Includes PLL BW 2–4 MHz,<br>CDR = 10 MHz,<br>Si53102-A3, VDD=2.5V  | —   | —   | 0.25 | ps   |
| PCIe Gen 4 Additive Phase Jitter                                                                                                                                                                                             | RMS <sub>GEN4</sub>   | PCIe Gen4, VDD=3.3V                                                | —   | —   | 0.22 | ps   |
|                                                                                                                                                                                                                              |                       | PCIe Gen4, VDD=2.5V                                                |     |     | 0.25 | ps   |
| Crossing Point Voltage at 0.7 V Swing                                                                                                                                                                                        | V <sub>OX</sub>       | VDD = 3.3 V                                                        | 300 | —   | 550  | mV   |
|                                                                                                                                                                                                                              |                       | VDD = 2.5 V                                                        | 200 | —   | 550  | mV   |
| Enable/Disable and Setup                                                                                                                                                                                                     |                       |                                                                    |     |     |      |      |
| Clock Stabilization from Powerup                                                                                                                                                                                             | T <sub>STABLE</sub>   | Power up to first output                                           | —   | —   | 3.0  | ms   |
| Note:                                                                                                                                                                                                                        |                       |                                                                    |     |     |      |      |
| 1. Visit <a href="http://www.pcisig.com">www.pcisig.com</a> for complete PCIe specifications                                                                                                                                 |                       |                                                                    |     |     |      |      |
| 2. Gen 4 specifications based on the PCI-Express Base Specification 4.0 rev. 0.5.                                                                                                                                            |                       |                                                                    |     |     |      |      |
| 3. Download the Skyworks PCIe Clock Jitter Tool at <a href="https://www.skyworksinc.com/en/application-pages/pci-express-learning-center">https://www.skyworksinc.com/en/application-pages/pci-express-learning-center</a> . |                       |                                                                    |     |     |      |      |

**Table 2.4. Thermal Conditions**


| Parameter                        | Symbol        | Condition       | Min | Typ | Max  | Unit |
|----------------------------------|---------------|-----------------|-----|-----|------|------|
| Temperature, Storage             | $T_S$         | Non-functional  | –65 |     | 150  | °C   |
| Temperature, Operating Ambient   | $T_A$         | Functional      | –40 |     | 85   | °C   |
| Temperature, Junction            | $T_J$         | Functional      | —   |     | 150  | °C   |
| Dissipation, Junction to Case    | $\theta_{JC}$ | JEDEC (JESD 51) | —   |     | 38.3 | °C/W |
| Dissipation, Junction to Ambient | $\theta_{JA}$ | JEDEC (JESD 51) | —   |     | 90.4 | °C/W |

**Table 2.5. Absolute Maximum Conditions**

| Parameter                         | Symbol         | Condition            | Min  | Typ | Max | Unit     |
|-----------------------------------|----------------|----------------------|------|-----|-----|----------|
| Main Supply Voltage               | $V_{DD\_3.3V}$ |                      | —    |     | 4.6 | V        |
| Input Voltage                     | $V_{IN}$       | Relative to $V_{SS}$ | –0.5 |     | 4.6 | $V_{DC}$ |
| ESD Protection (Human Body Model) | $ESD_{HBM}$    | JEDEC (JESD 22-A114) | 2000 |     | —   | V        |
| Flammability Rating               | UL-94          | UL (Class)           | V–0  |     |     |          |


### 3. Test and Measurement Setup

The following figures show the test load configurations for the differential clock signals.

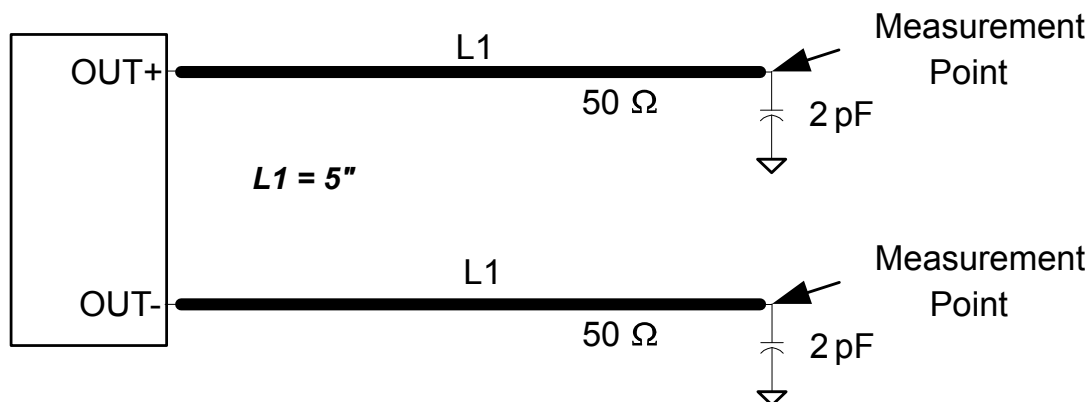


**Figure 3.1. 0.7 V Differential Load Configuration**

The outputs from this device can also support LVDS, LVPECL, or CML differential signaling levels using alternative termination. For recommendations on how to achieve this, see [“AN781: Alternative Output Termination for Si5211x, Si5213x, Si5214x, Si5216x, Si5310x, Si5311x, and Si5315x PCIe Clock Generator and Buffer Families.”](#)

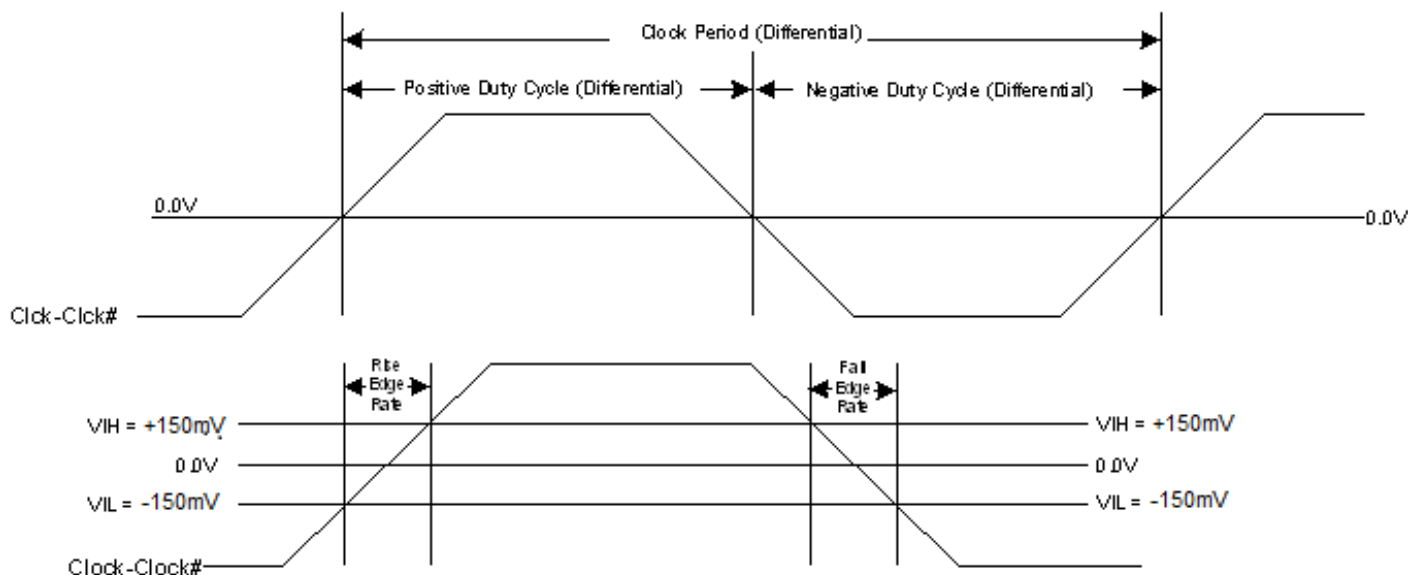

**Figure 3.2. Differential Measurement for Differential Output Signals (AC Parameters Measurement)**

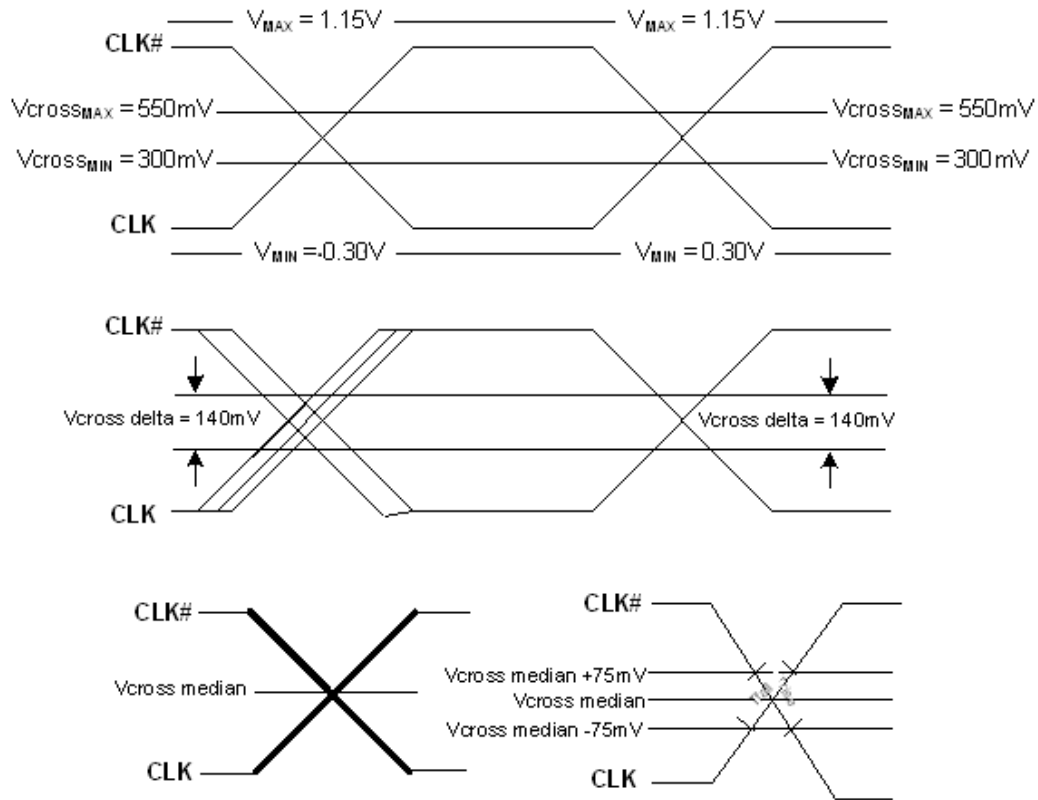

**Figure 3.3. Single-Ended Measurement for Differential Output Signals (AC Parameters Measurement)**

#### 4. Recommended Design Guideline

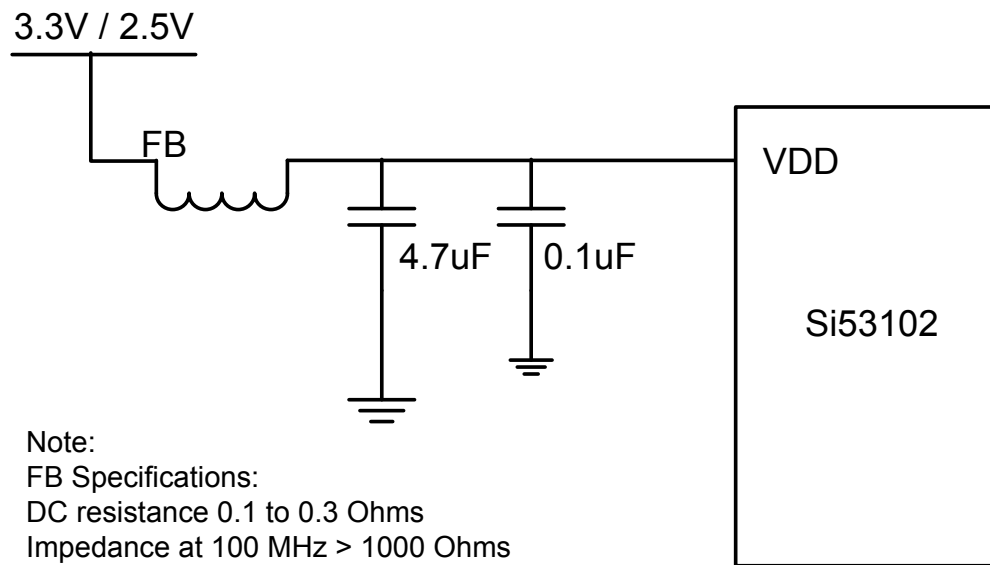


Figure 4.1. Recommended Application Schematic

## 5. Pin Descriptions

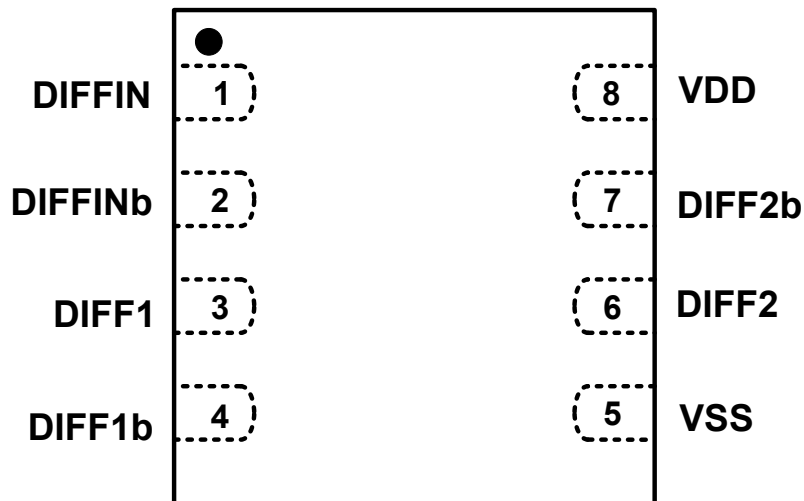



Figure 5.1. 8-Pin TDFN

Table 5.1. Si53102-Ax-GM 8-Pin TDFN Descriptions

| Pin # | Name    | Type   | Description                              |
|-------|---------|--------|------------------------------------------|
| 1     | DIFFIN  | O, DIF | 0.7 V, 100 MHz differentials clock input |
| 2     | DIFFINb | O, DIF | 0.7 V, 100 MHz differentials clock input |
| 3     | DIFF1   | O, DIF | 0.7 V, 100 MHz differential clock output |
| 4     | DIFF1b  | O, DIF | 0.7 V, 100 MHz differential clock output |
| 5     | GND     | GND    | Ground                                   |
| 6     | DIFF2   | O, DIF | 0.7 V, 100 MHz differential clock output |
| 7     | DIFF2b  | O, DIF | 0.7 V, 100 MHz differential clock output |
| 8     | VDD     | PWR    | 2.5 V or 3.3 V Power supply              |

## 6. Package Outline

The figure below illustrates the package details for the Si53102-A1-A2-A3 in an 8-Pin TDFN package. The table lists the values for the dimensions shown in the illustration.

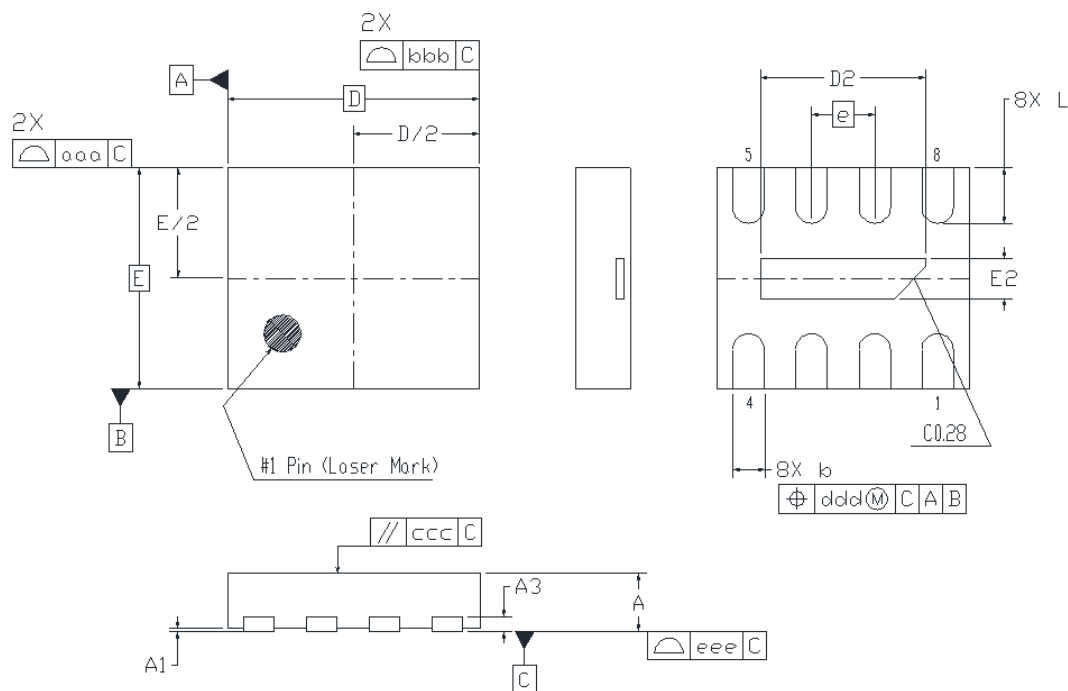

**Figure 6.1. 8-Pin TDFN Package Drawing**


**Table 6.1. Package Diagram Dimensions**

| Dimension | Min       | Nom  | Max  |
|-----------|-----------|------|------|
| A         | 0.70      | 0.75 | 0.80 |
| A1        | 0.00      | 0.02 | 0.05 |
| A3        | 0.20 REF. |      |      |
| b         | 0.15      | 0.20 | 0.25 |
| D         | 1.60 BSC  |      |      |
| D2        | 1.00      | 1.05 | 1.10 |
| e         | 0.40 BSC  |      |      |
| E         | 1.40 BSC  |      |      |
| E2        | 0.20      | 0.25 | 0.30 |
| L         | 0.30      | 0.35 | 0.40 |
| aaa       | 0.10      |      |      |
| bbb       | 0.10      |      |      |
| ccc       | 0.10      |      |      |
| ddd       | 0.07      |      |      |
| eee       | 0.08      |      |      |

| Dimension                                                                                                                                                                                                                                                                                                             | Min | Nom | Max |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|
| <b>Note:</b> <ol style="list-style-type: none"><li>1. All dimensions shown are in millimeters (mm) unless otherwise noted.</li><li>2. Dimensioning and Tolerancing per ANSI Y14.5M-1994.</li><li>3. Recommended card reflow profile is per the JEDEC/IPC J-STD-020 specification for Small Body Components.</li></ol> |     |     |     |

## 7. Land Pattern

The following figure illustrates the land pattern details for the Si53102-A1-A2-A3 in an 8-Pin TDFN package. The table lists the values for the dimensions shown in the illustration.

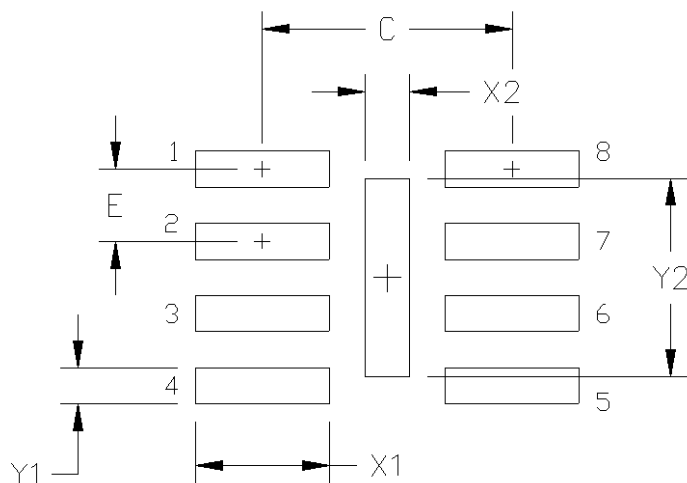

**Figure 7.1. 8-Pin TDFN Land Pattern**

**Table 7.1. Land Pattern Dimensions**

| Dimension | mm   |
|-----------|------|
| C1        | 1.40 |
| E         | 0.40 |
| X1        | 0.75 |
| Y1        | 0.20 |
| X2        | 0.25 |
| Y2        | 1.10 |

### Notes:

#### General

1. All dimensions shown are in millimeters (mm).
2. This Land Pattern Design is based on the IPC-7351 guidelines.
3. All dimensions shown are at Maximum Material Condition (MMC). Least Material Condition (LMC) is calculated based on a Fabrication Allowance of 0.05 mm.

#### Solder Mask Design

1. All metal pads are to be non-solder mask defined (NSMD). Clearance between the solder mask and the metal pad is to be 60  $\mu$ m minimum, all the way around the pad.

#### Stencil Design

1. A stainless steel, laser-cut and electro-polished stencil with trapezoidal walls should be used to assure good solder paste release.
2. The stencil thickness should be 0.125 mm (5 mils).
3. The ratio of stencil aperture to land pad size should be 1:1 for all pads.

#### Card Assembly

1. A No-Clean, Type-3 solder paste is recommended.
2. The recommended card reflow profile is per the JEDEC/IPC J-STD-020 specification for Small Body Components.

## 8. Revision History

### 8.1 Revision 1.0

July 25, 2013

Full-production revision from Rev 0.4

- Updated AC Electrical Specifications table.
  - Updated input frequency min and max specs.
- Updated Test and Measurement Setup section.
  - Added text and reference to AN781.

### 8.2 Revision 1.1

August 5, 2013

- Moved Recommended Design Guideline section.
- Updated Pin Descriptions.
- Updated Package Outline.
- Added Land Pattern.

### 8.3 Revision 1.2

December 2, 2015

- Updated Features.
- Updated Description.
- Updated AC Electrical Specifications table.

### 8.4 Revision 1.3

July 21, 2017

- Updated IDD max specification.
- Separated VOX into 2.5 V and 3.3 V specifications.
- Separated PCIe Gen3 jitter into 2.5 V and 3.3 V specifications.
- Separated PCIe Gen4 jitter into 2.5 V and 3.3 V specifications.

### 8.5 Revision 1.4

July 28, 2017

- Updated [2. Electrical Specifications](#).
  - Updated PCIe Gen 4 Additive Phase Jitter max spec.
- Updated [6. Package Outline](#).
  - Added notes to [Table 6.1 Package Diagram Dimensions on page 11](#).




**Connecting Everyone  
and Everything,  
All the Time**



**Portfolio**

[www.skyworksinc.com](http://www.skyworksinc.com)



**Quality**

[www.skyworksinc.com/quality](http://www.skyworksinc.com/quality)



**Support & Resources**

[www.skyworksinc.com/support](http://www.skyworksinc.com/support)

**Copyright © 2021 Skyworks Solutions, Inc. All Rights Reserved.**

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks' Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks' published specifications or parameters.

Skyworks, the Skyworks symbol, Sky5®, SkyOne®, SkyBlue™, Skyworks Green™, Clockbuilder®, DSPLL®, ISOModem®, ProSLIC®, and SiPHY® are trademarks or registered trademarks of Skyworks Solutions, Inc. or its subsidiaries in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.

Skyworks Solutions, Inc. | Nasdaq: SWKS | [sales@skyworksinc.com](mailto:sales@skyworksinc.com) | [www.skyworksinc.com](http://www.skyworksinc.com)

USA: 781-376-3000 | Asia: 886-2-2735 0399 | Europe: 33 (0)1 43548540 | [in](#) [f](#) [t](#) [y](#)