

# ANTREX Electronics

Electronic Components Sourcing Information

---

## Product Reference Information

**Part Number:** TD500N16KOFTIMHPSA1  
**Manufacturer:** Vishay General Semiconductor - Diodes Division  
**Package:** 3-MAGN-A-PAK™  
**Availability:** Please confirm with sales

### Product Page:

<https://antrexco.com/product/details/vishay-general-semiconductor-diodes-division/td500n16koftimhpsa1.html>

### Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

## Contact Information

Email: [info@antrexco.com](mailto:info@antrexco.com)

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

## Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

### Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

---

## Fast Thyristor/Diode and Thyristor/Thyristor (MAGN-A-PAK Power Modules), 200 A



MAGN-A-PAK

### FEATURES

- Fast turn-off thyristor
- Fast recovery diode
- High surge capability
- Electrically isolated baseplate
- 3500 V<sub>RMS</sub> isolating voltage
- Industrial standard package
- UL approved file E78996 
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level


**RoHS**  
COMPLIANT

### PRODUCT SUMMARY

|             |                           |
|-------------|---------------------------|
| $I_{T(AV)}$ | 200 A                     |
| Type        | Modules - Thyristor, Fast |

### DESCRIPTION

This series of MAGN-A-PAK modules are intended for applications such as self-commutated inverters, DC choppers, electronic welders, induction heating and others where fast switching characteristics are required.

### MAJOR RATINGS AND CHARACTERISTICS




| SYMBOL            | CHARACTERISTICS | VALUES      | UNITS              |
|-------------------|-----------------|-------------|--------------------|
| $I_{T(AV)}$       |                 | 200         | A                  |
|                   | $T_C$           | 85          | °C                 |
| $I_{T(RMS)}$      |                 | 444         | A                  |
| $I_{TSM}$         | 50 Hz           | 7600        |                    |
|                   | 60 Hz           | 8000        |                    |
| $I^2t$            | 50 Hz           | 290         | kA <sup>2</sup> s  |
|                   | 60 Hz           | 265         |                    |
| $I^2\sqrt{t}$     |                 | 2900        | kA <sup>2</sup> √s |
| $t_q$             |                 | 20/25       | μs                 |
| $t_{rr}$          |                 | 2           |                    |
| $V_{DRM}/V_{RRM}$ |                 | 800/1200    | V                  |
| $T_J$             | Range           | - 40 to 125 | °C                 |

### ELECTRICAL SPECIFICATIONS

#### VOLTAGE RATINGS

| TYPE NUMBER | VOLTAGE CODE | $V_{RRM}/V_{DRM}$ , MAXIMUM REPETITIVE<br>PEAK REVERSE AND OFF-STATE<br>BLOCKING VOLTAGE<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE<br>PEAK REVERSE VOLTAGE<br>V | $I_{RRM}/I_{DRM}$<br>AT $T_J = 125\text{ °C}$<br>mA |
|-------------|--------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------|
| VSK.F200-   | 08           | 800                                                                                           | 800                                                             | 50                                                  |
|             | 12           | 1200                                                                                          | 1200                                                            |                                                     |

**CURRENT CARRYING CAPABILITY**

| FREQUENCY                        |  |     |  |      |  |      | UNITS |
|----------------------------------|-----------------------------------------------------------------------------------|-----|------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------|------|-------|
| 50 Hz                            | 380                                                                               | 560 | 630                                                                                | 850  | 2460                                                                                | 3180 | A     |
| 400 Hz                           | 460                                                                               | 690 | 710                                                                                | 1060 | 1570                                                                                | 2080 |       |
| 2500 Hz                          | 310                                                                               | 450 | 530                                                                                | 760  | 630                                                                                 | 860  |       |
| 5000 Hz                          | 250                                                                               | 360 | 410                                                                                | 560  | 410                                                                                 | 560  |       |
| 10 000 Hz                        | 180                                                                               | 280 | 300                                                                                | 410  | -                                                                                   | -    |       |
| Recovery voltage $V_r$           | 50                                                                                | 50  | 50                                                                                 | 50   | 50                                                                                  | 50   | V     |
| Voltage before turn-on $V_d$     | 80 % $V_{DRM}$                                                                    |     | 80 % $V_{DRM}$                                                                     |      | 80 % $V_{DRM}$                                                                      |      |       |
| Rise of on-state current $di/dt$ | 50                                                                                | 50  | -                                                                                  | -    | -                                                                                   | -    | A/μs  |
| Case temperature                 | 85                                                                                | 60  | 85                                                                                 | 60   | 85                                                                                  | 60   | °C    |
| Equivalent values for RC circuit | 10/0.47                                                                           |     | 10/0.47                                                                            |      | 10/0.47                                                                             |      | Ω/μF  |

**ON-STATE CONDUCTION**

| PARAMETER                                                      | SYMBOL              | TEST CONDITIONS                                                                                          |                                  |                                                       | VALUES | UNITS              |  |
|----------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------------------------------|--------|--------------------|--|
| Maximum average on-state current at case temperature           | I <sub>T(AV)</sub>  | 180° conduction, half sine wave                                                                          |                                  |                                                       | 200    | A                  |  |
|                                                                |                     |                                                                                                          |                                  |                                                       | 85     | °C                 |  |
| Maximum RMS on-state current                                   | I <sub>T(RMS)</sub> | As AC switch                                                                                             |                                  |                                                       | 444    | A                  |  |
| Maximum peak, one-cycle non-repetitive on-state, surge current | I <sub>TSM</sub>    | t = 10 ms                                                                                                | No voltage reapplied             | Sinusoidal half wave, initial T <sub>J</sub> = 125 °C | 7600   |                    |  |
|                                                                |                     | t = 8.3 ms                                                                                               |                                  |                                                       | 8000   |                    |  |
|                                                                |                     | t = 10 ms                                                                                                | 100 % V <sub>RRM</sub> reapplied |                                                       | 6400   |                    |  |
|                                                                |                     | t = 8.3 ms                                                                                               |                                  |                                                       | 6700   |                    |  |
| Maximum I <sup>2</sup> t for fusing                            | I <sup>2</sup> t    | t = 10 ms                                                                                                | No voltage reapplied             |                                                       | 290    | kA <sup>2</sup> s  |  |
|                                                                |                     | t = 8.3 ms                                                                                               |                                  |                                                       | 265    |                    |  |
|                                                                |                     | t = 10 ms                                                                                                | 100 % V <sub>RRM</sub> reapplied |                                                       | 205    |                    |  |
|                                                                |                     | t = 8.3 ms                                                                                               |                                  |                                                       | 187    |                    |  |
| Maximum I <sup>2</sup> √t for fusing                           | I <sup>2</sup> √t   | t = 0.1 ms to 10 ms, no voltage reapplied                                                                |                                  |                                                       | 2900   | kA <sup>2</sup> √s |  |
| Low level value or threshold voltage                           | V <sub>T(TO)1</sub> | (16.7 % x π x I <sub>T(AV)</sub> < I < π x I <sub>T(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                       | 1.18   | V                  |  |
| High level value of threshold voltage                          | V <sub>T(TO)2</sub> | (I > π x I <sub>T(AV)</sub> < I < π x I <sub>T(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum      |                                  |                                                       | 1.25   |                    |  |
| Low level value on-state slope resistance                      | r <sub>t1</sub>     | (16.7 % x π x I <sub>T(AV)</sub> < I < π x I <sub>T(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                       | 0.74   | mΩ                 |  |
| High level value on-state slope resistance                     | r <sub>t2</sub>     | (I > π x I <sub>T(AV)</sub> < I < π x I <sub>T(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum      |                                  |                                                       | 0.70   |                    |  |
| Maximum on-state voltage drop                                  | V <sub>TM</sub>     | I <sub>pk</sub> = 600 A, T <sub>J</sub> = T <sub>J</sub> maximum, t <sub>p</sub> = 10 ms sine pulse      |                                  |                                                       | 1.73   | V                  |  |
| Maximum holding current                                        | I <sub>H</sub>      | T <sub>J</sub> = 25 °C, I <sub>T</sub> > 30 A                                                            |                                  |                                                       | 600    | mA                 |  |
| Maximum latching current                                       | I <sub>L</sub>      | T <sub>J</sub> = 25 °C, V <sub>A</sub> = 12 V, R <sub>a</sub> = 6 Ω, I <sub>g</sub> = 1 A                |                                  |                                                       | 1000   |                    |  |

**SWITCHING**

| PARAMETER                           | SYMBOL   | TEST CONDITIONS                                                                                                                               | VALUES |    | UNITS            |
|-------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------|----|------------------|
|                                     |          |                                                                                                                                               | K      | J  |                  |
| Maximum non-repetitive rate of rise | $di/dt$  | Gate drive 20 V, 20 $\Omega$ , $t_r \leq 1$ ms, $V_D = 80\% V_{DRM}$ , $T_J = 25^\circ\text{C}$                                               | 800    |    | A/ $\mu\text{s}$ |
| Maximum recovery time               | $t_{rr}$ | $I_{TM} = 350$ A, $di/dt = -25$ A/ $\mu\text{s}$ , $V_R = 50$ V, $T_J = 25^\circ\text{C}$                                                     | 2      |    | $\mu\text{s}$    |
| Maximum turn-off time               | $t_q$    | $I_{TM} = 750$ A; $T_J = T_J$ maximum; $di/dt = -25$ A/ $\mu\text{s}$ ; $V_R = 50$ V; $dV/dt = 400$ V/ $\mu\text{s}$ linear to $80\% V_{DRM}$ | 20     | 25 |                  |

**BLOCKING**

| PARAMETER                                          | SYMBOL                   | TEST CONDITIONS                                              | VALUES | UNITS            |
|----------------------------------------------------|--------------------------|--------------------------------------------------------------|--------|------------------|
| Maximum critical rate of rise of off-state voltage | $dV/dt$                  | $T_J = 125^\circ\text{C}$ , exponential to $67\% V_{DRM}$    | 1000   | V/ $\mu\text{s}$ |
| RMS insulation voltage                             | $V_{INS}$                | 50 Hz, circuit to base, $T_J = 25^\circ\text{C}$ , $t = 1$ s | 3000   | V                |
| Maximum peak reverse and off-state leakage current | $I_{RRM}$ ,<br>$I_{DRM}$ | $T_J = 125^\circ\text{C}$ , rated $V_{DRM}/V_{RRM}$ applied  | 50     | mA               |

**TRIGGERING**

| PARAMETER                                   | SYMBOL      | TEST CONDITIONS                                     | VALUES | UNITS |
|---------------------------------------------|-------------|-----------------------------------------------------|--------|-------|
| Maximum peak gate power                     | $P_{GM}$    | $f = 50$ Hz, $d\% = 50$                             | 60     | W     |
| Maximum peak average gate power             | $P_{G(AV)}$ | $T_J = 125^\circ\text{C}$ , $f = 50$ Hz, $d\% = 50$ | 10     |       |
| Maximum peak positive gate current          | $I_{GM}$    | $T_J = 125^\circ\text{C}$ , $t_p \leq 5$ ms         | 10     | A     |
| Maximum peak negative gate voltage          | $-V_{GT}$   |                                                     | 5      | V     |
| Maximum DC gate current required to trigger | $I_{GT}$    | $T_J = 25^\circ\text{C}$ , $V_{ak} 12$ V, $R_a = 6$ | 200    | mA    |
| DC gate voltage required to trigger         | $V_{GT}$    |                                                     | 3      | V     |
| DC gate current not to trigger              | $I_{GD}$    | $T_J = 125^\circ\text{C}$ , rated $V_{DRM}$ applied | 20     | mA    |
| DC gate voltage not to trigger              | $V_{GD}$    |                                                     | 0.25   | V     |

**THERMAL AND MECHANICAL SPECIFICATIONS**

| PARAMETER                                                      | SYMBOL       | TEST CONDITIONS                                                                                                                                                                                                                                                                 | VALUES               | UNITS                           |
|----------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------|
| Maximum junction operating temperature range                   | $T_J$        |                                                                                                                                                                                                                                                                                 | - 40 to 125          | $^\circ\text{C}$                |
| Storage temperature range                                      | $T_{Stg}$    |                                                                                                                                                                                                                                                                                 | - 40 to 150          |                                 |
| Maximum thermal resistance, junction to case per junction      | $R_{thJC}$   | DC operation                                                                                                                                                                                                                                                                    | 0.125                | K/W                             |
| Maximum thermal resistance, case to heatsink per module        | $R_{thC-hs}$ | Mounting surface flat, smooth and greased                                                                                                                                                                                                                                       | 0.025                |                                 |
| Mounting torque $\pm 10\%$<br>MAP to heatsink<br>busbar to MAP |              | A mounting compound is recommended. The torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Use of cable lugs is not recommended, busbar should be used and restrained during tightening. Threads must be lubricated with a compound. | 4 to 6<br>(35 to 53) | N $\cdot$ m<br>(lbf $\cdot$ in) |
| Approximate weight                                             |              |                                                                                                                                                                                                                                                                                 | 500                  | g                               |
|                                                                |              |                                                                                                                                                                                                                                                                                 | 17.8                 | oz.                             |
| Case style                                                     |              |                                                                                                                                                                                                                                                                                 | MAGN-A-PAK           |                                 |

| $\Delta R_{thJC}$ CONDUCTION |                       |                        |       |
|------------------------------|-----------------------|------------------------|-------|
| CONDUCTIONS ANGLE            | SINUSOIDAL CONDUCTION | RECTANGULAR CONDUCTION | UNITS |
| 180°                         | 0.009                 | 0.006                  | K/W   |
| 120°                         | 0.10                  | 0.011                  |       |
| 90°                          | 0.014                 | 0.015                  |       |
| 60°                          | 0.020                 | 0.020                  |       |
| 30°                          | 0.32                  | 0.033                  |       |

## Note

- Table shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

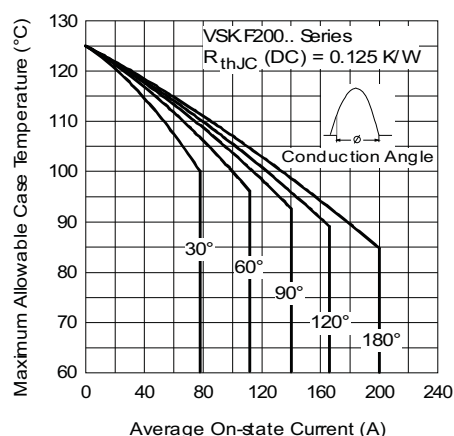


Fig. 1 - Current Ratings Characteristics

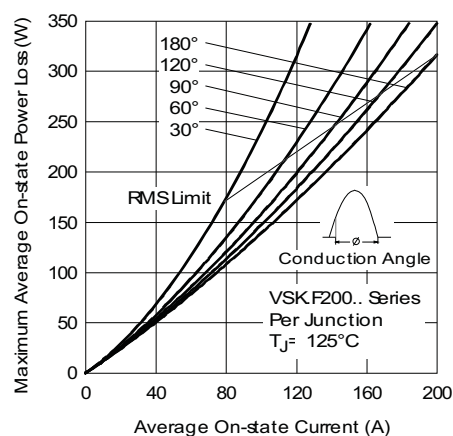


Fig. 3 - On-State Power Loss Characteristics

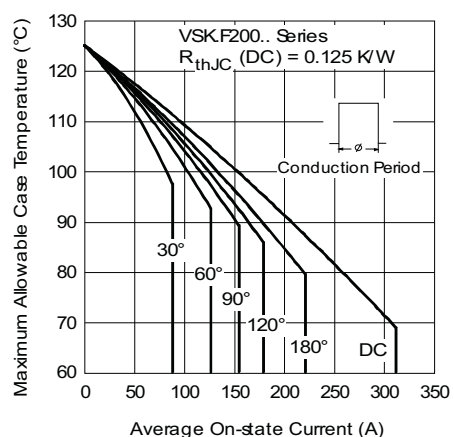


Fig. 2 - Current Ratings Characteristics

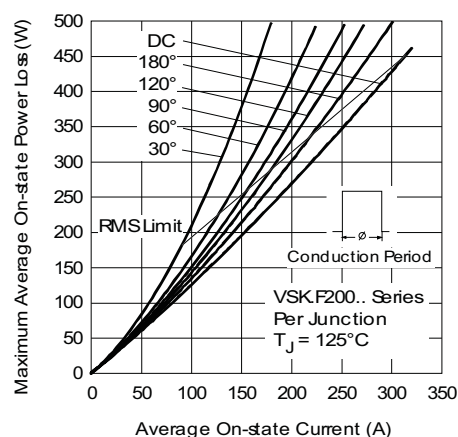


Fig. 4 - On-State Power Loss Characteristics

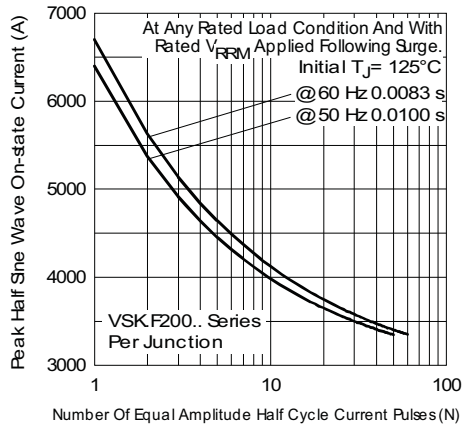


Fig. 5 - Maximum Non-Repetitive Surge Current

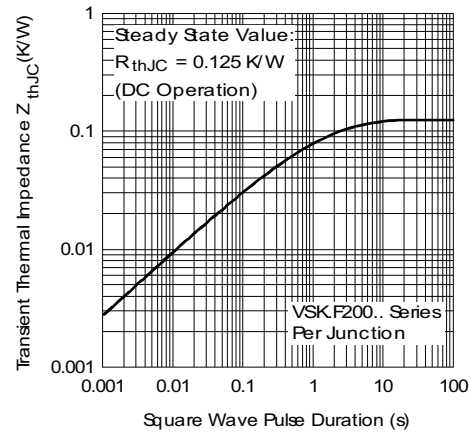


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics

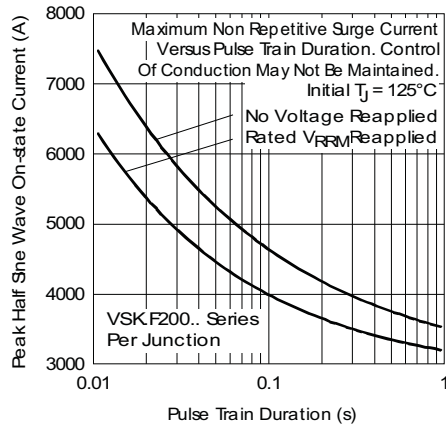


Fig. 6 - Maximum Non-Repetitive Surge Current

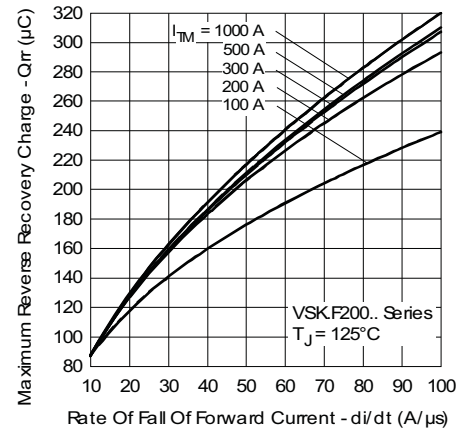


Fig. 9 - Reverse Recovery Charge Characteristics

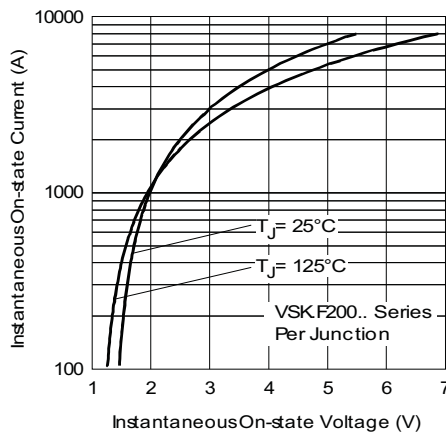


Fig. 7 - On-State Voltage Drop Characteristics

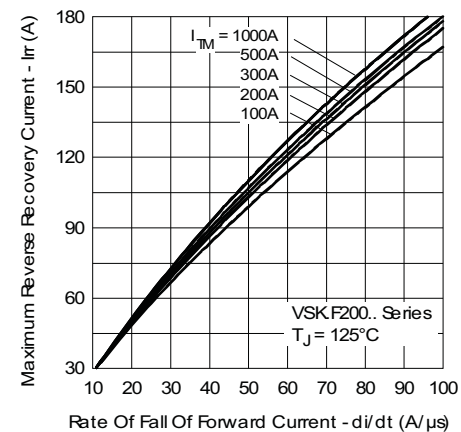


Fig. 10 - Reverse Recovery Current Characteristics

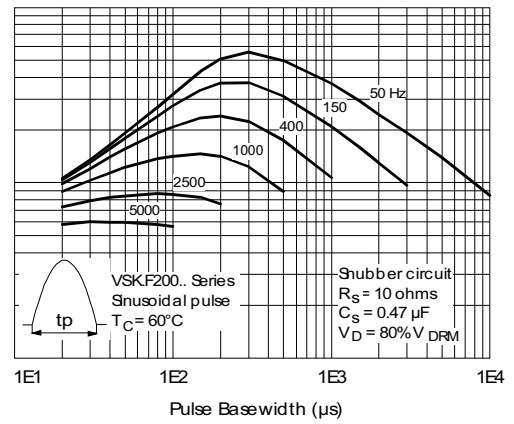
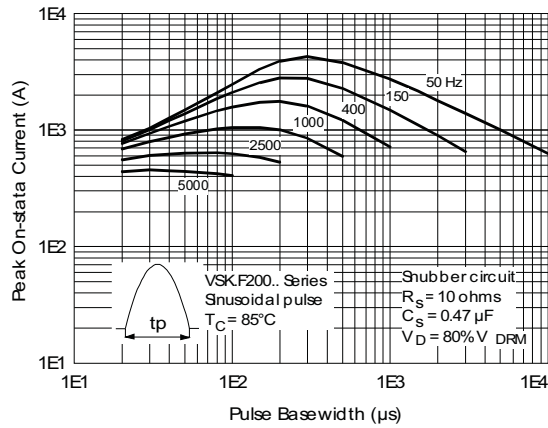


Fig. 11 - Frequency Characteristics

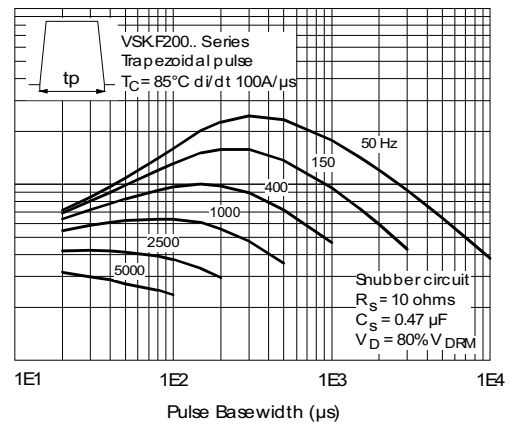
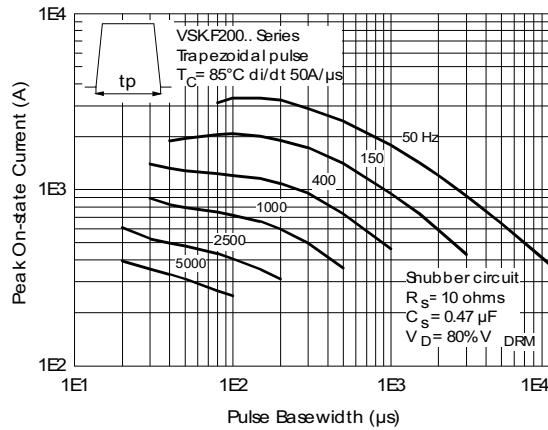


Fig. 12 - Frequency Characteristics

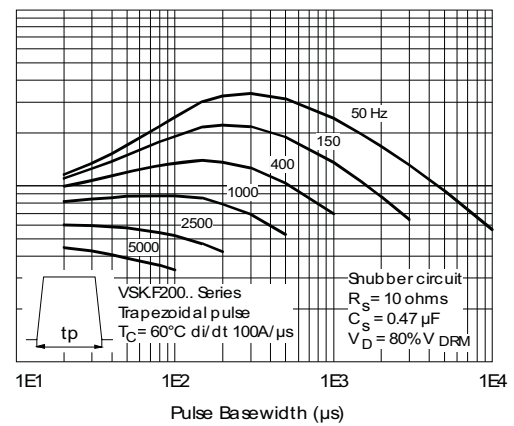
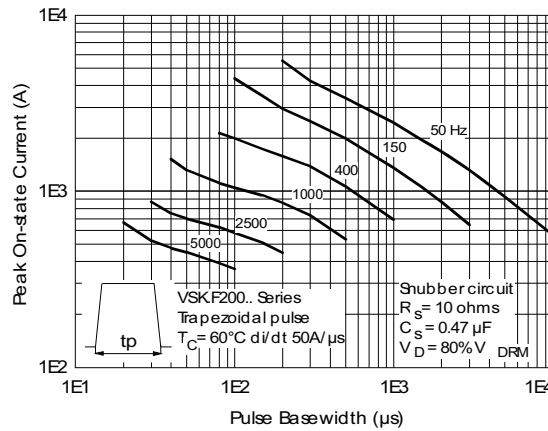


Fig. 13 - Frequency Characteristics

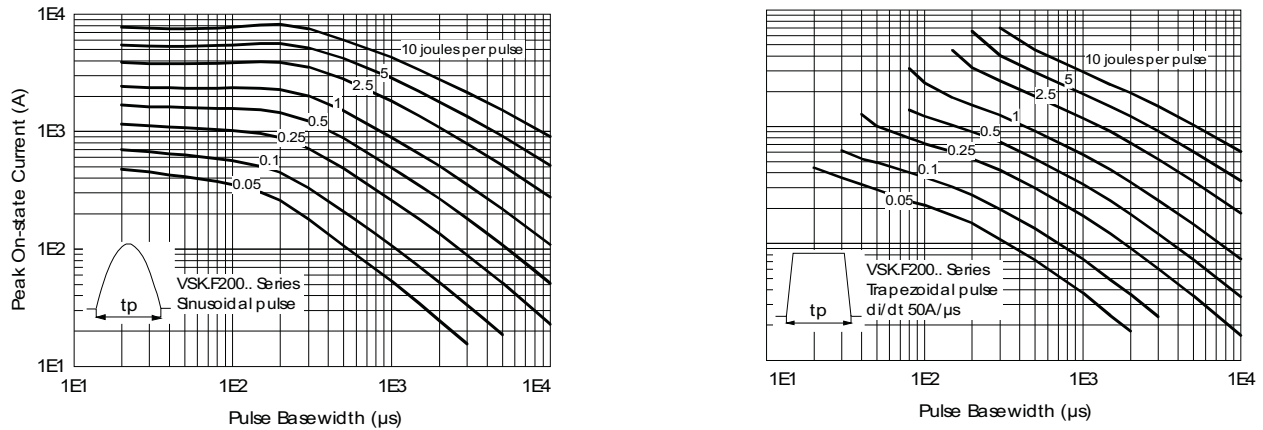


Fig. 14 - Maximum On-State Energy Power Loss Characteristics

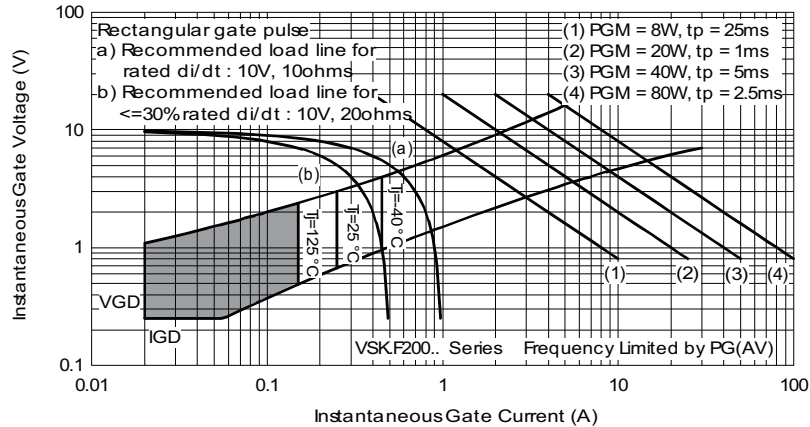


Fig. 15 - Gate Characteristics

# VSK.F200..P Series



Vishay Semiconductors Fast Thyristor/Diode and Thyristor/Thyristor  
(MAGN-A-PAK Power Modules), 200 A

## ORDERING INFORMATION TABLE

| Device code | VSK                                                               | T | F | 200 | - | 12 | H | K | P |
|-------------|-------------------------------------------------------------------|---|---|-----|---|----|---|---|---|
|             | 1                                                                 | 2 | 3 | 4   |   | 5  | 6 | 7 | 8 |
| 1           | - Module type                                                     |   |   |     |   |    |   |   |   |
| 2           | - Circuit configuration (see circuit configuration table)         |   |   |     |   |    |   |   |   |
| 3           | - Fast SCR                                                        |   |   |     |   |    |   |   |   |
| 4           | - Current rating: $I_{T(AV)} \times 10$ rounded                   |   |   |     |   |    |   |   |   |
| 5           | - Voltage code $\times 100 = V_{RRM}$ (see Voltage Ratings table) |   |   |     |   |    |   |   |   |
| 6           | - $dV/dt$ code: $H \leq 400 \text{ V}/\mu\text{s}$                |   |   |     |   |    |   |   |   |
| 7           | - $t_q$ code: $K \leq 20 \mu\text{s}$<br>$J \leq 25 \mu\text{s}$  |   |   |     |   |    |   |   |   |
| 8           | - Lead (Pb)-free                                                  |   |   |     |   |    |   |   |   |

### Note

- To order the optional hardware go to [www.vishay.com/doc?95172](http://www.vishay.com/doc?95172)

| CIRCUIT CONFIGURATION     |                            |                 |
|---------------------------|----------------------------|-----------------|
| CIRCUIT DESCRIPTION       | CIRCUIT CONFIGURATION CODE | CIRCUIT DRAWING |
| Two SCRs common cathodes  | U                          |                 |
| SCR/diode common cathodes | K                          |                 |
| Two SCRs common anodes    | V                          |                 |




Vishay Semiconductors

| LINKS TO RELATED DOCUMENTS |                                                                        |
|----------------------------|------------------------------------------------------------------------|
| Dimensions                 | <a href="http://www.vishay.com/doc?95086">www.vishay.com/doc?95086</a> |

## MAGN-A-PAK

**DIMENSIONS** in millimeters (inches)

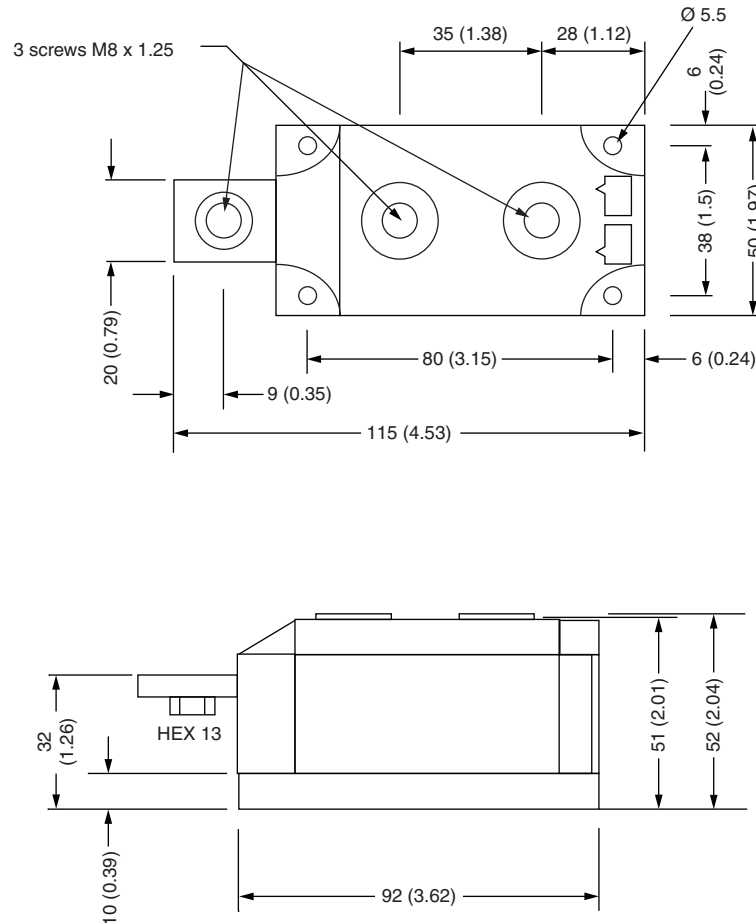

### Notes

- Dimensions are nominal
- Full engineering drawings are available on request
- UL identification number for gate and cathode wire: UL 1385
- UL identification number for package: UL 94 V-0



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.