

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number:	0546260000
Manufacturer:	Weidmüller
Package:	Module
Availability:	Please confirm with sales

Product Page:

<https://antrexco.com/product/details/weidmüller/0546260000.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects


Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

EG-Series
EGD2 EG2 5..240VAC/1A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

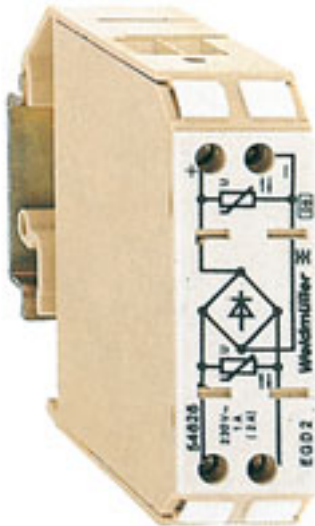

EGD rectifier components can be mounted on terminal rails.

The bridge circuit consists of four individual diodes with a wide input voltage range of 5...240 Vac.

The industry-standard rectifier switches are protected from overvoltage on both the input and output sides with varistors.

General ordering data

Order No.	0546260000
Type	EGD2 EG2 5..240VAC/1A
Version	Active components, Rectifier circuit
GTIN (EAN)	4008190103705
Qty.	10 pc(s).

EG-Series
EGD2 EG2 5..240VAC/1A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	20 mm	Height	58 mm
Net weight	36.87 g		

Temperatures

Operating temperature	-30 °C...+40 °C	Storage temperature	-45 °C...+100 °C
-----------------------	-----------------	---------------------	------------------

Probability of failure

MTTF	11,414 Years
------	--------------

General data

Design	Component housing	Height with TS 32	67.5 mm
Height with TS 35	63 mm	Protection degree	IP 20
Segment	Instrumentation and Control	Width + mounting tolerance	20.2 mm

technical data

Rated current	1 A	AC/DC/UC	AC
Cross-section	2.5 mm ²	Max. current load, side by side	2.5 A
Max. surge current at 10 ms pulse	10 A		

Connection data

Clamping range, rated connection	4 mm ²	Clamping range, rated connection, min.	0.5 mm ²
Clamping range, rated connection, max.	4 mm ²	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Wire connection cross section, finely stranded, max.	4 mm ²

Classifications

ETIM 2.0	EC000943	ETIM 3.0	EC000943
UNSPSC	30-21-19-21	eClass 4.1	27-13-08-01
eClass 5.1	27-13-08-01	eClass 6.2	27-13-08-02
eClass 7.1	27-27-09-90		

Approvals

Approvals



ROHS Conform

Downloads

 Declaration of Conformity [K013_06_10.pdf](#)

EG-Series
EGD2 EG2 5..240VAC/1A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings