

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: AK4499EXEQ
Manufacturer: Asahi Kasei Microdevices/AKM
Package: 64-TQFP Exposed Pad
Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/asahi-kasei-microdevices-akm/ak4499exeq.html>

Request a Quote:

Submit RFQ for this part



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.



= Product Brief = **AK4499EX**
Premium Switched Resistor Stereo DAC


1. General Description

The AK4499EX is a new concept Premium multi-bit Stereo DAC with newly developed Switched Resistor technology, achieving the industry's leading level low distortion and low noise characteristics. It is suitable for playback of high-resolution audio sources that are becoming widespread in Network Audio and USB-DACs Audio systems. Multi-bit Modulator input for a high-precision audio source playback.

Application: AV Receivers, CD/SACD player, Network Audios, USB DACs, USB Headphones,
Measurement Equipment, Control Systems, Public Audios (PA)

2. Features

- Stereo Switched Resistor DAC
- THD+N: -124 dB
- Dynamic Range, S/N: 138 dB, Mono Mode (135dB, Stereo Mode)
- Multi-bit Modulator Data Interface with 5.6448, 11.2896 MHz Clock
 - 7-bit Modulator Data
- Mono Mode
- Power Supply:
 - TVDD = 1.7 to 3.6 V, DVDD = 1.7 to 1.98 V,
 - AVDD = 4.75 to 5.25 V, VDDL/R = 4.75 to 5.25 V
- Digital Input Level: CMOS
- Package: 64-pin HTQFP
- Temperature: -40 to 85 °C



3. Block Diagram and Functions

3.1. Block Diagram

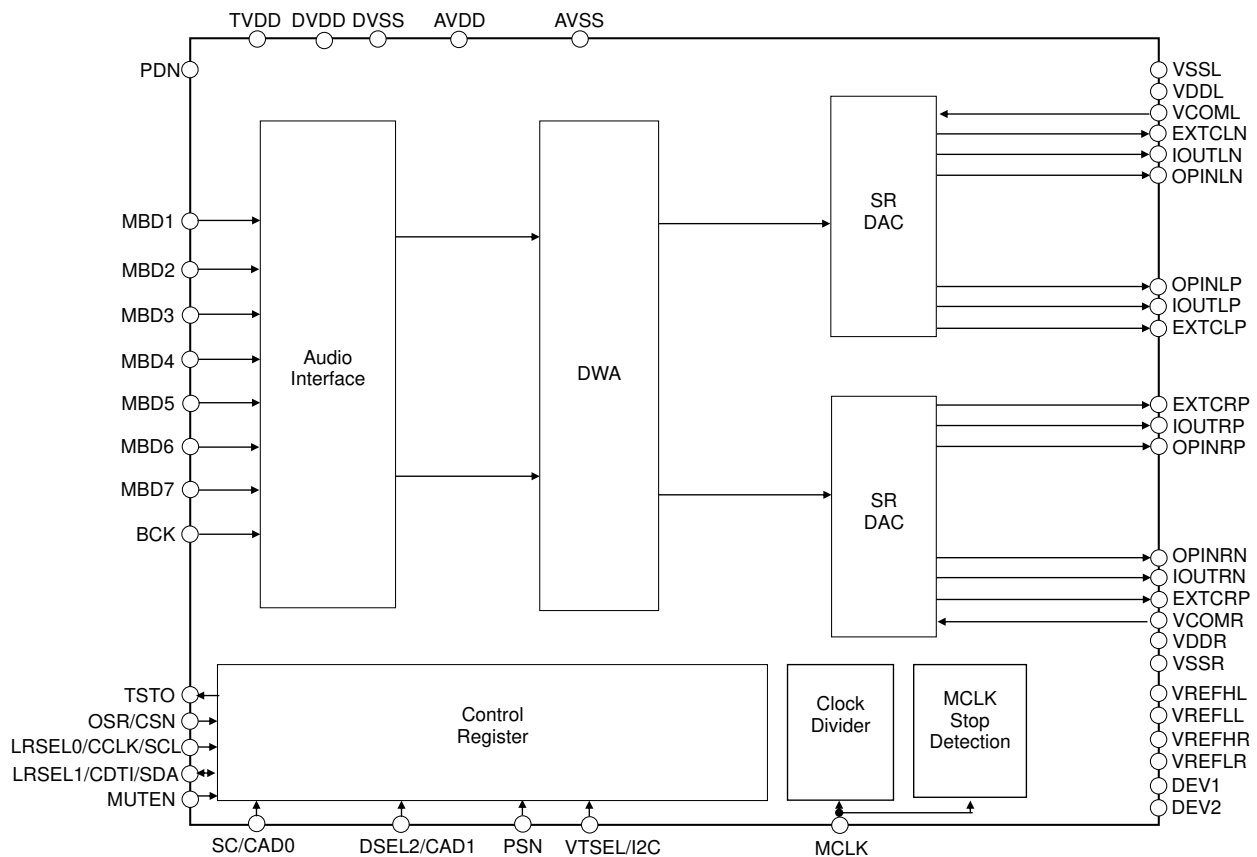


Figure 1. Block Diagram


3.2. Functions

Block	Functions
Audio Interface	BCK is used to clock MBD7-1 data into the shift register.
DWA	Processing two's compliment MBD7-1 data by Data Weighted Average.
SR DAC	Converting MBD7-1 data from DWA output to analog signal and that is designed by Switched Resistor DAC.
Control Register	Internal registers keep its settings for each mode. Control registers are accessed in 3-wire (CSN, CCLK, CDTI) or I2C-Bus (SCL, SDA) control mode.
Clock Divider	Generates the clock for SR DAC from the input clock of the MCLK pin.
MCLK Stop Detection	Detects when the master clock input is absent.

4. Package

4.1. Outline Dimensions


64-pin HTQFP10×10 (Unit: mm)

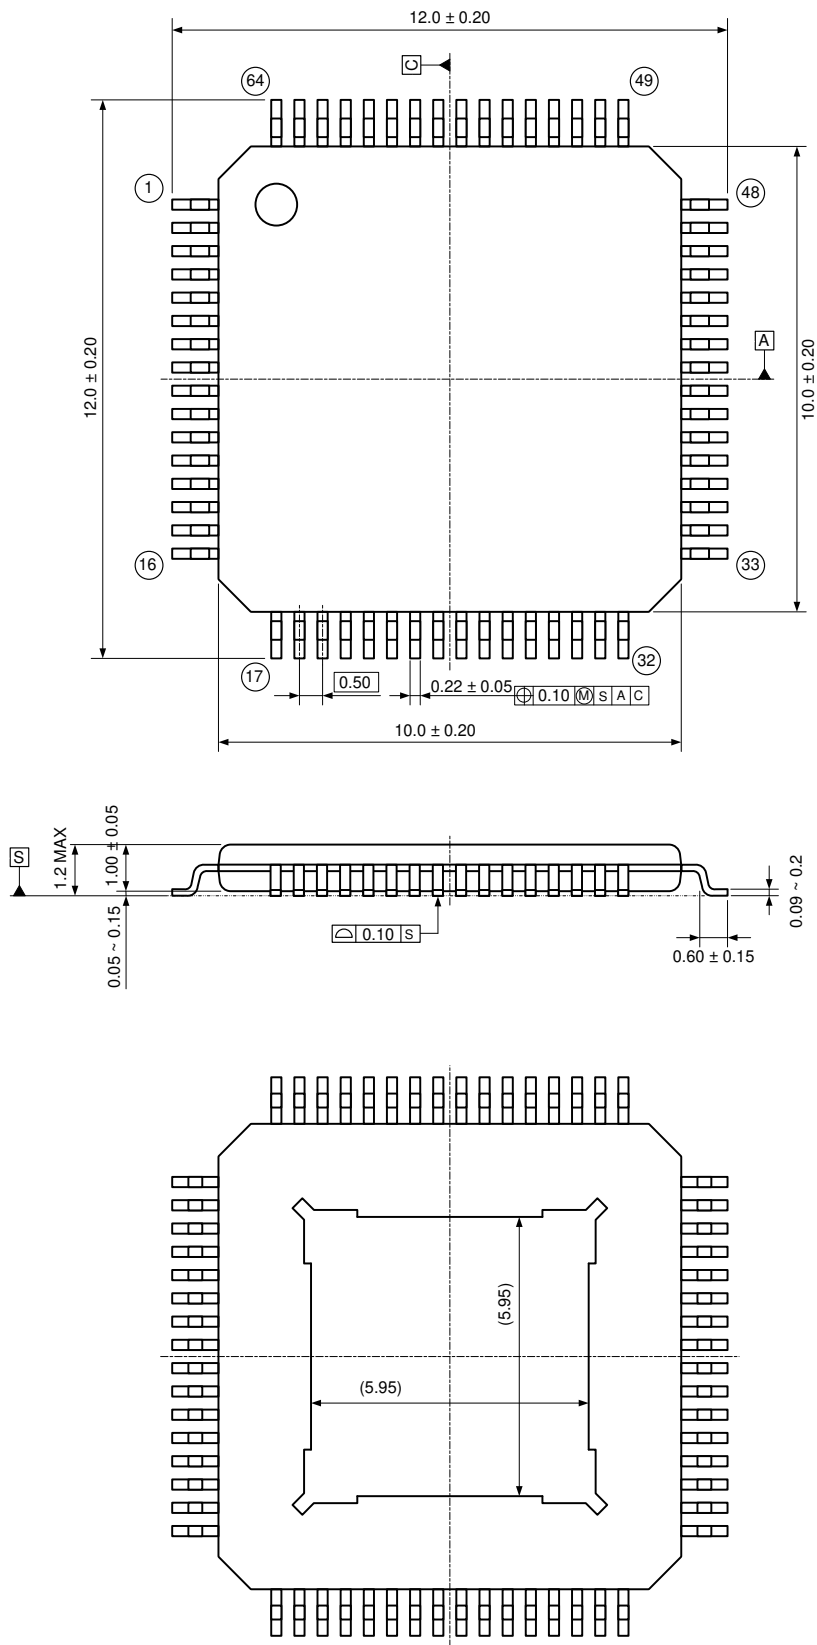

4.2. Material & Terminal Finish

Package molding compound:	Epoxy, Halogen (Br and Cl) free
Lead frame material:	EFTEC-64T
Terminal surface treatment:	Solder (Pb free) plate

4.3. Marking

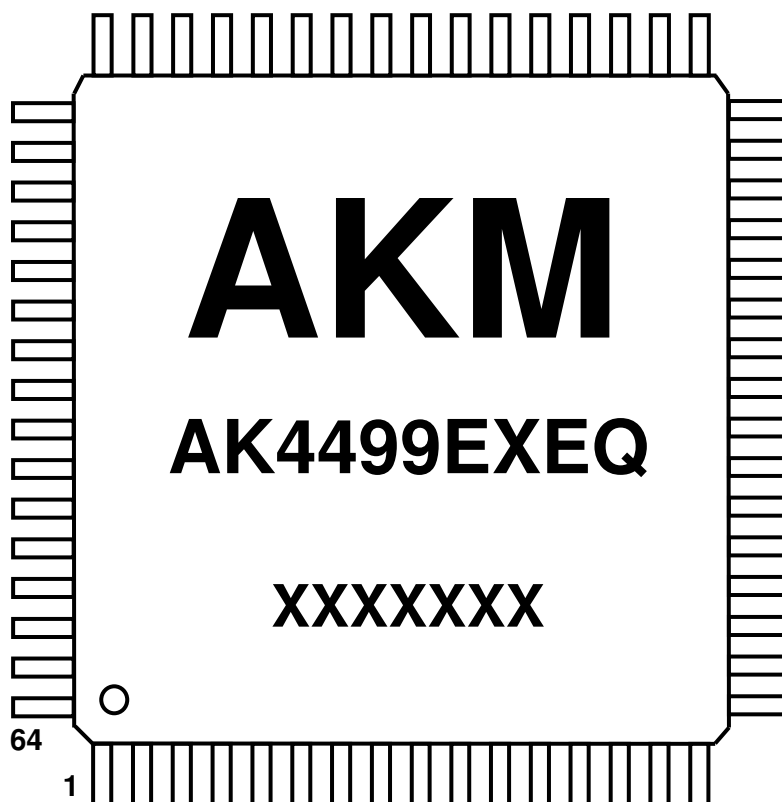

- 1) Pin #1 indication
- 2) Date Code: XXXXXXXX (7 digits)
- 3) Marking Code: AK4499EXEQ
- 4) AKM Logo

IMPORTANT NOTICE

0. Asahi Kasei Microdevices Corporation ("AKM") reserves the right to make changes to the information contained in this document without notice. When you consider any use or application of AKM product stipulated in this document ("Product"), please make inquiries the sales office of AKM or authorized distributors as to current status of the Products.
1. All information included in this document are provided only to illustrate the operation and application examples of AKM Products. AKM neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of AKM or any third party with respect to the information in this document. You are fully responsible for use of such information contained in this document in your product design or applications. AKM ASSUMES NO LIABILITY FOR ANY LOSSES INCURRED BY YOU OR THIRD PARTIES ARISING FROM THE USE OF SUCH INFORMATION IN YOUR PRODUCT DESIGN OR APPLICATIONS.
2. The Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact, including but not limited to, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for the above use unless specifically agreed by AKM in writing.
3. Though AKM works continually to improve the Product's quality and reliability, you are responsible for complying with safety standards and for providing adequate designs and safeguards for your hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of the Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption.
4. Do not use or otherwise make available the Product or related technology or any information contained in this document for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). When exporting the Products or related technology or any information contained in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. The Products and related technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
5. Please contact AKM sales representative for details as to environmental matters such as the RoHS compatibility of the Product. Please use the Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. AKM assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.
6. Resale of the Product with provisions different from the statement and/or technical features set forth in this document shall immediately void any warranty granted by AKM for the Product and shall not create or extend in any manner whatsoever, any liability of AKM.
7. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of AKM.