

ANTREX Electronics

Electronic Components Sourcing Information

Product Reference Information

Part Number: AK5705ECBP-B

Manufacturer: Asahi Kasei Microdevices/AKM

Package: -

Availability: Please confirm with sales

Product Page:

<https://antrexco.com/product/details/asahi-kasei-microdevices-akm/ak5705ecbp-b.html>

Request a Quote:

[Submit RFQ for this part](#)



Scan for product page

Contact Information

Email: info@antrexco.com

WhatsApp: +86-186-8066-5326

Website: <https://antrexco.com>

Quality & Trust

New & Original Components

Supplier verification and packaging condition review

CoC / RoHS / REACH documents available on request

Secure sourcing support for OEM / EMS projects

Note:

This PDF includes an ANTREX product reference cover page.

The original manufacturer datasheet follows from the next page.

1. General Description

The AK5705 is a high-performance four-channel 32-bit analog-to-digital converter (ADC) suitable for audio, voice recognition, voice control, and teleconferencing applications. The AK5705's low-noise, low-power microphone amplifier is suitable for high S/N microphone applications and offers a dynamic range of 109 dB. The built-in transimpedance amplifier for current-to-voltage conversion allows the output current of a sensor or photodiode to be converted to digital data. The AK5705 supports sampling frequencies up to 384 kHz and can support up to 16-channel microphone arrays by connecting multiple AK5705s.

2. Features

1. **Recording Function**
 - **4-Channel Low Power 32-bit ADC**
 - 2-types Digital Filter (Low-latency [5/fs] Sharp Roll-off and Voice)
 - **Single-ended Inputs or Full-differential Inputs**
 - Integrated AC coupling capacitor
 - **MIC Amplifier Gain: +24 dB to 0 dB, 3 dB step**
 - **Transimpedance Amplifier**
 - **ADC Characteristics:**
 - S/N, DR: 109 dB, THD+N: -87 dB (Gain = 0 dB)
 - S/N, DR: 100 dB, THD+N: -86 dB (Gain = +18 dB)
 - **Power Supply Noise Reduction**
 - PSRR: 58 dB
 - **4-Channel Digital MIC Interface**
 - **Microphone Sensitivity Adjustment**
2. **Digital Audio interface**
 - **Master/Slave Mode**
 - **Sampling Frequency:**
 - 8 k, 11.025 k, 12 k, 16 k, 22.05 k, 24 k, 32 k, 44.1 k, 48 k, 88.2 k, 96 k, 176.4 k, 192 k, 352.8 k, 384 kHz
 - **Interface Format**
 - 32/24/16-bit I²S/MSB justified
 - 4-ch TDM
 - 8/12/16-ch Cascade TDM
3. **Built-in PLL**
4. **Control I/F: I²C-bus (Fast-mode, Max. 400 kHz)**
5. **Operating Temperature Range: Ta = -40 to 85 °C**
6. **Power Supply:**
 - **AVDD (ADC, MIC, PLL, LDO):** 1.7 V to 1.9 V or 3.0 V to 3.6 V
 - **TVDD (Host & Audio I/F):** 1.65 V to 3.6 V
7. **Package: 25-pin CSP (2.1275 x 2.2085 mm, 0.4 mm pitch)**

3. Block Diagram


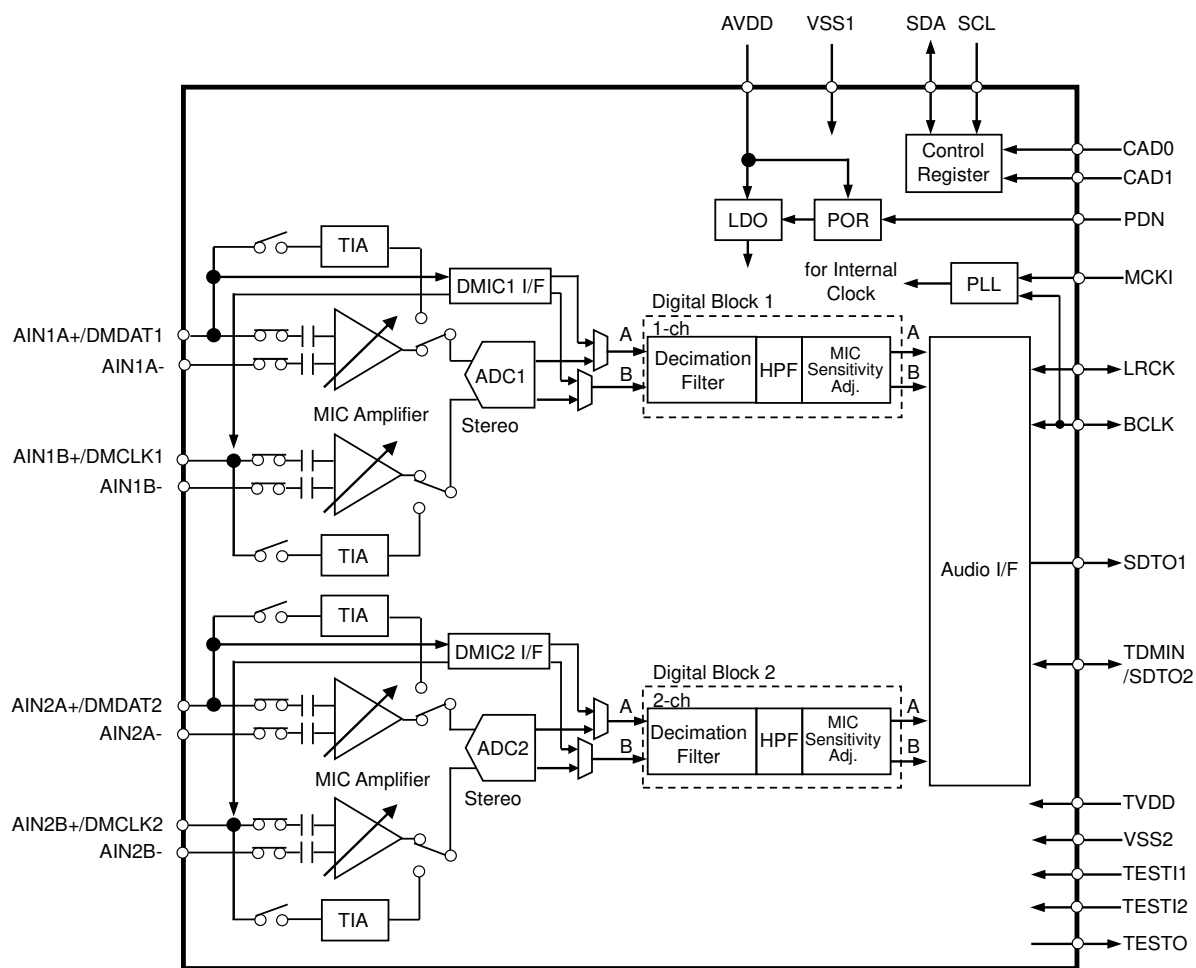


Figure 1. AK5705 Block Diagram

4. Package

4.1. Outline Dimensions


25-pin CSP (2.1275 x 2.2085 mm, 0.4 mm pitch)

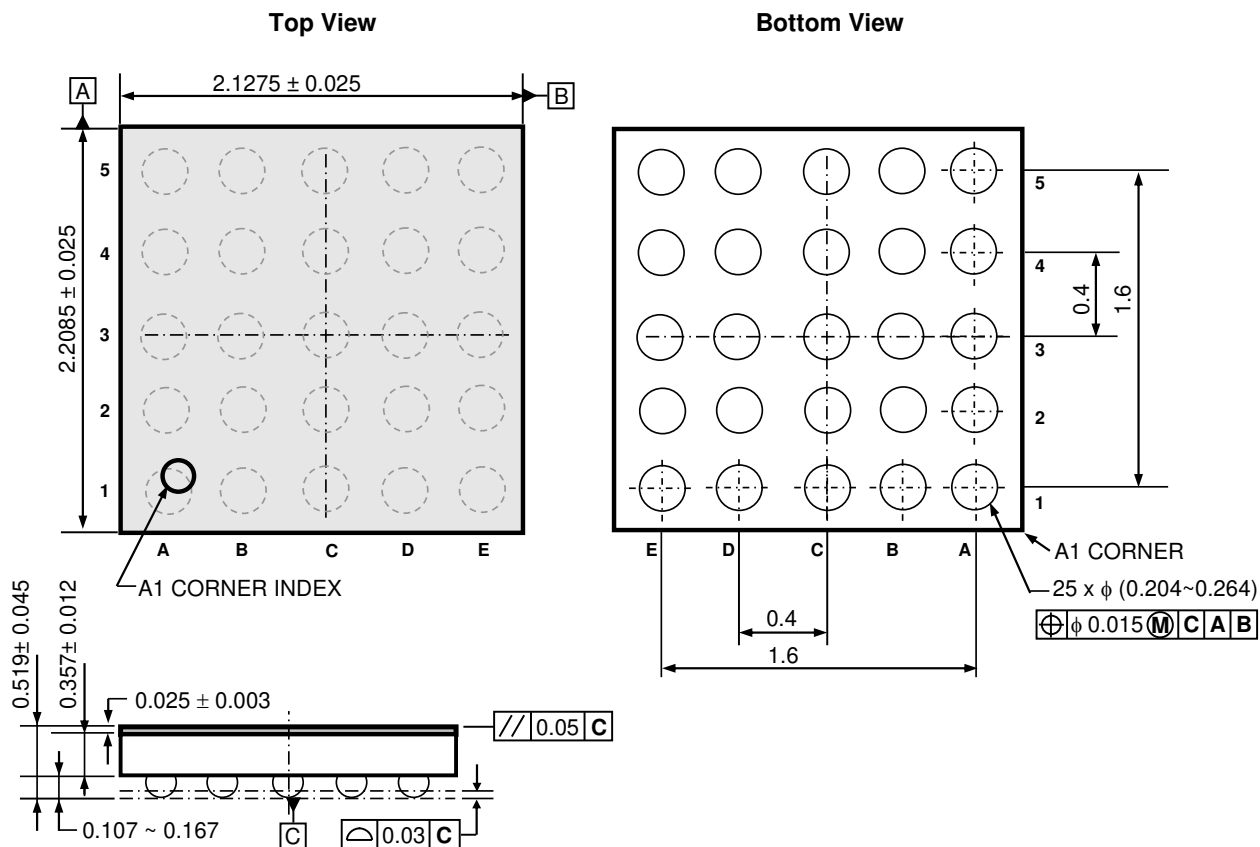

4.2. Material & Lead finish

Package molding compound: Epoxy, Halogen (Br and Cl) free
Solder ball material: SnAgCu

4.3. Marking



XXXX: Date code (4 digits)
Pin #A1 indication

IMPORTANT NOTICE

0. Asahi Kasei Microdevices Corporation ("AKM") reserves the right to make changes to the information contained in this document without notice. When you consider any use or application of AKM product stipulated in this document ("Product"), please make inquiries the sales office of AKM or authorized distributors as to current status of the Products.
1. All information included in this document are provided only to illustrate the operation and application examples of AKM Products. AKM neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of AKM or any third party with respect to the information in this document. You are fully responsible for use of such information contained in this document in your product design or applications. **AKM ASSUMES NO LIABILITY FOR ANY LOSSES INCURRED BY YOU OR THIRD PARTIES ARISING FROM THE USE OF SUCH INFORMATION IN YOUR PRODUCT DESIGN OR APPLICATIONS.**
2. The Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact, including but not limited to, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for the above use unless specifically agreed by AKM in writing.
3. Though AKM works continually to improve the Product's quality and reliability, you are responsible for complying with safety standards and for providing adequate designs and safeguards for your hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of the Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption.
4. Do not use or otherwise make available the Product or related technology or any information contained in this document for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). When exporting the Products or related technology or any information contained in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. The Products and related technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
5. Please contact AKM sales representative for details as to environmental matters such as the RoHS compatibility of the Product. Please use the Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. AKM assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.
6. Resale of the Product with provisions different from the statement and/or technical features set forth in this document shall immediately void any warranty granted by AKM for the Product and shall not create or extend in any manner whatsoever, any liability of AKM.
7. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of AKM.